



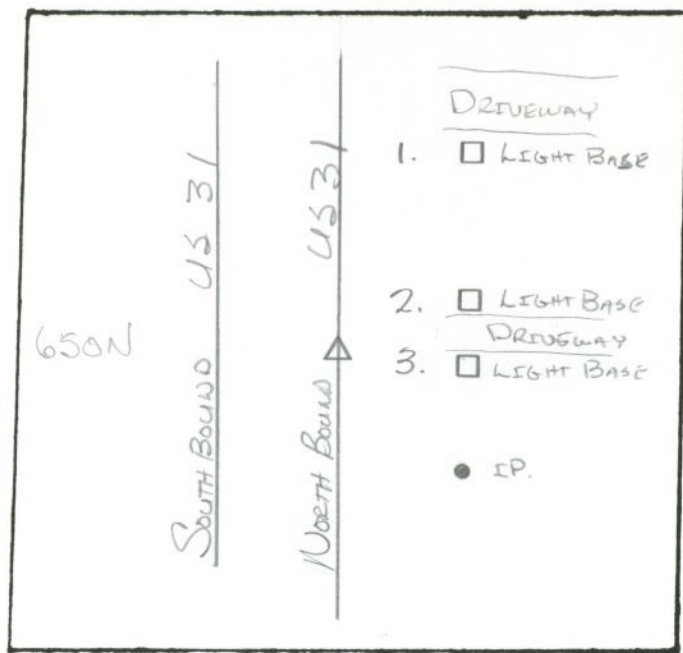

GRAPHIC TIES
(SKETCHED)

SEC 31 TWP 23 RANGE 4

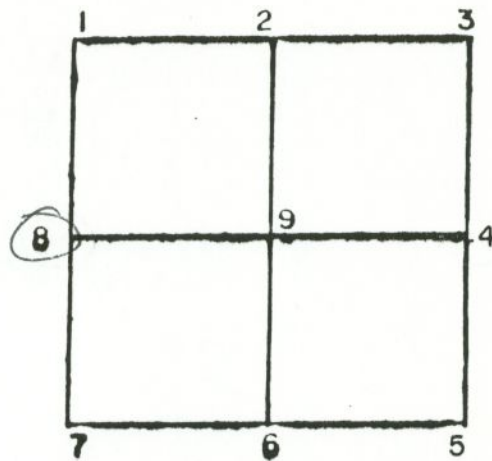


CORNER IDENT. IRON PIN


TIES: 1. 120.48' SOUTHWEST CORNER OF BRICK DRIVEWAY
LIGHT BASE
2. 56.18' SOUTHWEST CORNER OF BRICK DRIVEWAY
LIGHT BASE
3. 50.75' SOUTHWEST CORNER OF BRICK DRIVEWAY
LIGHT BASE
4. 54.72' IRON PIN AT SW PROPERTY CORNER
HAS WYATT JOHNSON CAP

SEC 31 TWP 23 RANGE 4

SEC. 32 TWP. 23 RANGE 4

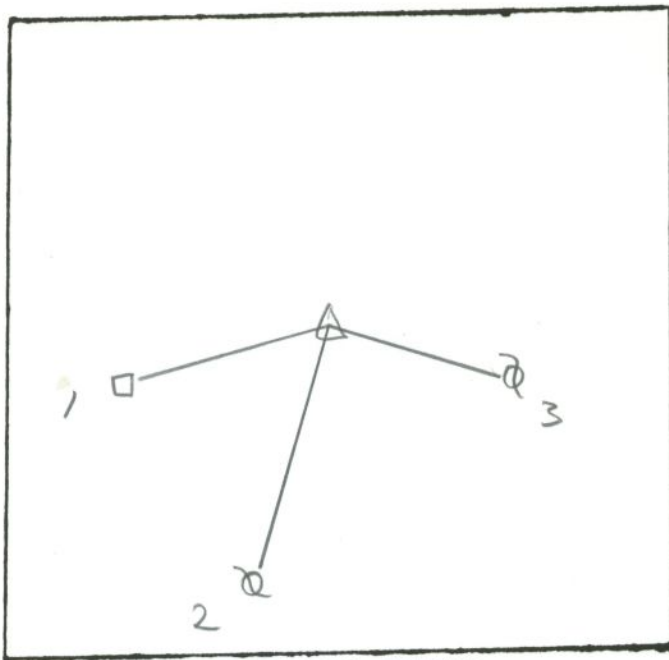

GRAPHIC TIES
(SKETCHED)

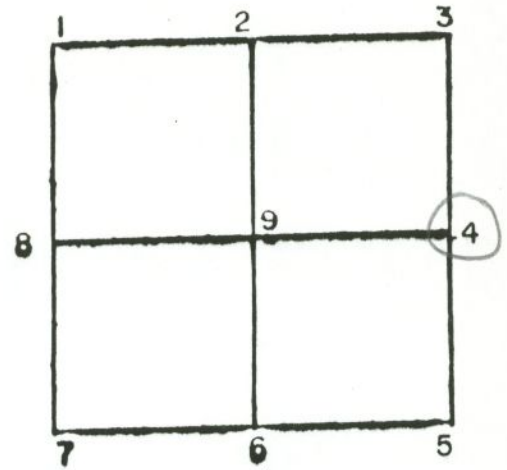

CORNER IDENT. NOT STATED


TIME: 1:25:00 HP

2. 54.90 PWP


3. 28.70. PWP

SEC 32 TWP 23 RANGE 4

SEC 32 TWP 23 RANGE 4

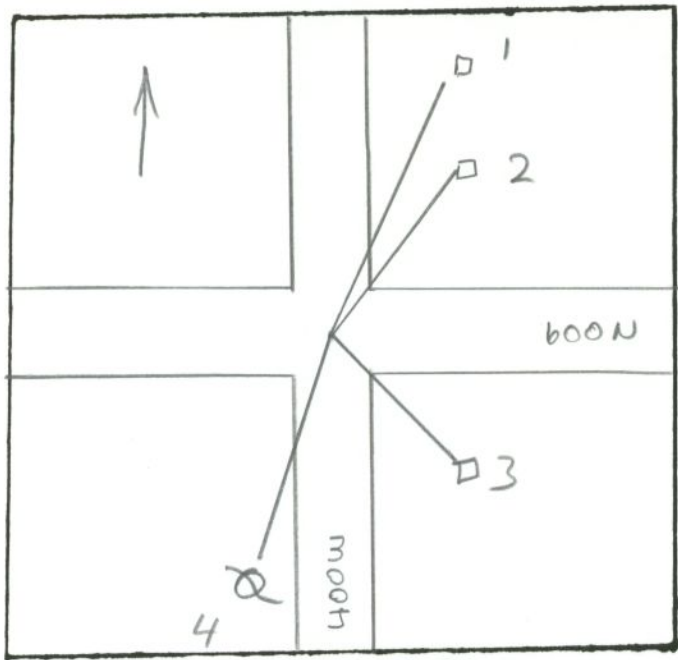

GRAPHIC TIES
(SKETCHED)

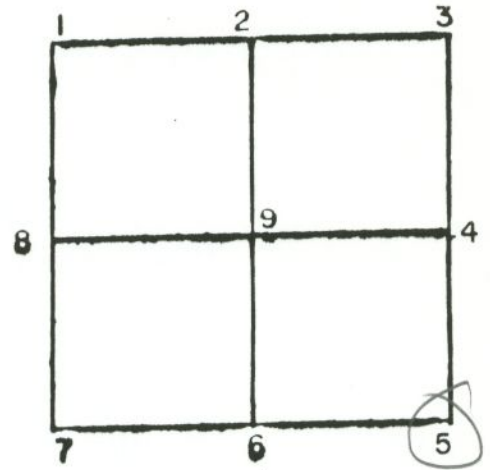


CORNER IDENT. NOT STATED


TIES: 1. 34.70' FP
2. 43.50' HP
3. 31.20' HP
4. 28.30' PWP

SEC 32 TWP 23 RANGE 4

SEC 32 TWP 23 RANGE 4

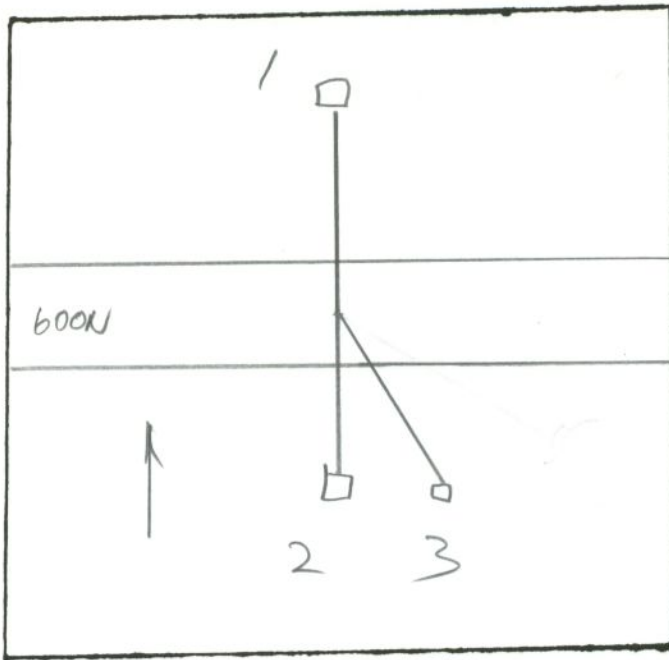

GRAPHIC TIES
(SKETCHED)

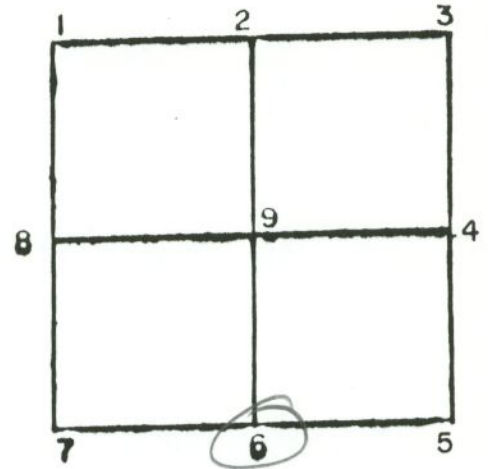


CORNER IDENT. NOT STATED

TUES: 1- 16.00 HP

2. 17.30 HP


3. 17.90' FP

SEC 32 TWP 23 RANGE 4

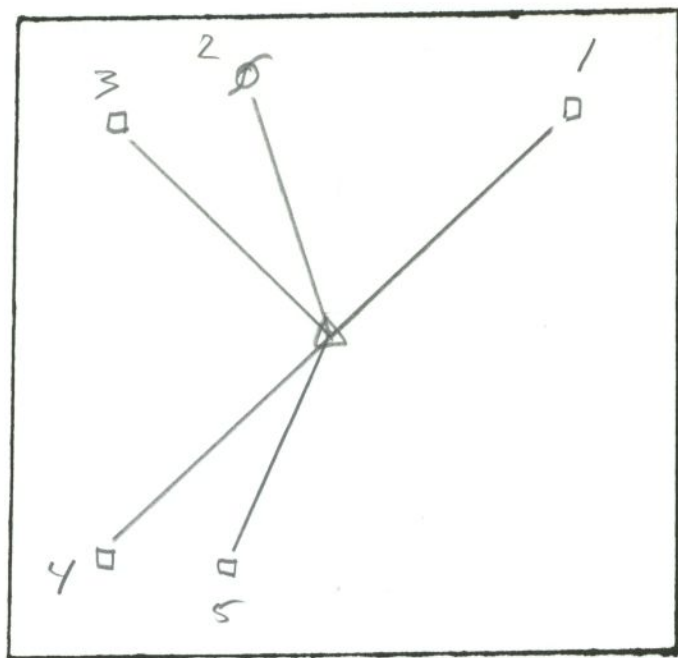

GRAPHIC TIES
(SKETCHED)


SEC 33 TWP 23 RANGE 4

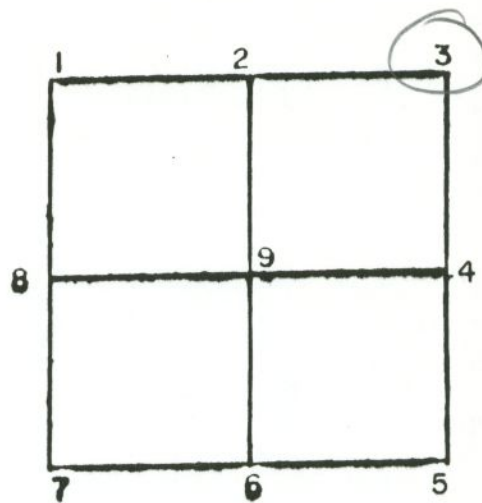

CORNER IDENT. NOT STATED

TIES: 1. 26.90' HP
2. 28.20' PWP
3. 25.00' HP
4. 31.80' HP
5. 32.80' HP


SEC 33 TWP 23 RANGE 4

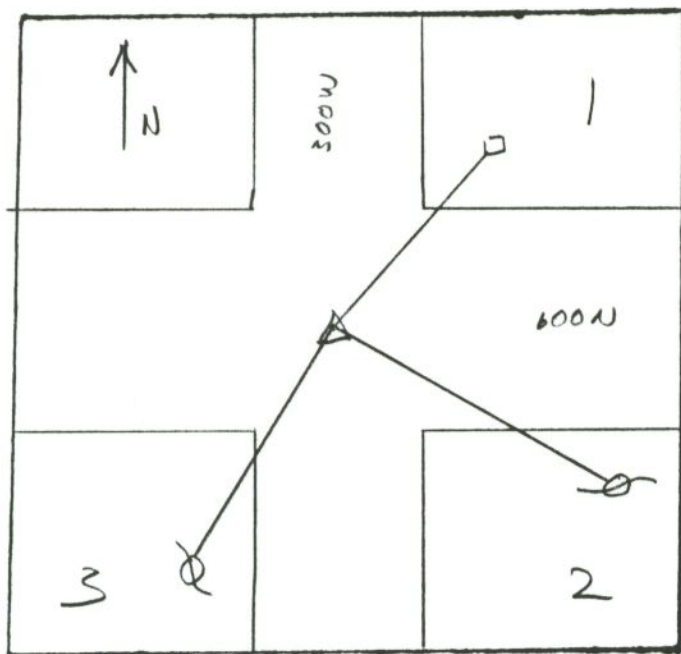

GRAPHIC TIES
(SKETCHED)

SEC 33 TWP 23 RANGE 4


6-20-86

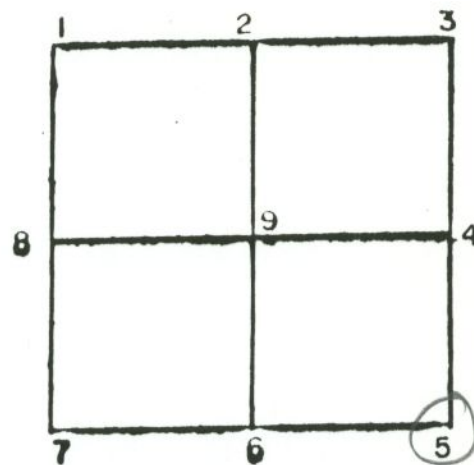

CORNER IDENT. 5 $\frac{3}{4}$ " IRON ROD


TIES: 1. 23.68' PK - W FACE CORNER POST
2. 74.0' PK - SW FACE PWP
3. 38.44' PK - SE FACE PWP

SEC 33 TWP 23 RANGE 4

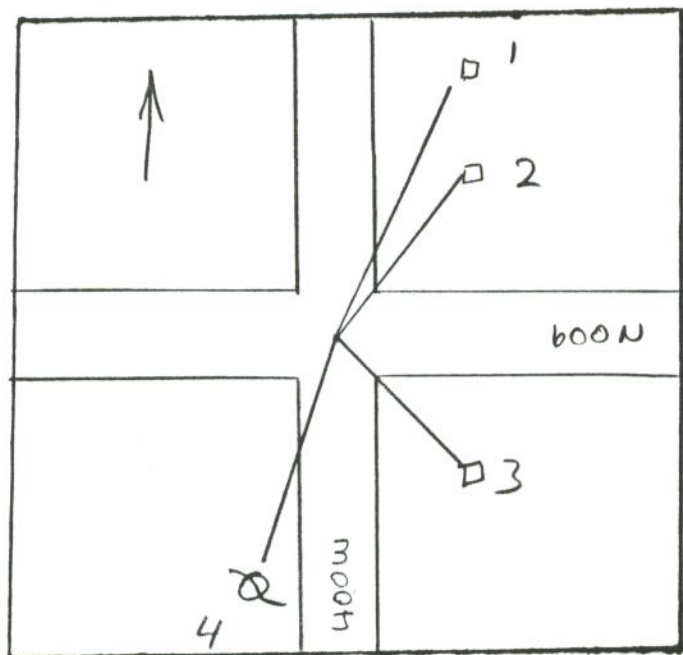

GRAPHIC TIES
(SKETCHED)

SEC 33 TWP 23 RANGE 4

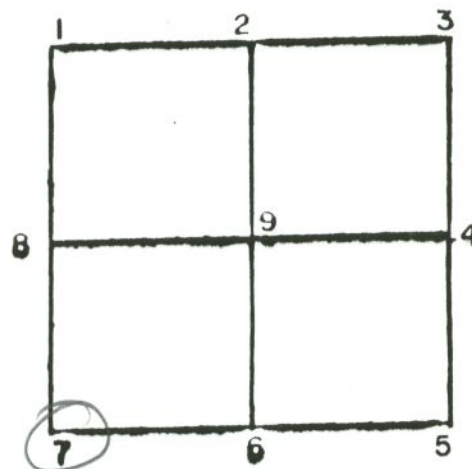


CORNER IDENT. NOT STATED


TIES: 1. 34.70' FP
2. 43.50' HP
3. 31.20' HP
4. 28.30' PWP

SEC 33 TWP 23 RANGE 4

SEC. 33 TWP. 23 RANGE 4

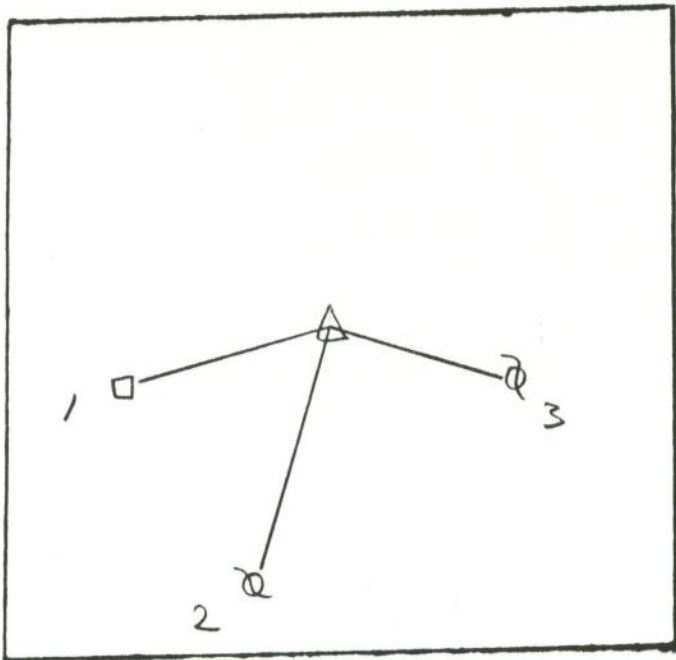

GRAPHIC TIES
(SKETCHED)

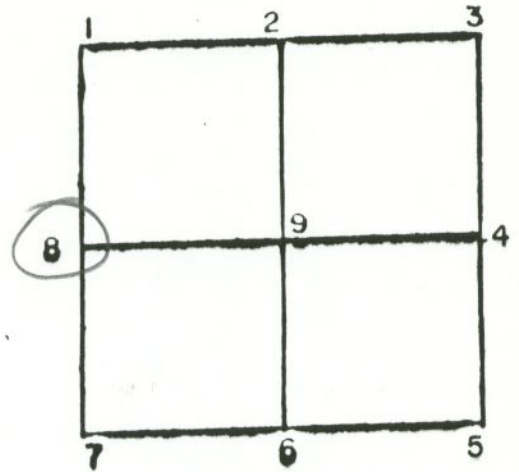

CORNER IDENT. NOT STATED


THES: 1 25.00' HP

2. 54.90 PWP


3. 28.70. PWP

SEC 33 TWP 23 RANGE 4

SEC 34 TWP 23 RANGE 4

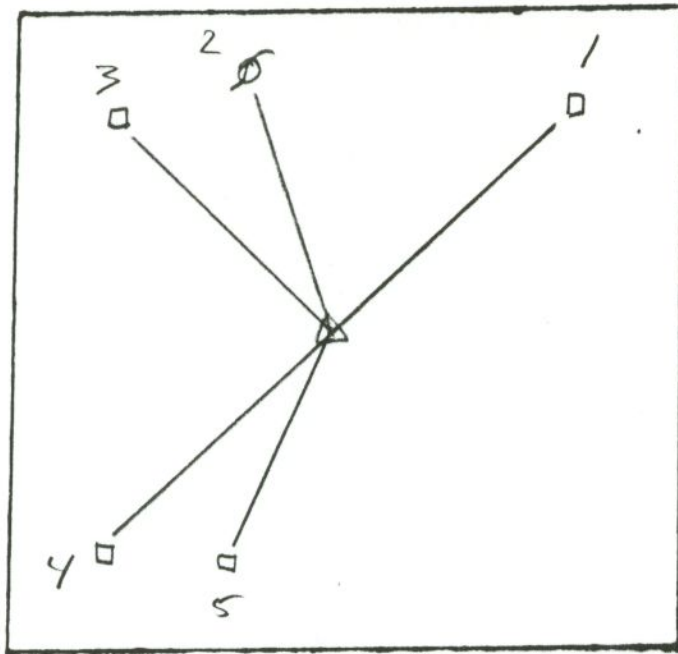

GRAPHIC TIES
(SKETCHED)

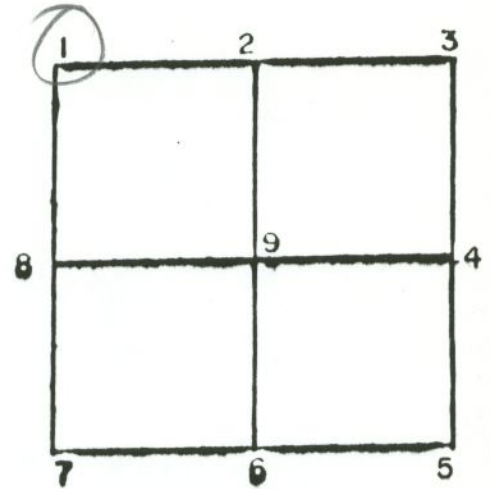


CORNER IDENT. NOT STATED


TIES:	1.	26.90°	HP
	2.	28.20°	PWP
	3.	25.00°	HP
	4.	31.80°	HP
	5.	32.80°	HP

SEC 34 TWP 23 RANGE 4

SEC. 34 TWP. 23 RANGE 4

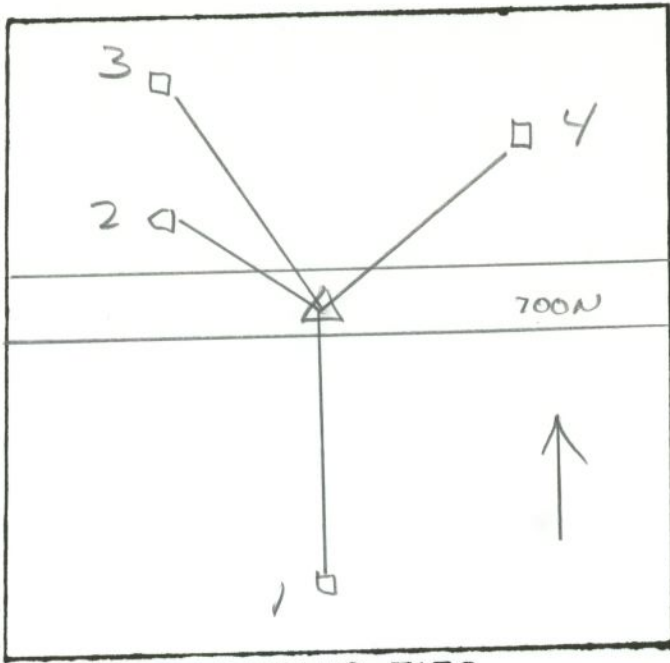

GRAPHIC TIES
(SKETCHED)

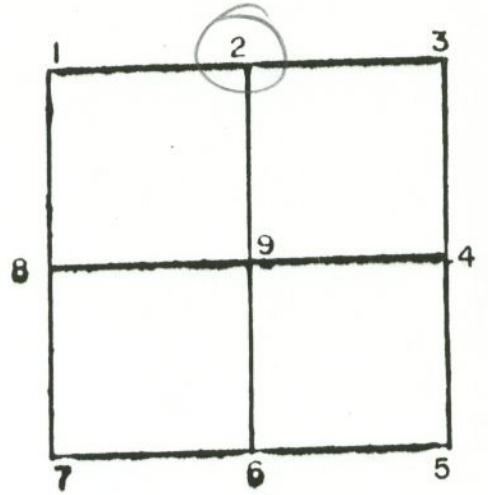

CORNER IDENT. NOT STATED

TIES:

1.	19.10'	HP
2.	26.00'	HP
3.	32.10'	HP
4.	27.10'	HP

SEC 34 TWP 23 RANGE 4

DATE: 9/2/04

SECTION 34 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt#: 0021
N: _____
E: _____

TYPE OF MON.: HARRISON MKR

DEPTH: 34


UNCERTAINTY: _____

BY: PARTY 1

DATE: 9-02-04

DES. NO.: 0101424

STATE FORM 40180 (R2 / 2-04)

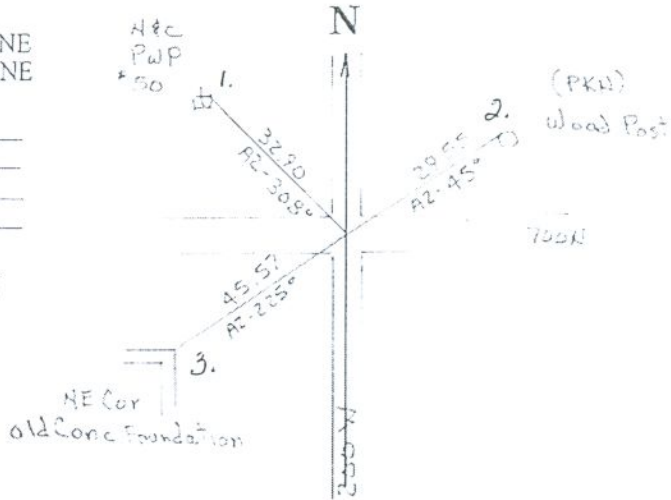

REFERENCED BY:


.....
OTHERS.....

CORNER IDENTIFIED: Harrison Marker

TIES:

1. 32.90' A2 308° N+C PWP
2. 29.55' A2 45° PK Nail Wood post
3. 45.57' A2 225° NE Corner old conc. foundation


SECTION 34 TWP. 23 RANGE 4

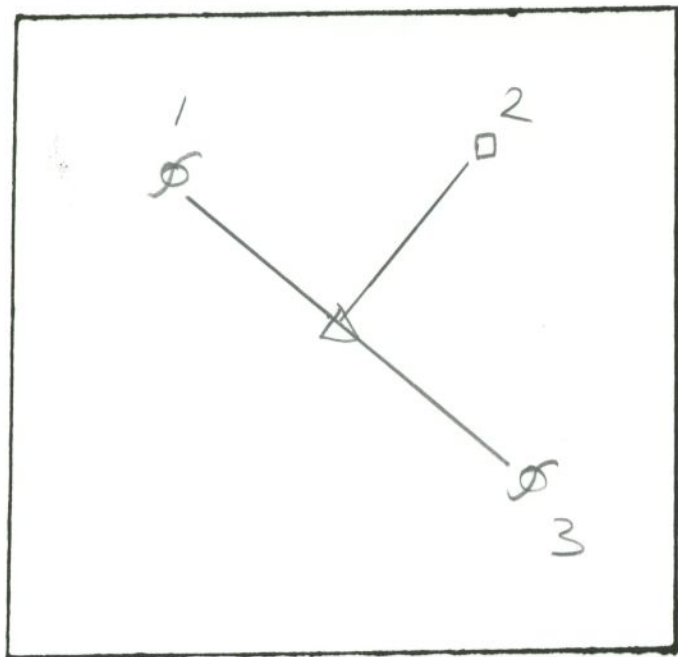

GRAPHIC TIES
(SKETCHED)

SEC. 34 TWP 23 RANGE 4

4-7-80

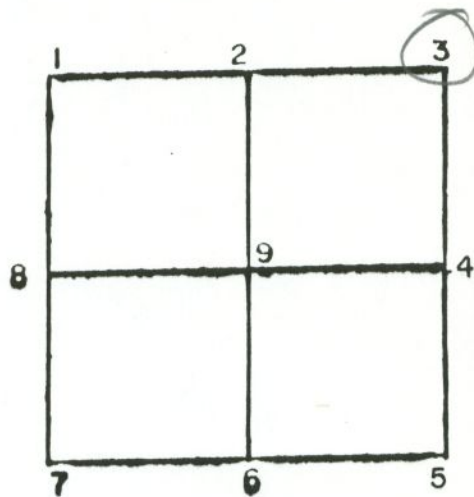

CORNER IDENT. NOT STATED

TIES: 1. 42.50' PWP
2. 29.15' HP
3. 41.20' PWP

HARRISON MARKER


MATCHING REFERENCE

SEC 34 TWP 23 RANGE 4

DATE: 9/2/04

SECTION 34 TWP. 23 RANGE 4


LIBERTY TWP., TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0022
N: _____
E: _____

TYPE OF MON.: HARRISON MKR
DEPTH: 3"
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES.NO.: 0101424

STATE FORM 40180 (R2/2-04)

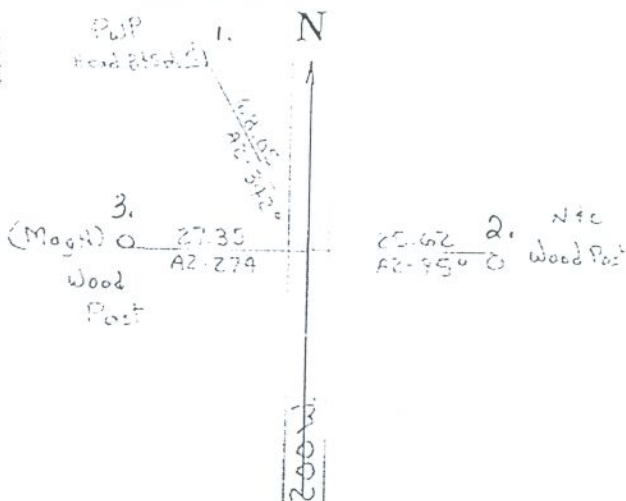

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: Harrison marker


TIES:

1. 68.05 AZ 342° Head of Spine

2. 25.62 AZ 95° N+C Wood Post

3. 27.35 AZ 274° Mag. nail Wood Post


SECTION 34 TWP. 23 RANGE 4

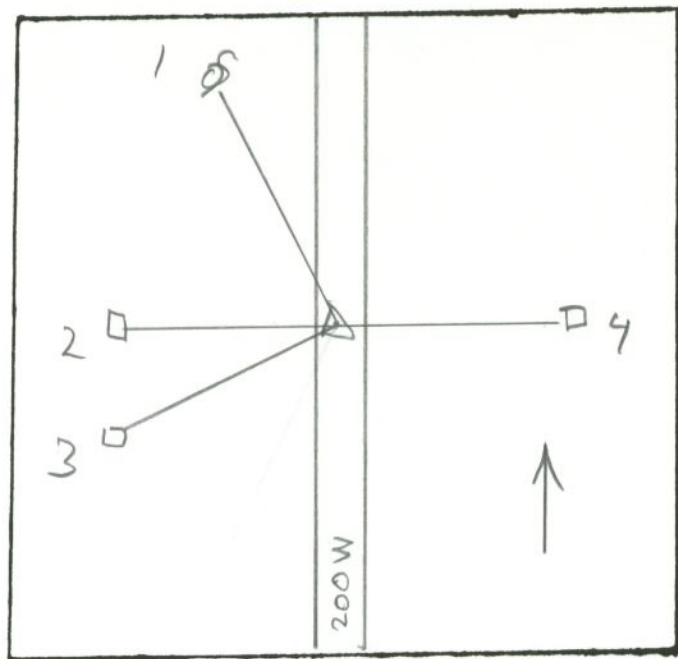

GRAPHIC TIES
(SKETCHED)

SEC 34 TWP 23 RANGE 4

4-7-80

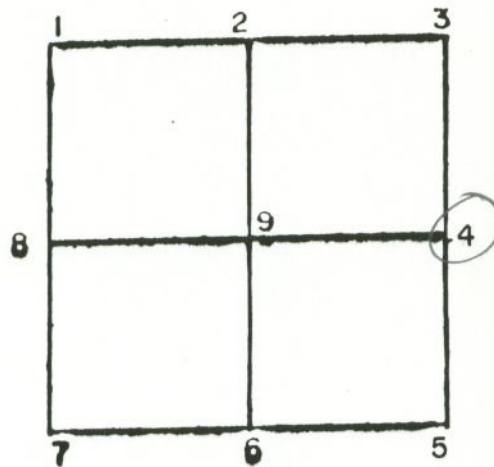

CORNER IDENT. NOT STATED

TIES: 1. 19.70' PWP
2. 16.40' HP
3. 22.80' FP
4. 16.60' HP


HARRISON MARKER

SEC 34 TWP 23 RANGE 4

DATE: 9/2/04

SECTION 34 TWP. 23 RANGE 4


LIBERTY TWP. TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0023
N: _____
E: _____

TYPE OF MON.: R.R. Spike
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES.NO.: 0101424

STATE FORM 40180 (R2/2-04)

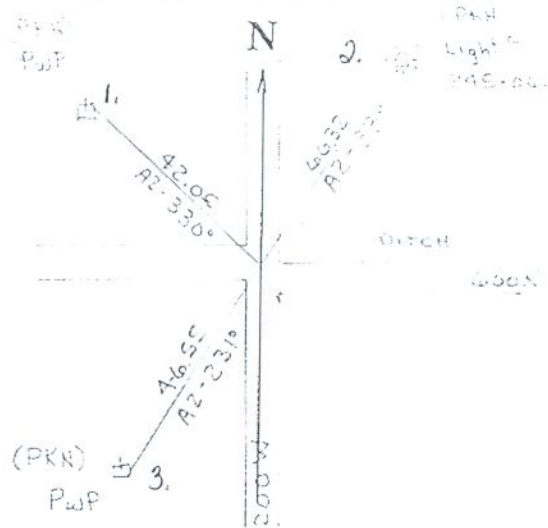

REFERENCED BY:

OTHERS.....


CORNER IDENTIFIED: R.R. Spike found 0" deep

TIES:


1. 42.06' AZ. 330° PK Nail PWP
2. 66.32' AZ. 33° PK Nail Light pole #245-060
3. 46.55' AZ. 231° PK Nail PWP

SECTION 34 TWP. 23 RANGE 4

4

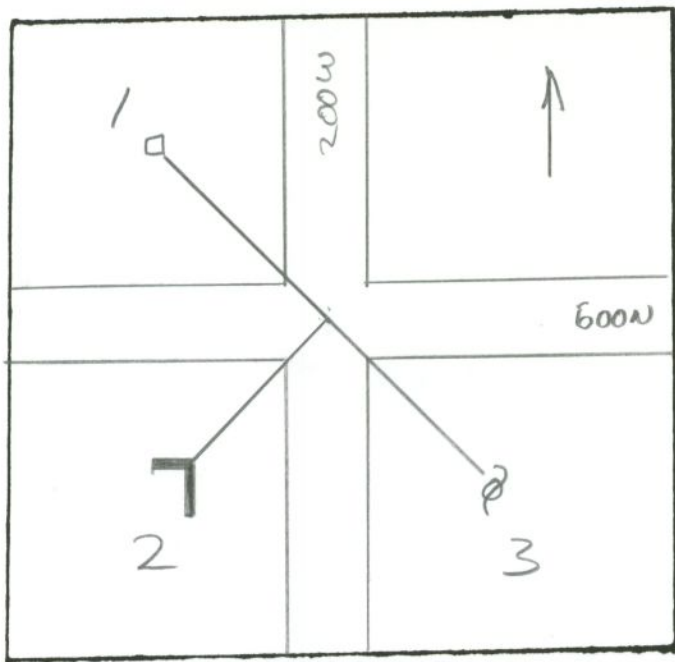

GRAPHIC TIES
(SKETCHED)

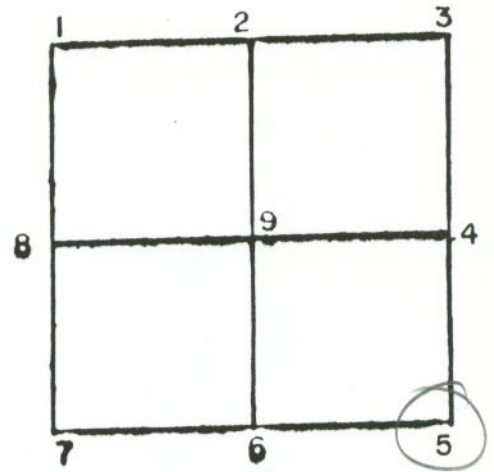


CORNER IDENT. NOT STATED

THES:

1. 31.51'	HP
2. 22.21'	HEADWALL
3. 47.80'	PWP


SEC 34 TWP 23 RANGE 4

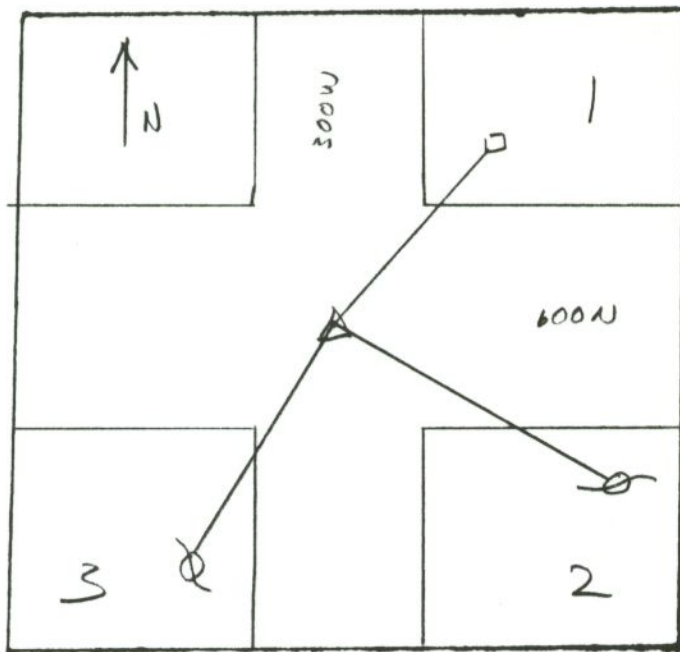

GRAPHIC TIES
(SKETCHED)

SEC. 34 TWP. 23 RANGE 4

6-20-86

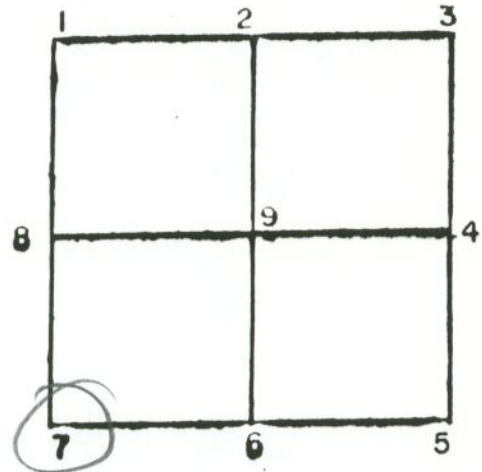

CORNER IDENT. 7 3/4" IRON ROD

TIES: 1. 23.68' PK - W FACE CORNER POST

2. 74.0' PK - SW FACE PWP

3. 38.44' PK - SE FACE PWP

SEC 34 TWP 23 RANGE 4

DATE: 9/2/04


SECTION 35 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt#: 0021
N: _____
E: _____

TYPE OF MON.: HARRISON MKR
DEPTH: 3'
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

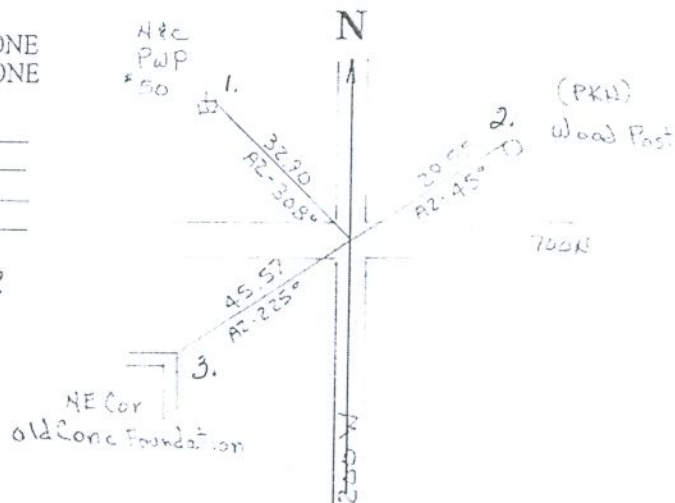

REFERENCED BY:


OTHERS:

CORNER IDENTIFIED: Harrison Marker

TIES:

1. 32.90' AZ 308° N+C PWP
2. 29.55' AZ 45° PK Nail Wood post
3. 45.57' AZ 225° NE Corner old Conc. foundation


SECTION 35 TWP. 23 RANGE 4

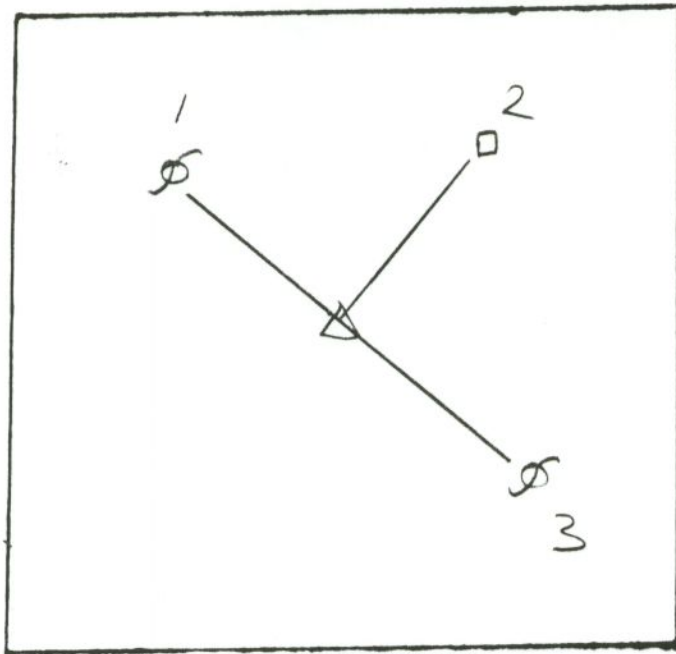

GRAPHIC TIES
(SKETCHED)

SEC 35 TWP 23 RANGE 4

4-7-80

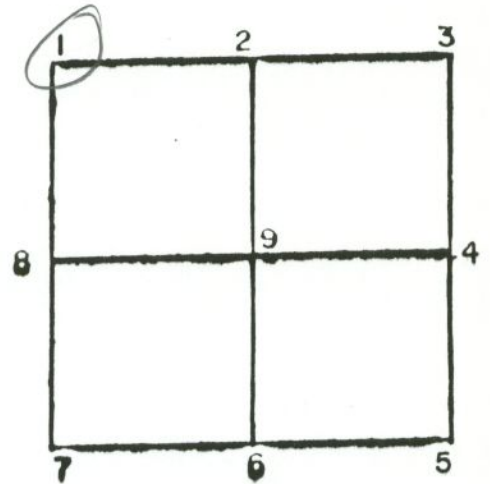

CORNER IDENT. NOT STATED

TIES: 1. 42.50' PWP
2. 29.15' HP
3. 41.20' PWP

HARRISON MARKER

MATCHING REFERENCE

SEC 35 TWP 23 RANGE 4

DATE: 9/2/04

SECTION 35 TWP. 23 RANGE 4

LIBERTY TWP. TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☒ LOCAL GRID
Units: _____
Pt.#: 0020
N: _____
E: _____

TYPE OF MON.: R.R.S. & L. over Stone
DEPTH: 1 1/4" 12" Deep
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES. NO.: 0101424
STATE FORM 40180 (R2/2-04)

Diagram showing a corner monument (PWP) with four ties:
1. 70.08' AZ 290° (PKN)
2. 72.89' AZ 17° (PWP (PKN))
3. 22.65' AZ 159° (PKN) Wood FP
4. 15.15' AZ 184° (Rebar & Cap)

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: RR Spile found over Stone 12" deep

TIES:


1. 70.08' AZ 290° PK Nail PWP
2. 72.89' AZ 17° PK Nail PWP
3. 22.65' AZ 159° RK Nail wood fence post
4. 15.15' AZ 184° Rebar + Cap.

SECTION 35 TWP. 23 RANGE 4

REFERENCE SHEET

SECTION 35 TOWNSHIP 23 RANGE 4 EAST

DATE OF RECOVERY MARCH 20, 2002

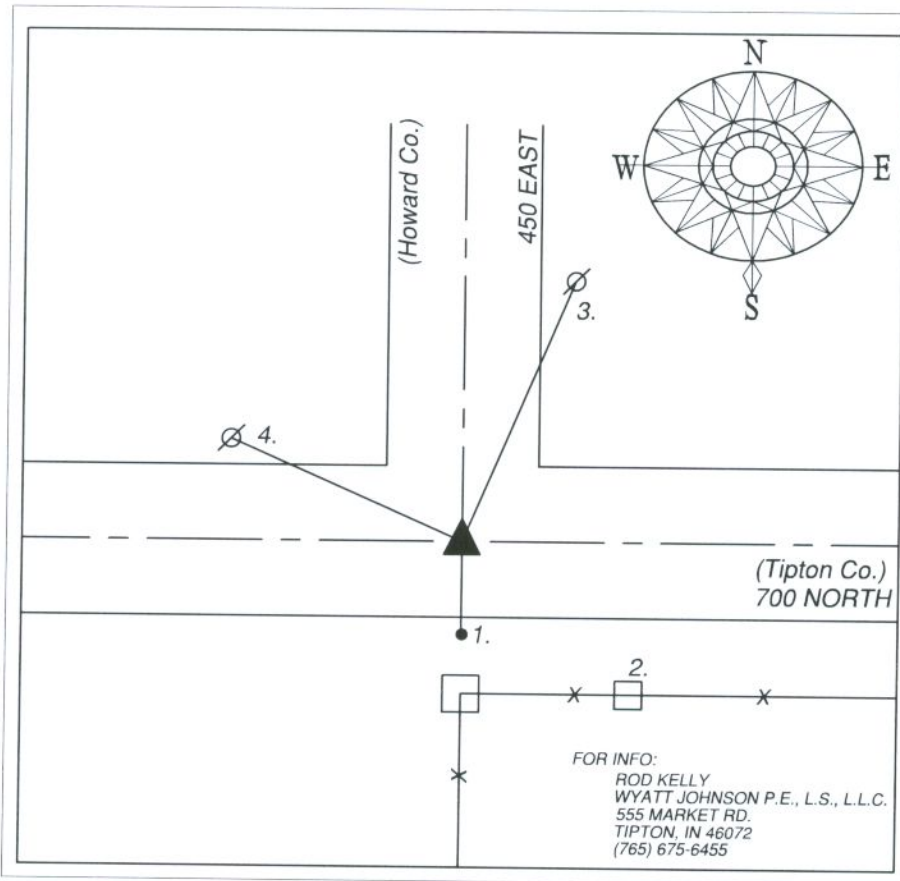

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: -

CREW: -

NORTH: - EAST: -

ELEVATION: -

LATITUDE: -

LONGITUDE: -

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY

JOB # 97-168

TYPE OF MARKER IDENTIFIED: STONE FOUND 0.85' BELOW SURFACE OF CHIP AND SEALED ROAD

HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO CURRENT REFERENCES IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT.
THIS STONE WAS FOUND BY US ON 03/20/2002. A PK NAIL WAS FOUND OVER THE TOP OF THE STONE FLUSH WITH TOLERANCES.

REFERENCE	DISTANCE	-DESCRIPTION-	FOUND SET	
1.	15.14'	IRON ROD WITH IDENTIFYING CAP 2' SOUTH OF EDGE OF ROAD	☐	☒
2.	22.65'	MAG NAIL WITH IDENTIFYING WASHER IN POST/FL	☐	☒
3.	72.77'	PK NAIL IN SOUTH SIDE OF POWERPOLE	☒	☐
4.	70.09'	MAG NAIL WITH IDENTIFYING WASHER IN SOUTH SIDE OF POWERPOLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐

DATE: 9/1/04


SECTION 35 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA



LOCAL GRID COORD
PT.# 0011
N: _____
E: _____

TYPE OF MON.: IRON ROD IN CONC.
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES.NO.: 0101424

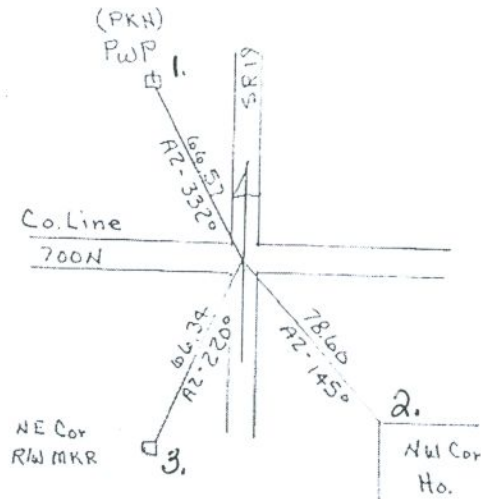

REFERENCED BY:

.....
OTHERS.....

CORNER IDENTIFIED: Iron Rod in Concrete 0" deep

TIES:

1. 66.57' AZ 332° PK Nail PWP


2. 78.60' AZ 145° NW Corner house

3. 66.34' AZ 220° NE Cor R/W Marker


SECTION 35 TWP. 23 RANGE 4

SEC 35 TWP 23 RANGE 4

4-15-99

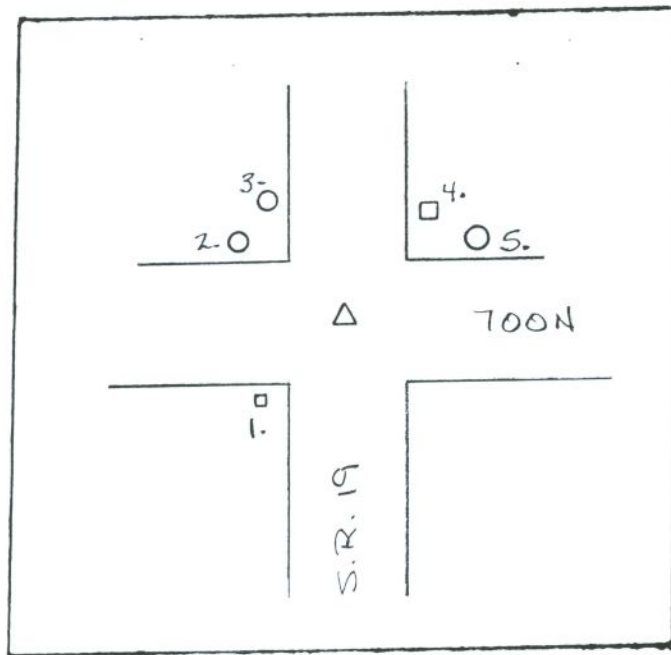


GRAPHIC TIES
(SKETCHED)

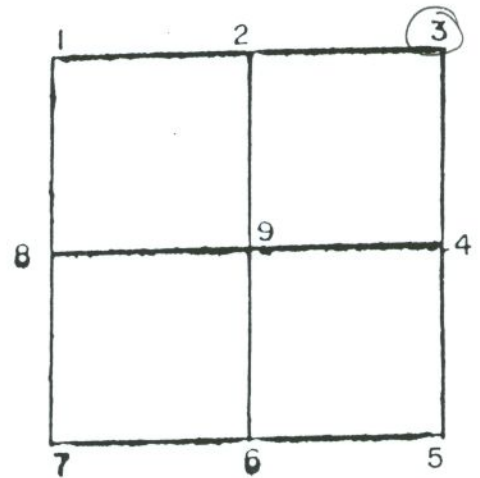


CORNER IDENT. STONE W/POINT 1.8' DEEP 1.3' IRON ROD OVER POINT

- TIES:
1. 76.00 TOP E OF R/W MARKER
 2. 74.49 PK NAIL IN POWERPOLE
 3. 66.60 PK NAIL IN POWERPOLE
 4. 70.42' PK NAIL IN CORNER POST
 5. 80.76 PK NAIL IN POWERPOLE

SEC 35 TWP 23 RANGE 4

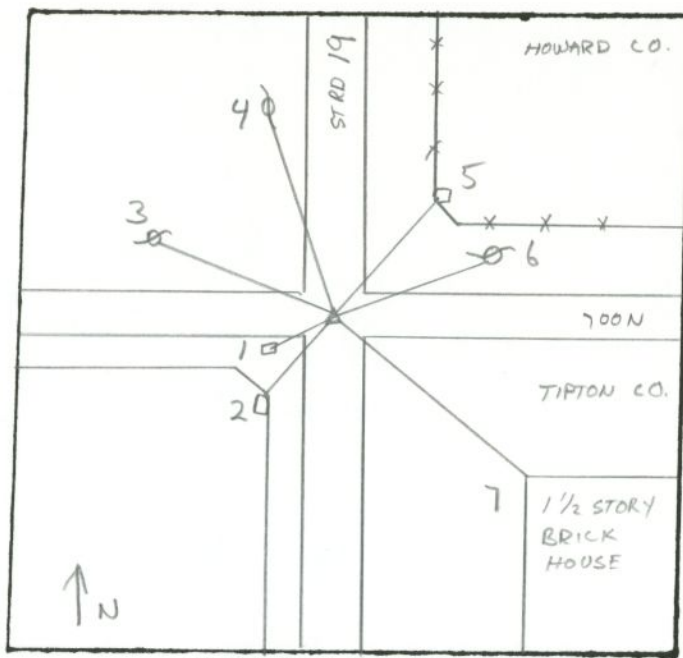

SEC 35 TWP 23 RANGE 4

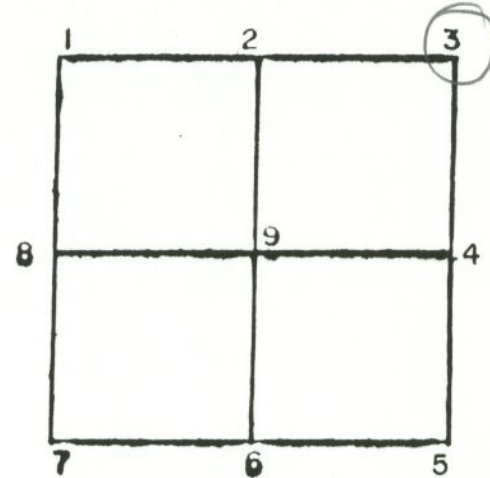

GRAPHIC TIES
(SKETCHED)


CORNER IDENT. 3 STONE W/POINT 1.8'D. 1.3' IRON ROD OVER POINT

- TIES:
1. 76.0' TOP 4 OF R/W MARKER
 2. 67.70' PK IN FENCE POST
 3. 74.55' PK IN PWP 10-389
 4. 66.46' PK IN PWP 203-939
 5. 70.42' PK IN FENCE POST
 6. 80.76' PK IN PWP 31-846
 7. 77.92' TOP OF 8TH BRICK FROM BOTTOM


SEC 35 TWP 23 RANGE 4

SEC 35 TWP 23 RANGE 4

4-15-99

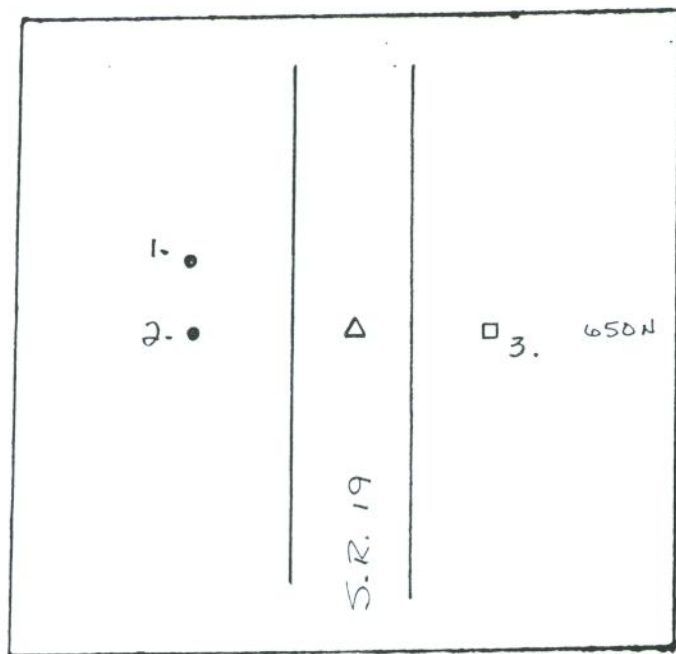

GRAPHIC TIES
(SKETCHED)

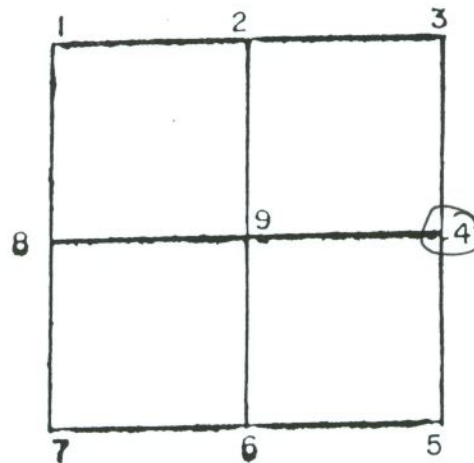

CORNER IDENT. STONE w/ POINT 1.0' DEEP 0.9' IRON ROD SET

TIES: 1. 49.89 IRON ROD SET 10' OFF WEST EDGE PAVEMENT

2. 26.48 " " " " " " " "


3. 41.75 P.K. NAIL SET IN NORTH FACE OF WOOD POST
OF BILLBOARD.

SEC 35 TWP 23 RANGE 4

DATE: 9/1/04


SECTION 35 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA



LOCAL GRID COORD
PT.# 0010
N: _____
E: _____

TYPE OF MON.: IRON ROD IN CONC
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 09-01-04
DES.NO.: 0101424

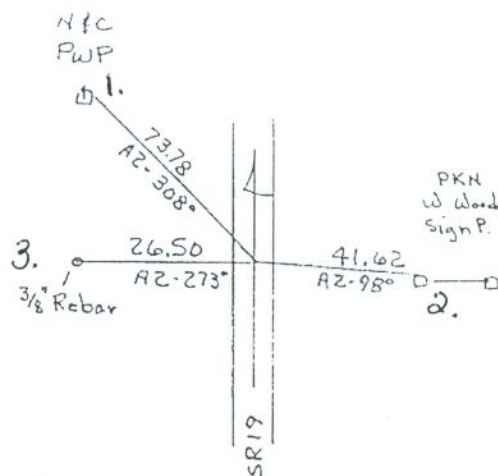

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: Iron Rod in concrete found 0" deep.


TIES:

1. 73.78' AZ 308° N+C PWP

2. 41.62' AZ 98° PK Nail W. Wood Sign pole

3. 26.50' AZ 273° 3/8" rebar.


SECTION 35 TWP. 23 RANGE 4

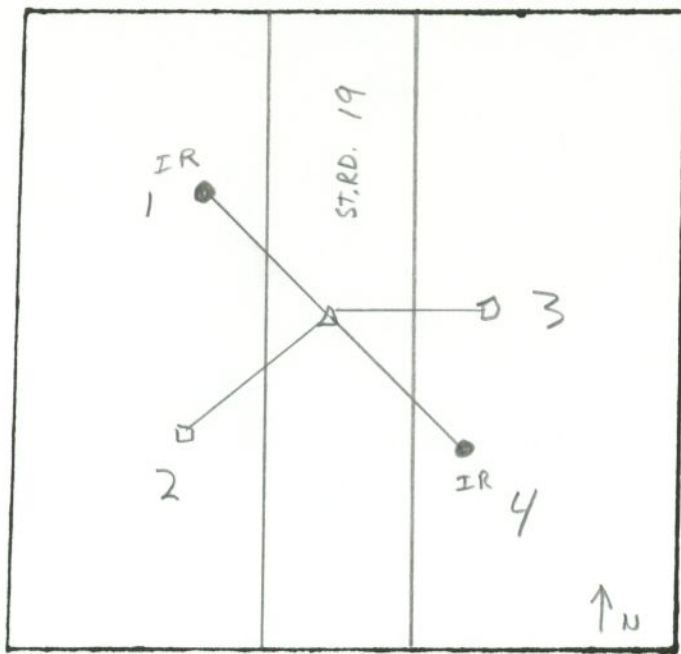

GRAPHIC TIES
(SKETCHED)

SEC 35 TWP 23 RANGE 4

5-11-82

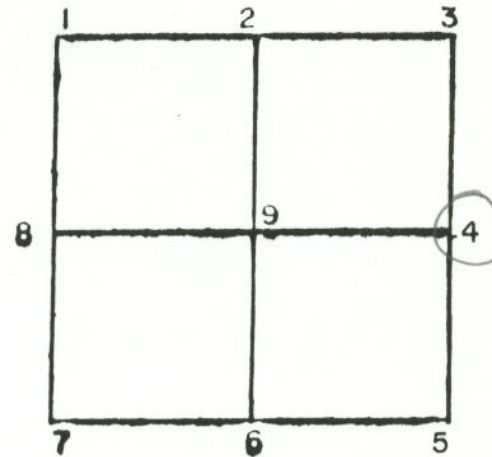


CORNER IDENT. 4 STONE W/POINT 1.0' D. 0.9' IRON ROD OVER POINT

- TIES:
- 1. 15.45' IRON ROD 10' N OF CORNER 0.5' W OF PAVEMENT EDGE
 - 2. 110.11' PK IN FENCE POST
 - 3. 36.3' TOP & R/W MARKER
 - 4. 14.44' IRON ROD 10' S OF CORNER 0.5' E OF PAVEMENT EDGE


SEC 35 TWP 23 RANGE 4

SEC. 35 TWP 23 RANGE 4

4-15-99

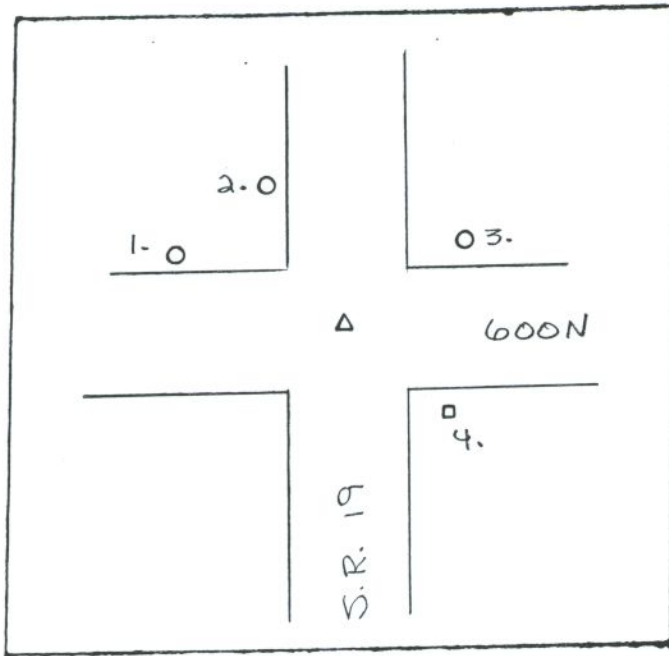


GRAPHIC TIES
(SKETCHED)

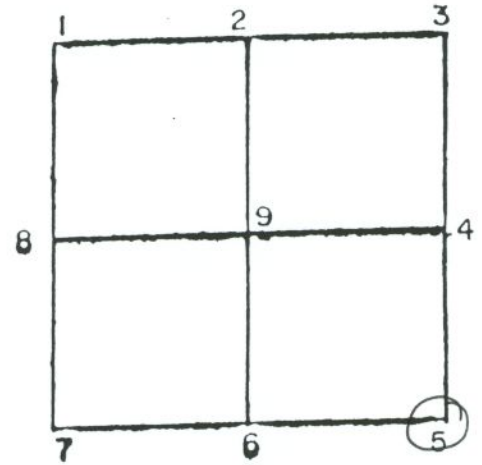

CORNER IDENT. STONE W/DRILL HOLE 1.6' DEEP 1.3' IRON ROD SET


TIES: 1. 82.30 PK NAIL IN POWERPOLE
2. 74.25 " " " "
3. 78.37 " " " "
4. 73.95 E TOP OF R/W MARKER

SEC 35 TWP 23 RANGE 4

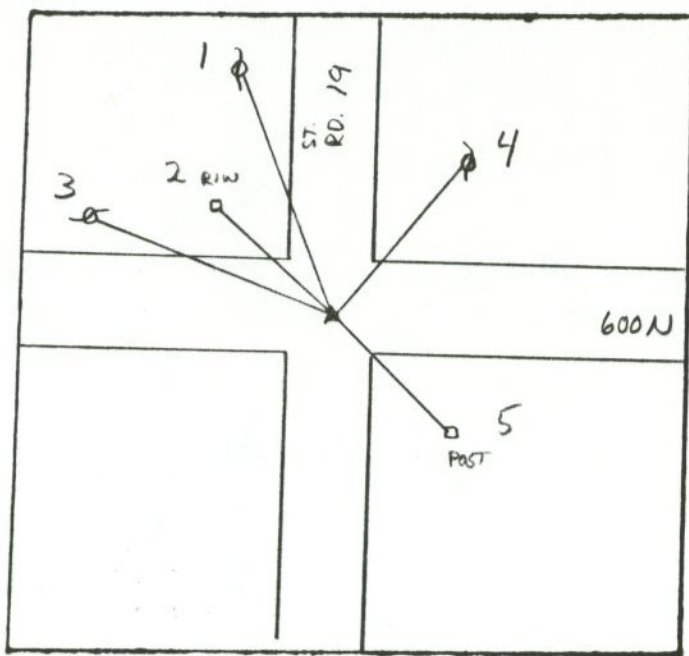

GRAPHIC TIES
(SKETCHED)

SEC. 35 TWP. 23 RANGE 4

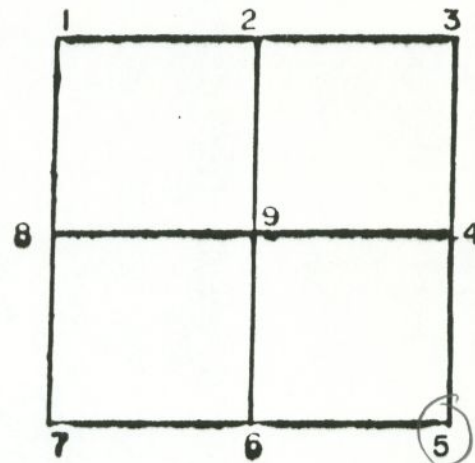

CORNER IDENT. 5 STONE W/DRILL HOLE 1.6'D. 1.3' IR. OVER DRILL HOLE

- TIES:
1. 73.97' PK IN PWP 203-913
 2. 70.1' TOP of R/W MARKER
 3. 82.22' PK IN PWP 203-912
 4. 78.44' PK IN PWP 26-307
 5. 74.91' PK IN HEAD POST

SEC. 35 TWP. 23 RANGE 4

DATE: 9/7/04

SECTION 35 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA




COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☒ LOCAL GRID

Units: _____
Pt.#: 0510 PWP N#C 1.
N: _____
E: _____

TYPE OF MON.: Rebar L.
DEPTH: 2"±
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-7-04
DES.NO.: 0101424

STATE FORM 40180 (R2 / 2-04)

$\frac{1}{2}$ mi. W. of SR19

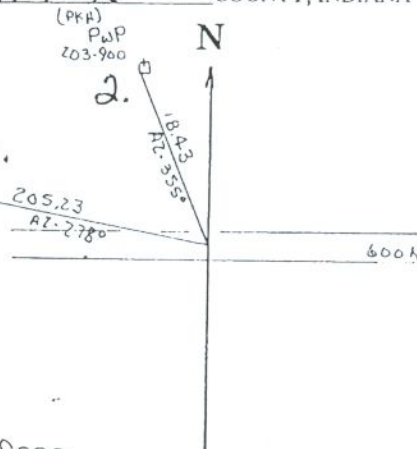

REFERENCED BY:

OTHERS: _____


CORNER IDENTIFIED: Rebar found 2"± deep.

TIES:

1. 205.23' AZ 278° N+C PWP

2. 18.43' AZ 355° PK Nail PWP #203.900


SECTION 35 TWP. 23 RANGE 4

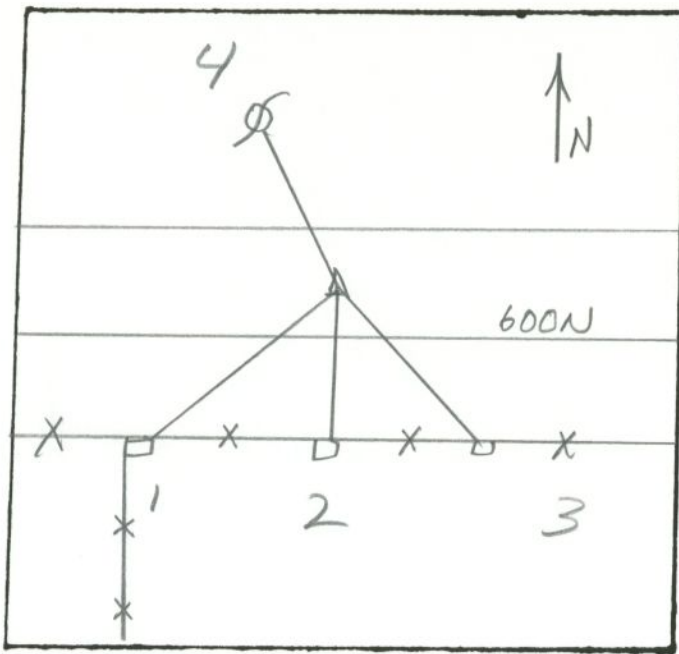

GRAPHIC TIES
(SKETCHED)

SEC 35 TWP 23 RANGE 4

4-14-80

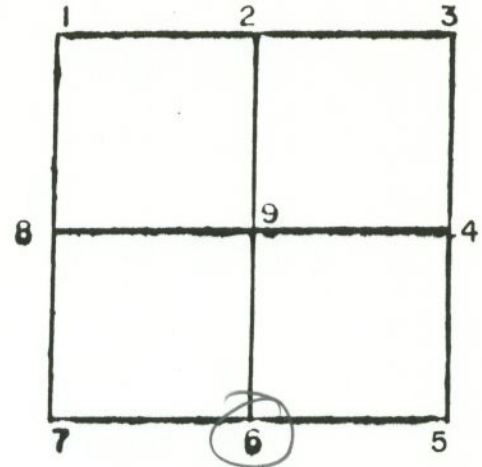

CORNER IDENT. 6 STONE W/POINT FND 0.3" DEEP IRON SET

TIES: 1. 40.09' PK - FENCEPOST (FP)
2. 23.43' PK - FP
3. 20.79' PK - FP
4. 19.47' PK - PWA


FB 150 PG. 18

SEC 35 TWP 23 RANGE 4

DATE: 9/2/04

SECTION 35 TWP. 23 RANGE 4


LIBERTY TWP. TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0023
N: _____
E: _____

TYPE OF MON.: R.R. SpKF
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES.NO.: 0101424

STATE FORM 40180 (R2/2-04)

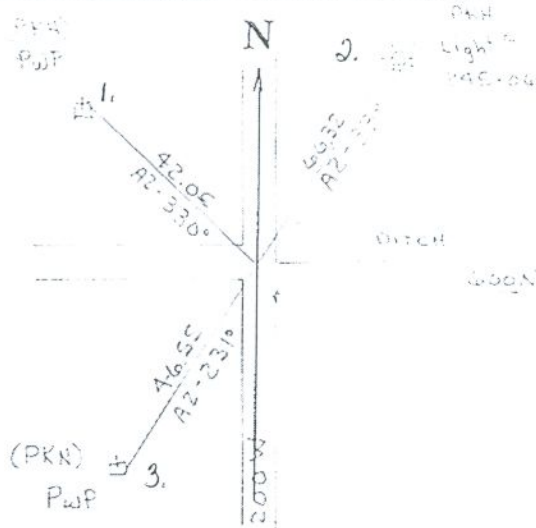

REFERENCED BY:


.....
OTHERS.....

CORNER IDENTIFIED: RR Spike found 0" deep

TIES:

1. 42.06' AZ 330° PK Nail PWP
2. 46.32' AZ 33° PK Nail Light pole #245-060
3. 46.55' AZ 231° PK Nail PWP

SECTION 35 TWP. 23 RANGE 4

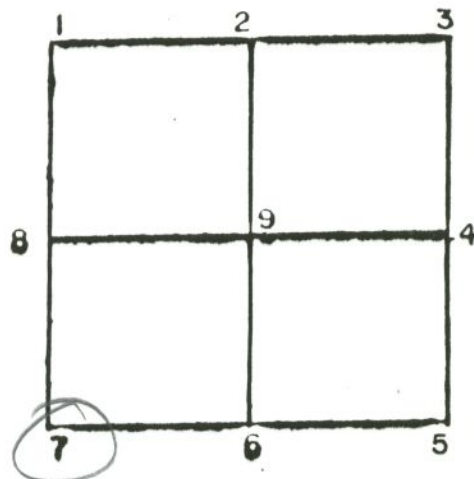

CORNER IDENT. NOT STATED

1. 31.51' HP

2. 22.21 HEADWALL


3. 47.80' PWP

SEC 35 TWP 23 RANGE 4

DATE: 9/2/04

SECTION 35 TWP. 23 RANGE 4


LIBERTY TWP., TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0022
N: _____
E: _____

TYPE OF MON.: HARRISON MKR
DEPTH: 3" ±
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES.NO.: 0101424

STATE FORM 40180 (R2/2-04)

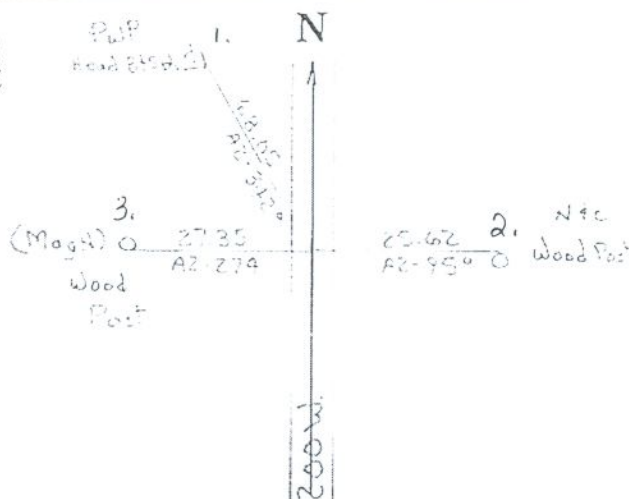

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: Harrison marker

TIES:

1. 68.05 AZ 342° Head Post Spine


2. 25.62 AZ 95° N+C Wood Post

3. 27.35 AZ 274° Mag. nail Wood Post


SECTION 35 TWP. 23 RANGE 4

SEC 35 TWP 23 RANGE 4

4-7-80

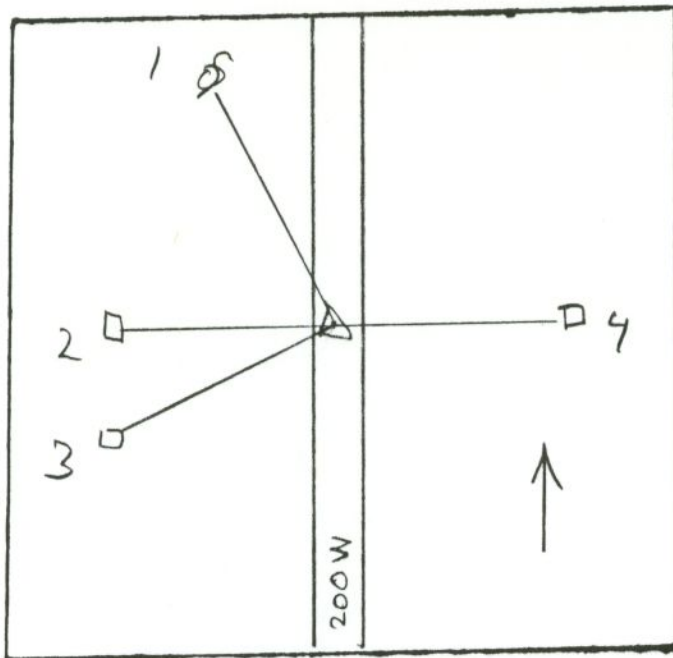

GRAPHIC TIES
(SKETCHED)

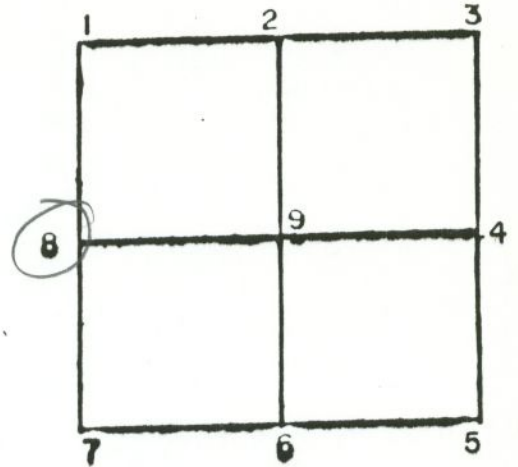

CORNER IDENT. NOT STATED

TIES: 1. 19.70° PWP
2. 16.40° HP
3. 22.80° FP
4. 16.60° HP


HARRISON MARKER

SEC 35 TWP 23 RANGE 4

DATE: 9/1/04

SECTION 36 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA



LOCAL GRID COORD

PT.# 0011

N: _____

E: _____

TYPE OF MON.: IRON ROD IN CONC.


DEPTH: 0

UNCERTAINTY: _____

BY: PARTY 1

DATE: 9-01-04

DES.NO.: 0101424

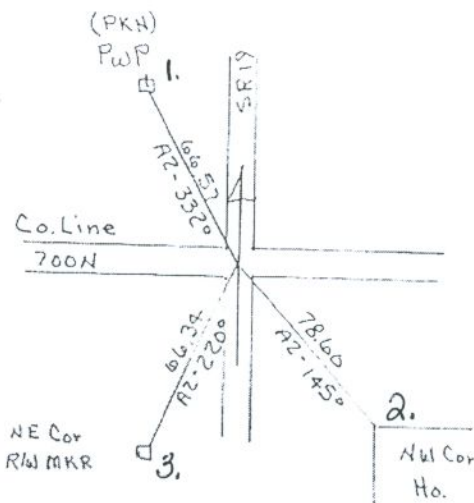

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: Iron Rod in Concrete 0" deep

TIES:

1. 66.57' AZ 332° PK Nail PWP


2. 78.60' AZ 145° NW Corner house

3. 66.34' AZ 220° NE Cor R/W Marker


SECTION 36 TWP. 23 RANGE 4

SEC 36 TWP 23 RANGE 4

4-15-99

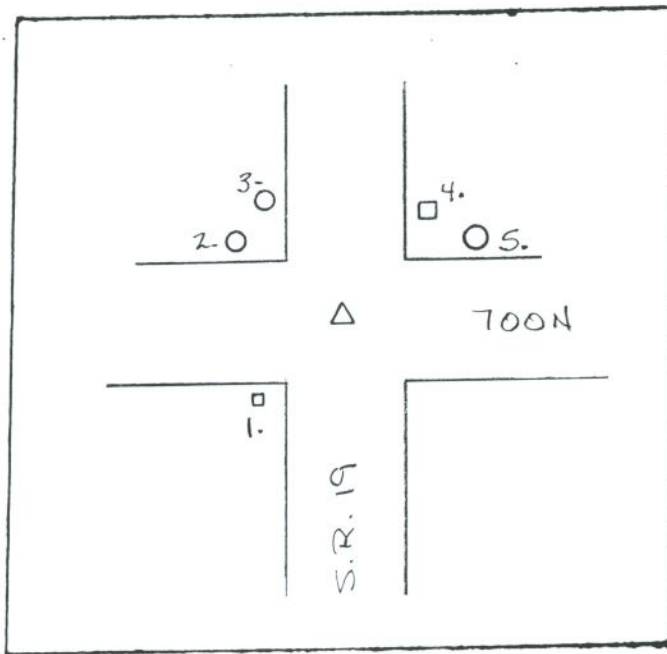


GRAPHIC TIES
(SKETCHED)

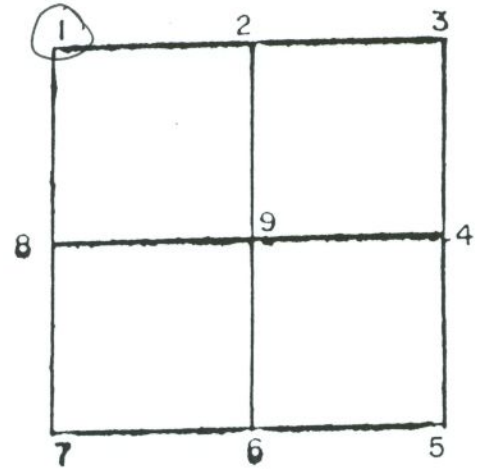


CORNER IDENT. STONE W/POST 1.8' DEEP 1.3' IRON ROD OVER POINT

- TIES: 1. 76.00 TOP E OF R/W MARKER
2. 74.49 PK NAIL IN POWERPOLE
3. 66.60 PK NAIL IN POWERPOLE
4. 70.42' PK NAIL IN CORNER POST
5. 80.76 PK NAIL IN POWERPOLE

SEC 36 TWP 23 RANGE 4

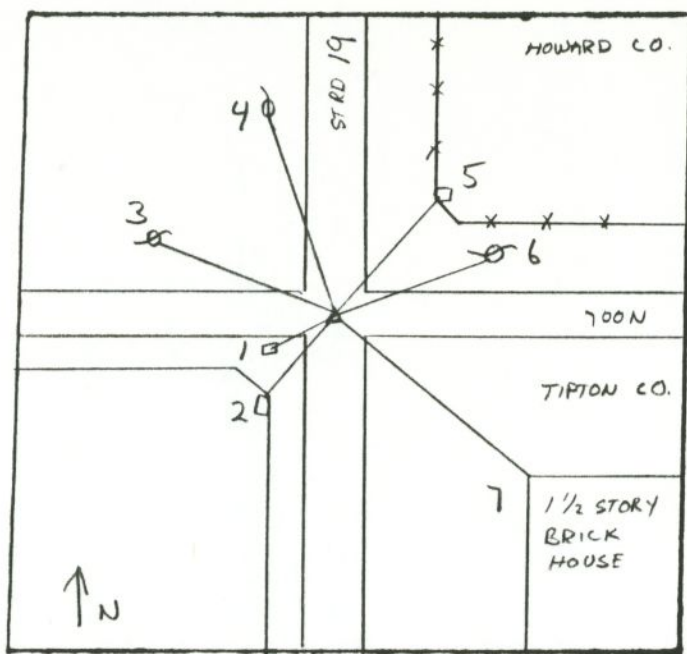

SEC 36 TWP 23 RANGE 4

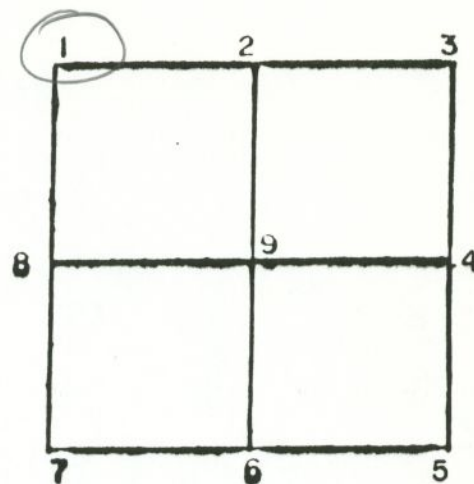

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 1 STONE W/POINT 1.6" D. 1.3' IRON ROD OVER POINT


- TIES:
1. 76.0' TOP 4 OF R/W MARKER
 2. 67.70' PK IN FENCE POST
 3. 74.55' PK IN PWP 10-389
 4. 66.46' PK IN PWP 203-939
 5. 70.42' PK IN FENCE POST
 6. 80.76' PK IN PWP 31-846
 7. 77.92' TOP OF 8TH BRICK FROM BOTTOM

SEC 36 TWP 23 RANGE 4


DATE: 9/2/04

SECTION 36 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☒ LOCAL GRID
Units: _____
Pt.#: 0019
N: _____
E: _____

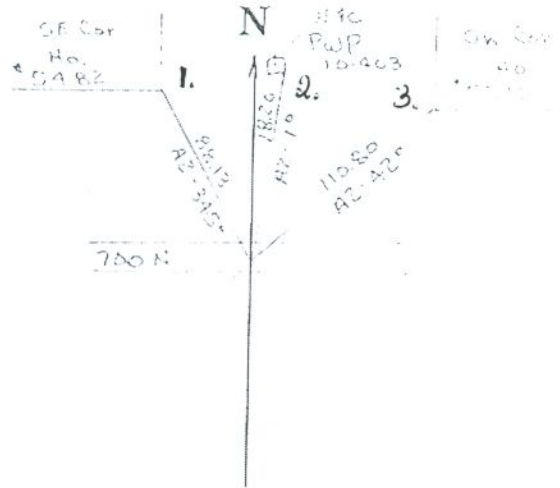

TYPE OF MON.: R.R. SpKL.
DEPTH: 3"
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES.NO.: 0101424

STATE FORM 40180 (R2/2-04)

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: R.R. Spike found 3" deep.

TIES:

1. 88.13' AZ 345° SE Cor house #5482

2. 18.20' AZ 1° N+c PWP 10-403

3. 110.80' AZ 42° SW Cor house #5516

SECTION 36 TWP. 23 RANGE 4

DATE: 9/2/04


SECTION 36 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 00 3
N: _____
E: _____

TYPE OF MON.: IRON ROD L.
DEPTH: 2" ±
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

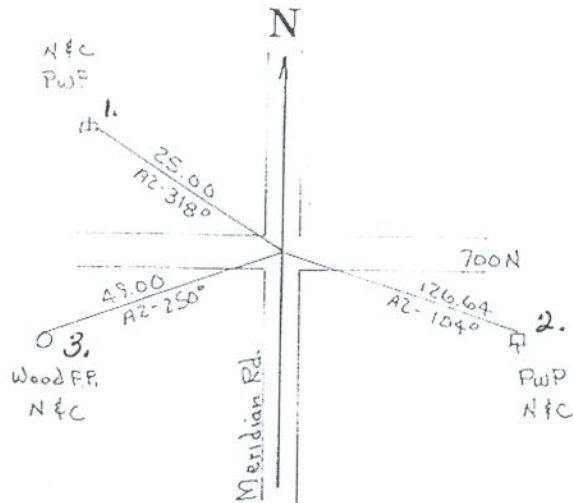

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: Iron Rod found 2" ± deep

TIES:


1. 25.00' AZ 318° N+C PWP
2. 126.64' AZ 104° N+C PWP
3. 49.00' AZ 250° N+C Wood fence post.

SECTION 36 TWP. 23 RANGE 4

DATE: 9/2/04

SECTION 36 TWP. 23 RANGE 4


LIBERTY TWP., TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0017
N: _____
E: _____

TYPE OF MON.: MAG. N. F.
DEPTH: 0"
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

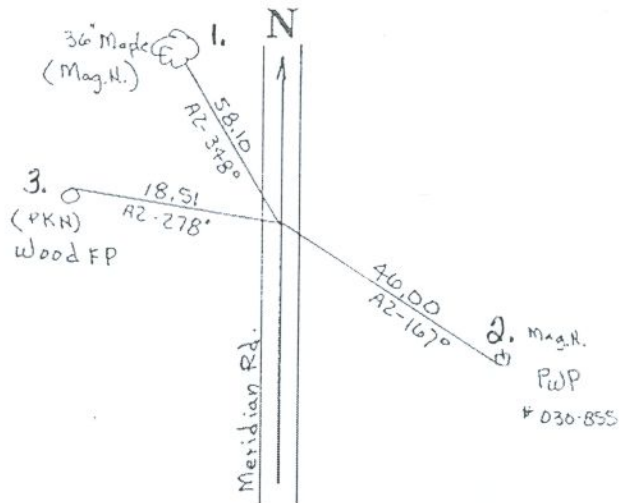

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: MAG. NAIL FOUND 0" DEEP

TIES:

1. 58.10' AZ 348° MAG NAIL 36" MAPLE

2. 46.00' AZ 167° MAG NAIL PWP


3. 18.51' AZ 278°

SECTION 36 TWP. 23 RANGE 4

DATE: 9/7/02

SECTION 36 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA




COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0016
N: _____
E: _____

TYPE OF MON.: IRON PIN L.
DEPTH: 2"±
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-7-02
DES.NO.: 0101424

STATE FORM 40180 (R2/2-04)

1 mi. E of SR19

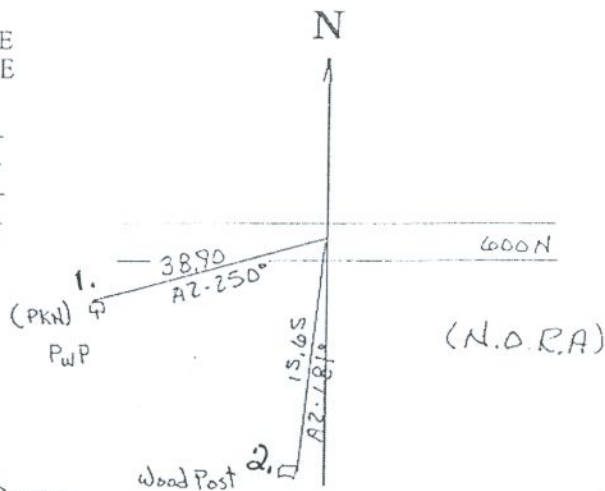

REFERENCED BY:

OTHERS:


CORNER IDENTIFIED: Iron Pin found 2"± deep

TIES:

1. 38.90' AZ 250° PK Nail PWP

2. 15.65' AZ 181° Wood post


SECTION 36 TWP. 23 RANGE 4

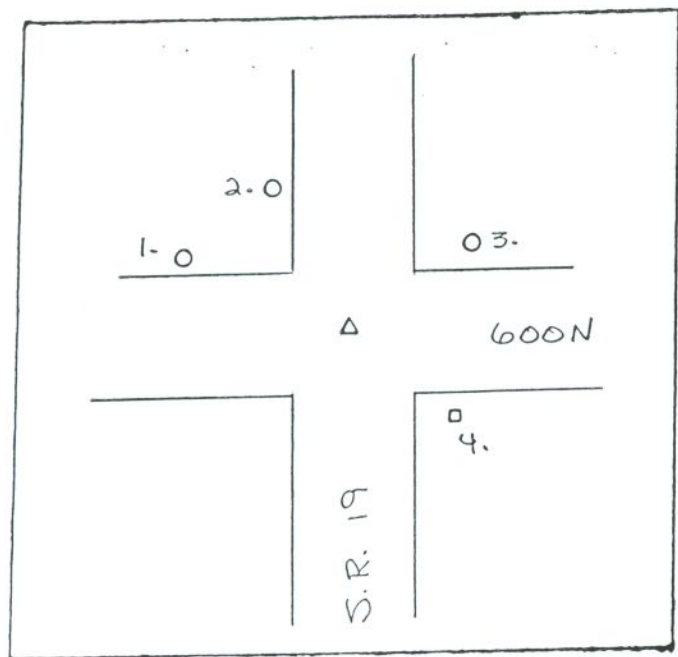

GRAPHIC TIES
(SKETCHED)

SEC. 36 TWP 23 RANGE 4


4-15-99

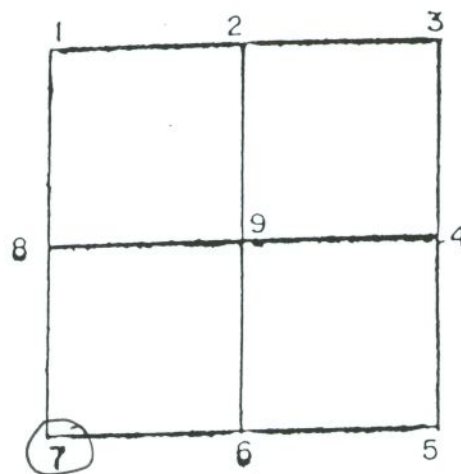

CORNER IDENT. STONE W/DRILL HOLE 1.6' DEEP 1.3' IRON ROD SET


TIES: 1. 82.30 PK NAIL IN POWERPOLE
2. 74.25 " " " "
3. 78.37 " " " "
4. 73.95 E TOP OF R/W MARKER

SEC 36 TWP 23 RANGE 4

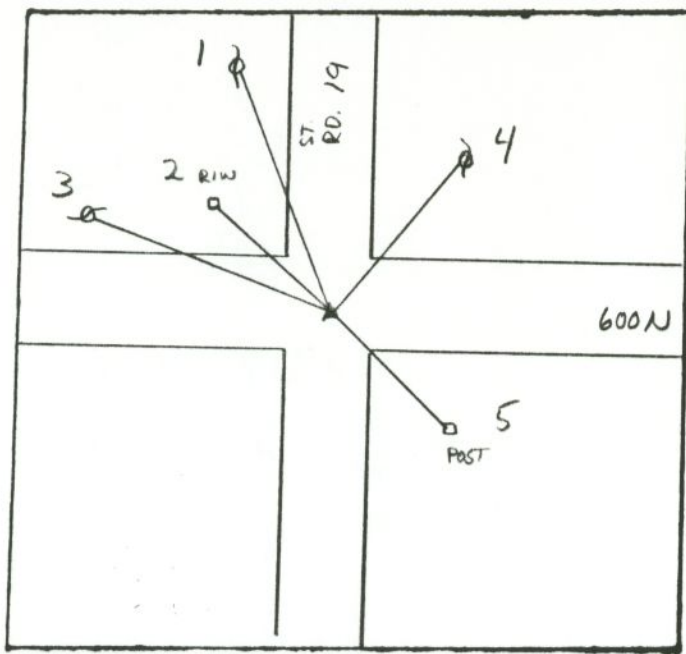

GRAPHIC TIES
(SKETCHED)

SEC. 36 TWP. 23 RANGE 4

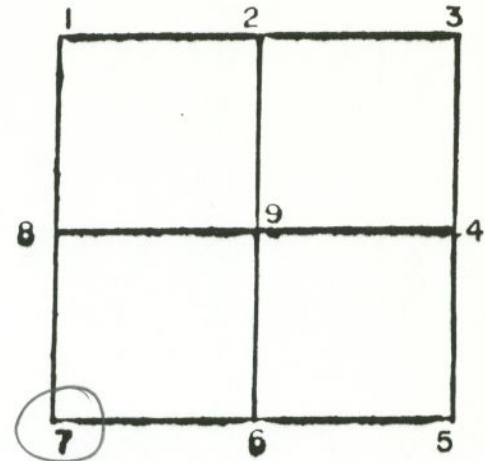

CORNER IDENT. 7 STONE W/DRILL HOLE 1.6" D. 1.3" IR. OVER DRILL HOLE


- TIES:
- 1. 73.97' PK IN PWP 203-913
 - 2. 70.1' TOP of R/W MARKER
 - 3. 82.22' PK IN PWP 203-912
 - 4. 78.44' PK IN PWP 26-307
 - 5. 74.91' PK IN HEAD POST
 -
 -
 -
 -
 -
 -
 -

SEC 36 TWP 23 RANGE 4

DATE: 9/1/04


SECTION 36 TWP. 23 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA



LOCAL GRID COORD
PT.# 0010
N: _____
E: _____

TYPE OF MON.: IRON ROD IN CONC
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 09-01-04
DES.NO.: 0101424

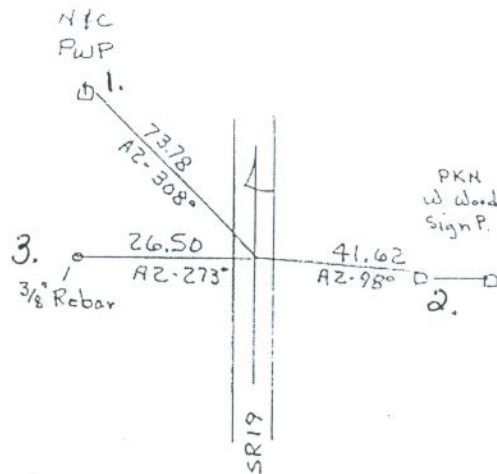

REFERENCED BY:

.....
OTHERS.....

CORNER IDENTIFIED: Iron Rod in concrete found 0" deep

TIES:

1. 73.78' AZ 308° N+C PWP


2. 41.62' AZ 98° PK Nail W. Wood Sign pole

3. 26.50' AZ 273° 3/8" rebar


SECTION 36 TWP. 23 RANGE 4

SEC. 36 TWP. 23 RANGE 4

4-15-99

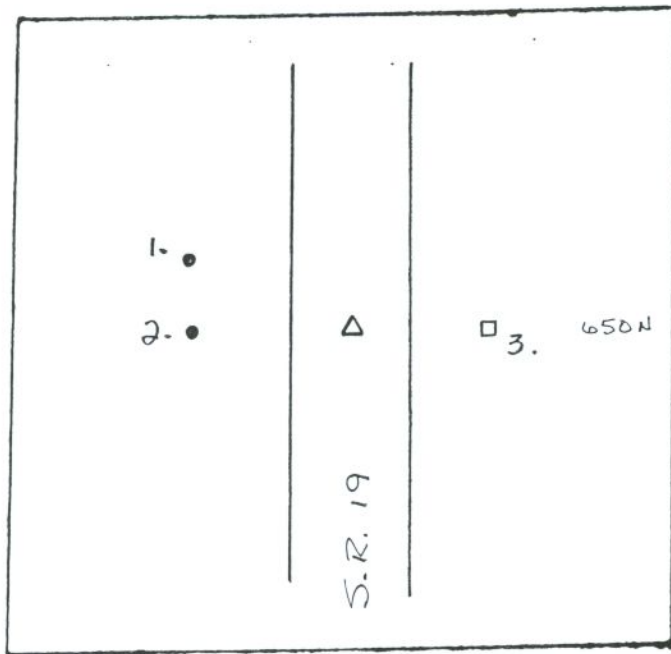

GRAPHIC TIES
(SKETCHED)

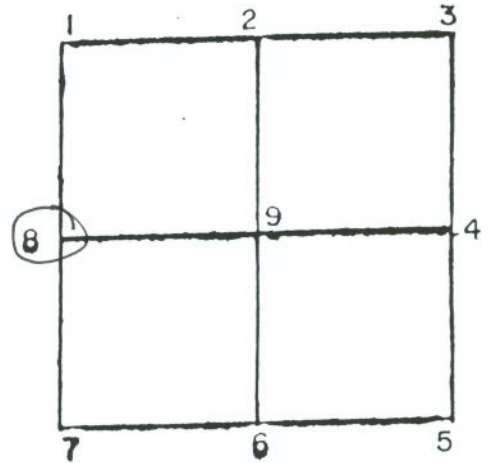


CORNER IDENT. STONE w/POUNT 1.0' DEEP 0.9' IRON ROD SET

TIES: 1. 49.89 IRON ROD SET 10' OFF WEST EDGE PAVEMENT
2. 26.48 " " " " " " " "
3. 41.75 P.K. NAIL SET IN NORTH FACE OF WOOD POST
OF BILLBOARD.


SEC. 36 TWP. 23 RANGE 4

SEC 36 TWP 23 RANGE 4

5-11-82

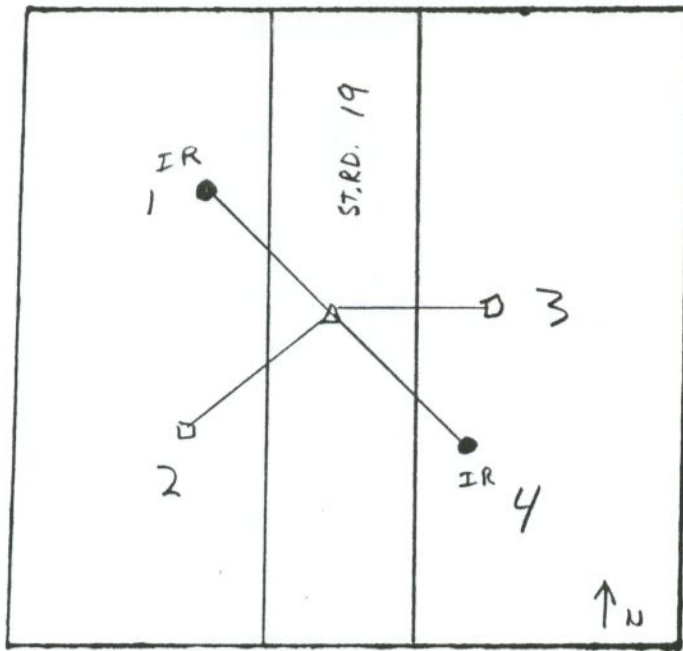

GRAPHIC TIES
(SKETCHED)

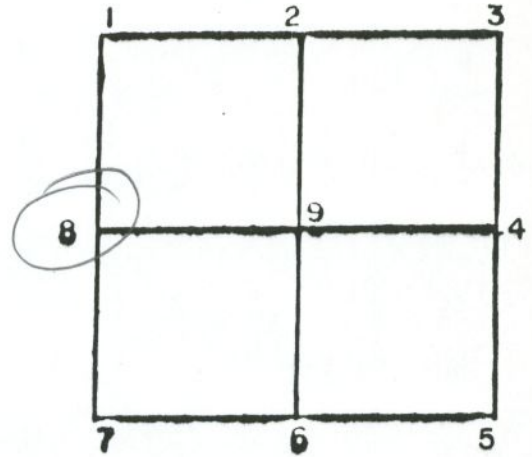

CORNER IDENT. 8 STONE W/POINT 1.0' D. 0.9' IRON ROD OVER POINT

- TIES:
- 1. 15.45' IRON ROD 10' N OF CORNER 0.5' W OF PAVEMENT EDGE
 - 2. 110.11' PK IN FENCE POST
 - 3. 36.3' TOP & R/W MARKER
 - 4. 14.44' IRON ROD 10' S OF CORNER 0.5' E OF PAVEMENT EDGE

SEC 36 TWP 23 RANGE 4