



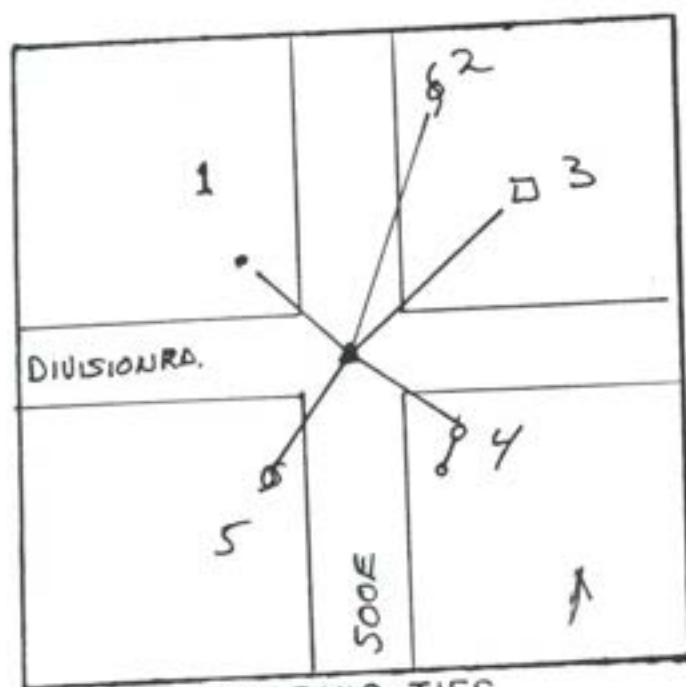

SEC. 1 TWP 21 RANGE 5

2-10-92

L. MILLER

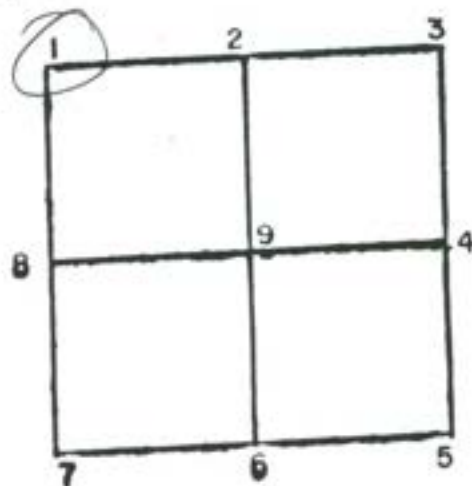

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. STONE FND. $\pm .60'$ BELOW SURFACE

- TIES:
- ① IRON ROD - SET 21.59'
 - ② PK SET WEST SIDE OF Utility Pole 45.53'
 - ③ PK SET IN S.W. COR HEADPOST 24.01'
 - ④ RR SPIKE - EAST SIDE OF WOOD POST 32.00'
 - ⑤ PK SET - NORTH SIDE OF Power Pole 28.41'

STONE FOUND $\pm .60'$ BELOW SURFACE - HIGH POINT USED


P.K. SET. OVER STONE

$\pm 3.5'$ WEST OF ~~E~~ 500 E


$\pm 2.5'$ NORTH OF ~~E~~ DIVISION ROAD

SEC. 1 TWP 21 RANGE 5

SEC 1 TWP 21 RANGE 5

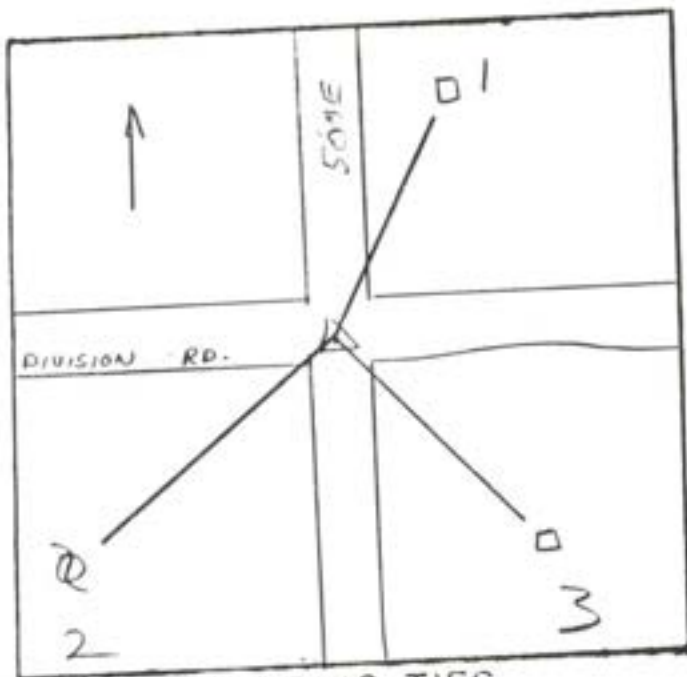

GRAPHIC TIES
(SKETCHED)

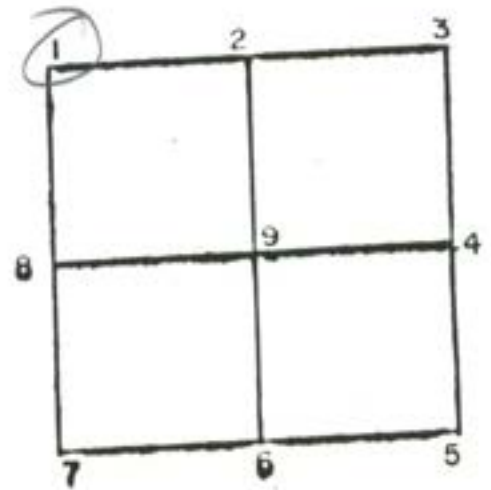

CORNER IDENT. NOT STATED

TIES: 1. 24.20' HP DESTROYED
2. 26.40' PWP
3. 31.00' HP DESTROYED

2-10-92

SEC 1 TWP 21 RANGE 5


	$\begin{matrix} 1 \\ 0 \end{matrix}$	$\begin{matrix} 2 \\ 0 \end{matrix}$
DIVISION AD	Δ	
	$\begin{matrix} \square \\ 4 \end{matrix}$	ϕ_3

A 3x3 grid with numbers 1-9. The top row contains 1, 2, and 3. The middle row contains 8, 9, and 4. The bottom row contains 7, 6, and 5. The number 2 is circled.

TIES:

1. 16.95 5/8" I.R.
2. 18.73 5/8" I.R.
3. 86.50 PK IN PWP
4. 17.17 PK IN H.P.


SEC 1 TWP 21 RANGE 5

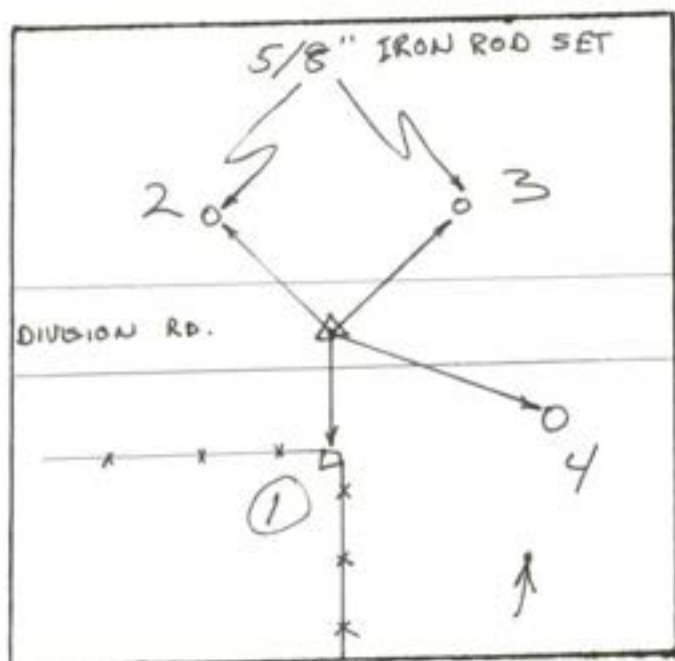

GRAPHIC TIES
(SKETCHED)

SEC. 1 TWP 21 RANGE 5

2-10-92
L. MILLER

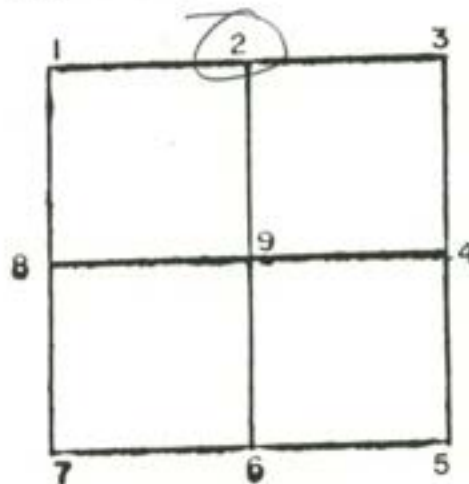


CORNER IDENT. STONE FND. W/ 'X' CUT

TIES: 1 PK FND. IN CORNER POST 17.17'
2 IRON ROD SET-5/8" - 16.93'
3 IRON ROD 5/8" SET ~~16.73'~~ 18.73'
4 P.K. SET IN ~~HOT~~ POWERPOST 86.50'

STONE FOUND WITH CUT "X"
± .50' BELOW SURFACE - ASPHALT


SEC. 1 TWP 21 RANGE 5

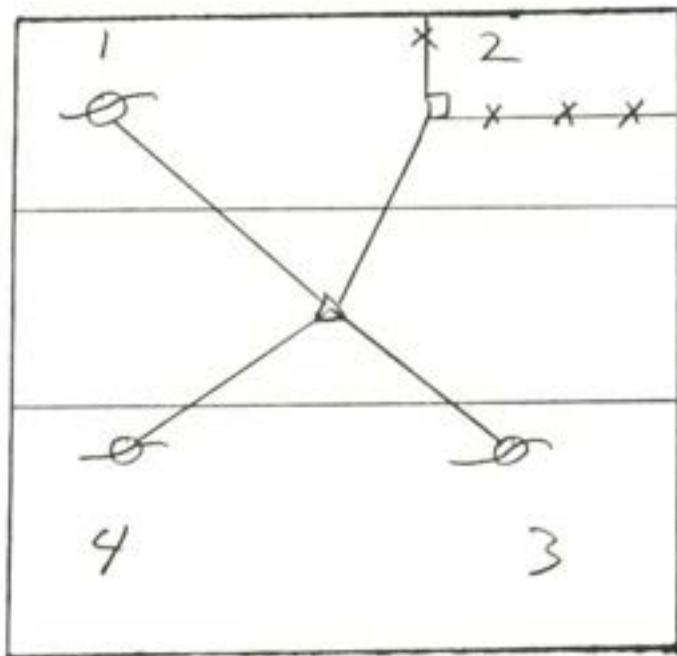

GRAPHIC TIES
(SKETCHED)

SEC 1 TWP 21 RANGE 5


8-8-72

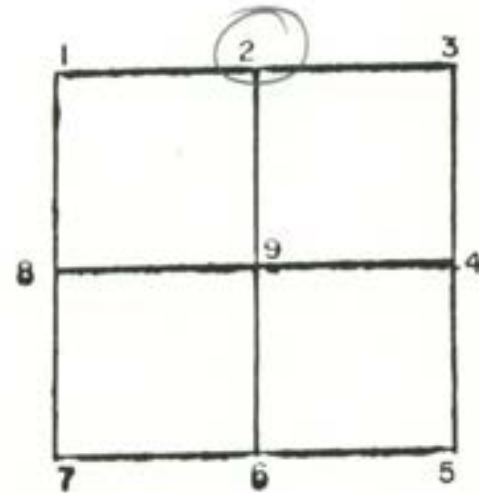

CORNER IDENT. 2 IRON PIN

TIES: 1. 69.9' PWP
2. 45.3' HEADPOST
3. 55.3' PWP
4. 29.5' PWP


SEC 1 TWP 21 RANGE 5

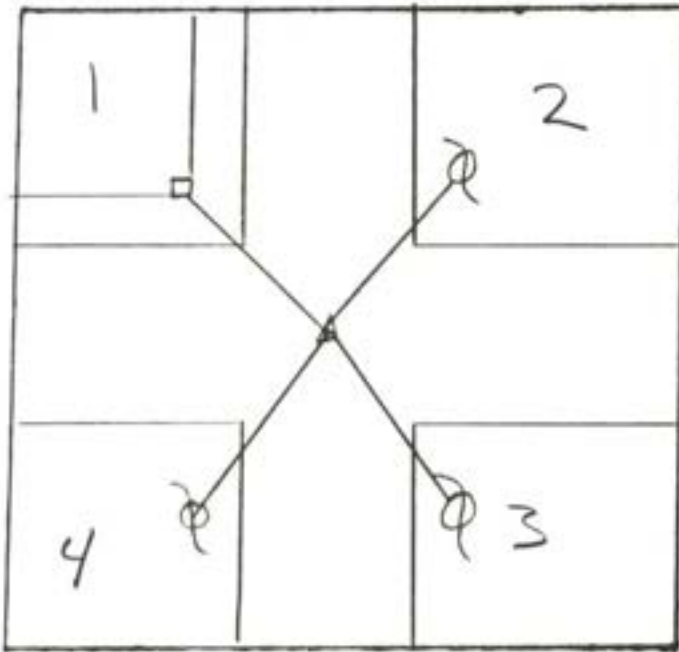

GRAPHIC TIES
(SKETCHED)

SEC. 1 TWP 21 RANGE 5


7-13-72

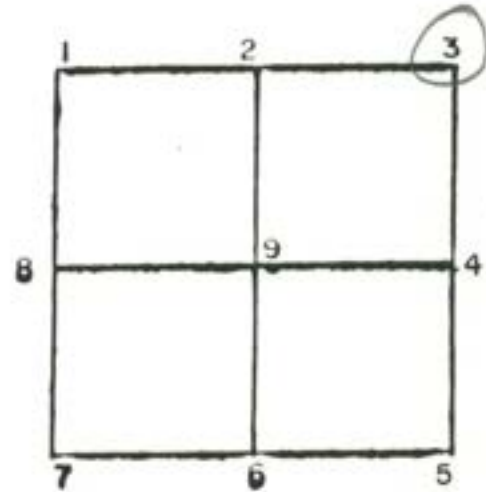

CORNER IDENT. 3 STONE


TIES:	1. 30.6'	HEAD POST
	2. 41.6'	PWP
	3. 39.5'	PWP
	4. 29.9'	PWP

SEC. 1 TWP 21 RANGE 5

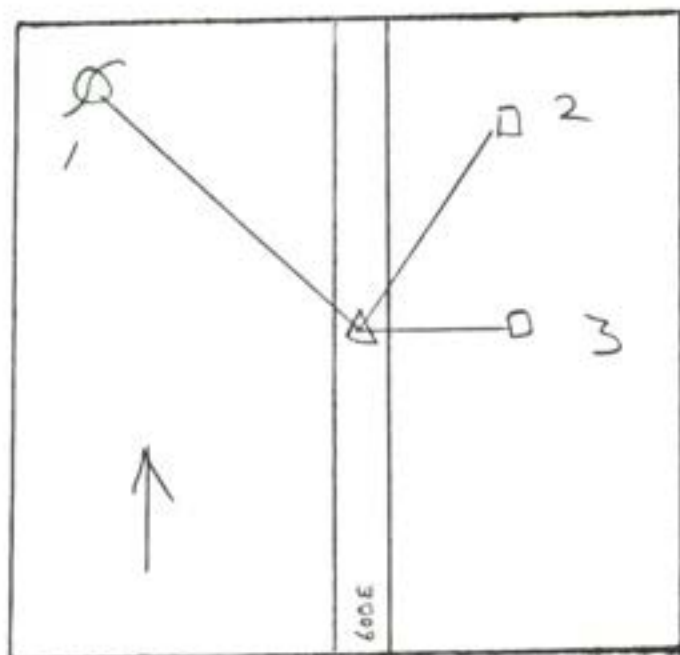

GRAPHIC TIES
(SKETCHED)


SEC 1 TWP 21 RANGE 5

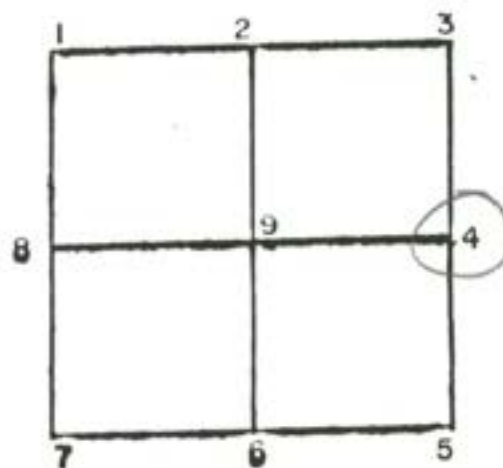

CORNER IDENT. NOT STATED

TIES: 1. 62.30' PWP
2. 26.80' FA
3. 25.30' HP


SEC 1 TWP 21 RANGE 5

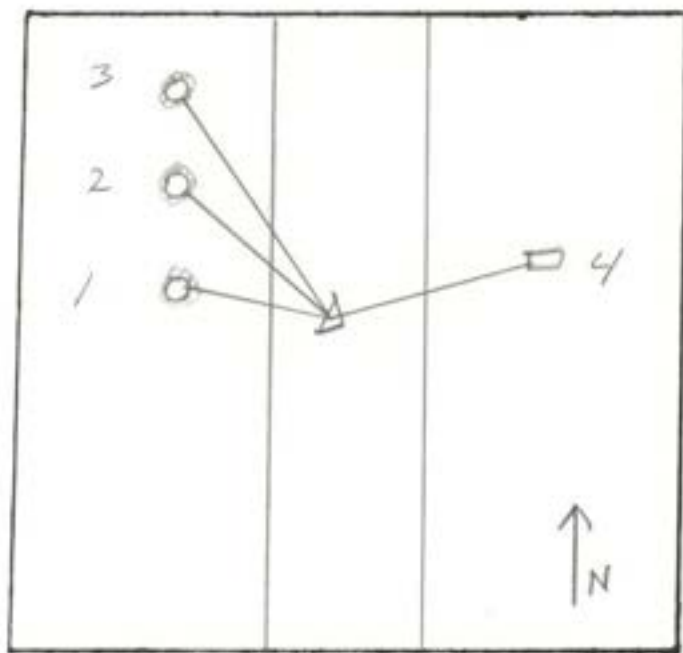

GRAPHIC TIES
(SKETCHED)

SEC 1 TWP 21 RANGE 5


11-26-86

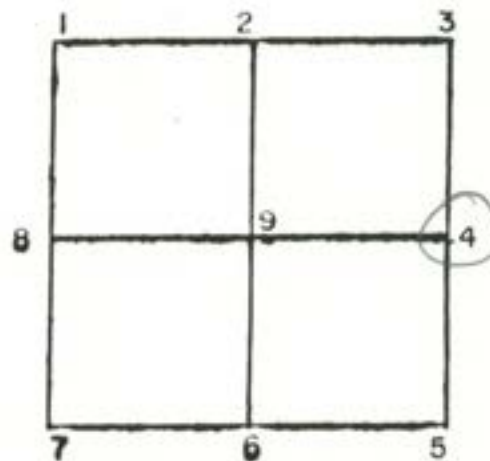

CORNER IDENT. 4 NO DESCRIPTION GIVEN


TIES: 1. 37.33' PK - TREE
2. 66.53' PK - TREE
3. 86.25' PK - TREE
4. 53.03' PK - HEADPOST

SEC 1 TWP 21 RANGE 5

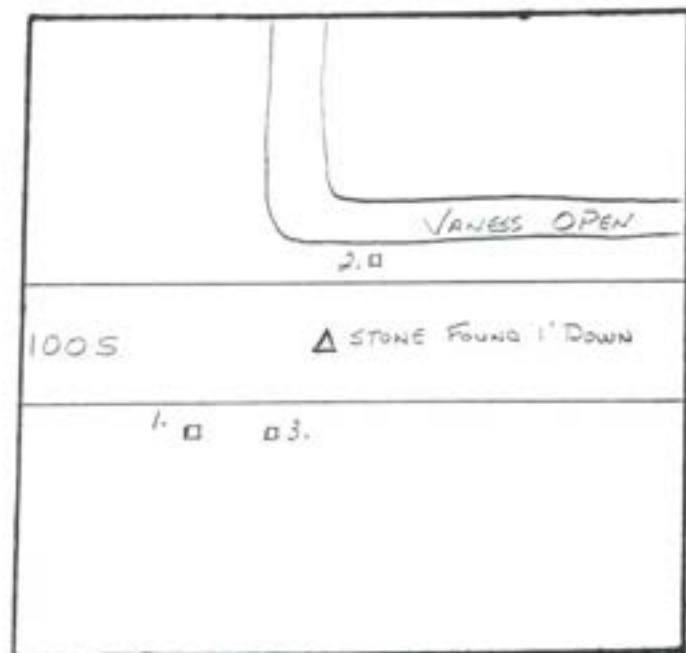

GRAPHIC TIES
(SKETCHED)


SEC 1 TWP 21 RANGE 5

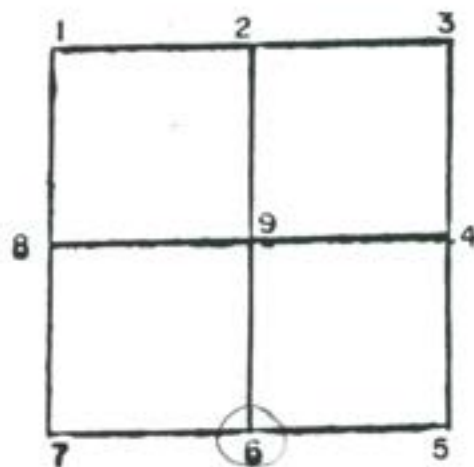

CORNER IDENT. Stone

TIES: 1. HEADPOST 30.42'
2. FENCEPOST 30.70'
3. HEADPOST 24.80'


SEC 1 TWP 21 RANGE 5

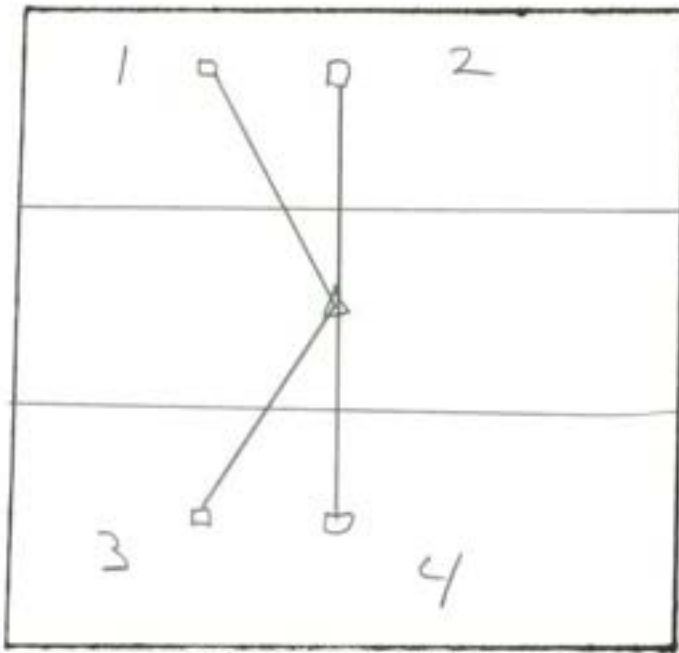

GRAPHIC TIES
(SKETCHED)

SEC 1 TWP 21 RANGE 5


8-7-72

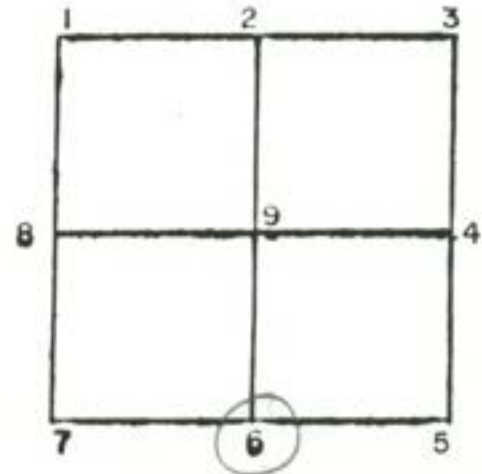

CORNER IDENT. 6 IRON PIN


TIES: 1. 31.5' FENCE POST
2. 11.8' HEADPOST
3. 30.4' FENCE POST
4. 24.6' HEADPOST

SEC 1 TWP 21 RANGE 5

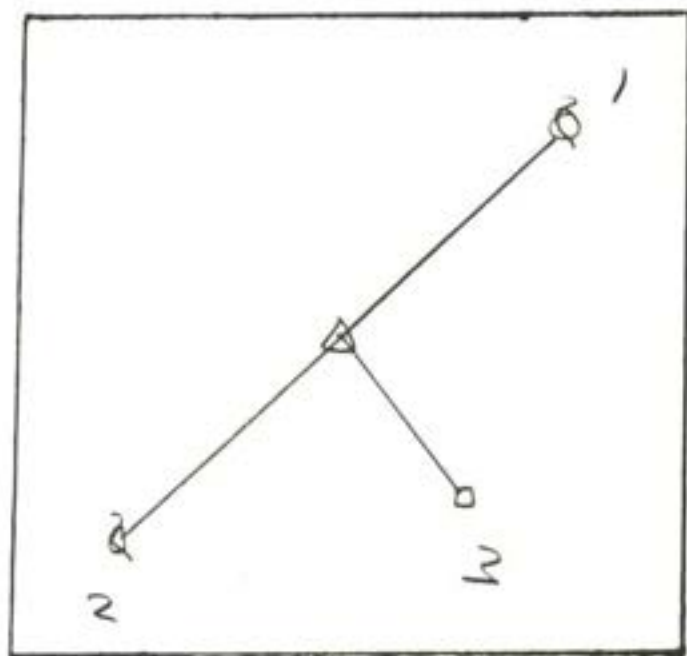

GRAPHIC TIES
(SKETCHED)

SEC. 1 TWP 21 RANGE 5

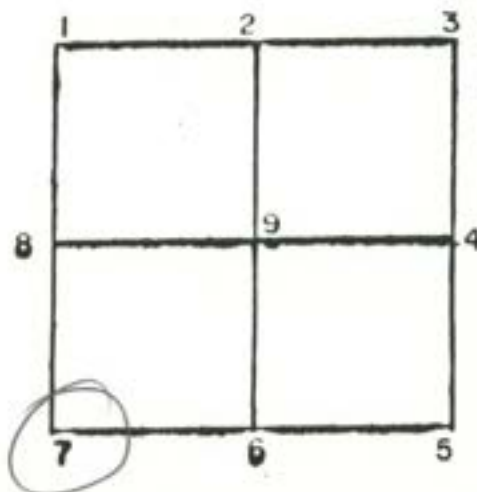


CORNER IDENT. NOT STATED

TIES: 1. 24.55' PWP

2. 30.75' PWP

3. 26.00" HP


SEC 1 TWP 21 RANGE 5

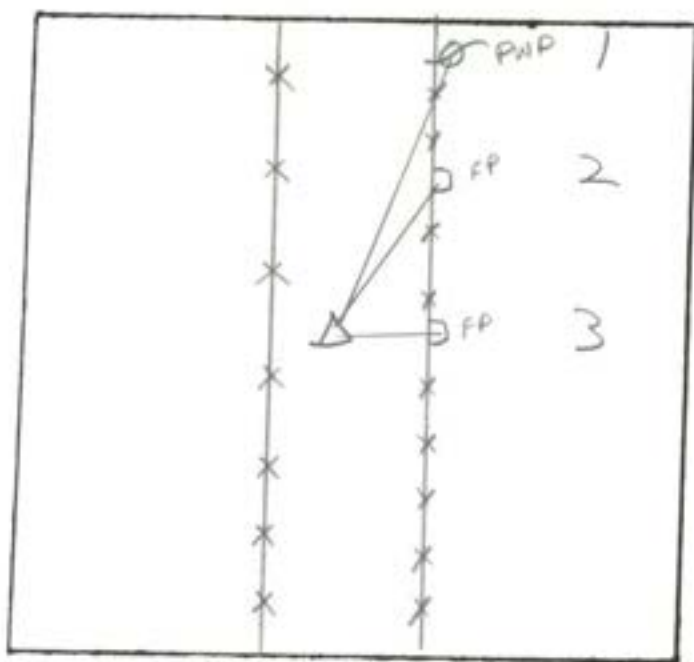

GRAPHIC TIES
(SKETCHED)

SEC 1 TWP 21 RANGE 5

8-8-72

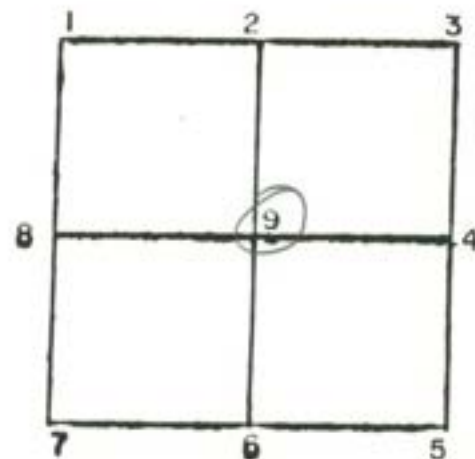

CORNER IDENT. 9 IRON PIN


TIES:

1. 49.5' PWP

2. 18.4' FENCE POST

3. 15.4' FENCE POST


SEC 1 TWP 21 RANGE 5

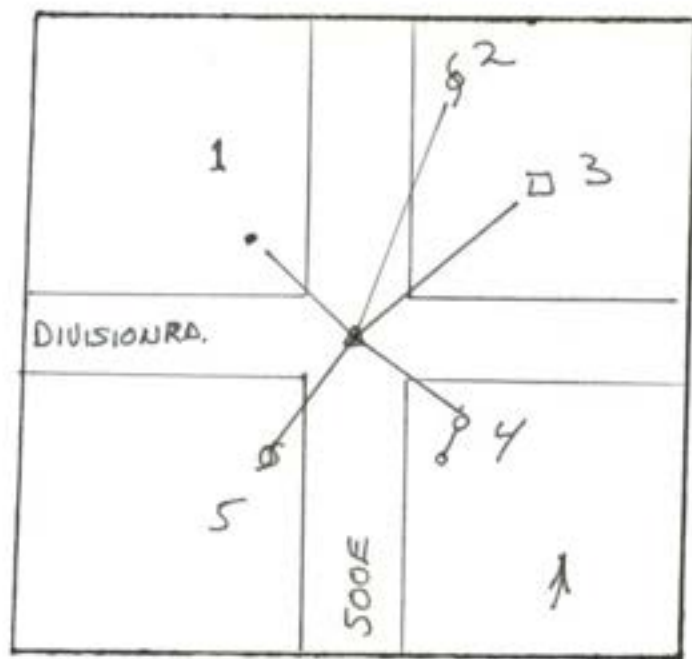

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 21 RANGE 5

2-10-92
L. MILLER

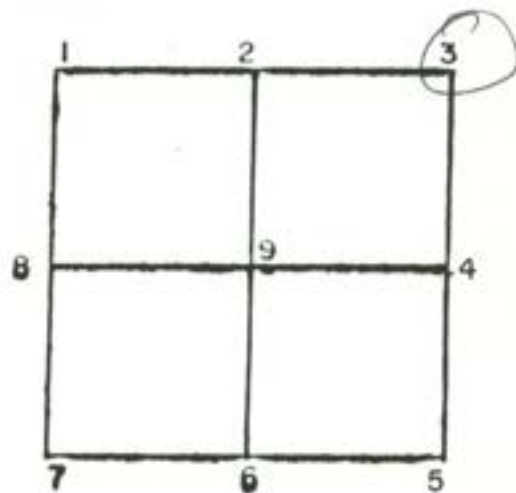

CORNER IDENT. STONE FND. $\pm .60'$ BELOW SURFACE


- TIES:
- ① IRON ROD - SET 21.59'
 - ② PK SET WEST SIDE OF Utility Pole 45.53'
 - ③ PK SET IN S.W. COR HEADPOST 24.01'
 - ④ RR SPIKE - EAST SIDE OF WOOD POST 32.00'
 - ⑤ PK SET - NORTH SIDE OF POWER Pole 28.41'

STONE FOUND $\pm .60'$ BELOW SURFACE - HIGH POINT USED
P.K. SET. OVER STONE

$\pm 3.5'$ WEST OF $\frac{1}{2}$ 500 E


$\pm 2.5'$ NORTH OF $\frac{1}{2}$ DIVISION ROAD

SEC 2 TWP 21 RANGE 5

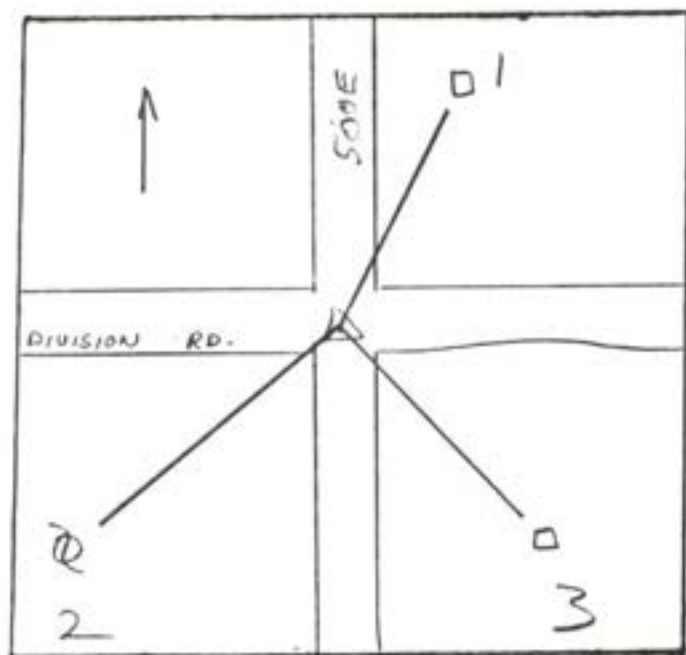

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 21 RANGE 5

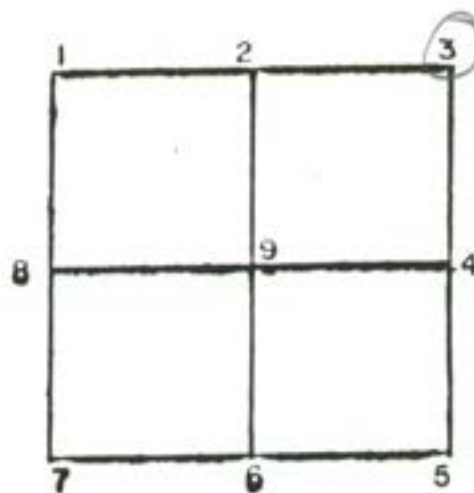


CORNER IDENT. NOT STATED

TIES: 1. 24.20' HP

2. 26.90' PWP


3. 31.00' HP

SEC 2 TWP 21 RANGE 5

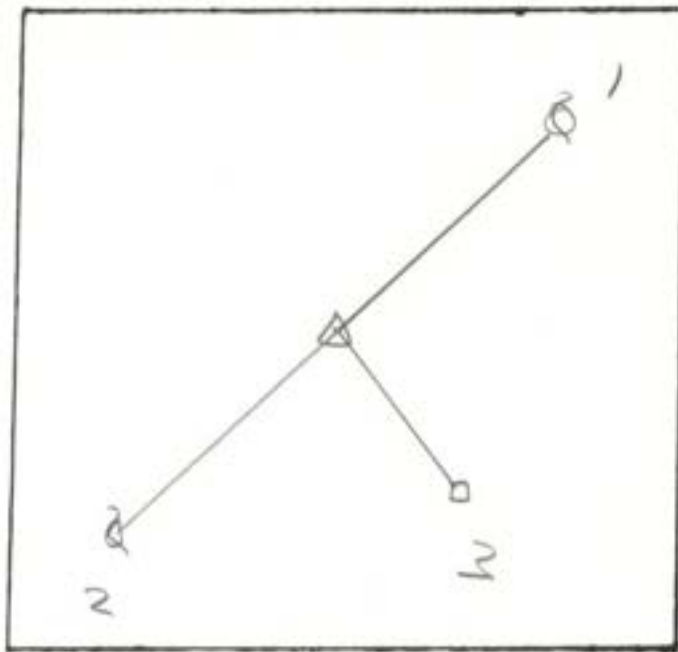

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 21 RANGE 5

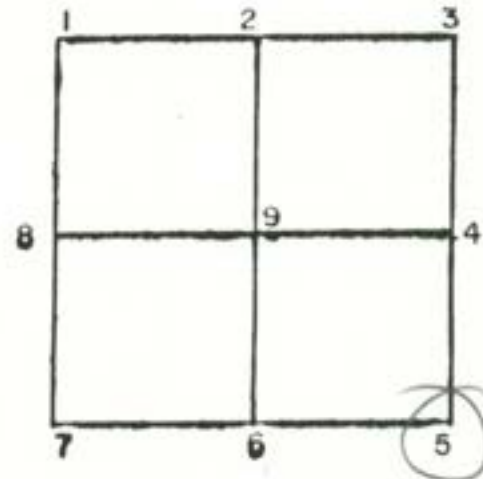

CORNER IDENT. NOT STATED

TIES: 1. 24.55' PWP

2. 30.75' PWP



3. 26.00" HP

SEC 2 TWP 21 RANGE 5

SECTION 2 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY APRIL 30, 2002

REFERENCE SHEET

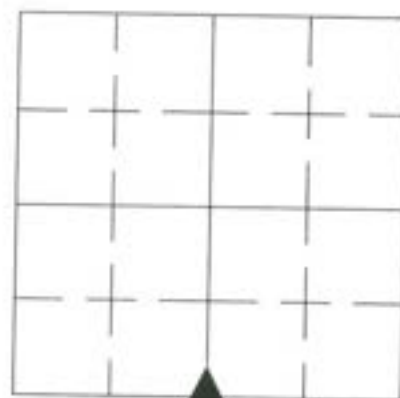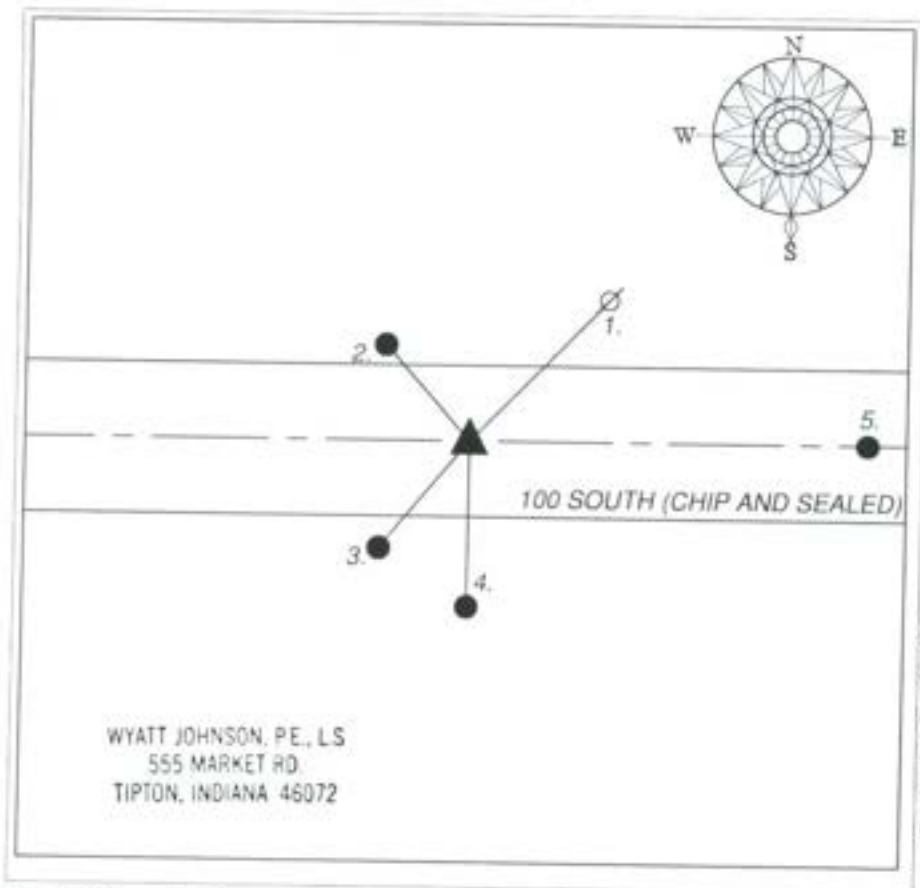

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: 04/30/02

CREW: _____

NORTH: 1836735.96 EAST: 255074.31

ELEVATION: _____

LATITUDE: 40°17'26.8517"

LONGITUDE: 85°55'42.1807"

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY

JOB # 02-051


TYPE OF MARKER IDENTIFIED: STONE FLUSH

HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO REFERENCE IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT BESIDES THE ORIGINAL NOTES FROM COUNTY SURVEYOR'S OFFICE.

REFERENCE	DISTANCE	DESCRIPTION	FOUND SET	
1.	45.97'	MAG NAIL W/ IDENTIFYING WASHER IN POWERPOLE	☐	☒
2.	18.26'	IRON ROD W/ IDENTIFYING CAP 1' NORTH OF EDGE OF ROAD	☐	☒
3.	16.43'	IRON ROD W/ IDENTIFYING CAP 4' SOUTH OF EDGE OF ROAD	☐	☒
4.	16.52'	IRON ROD W/ IDENTIFYING CAP @ APPARENT R/W	☐	☒
5.	400.00'	RAILROAD SPIKE IN CENTERLINE OF ROAD	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐

SEC 2 TWP 21 RANGE 5

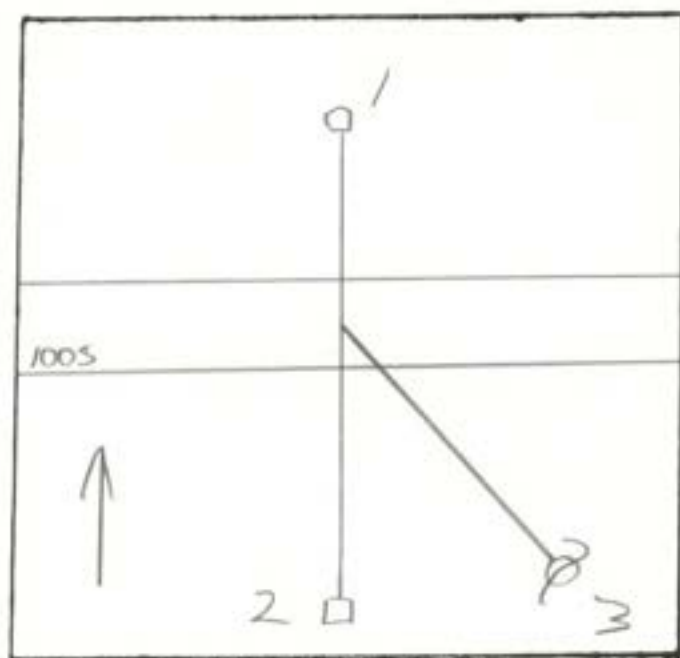

GRAPHIC TIES
(SKETCHED)

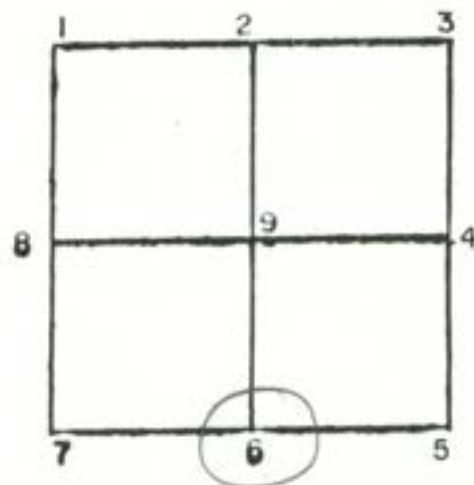


CORNER IDENT. NOT STATED

TIME:	1. 25.05'	HP
	2. 19.50'	HP
	3. 18.55'	PWA


SEC 2 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 2 TWP. 21 RANGE 5

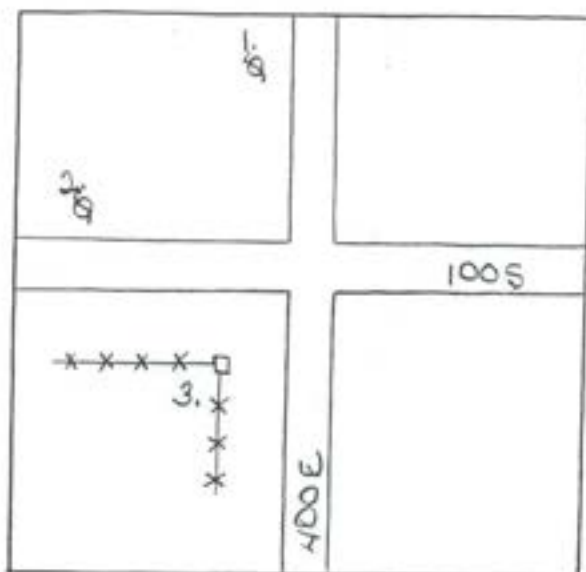

GRAPHIC TIES (SKETCHED)

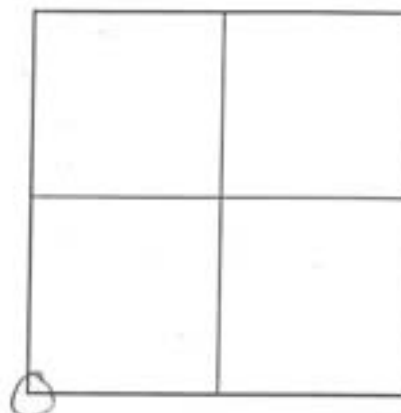

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: R.R. SPIKE FOUND AT SURFACE

TIES:

1. 83.00' AZ 355° N & C IN PWP

2. 37.13' AZ 300° PK NAIL IN PWP

3. 20.31' AZ 187° N & C IN WOOD CORNER POST

.....

.....


.....

.....


.....

.....

SECTION 2 TWP. 21 RANGE 5

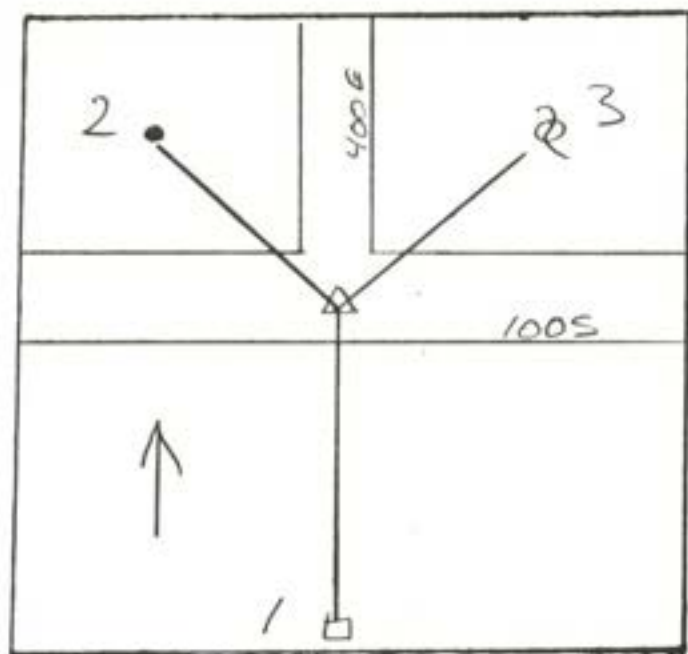

SEC. 2 TWP 21 RANGE 5

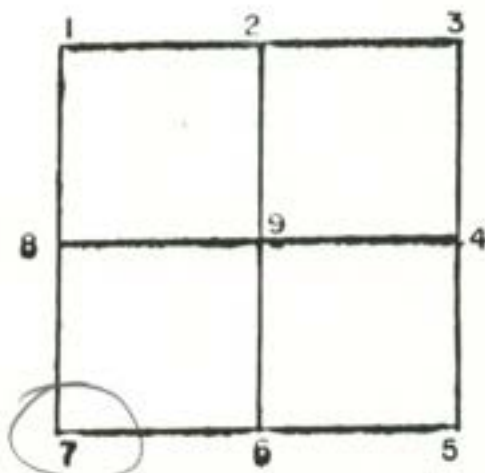


CORNER IDENT. NOT STATED

TIES: 1. 20.30' HP

2. 25.10' METAL FP

3. 35.75' PWP


SEC. 2 TWP 21 RANGE 5

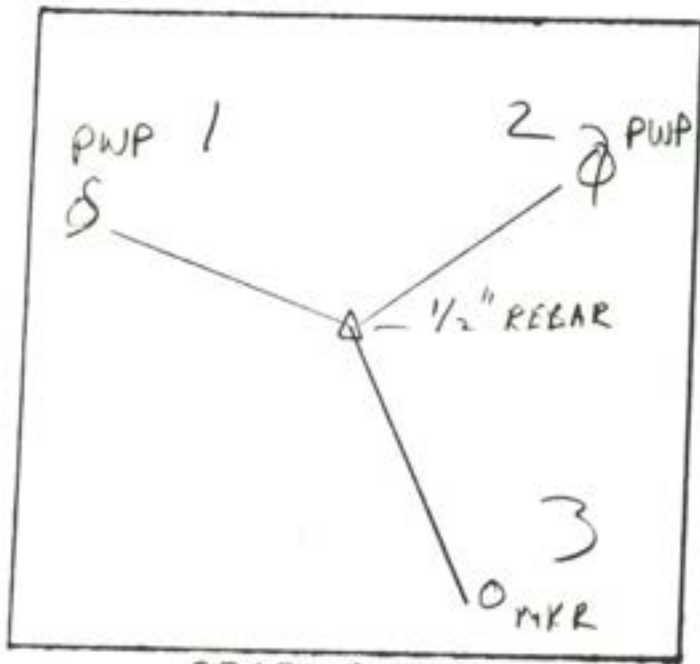

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 21 RANGE 5

DEC 1988

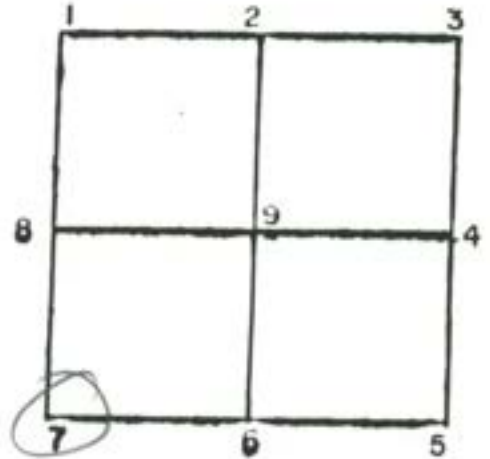

CORNER IDENT. 1/2" REBAR 1" ±


TIES:

1. PWP 37.12 PK

2. PWP 45.91 PK


3. PROPERTY CORNER MKR 19.78

SEC 2 TWP 21 RANGE 5

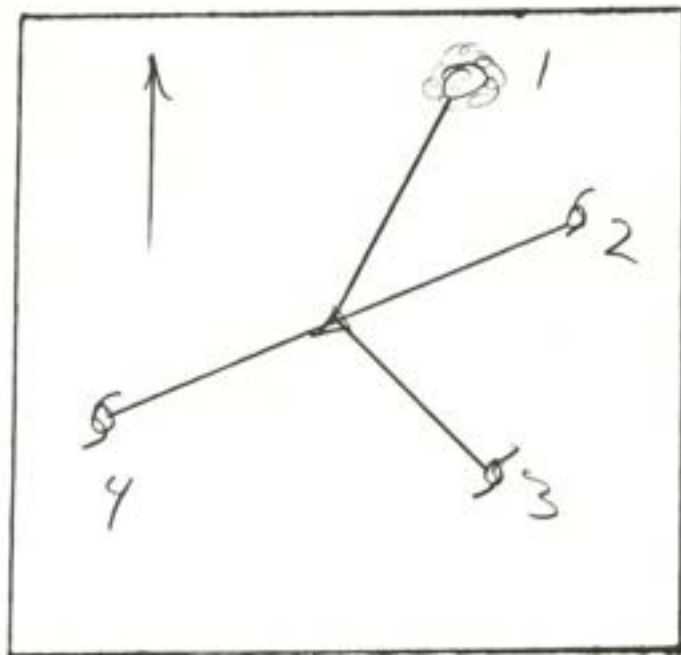

GRAPHIC TIES
(SKETCHED)

SEC. 2 TWP 21 RANGE 5

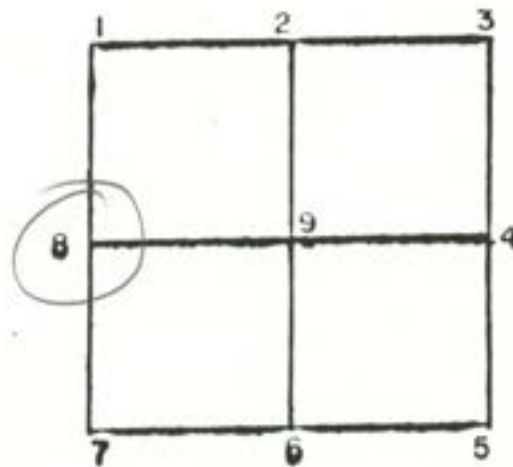

CORNER IDENT. NOT STATED



TIES: 1. 100.96' MAPLE TREE
2. 63.73' PWP
3. 16.12' PWP
4. 19.80' PWP

SEC 2 TWP 21 RANGE 5

SECTION 3 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY APRIL 30, 2002

REFERENCE SHEET

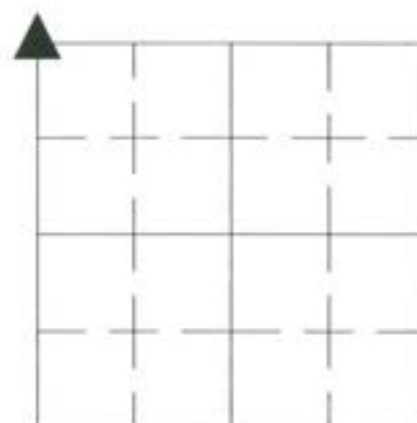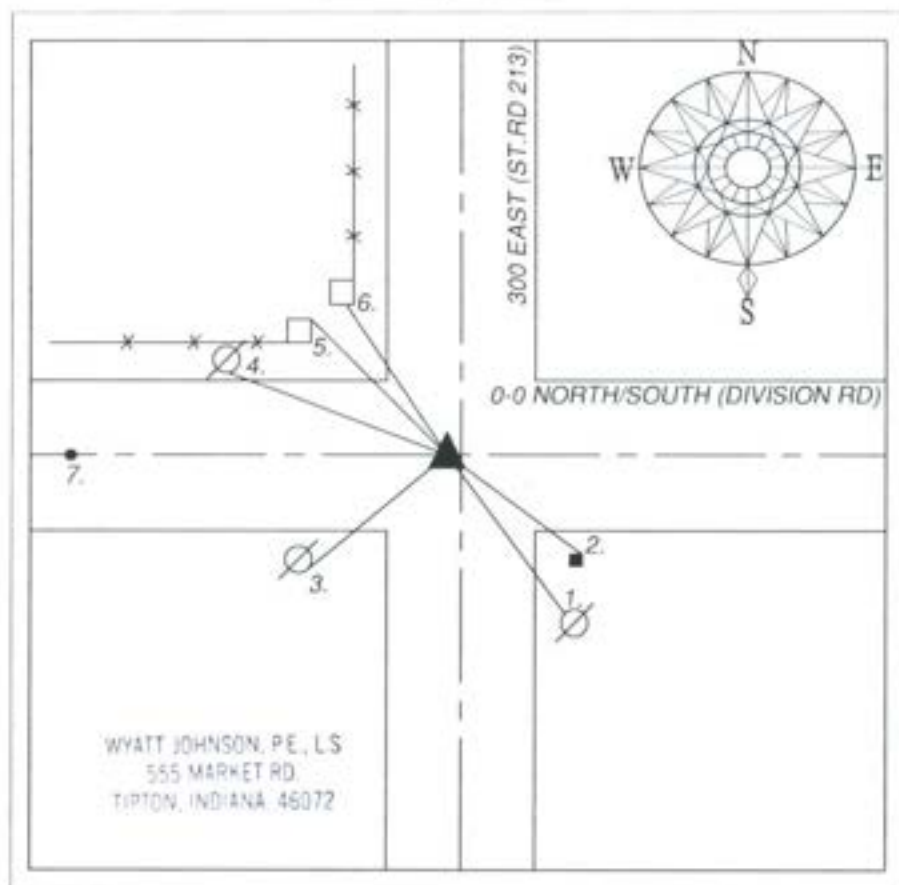

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: 04/30/02

CREW: _____

NORTH: 1841995.36 EAST: 247133.06

ELEVATION: _____

LATITUDE: 40°18'18.58092"

LONGITUDE: 85°57'24.88375"

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY


JOB # 02-036

TYPE OF MARKER IDENTIFIED: MAG NAIL SET WITH IDENTIFYING WASHER

HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO REFERENCE IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT BESIDES THE ORIGINAL NOTES FROM COUNTY SURVEYOR. A IRON ROD WAS FOUND IN 1976 BY R.E. MITCHELL WHEN HE DID A SURVEY ON THE PROPERTY AT THE NORTHWEST CORNER OF THIS INTERSECTION. RODS WERE FOUND AND USED ON THE SECTION LINE TO ESTABLISH THIS CORNER. (D.R. 120 PG. 444 9-7-76)

REFERENCE	DISTANCE	DESCRIPTION	FOUND SET	
1.	45.66'	P.K. NAIL IN NORTHWEST SIDE OF POWERPOLE	☒	☐
2.	44.30'	NORTHWEST CORNER OF R/W MARKER	☒	☐
3.	48.58'	MAG NAIL W/ IDENTIFYING WASHER IN SOUTH SIDE OF POWERPOLE	☐	☒
4.	71.79'	MAG NAIL W/ IDENTIFYING WASHER IN SOUTH SIDE OF POWERPOLE	☐	☒
5.	52.15'	MAG NAIL W/ IDENTIFYING WASHER IN NORTHEAST CORNER OF POST	☐	☒
6.	48.02'	MAG NAIL W/ IDENTIFYING WASHER IN SOUTH SIDE OF POST	☐	☐
7.	659.60'	BOAT SPIKE 0.45' BELOW SURFACE	☒	☐
-	-	-	☐	☐

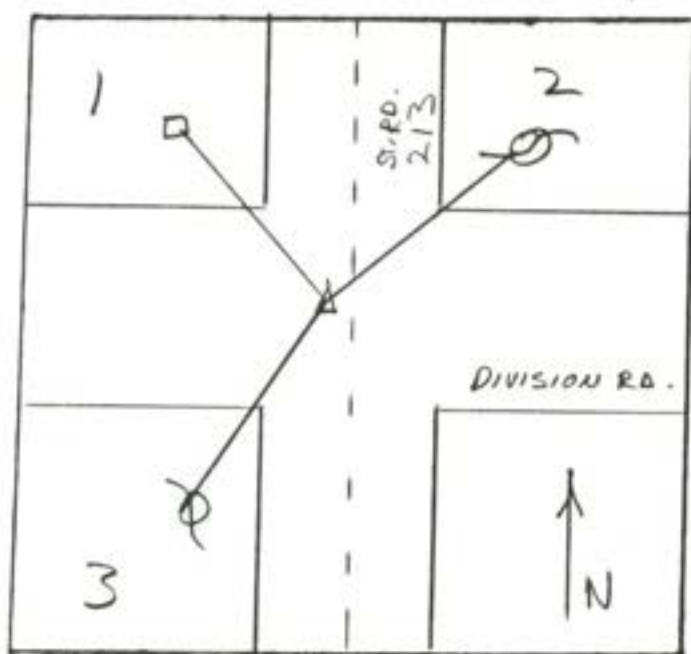

GRAPHIC TIES
(SKETCHED)


SEC. 3 TWP. 21 RANGE 5

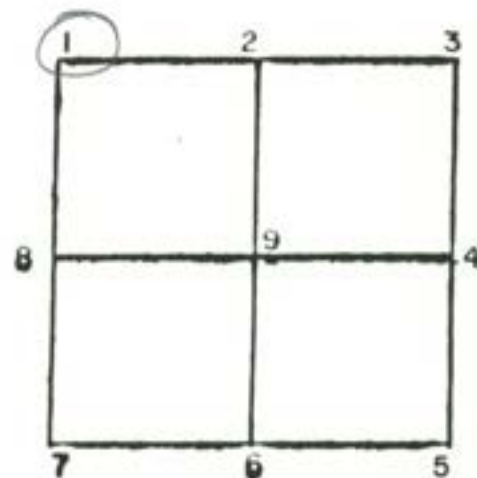

CORNER IDENT. 1 NO DESCRIPTION GIVEN


TIES: 1. 43.80' PK - HEADPOST
2. 61.87' PK - PWP
3. 47.33' PK - PWP

SEC. 3 TWP. 21 RANGE 5

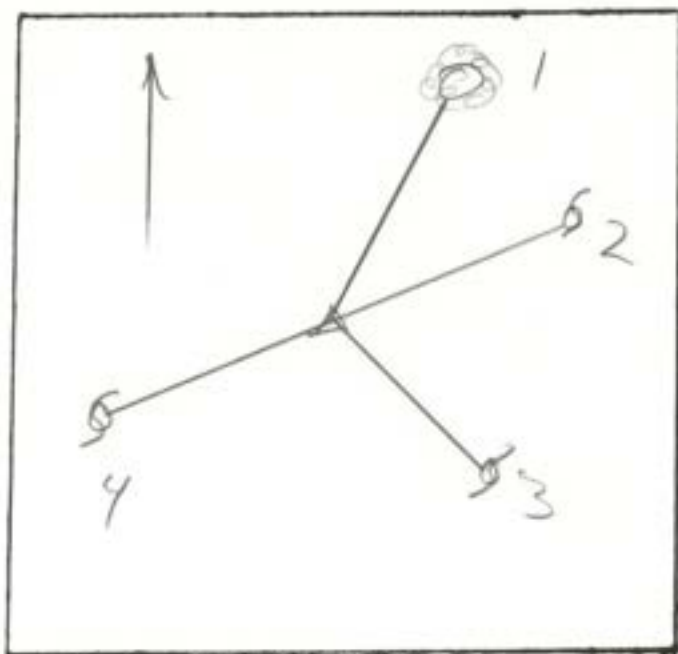

GRAPHIC TIES
(SKETCHED)

SEC 3 TWP 21 RANGE 5

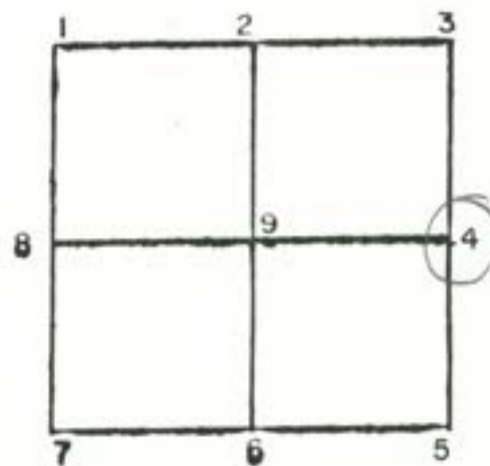


CORNER IDENT. NOT STATED

TIES: 1. 100.96' MAPLE TREE
2. 63.73' PWP
3. 16.12' PWP
4. 19.80' PWP


SEC 3 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 3 TWP. 21 RANGE 5

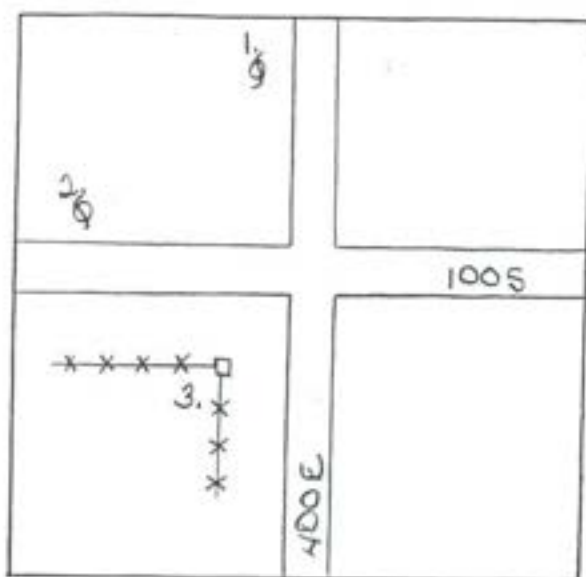

GRAPHIC TIES (SKETCHED)

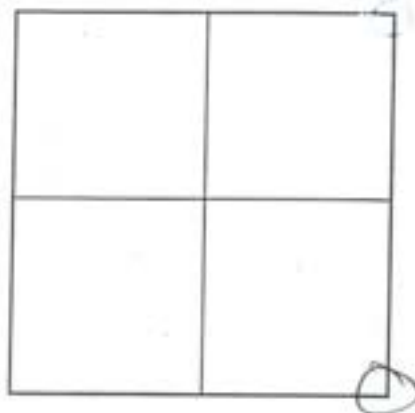

REFERENCED BY:

CORNER IDENTIFIED: A.A. SPIKE FOUND AT SURFACE


TIES:

1. 83.00' AZ 355° N & C IN PWP

2. 37.13' AZ 300° PK NAIL IN PWP

3. 20.31' AZ 187° N & C IN WOOD CORNER POST


SECTION 3 TWP. 21 RANGE 5

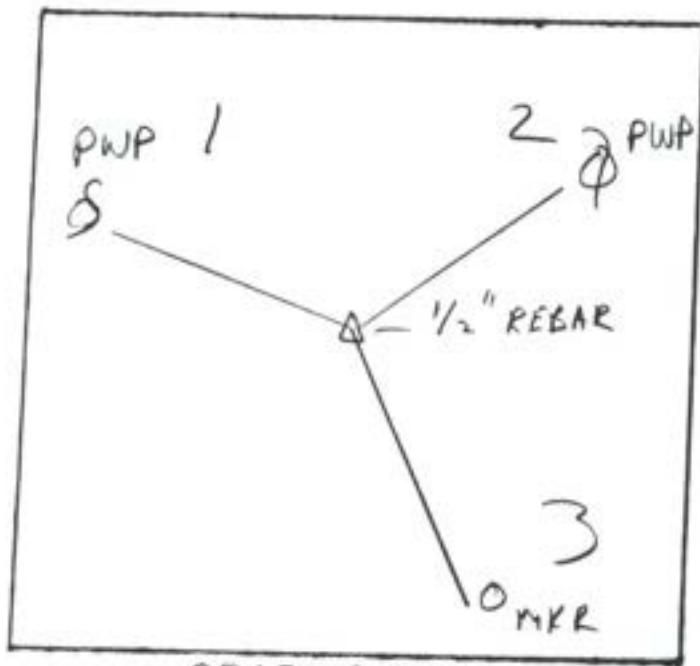

GRAPHIC TIES
(SKETCHED)

SEC 3 TWP 21 RANGE 5


DEC 1988

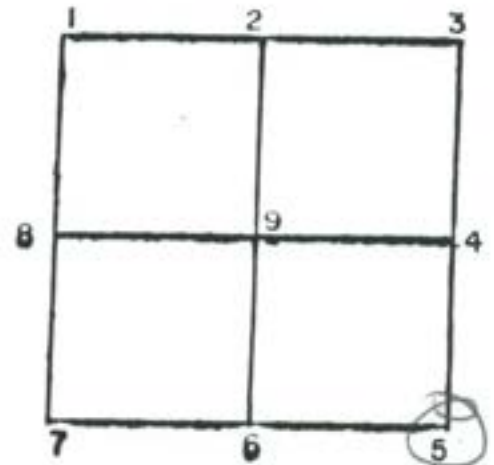

CORNER IDENT. 1/2" REBAR 1" ±


TIES: 1. PWP 37.12 PK
2. PWP 45.91 PK
3. PROPERTY CORNER MKR 19.78

SEC 3 TWP 21 RANGE 5

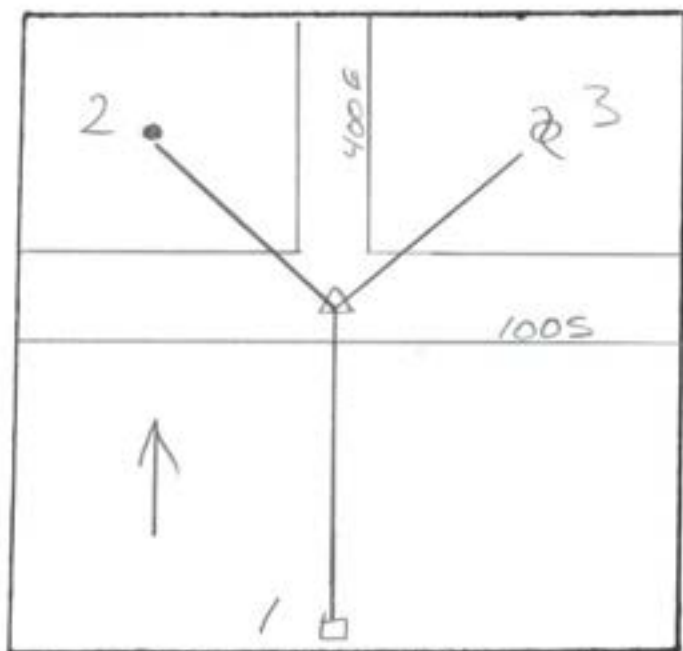

GRAPHIC TIES
(SKETCHED)

SEC 3 TWP 21 RANGE 5

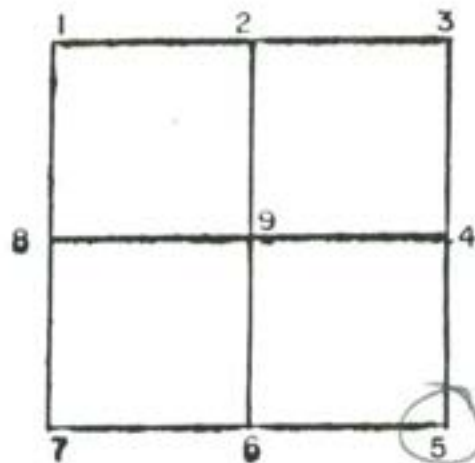

CORNER IDENT. NOT STATED

TIES: 1. 20.30' HP


2. 25.10' METAL FP

3. 35.75' PWP


SEC 3 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 3 TWP. 21 RANGE 5

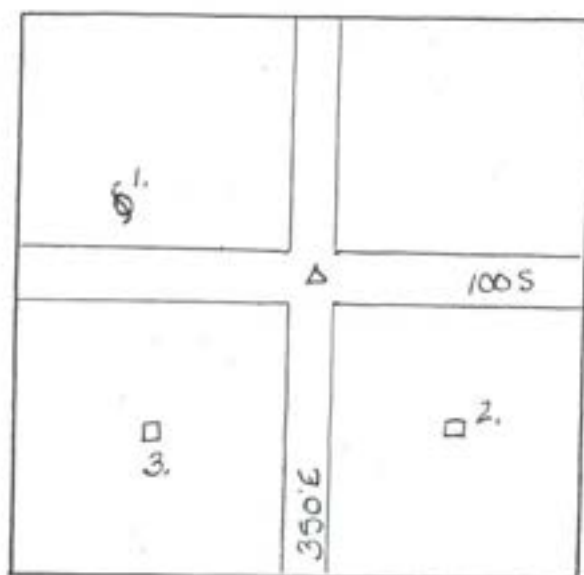

GRAPHIC TIES (SKETCHED)

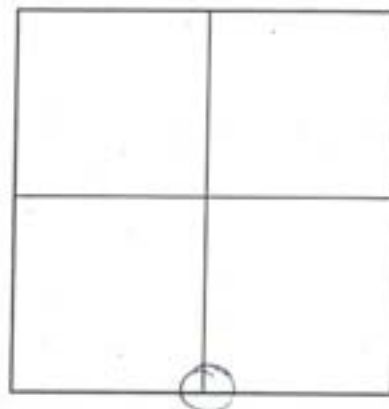

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: PK NAIL LOCATED 1" $\pm$ DEEP

TIES:

1. 48.11' AZ 298° PK NAIL IN P.W.P


2. 44.44' AZ 118° PK NAIL IN WOOD POST

3. 29.17' AZ 226° PK NAIL IN WOOD CORNER POST


SECTION 3 TWP. 21 RANGE 5

DATE: 11/13/01

SECTION 3 TWP. 21 RANGE 5

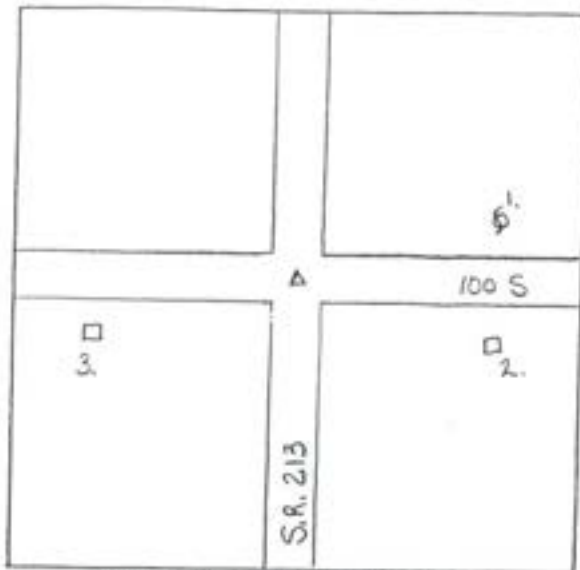

GRAPHIC TIES (SKETCHED)

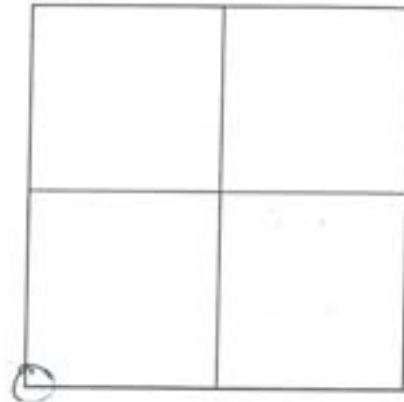

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 2" ± DEEP


TIES:

1. 78.90' AZ 79° PK NAIL IN PWP

2. 75.46' AZ 110° PK NAIL IN 6" WOOD POST


3. 44.45' AZ 260° NW COR R/W MARKER

SECTION 3 TWP. 21 RANGE 5

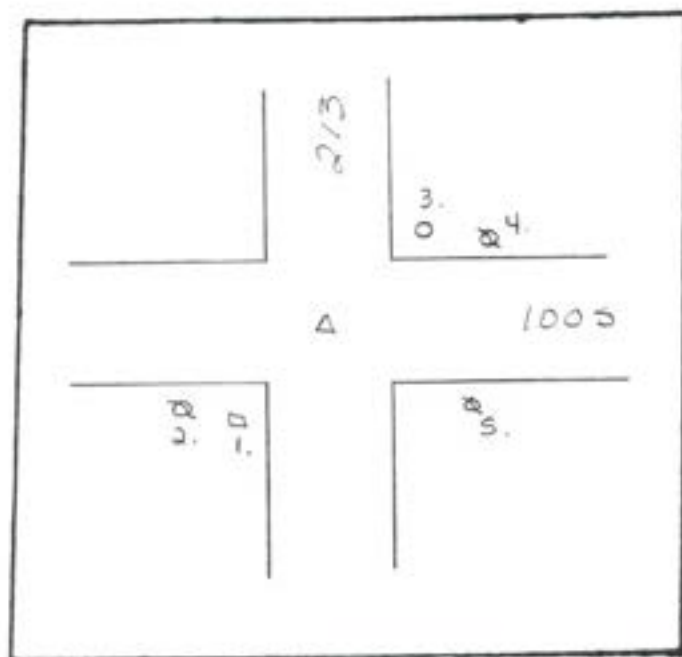

GRAPHIC TIES
(SKETCHED)

SEC 3 TWP 21 RANGE 5

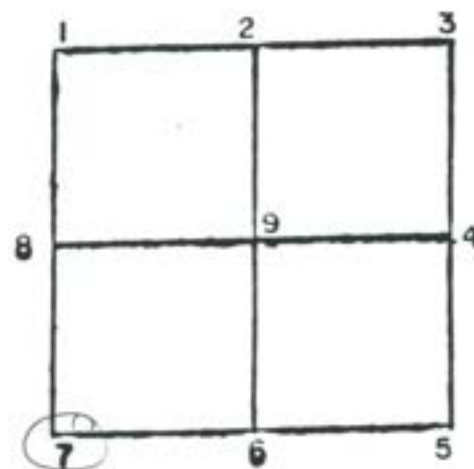

CORNER IDENT. BRASS PEN



TIES: 1. 42.26' NW FLAT OF RIW MARKER
2. 69.03 PK IN PWP
3. 45.50 '+' IN CENTER OF USGS BENCH MARK
4. 78.85 PK IN PWP
5. 75.34 PK IN SHORT POLE BY TELEPHONE PED.

SEC 3 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 4 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY APRIL 30, 2002

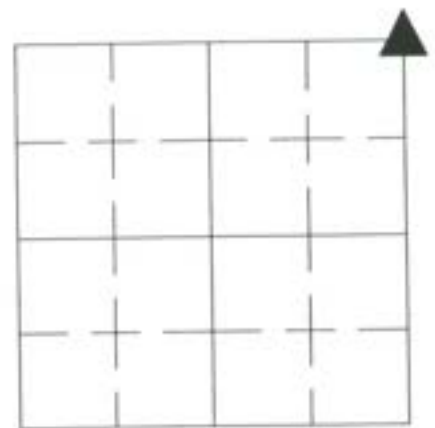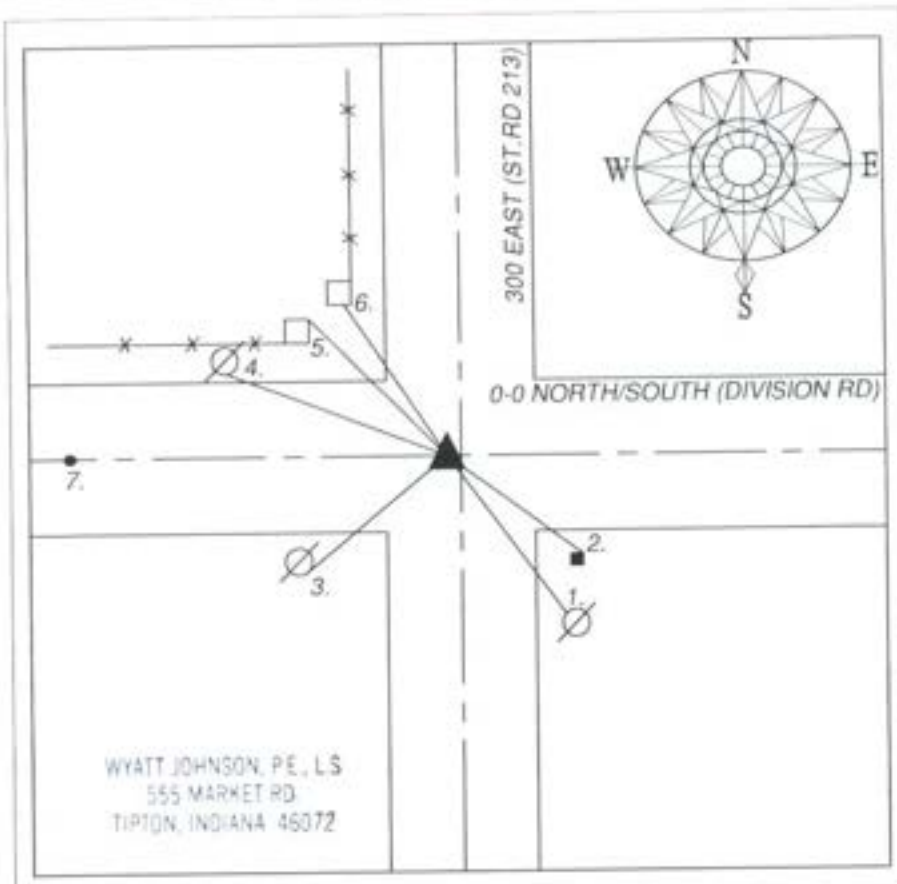

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: 04/30/02

CREW: _____

NORTH: 1841995.36 EAST: 247133.06

ELEVATION: _____

LATITUDE: 40°18'18.58092"

LONGITUDE: 85°57'24.88375"

DRAWN BY: R.K.


CREW: ROD KELLY, JARED HENRY

JOB # 02-036

TYPE OF MARKER IDENTIFIED: MAG NAIL SET WITH IDENTIFYING WASHER
HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO REFERENCE IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT BESIDES THE ORIGINAL NOTES FROM COUNTY SURVEYOR. A IRON ROD WAS FOUND IN 1976 BY R.E. MITCHELL WHEN HE DID A SURVEY ON THE PROPERTY AT THE NORTHWEST CORNER OF THIS INTERSECTION. RODS WERE FOUND AND USED ON THE SECTION LINE TO ESTABLISH THIS CORNER. (D.R.120 PG.444 9-7-76)

REFERENCE	DISTANCE	DESCRIPTION	FOUND SET	
1.	45.66'	P.K. NAIL IN NORTHWEST SIDE OF POWERPOLE	☒	☐
2.	44.30'	NORTHWEST CORNER OF R/W MARKER	☒	☐
3.	48.58'	MAG NAIL W/ IDENTIFYING WASHER IN SOUTH SIDE OF POWERPOLE	☐	☒
4.	71.79'	MAG NAIL W/ IDENTIFYING WASHER IN SOUTH SIDE OF POWERPOLE	☐	☒
	52.15'	MAG NAIL W/ IDENTIFYING WASHER IN NORTHEAST CORNER OF POST	☐	☒
6.	48.02'	MAG NAIL W/ IDENTIFYING WASHER IN SOUTH SIDE OF POST	☐	☐
7.	659.60'	BOAT SPIKE 0.45' BELOW SURFACE	☒	☐
			☐	☐

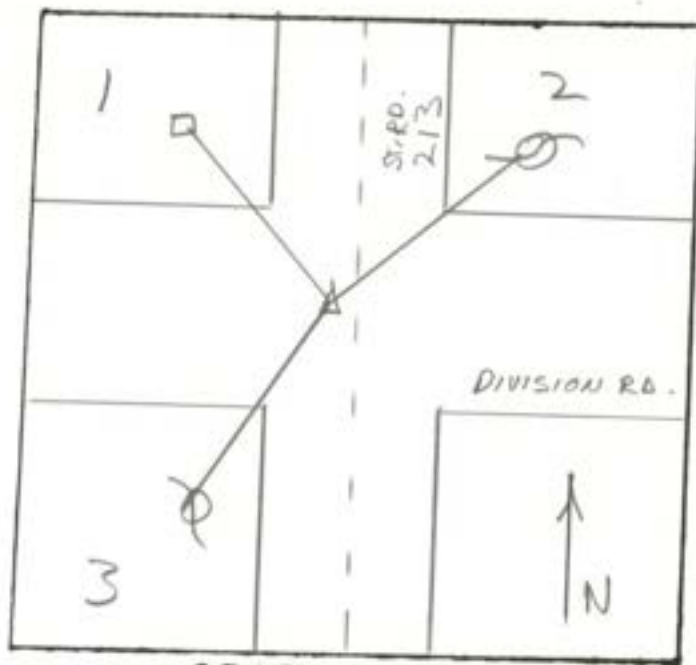

GRAPHIC TIES
(SKETCHED)

SEC. 4 TWP 21 RANGE 5

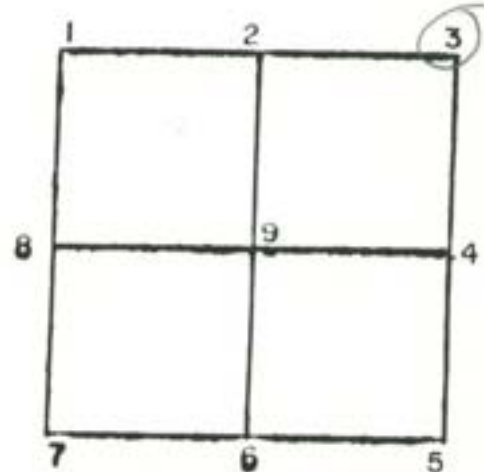

CORNER IDENT. 3 NO DESCRIPTION GIVEN

- TIES:
- 1. 43.80' PK - HEADPOST
 - 2. 61.87' PK - PWP
 - 3. 47.33' PK - PWP
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -


SEC 4 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 4 TWP. 21 RANGE 5



GRAPHIC TIES (SKETCHED)

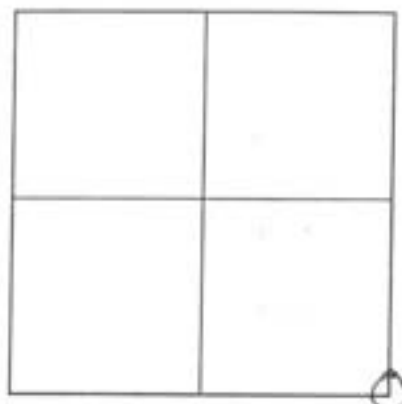

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 2" ± DEEP


TIES:

1. 78.90' AZ 79° PK NAIL IN PWP

2. 75.46' AZ 110° PK NAIL IN 6" WOOD POST


3. 44.45' AZ 260° NW COR R/W MARKER

SECTION 4 TWP. 21 RANGE 5

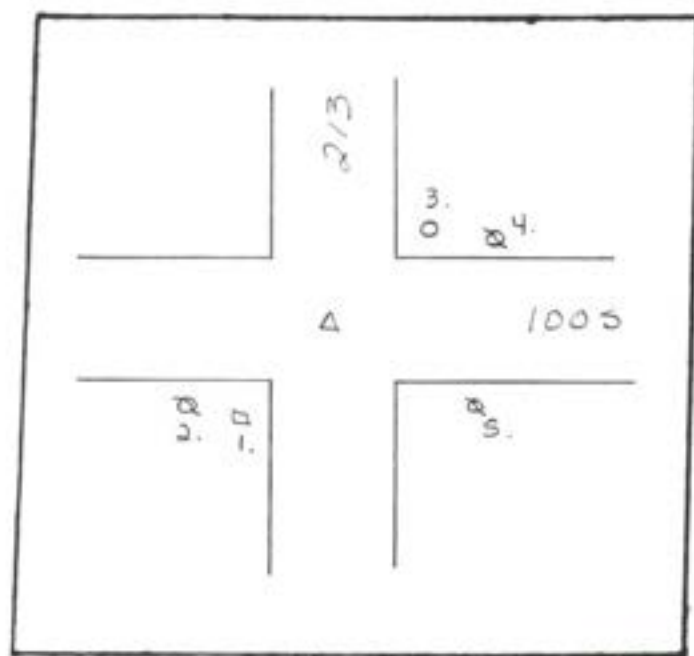

GRAPHIC TIES
(SKETCHED)

SEC. 4 TWP. 21 RANGE 5

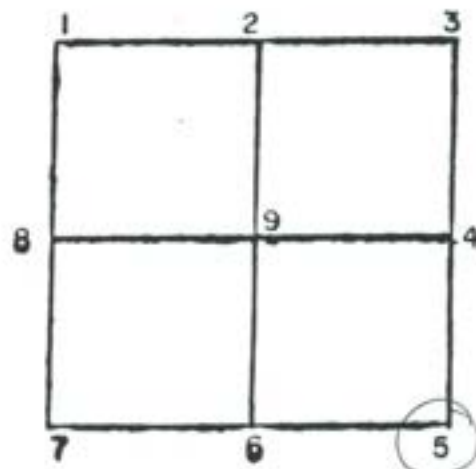


CORNER IDENT. BRASS PEN

TIES: 1. 42.26' NW FLAT OF RIW MARKER
2. 69.03 PK IN PWP
3. 45.50 '4' IN CENTER OF USGS BENCH MARK
4. 78.85 PK IN PWP
5. 75.34 PK IN SHORT POLE BY TELEPHONE PED.


SEC. 4 TWP. 21 RANGE 5

DATE: 11/13/01

SECTION 4 TWP. 21 RANGE 5

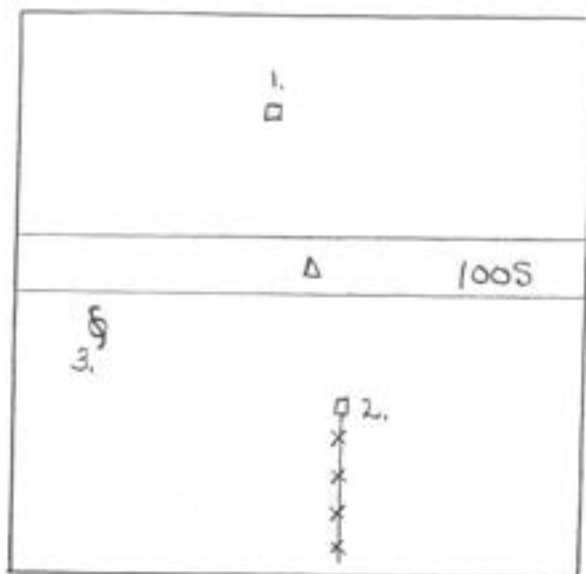

GRAPHIC TIES (SKETCHED)

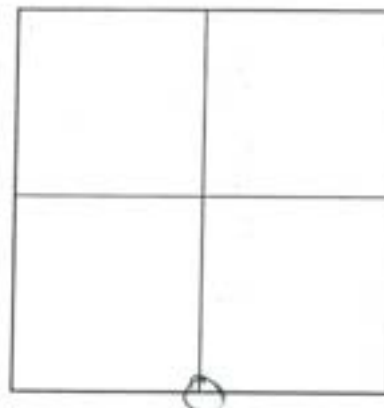

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: 1/2" rebar located 4" DEED

TIES:


1. 17.62' AZ 3° PK NAIL IN WOOD POST

2. 18.28' AZ 183° PK NAIL IN END WOOD F.P.


3. 68.98' AZ 259° PK NAIL IN PWP

SECTION 4 TWP. 21 RANGE 5

SEC. 4 TWP. 21 RANGE 5

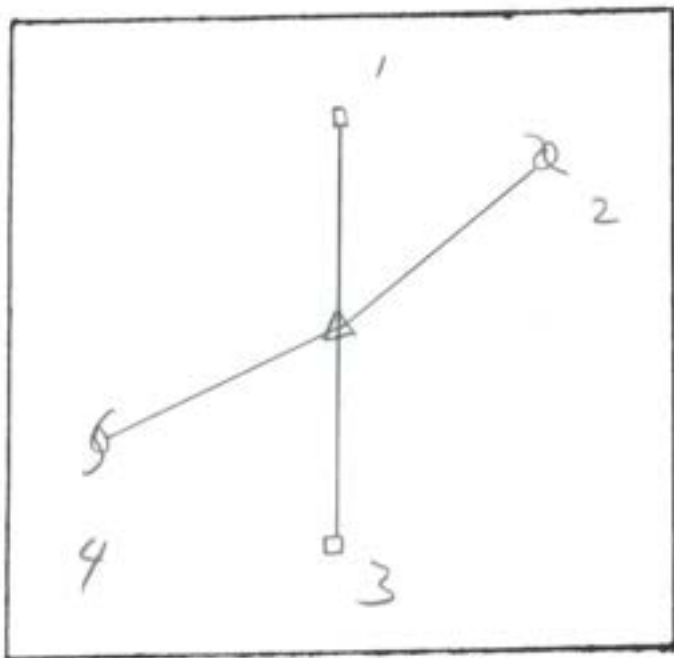

GRAPHIC TIES
(SKETCHED)

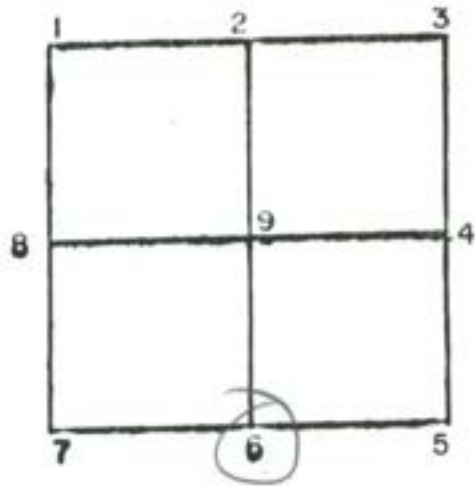


CORNER IDENT. NOT STATED

TEST	1.	2.	3.	4.
	17.78'	19.67'	18.20'	71.49'
	HP	PWP	HP	PWP


SEC 4 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 4 TWP. 21 RANGE 5

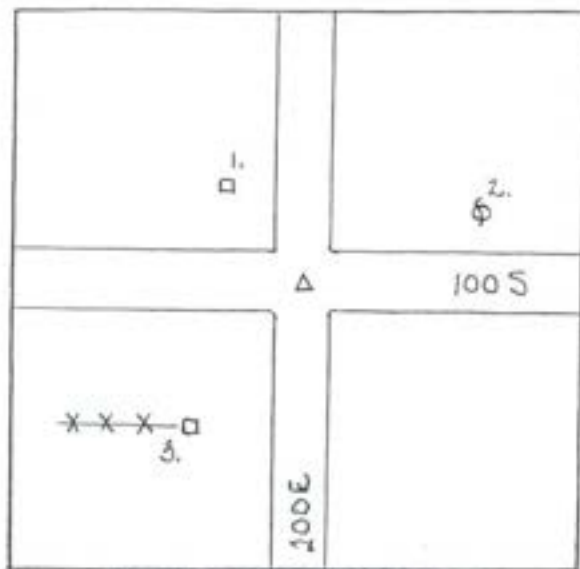

GRAPHIC TIES (SKETCHED)

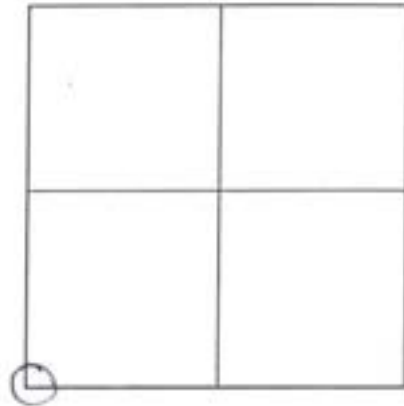

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: I. P. L. 6" DEEP

TIES:


1. 28.47' AZ 319° PKN (JOHNSON) IN WOOD POST

2. 57.20' AZ 77° N E C IN PWP


3. 23.66' AZ 230° PKN (JOHNSON) END WOOD POST

SECTION 4 TWP. 21 RANGE 5

SEC 4 TWP 21 RANGE 5

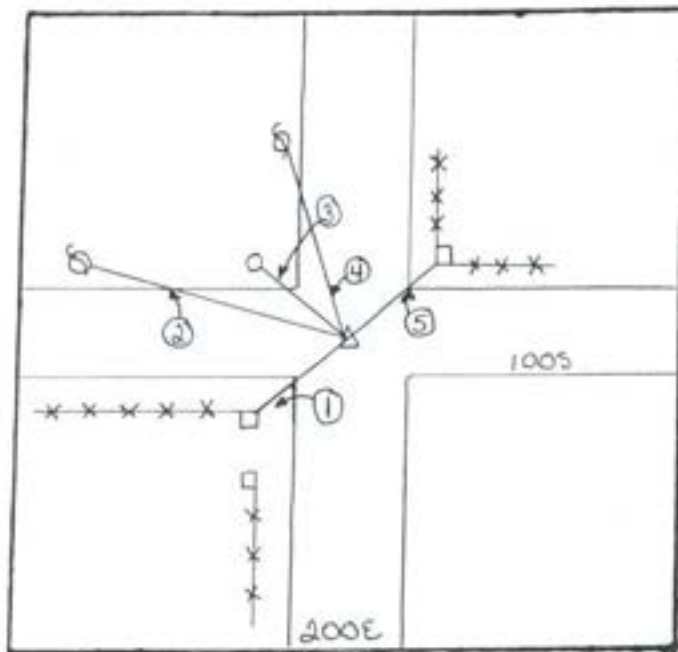

GRAPHIC TIES
(SKETCHED)

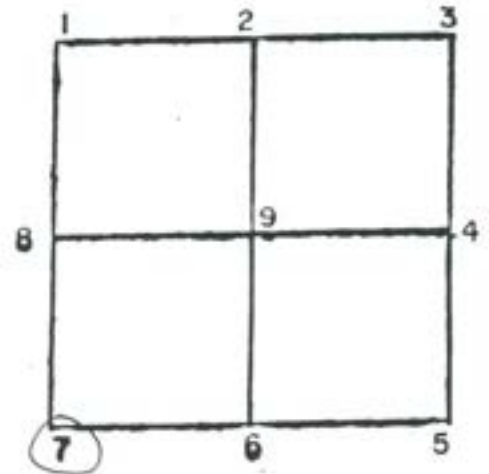


CORNER IDENT. Δ-FIR 3/4" - 6" DEEP

TIES: 1. 23.65 POST W/ FL
2 58.60 PWP
3 28.50 CUT OFF PWP/ POST
4 58.85 PWP
5 31.85 DECORATIVE FENCE


* P.K. NAILS IN ALL POSTS & POLES

SEC 4 TWP 21 RANGE 5

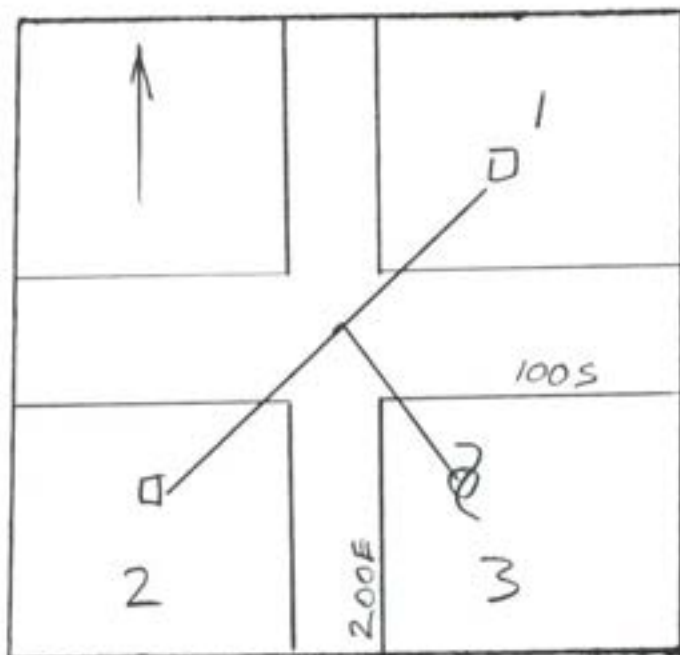

GRAPHIC TIES
(SKETCHED)


SEC 4 TWP 21 RANGE 5

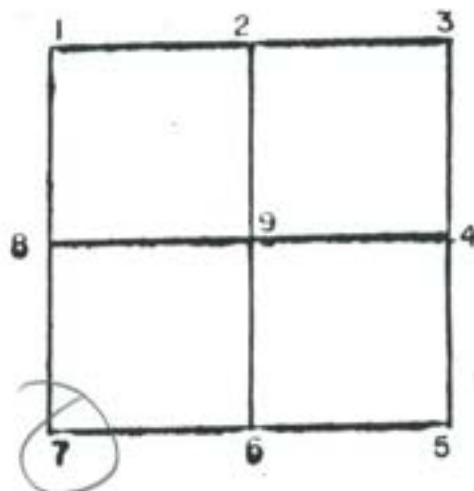

CORNER IDENT. NOT STATED


TIES: 1. 26.20'
2. 23.70'
3. 25.20'

SEC 4 TWP 21 RANGE 5

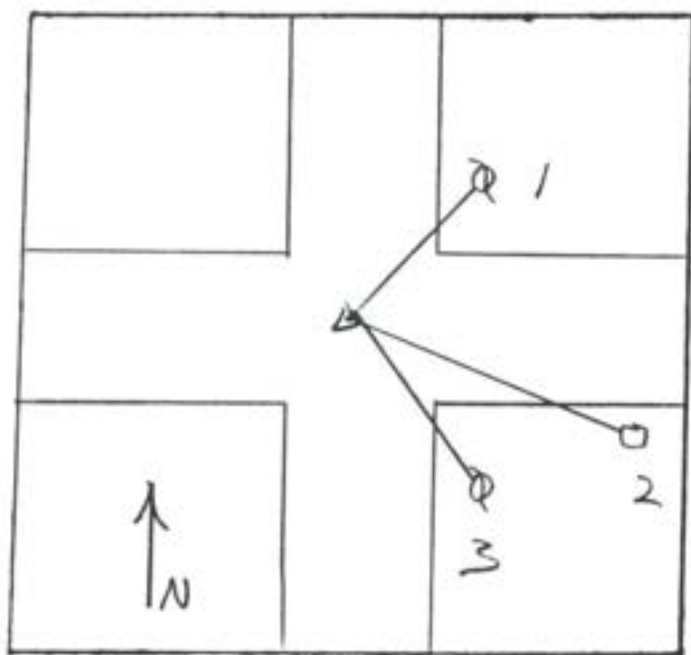

GRAPHIC TIES
(SKETCHED)

SEC 5 TWP 21 RANGE 5

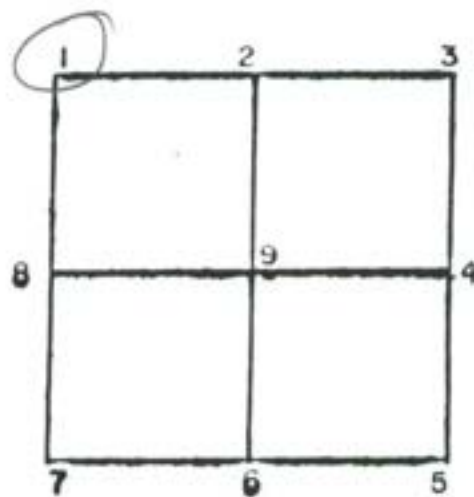


CORNER IDENT. 1 COLT FND

TIES: 1. 55.5' PWP
2. 66.7' HEADPOST
3. 52.6' PWP


Per R.E. MITCHELL SW COR OF 32 -
IS 1.8' W OF 5-21-5 // PER ORIGINAL
FIELD NOTES CLOSING CORNER = ORIGINAL CORNER

SEC 5 TWP 21 RANGE 5

SEC 5 TWP 21 RANGE 5

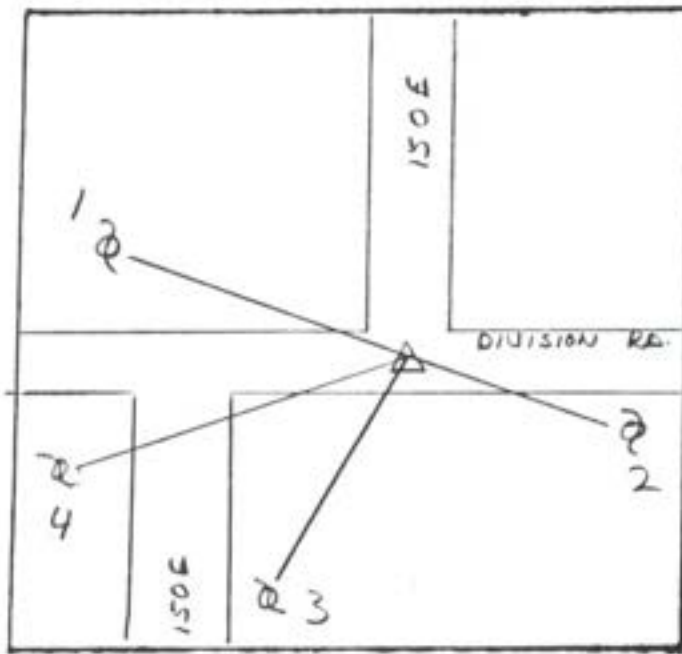

GRAPHIC TIES
(SKETCHED)

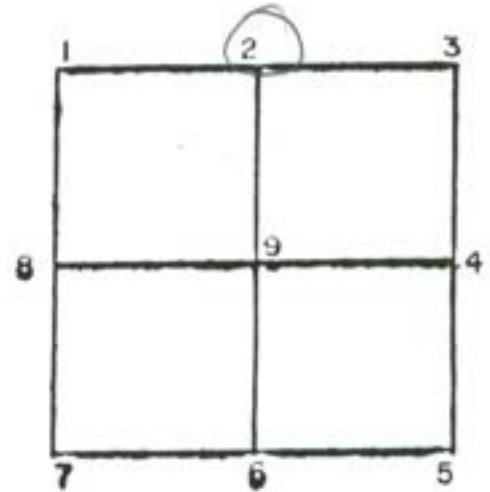

CORNER IDENT. NOT STATED

TIES: 1. 94.2' PWP
2. 60.0' PWP
3. 55.25' PWP
4. 51.75' PWP


SEC 5 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 5 TWP. 21 RANGE 5



GRAPHIC TIES (SKETCHED)

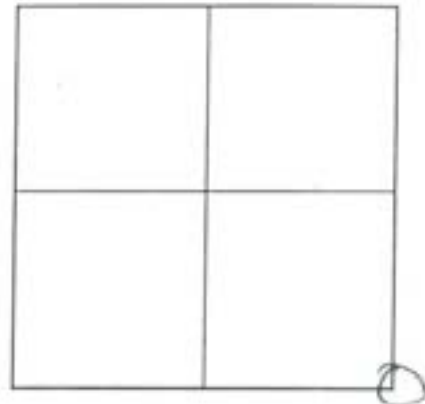

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: I. P. L. 6" DEEP

TIES:


1. 28.47' AZ 319° PKN (JOHNSON) IN WOOD POST

2. 57.20' AZ 77° N.E.C. IN PWP


3. 23.66' AZ 230° PKN (JOHNSON) END WOOD POST

SECTION 5 TWP. 21 RANGE 5

SEC 5 TWP 21 RANGE 5

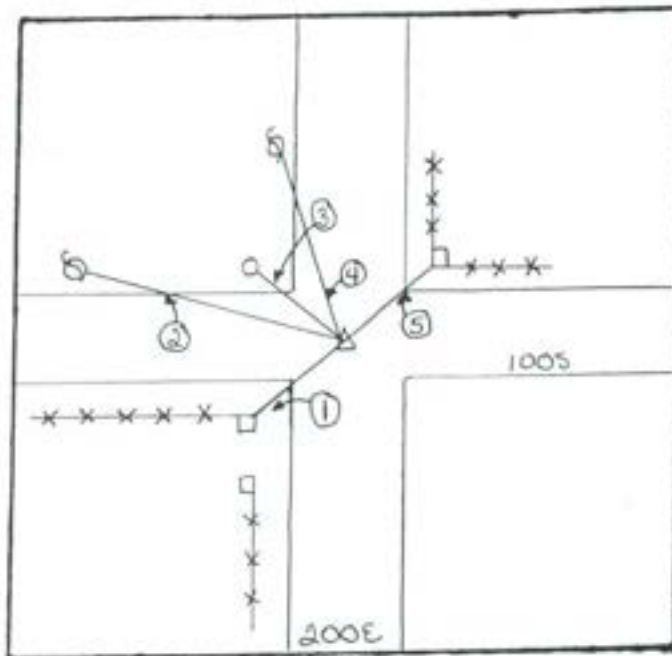

GRAPHIC TIES
(SKETCHED)

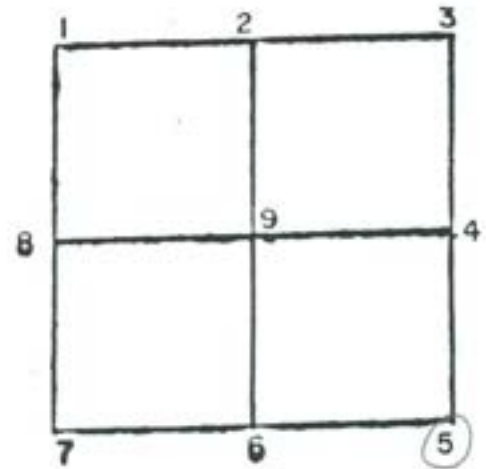


CORNER IDENT. Δ-FIR 3/4" - 16" DEEP

TIES: 1. 23.65 POST W/ FL
2. 58.60 DWP
3. 28.50 CUT OFF PWP/POST
4. 58.85 PWP
5. 31.85 DECORATIVE FENCE


*P.K. NAILS IN ALL POSTS & POLES

SEC 5 TWP 21 RANGE 5

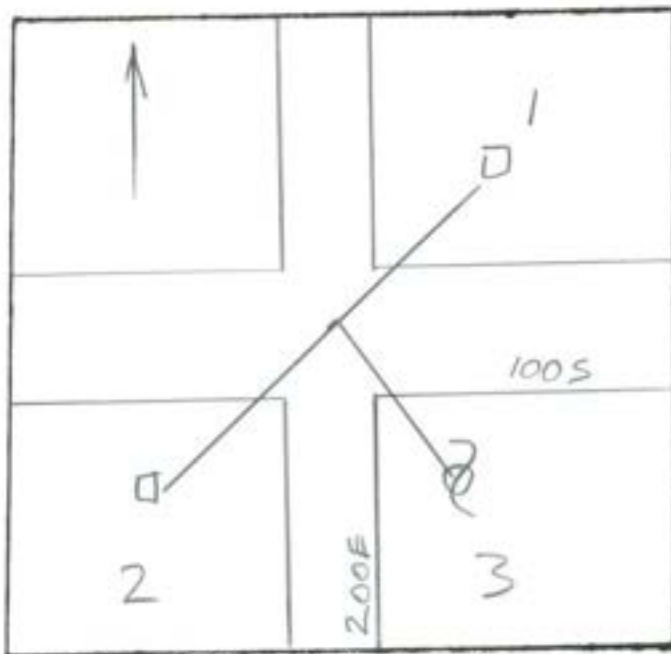

GRAPHIC TIES
(SKETCHED)

SEC 5 TWP 21 RANGE 5

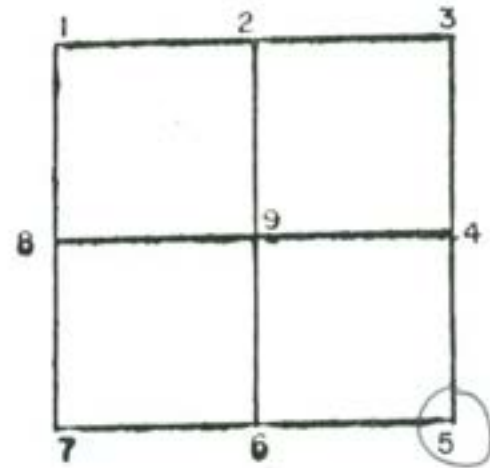


CORNER IDENT. NOT STATED

TIES: 1. 26.20'

2. 23.70'


3. 25.20'

SEC 5 TWP 21 RANGE 5

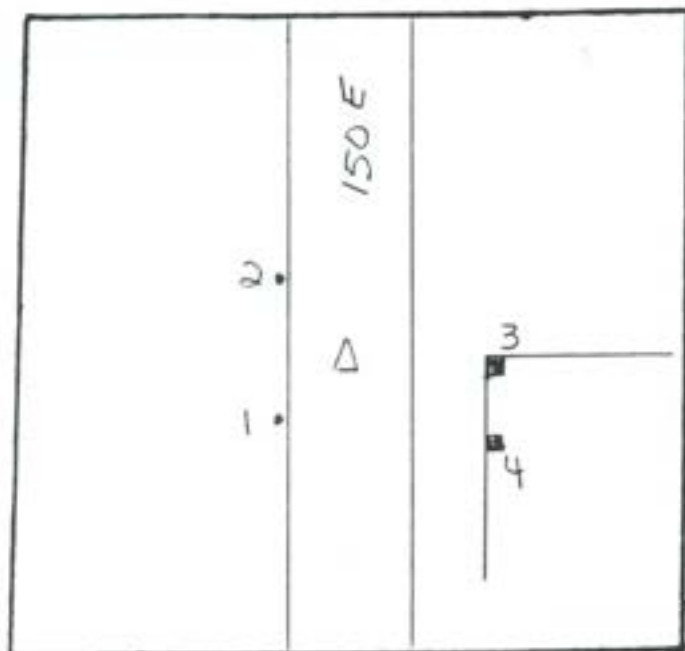

GRAPHIC TIES
(SKETCHED)

SEC. 5 TWP. 21 RANGE 5
1-3-94

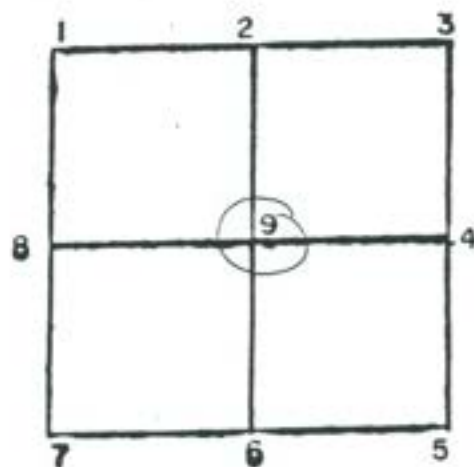

CORNER IDENT. FOUND BOLT SPEKE 8"± BELOW ROAD SURFACE
REPLACED WITH 5/8" REBAR. NO STONE FOUND


TIES:

1.	13.18	5/8" IRON ROD AT EDGE OF ROAD
2.	14.18	" " " " " " "
3.	16.63	PK NAIL IN CORNER POST
4.	18.90	" " " BRACE "

SEC. 5 TWP. 21 RANGE 5


[illegible]

SEC 6 TWP 21 RANGE 5

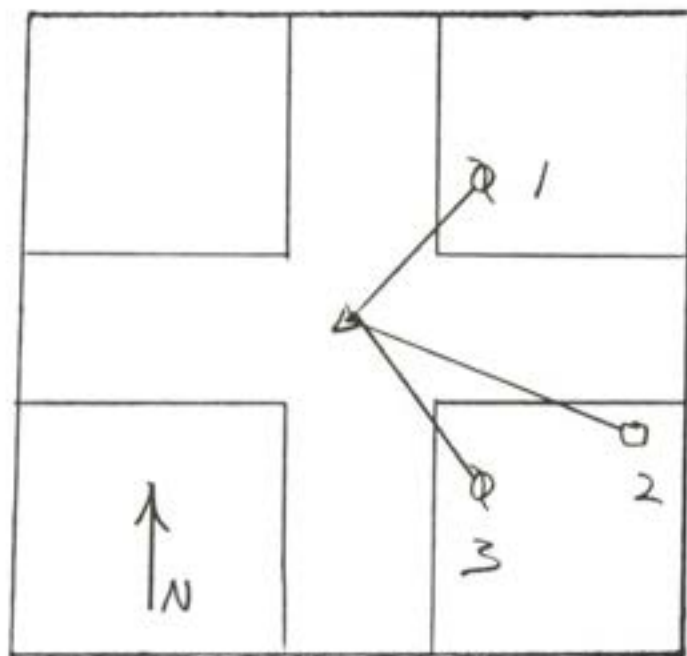

GRAPHIC TIES
(SKETCHED)

SEC. 6 TWP. 21 RANGE 5

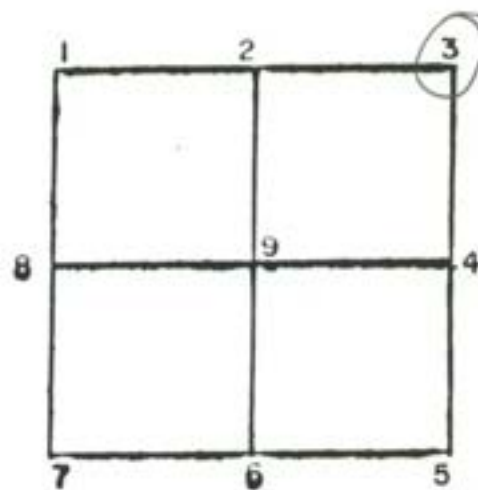


CORNER IDENT. 3 Call FND

TIES: 1. 55.5' PWP
2. 66.7' HEADPOST
3. 52.6' PWP

Per R.E. MITCHELL SW COR OF 32
IS 1.8' W OF S-21-5 // PER ORIGINAL
FIELD NOTES CLOSING CORNER = ORIGINAL CORNER


SEC. 6 TWP. 21 RANGE 5

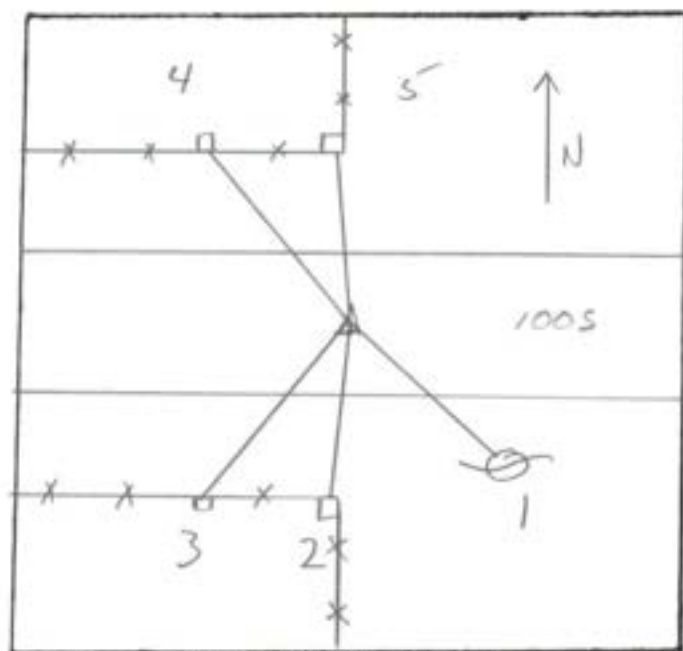

GRAPHIC TIES
(SKETCHED)

SEC 6 TWP 21 RANGE 5


July 1983

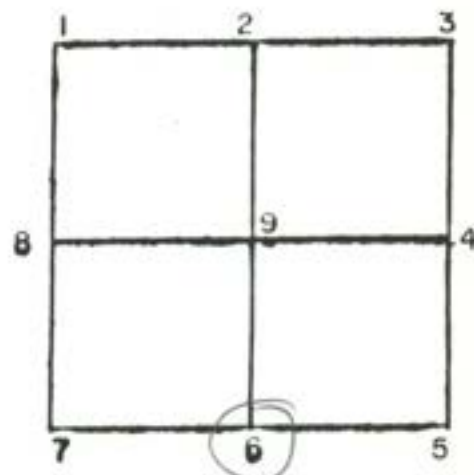

CORNER IDENT. 6 STONE FND - 5" BELOW SURFACE

TIES:	<u>1. 18.65'</u>	<u>PK</u>	<u>PWP</u>
	<u>2. 19.0'</u>	<u>PK</u>	<u>HEAD POST</u>
	<u>3. 20.75'</u>	<u>PK</u>	<u>BRACE POST</u>
	<u>4. 19.05'</u>	<u>PK</u>	<u>BRACE POST</u>
	<u>5. 17.60'</u>	<u>PK</u>	<u>HEAD POST</u>


SEC 6 TWP 21 RANGE 5

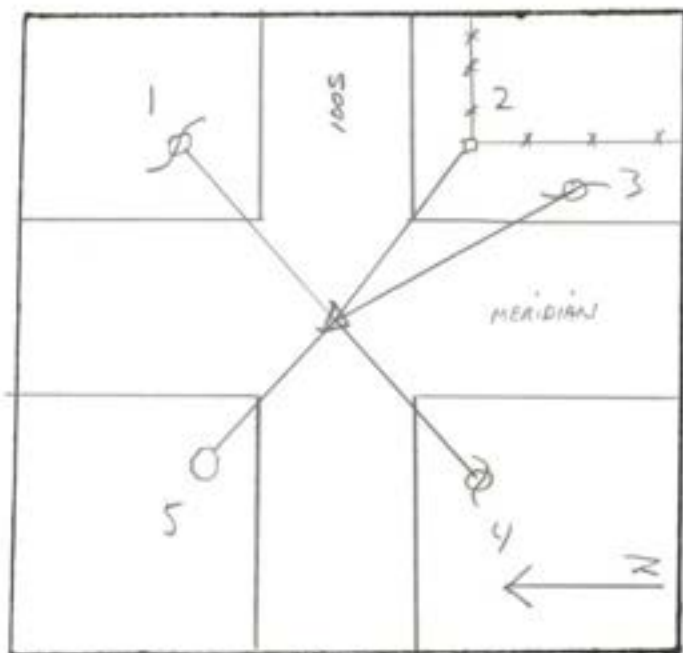

GRAPHIC TIES
(SKETCHED)

SEC 6 TWP 21 RANGE 5

July 1983

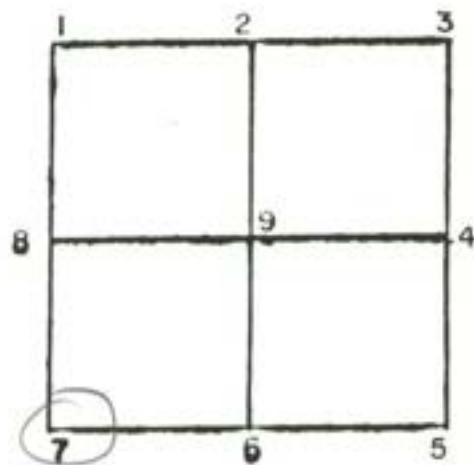


CORNER IDENT. 7 IRON PIPE END


TIES:	1. 26.75'	PK	PWP
	2. 25.5'	PK	HEAD POST
	3. 29.85'	PK	PWP
	4. 43.6'	PK	PWP
	5. 27.2'		FACE OF CONCRETE POST

SEC 6 TWP 21 RANGE 5

SEC 6 TWP 21 RANGE 5

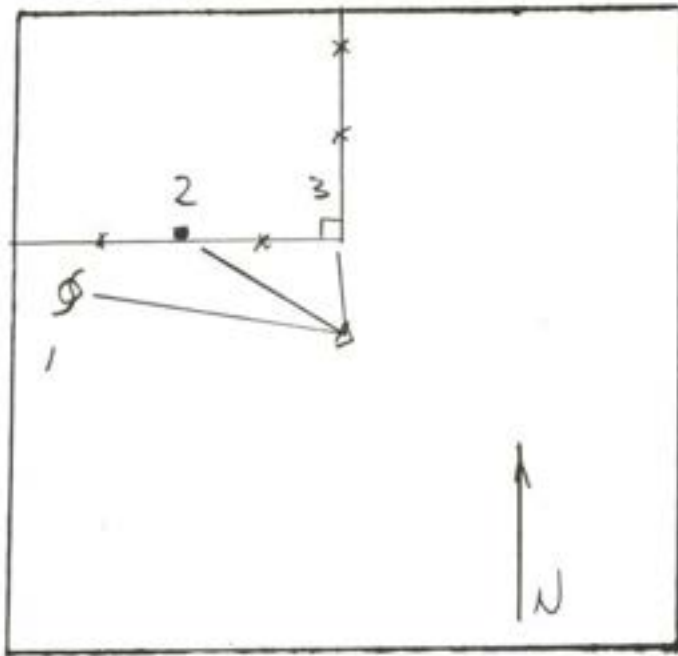

GRAPHIC TIES
(SKETCHED)

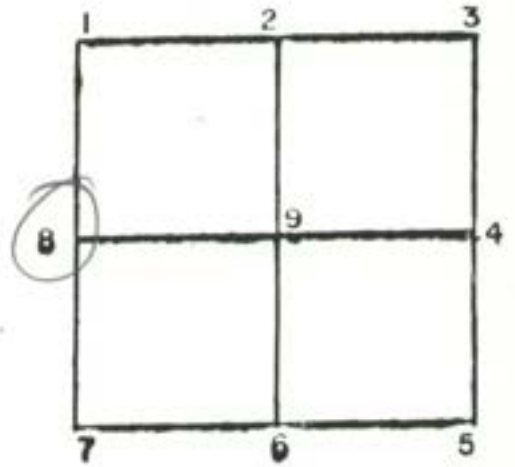


CORNER IDENT. NOT STATED

TIES: 1. 20.55' PWP
2. 17.70' FP
3. 16.00' HP

SEC 6 TWP 21 RANGE 5




July 1983

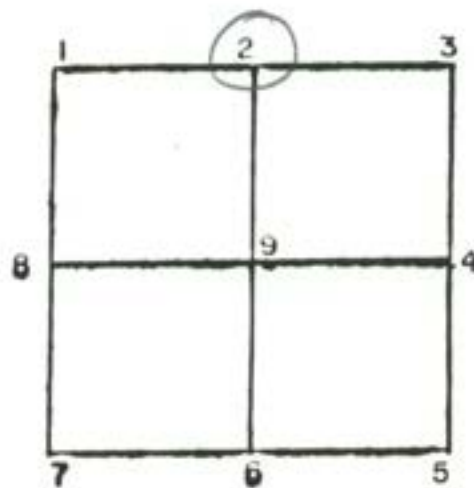

Thus:


1. 18.65'	PK	PWP
2. 19.0'	PK	HEAD POST
3. 20.75'	PK	BRACE POST
4. 19.05'	PK	BRACE POST
5. 17.60'	PK	HEAD POST

SEC 7 TWP 21 RANGE 5

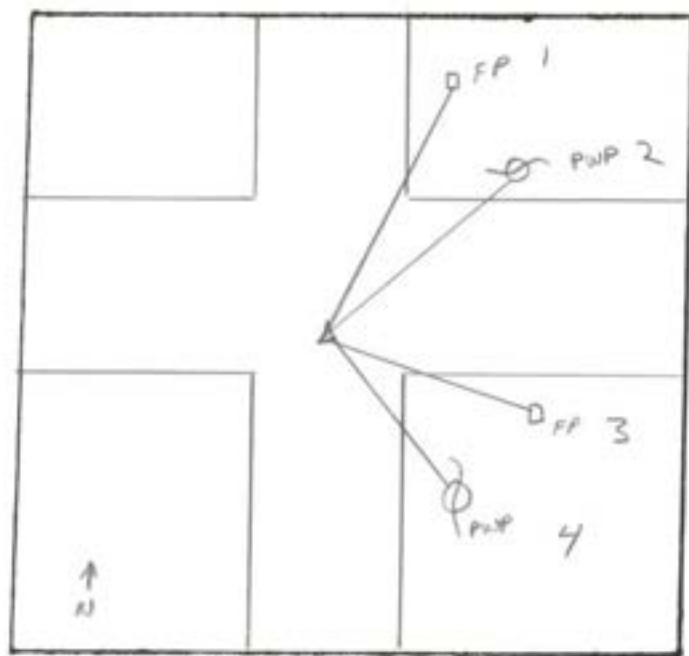

GRAPHIC TIES
(SKETCHED)


SEC. 7 TWP 21 RANGE 5

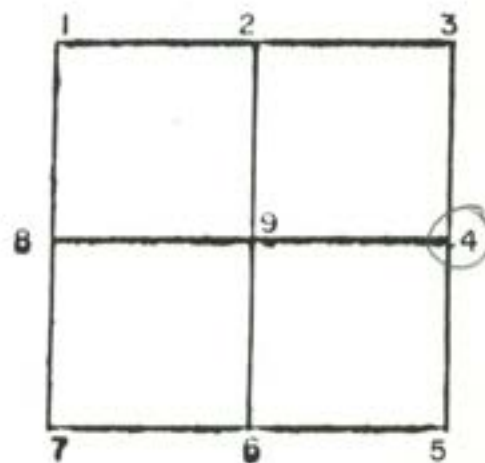

CORNER IDENT. 4 BRASS PLUG 2' NORTH OF SOUTH ELEMENT


TIES: 1. 61.15' FENCE POST
2. 53.70' PWP
3. 40.13' FENCE POST
4. 30.83' PWP

SEC 7 TWP 21 RANGE 5

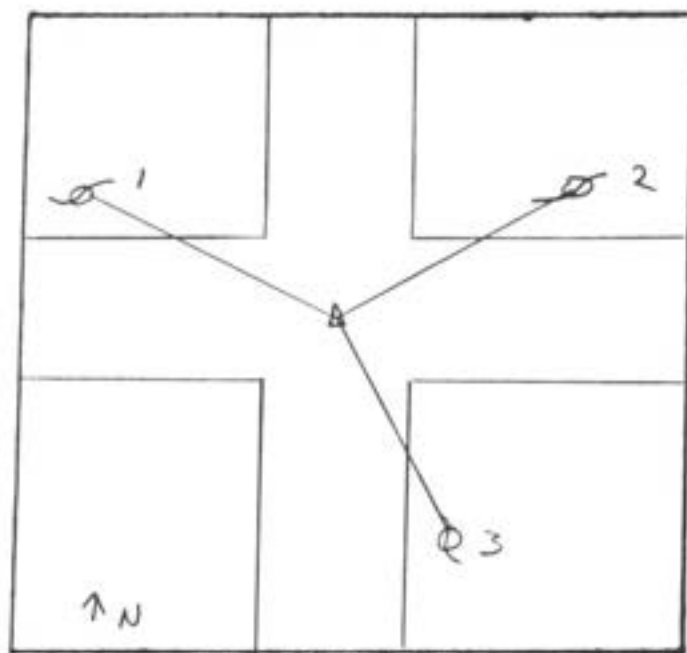

GRAPHIC TIES
(SKETCHED)

SEC. 7 TWP 21 RANGE 5

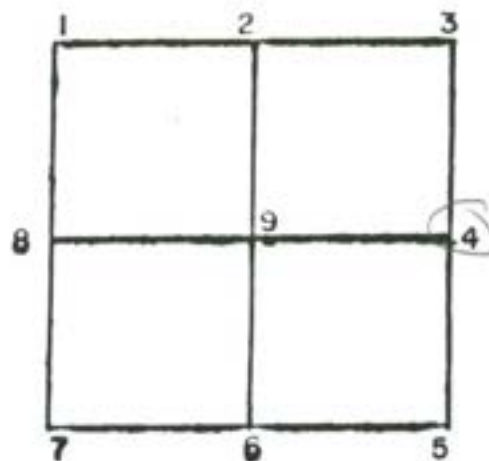


CORNER IDENT. _____

TIES: 1. 82.91' PK IN PWP
2. 54.15' PK IN PWP
3. 29.81' PK IN PWP

To reference PK Nail found on 3-5-79
 No other monumentation located


STATE HIGHWAY DEPT SURVEYORS WERE IN 7/31/85
 SAID THEY HAVE LOCATED ABOVE CORNER.
 SET 4 PK NAILS IN LINE TO FIND CORNER.
 9' OFF & PAVEMENT. ALMOST OFF PAVEMENT.

SEC. 7 TWP 21 RANGE 5

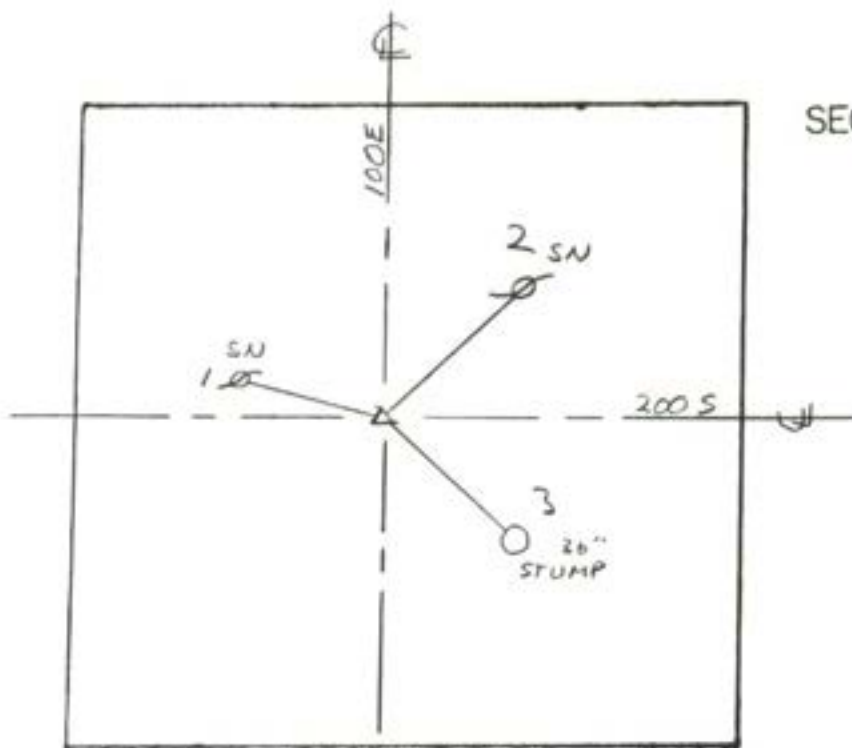

GRAPHIC TIES
(SKETCHED)

SEC. 7 TWP 21 RANGE 5

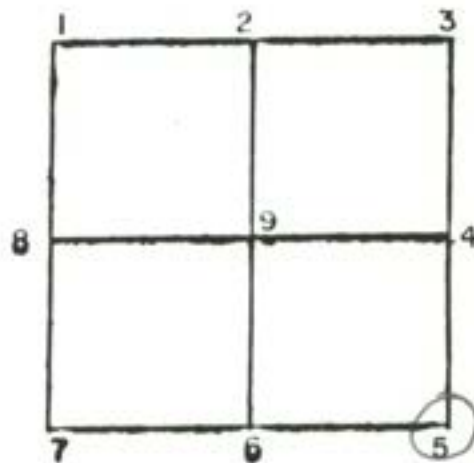

CORNER IDENT. 5 FOUND IRON PIN 3/4" ϕ

TIES:

1. 67.10' SN IN PWP

2. 34.1' SN IN PWP

3. 42.94 SN 36" TREE STUMP

SEC 7 TWP 21 RANGE 5

☐ ok

Date: 2/2/05

Corner: RAILROAD SPIKE SET

Location: CO. RD. 200 SOUTH

1/2 MILE EAST OF

MERIDIAN ROAD




Corner	Sec.	Twp.	Range
2	7	21	5

WITNESSES

	Description	Bearing	Distance
1	NAIL IN NORTH SIDE OF FENCE POST	S00°E	14.13
2	MAU SET IN NW SIDE 20" OAK TREE	S80°W	73.04
3	MAU SET IN WEST SIDE FENCE POST	N00°E	14.25
4	MAU SET IN SE SIDE 30" TREE	N10°E	33.15

DRAWING

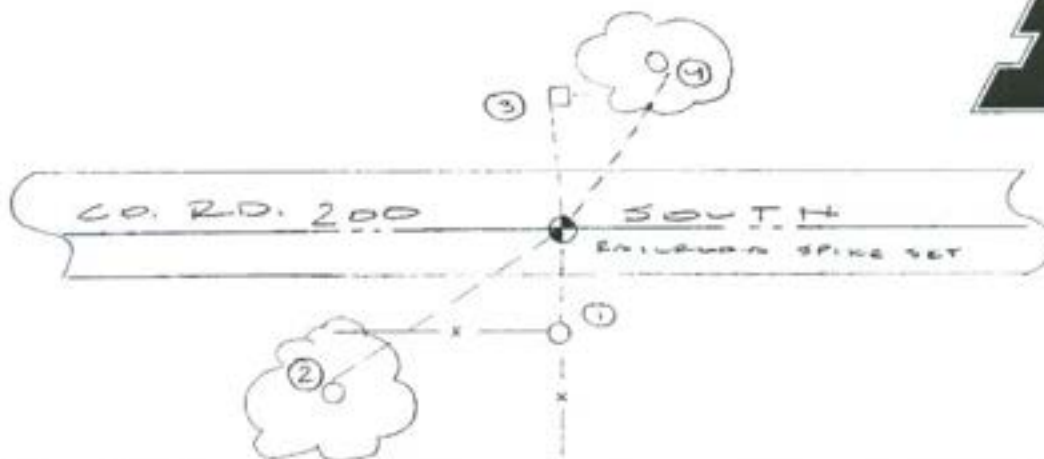

Inspection Report

Date:	Surveyor	Remarks
2/2/05	REW (Ward)	SET RAILROAD SPIKE FROM EXISTING SURVEYS - WITNESSED

LAND SURVEYOR CERTIFICATE

I, Richard E. Ward hereby certify that I am a Land Surveyor, licensed in compliance with the laws of the State of Indiana; and that to the best of my knowledge and belief, the drawing within represents a survey made under my supervision in accordance with Title 865, Article 1, Rule 12 of the Indiana Administrative Code. The Field work for said survey was complete on 2/2/05.


Richard E. Ward, L.S.
Indiana Reg. No. S 0432



**RICHARD E. WARD
& ASSOCIATES**
PROFESSIONAL LAND SURVEYORS


LOT & FARM SURVEYS - SUBDIVISION LAYOUTS - MORTGAGE SURVEYS
P. O. BOX 172 - ANDERSON, INDIANA 46015 - (785 643-8078)



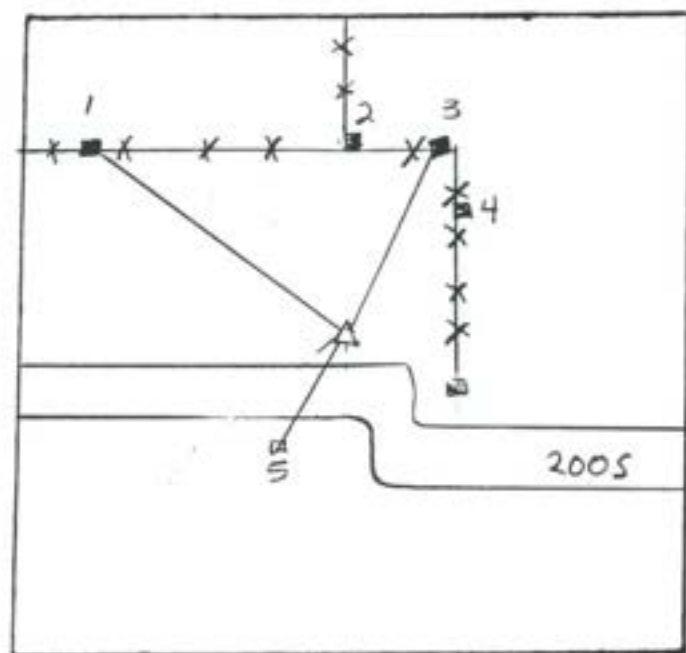

GRAPHIC TIES
(SKETCHED)

SEC 7 TWP 21 RANGE 5
8/31/94

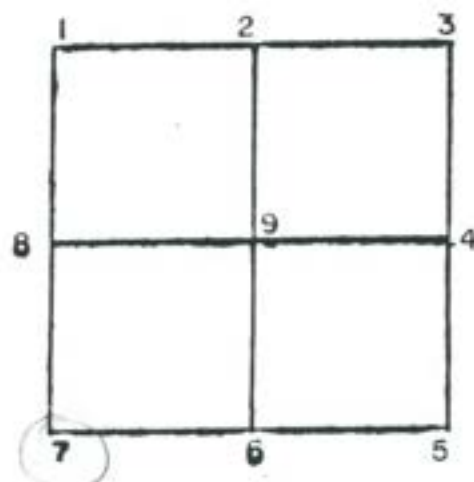

CORNER IDENT. 1 Stone Found w/ 't' cut in top 1' deep

TIES:

1. 18.85' BRACE POST

2 18.00 HEADPOST


3 23.37 HEADPOST

4. 18.35 BRACE POST


5 38.46 HEADPOST

SEC 7 TWP 21 RANGE 5

SEC. 7 TWP. 21 RANGE 5

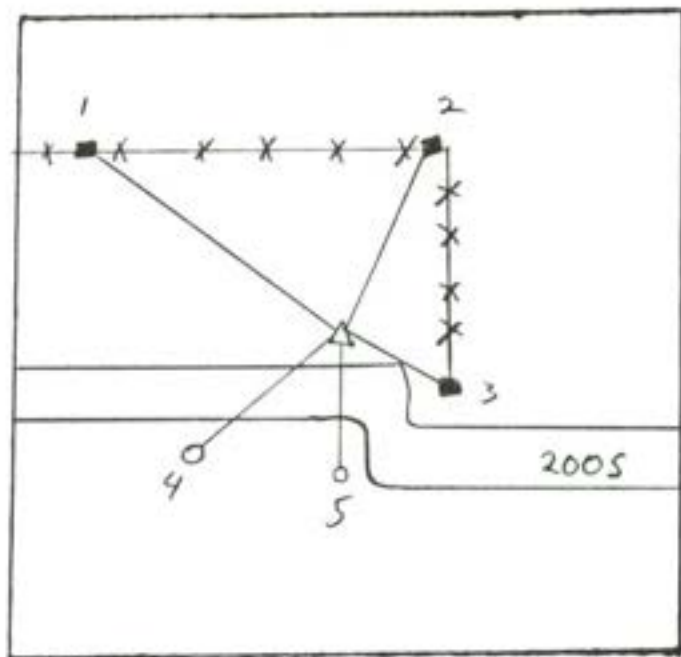

GRAPHIC TIES
(SKETCHED)

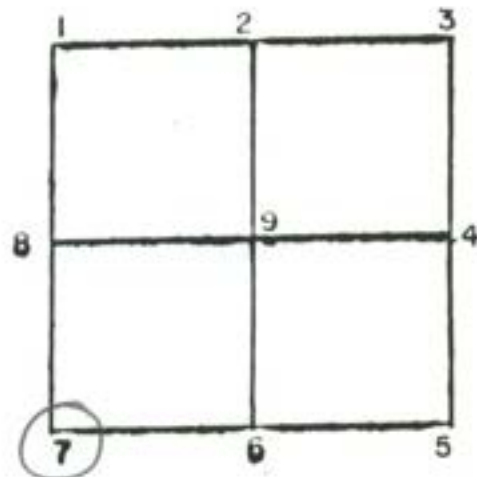CORNER IDENT. 2

NOT STATED


TIES:

1.	21.0'	FENCE POST
2.	12.9'	FENCE POST
3.	10.2'	FENCE POST
4.	68.0'	POST
5.	38.6	CENTER POST


SEC 7 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 8 TWP. 21 RANGE 5

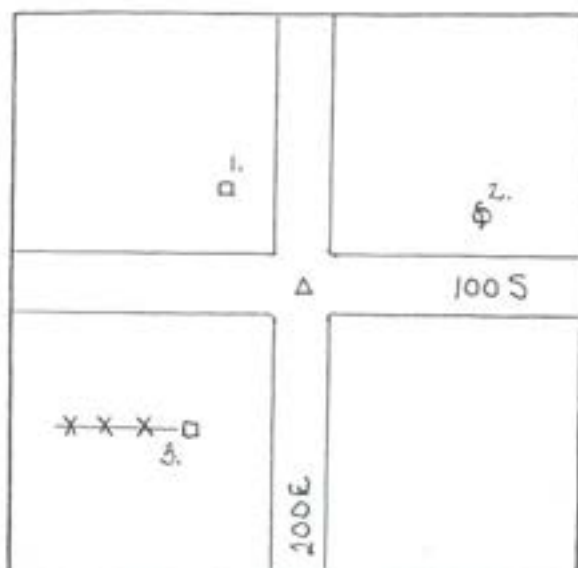

GRAPHIC TIES (SKETCHED)

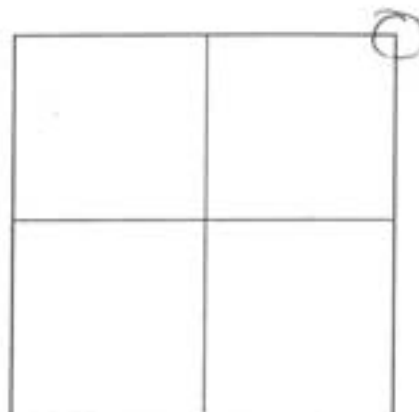

REFERENCED BY:

CORNER IDENTIFIED: I.P.L. 6" DEEP

TIES:


1. 28.47' AZ 319° PKN (JOHNSON) IN WOOD POST

2. 57.20' AZ 77° N.E.C. IN PWP


3. 23.66' AZ 230° PKN (JOHNSON) END WOOD POST

SECTION 8 TWP. 21 RANGE 5

SEC 8 TWP 21 RANGE 5

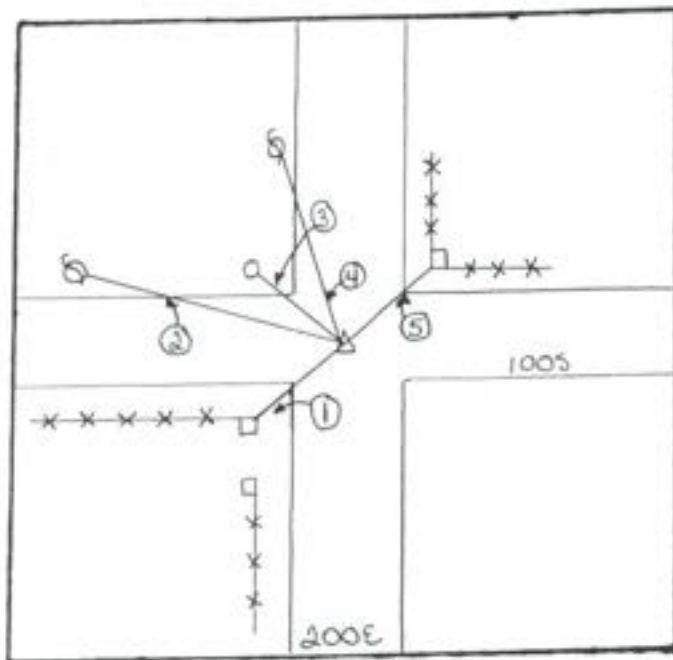

GRAPHIC TIES
(SKETCHED)

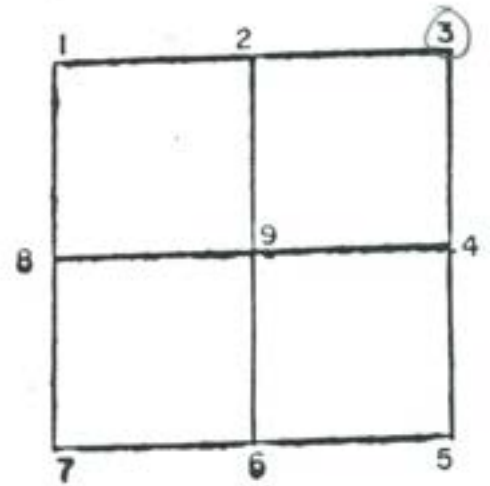


CORNER IDENT. Δ-FIR 3/4" - 6" DEEP

TIES: 1. 23.65 POST W/ FL
2. 58.60 PWP
3. 28.50 CUT OFF PWP/POST
4. 58.85 PWP
5. 31.85 DECORATIVE FENCE


* P.K. NAILS IN ALL POSTS + POLES

SEC 8 TWP 21 RANGE 5

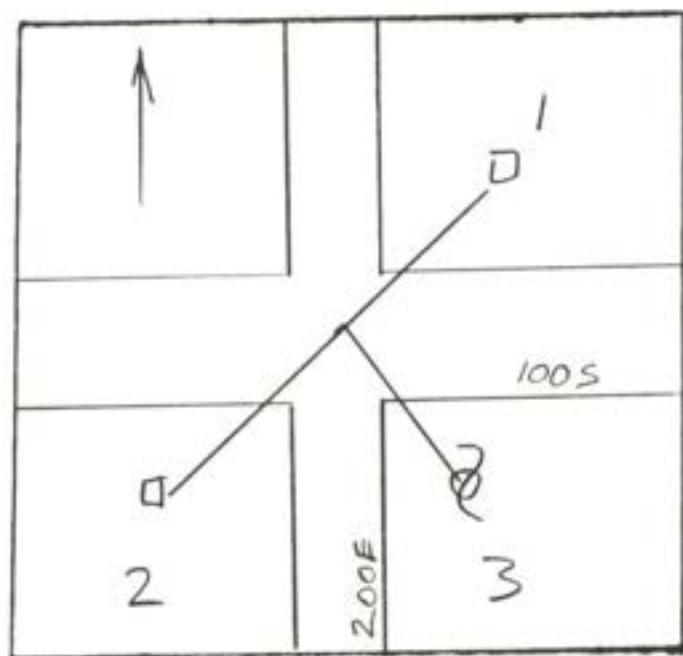

GRAPHIC TIES
(SKETCHED)

SEC 8 TWP 21 RANGE 5

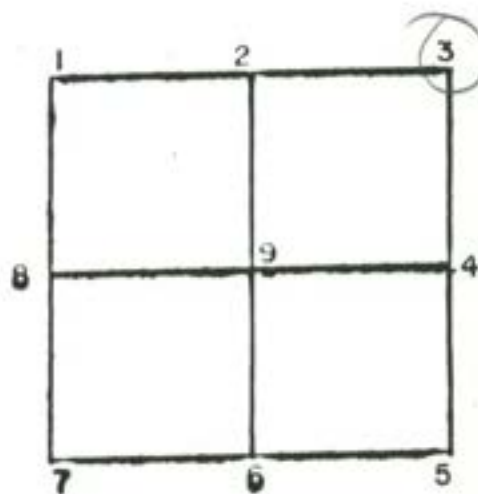

CORNER IDENT. NOT STATED

TIES: 1. 26.20'


2. 23.70'

3. 25.20'


SEC 8 TWP 21 RANGE 5

DATE: 11/14/01

SECTION 8 TWP. 21 RANGE 5

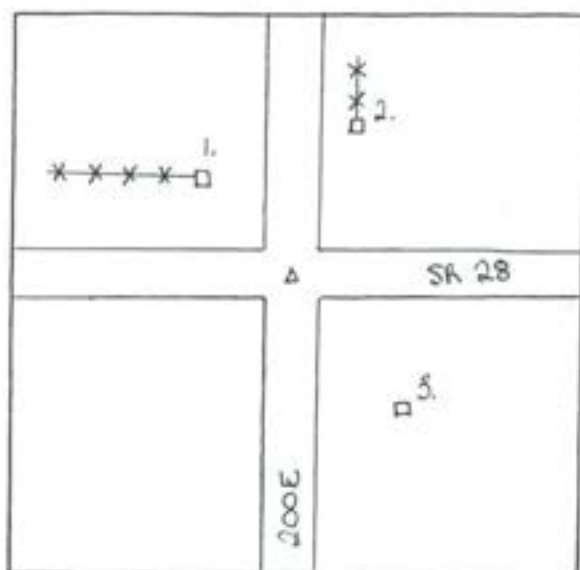

GRAPHIC TIES (SKETCHED)

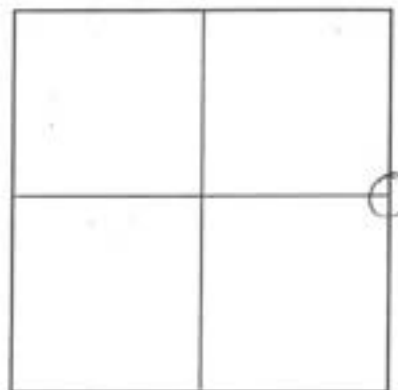

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: ^(BENT) RR SPIKE LOCATED 3" ± DEEP RESET SPIKE

TIES:

1. 50.85' AZ 327° N&C COR WOOD F.P.


2. 60.85' AZ 21° END WOOD F.P.

3. 27.01' AZ 140° DH TOP R/W MARKER


SECTION 8 TWP. 21 RANGE 5

DATE: 11/13/01

SECTION 8 TWP. 21 RANGE 5

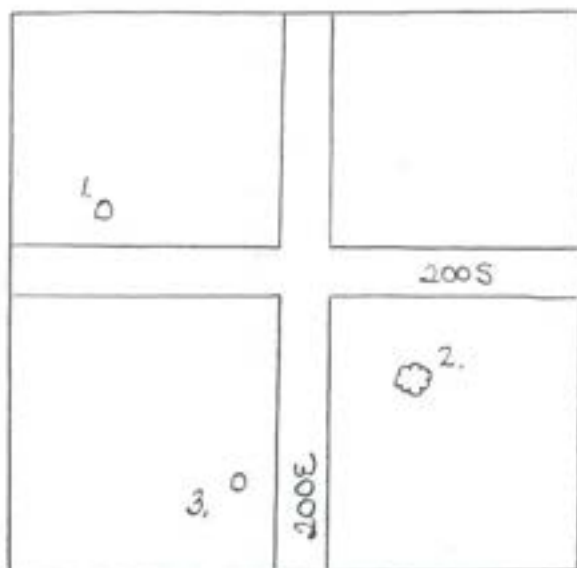

GRAPHIC TIES (SKETCHED)

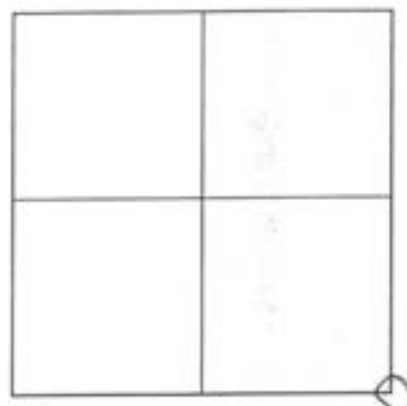

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 6" ± DEEP

TIES:


1. 61.65' AZ 289° N&C IN PWP

2. 24.48' AZ 136° N&C IN 48" CAT.


3. 54.00' AZ 197° PKN W. SD. PWP

SECTION 8 TWP. 21 RANGE 5

SEC. 8 TWP. 21 RANGE 5

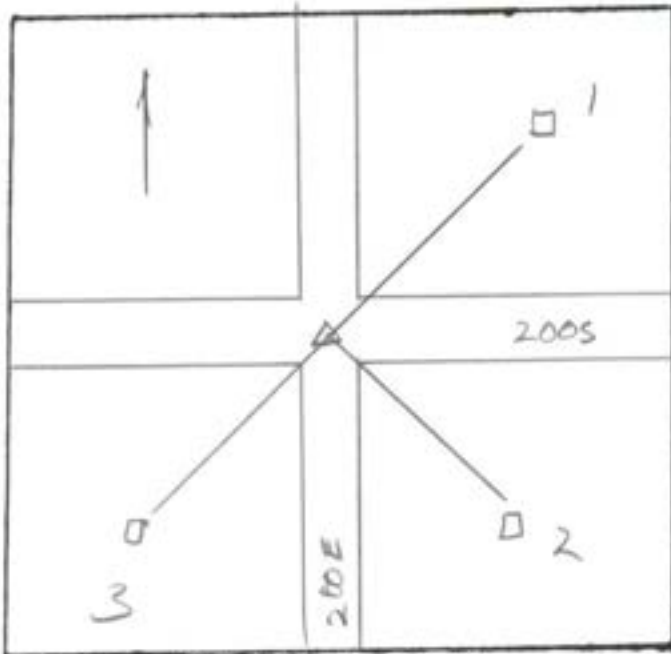

GRAPHIC TIES
(SKETCHED)

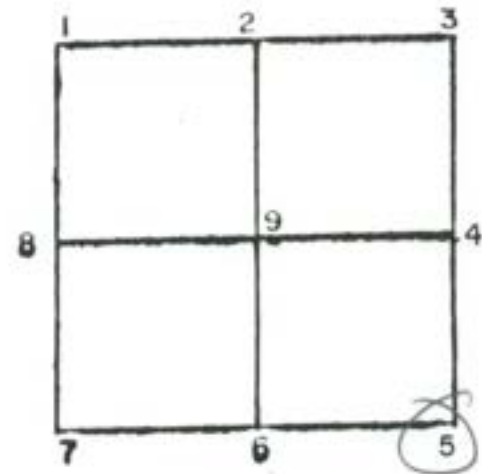

CORNER IDENT. NOT STATED

Then: 1. 21.65 HP

2. 23.30' HP

3. 23.60' HP

SEC 8 TWP 21 RANGE 5

☐ ok

Date: 1/26/2005

Corner: BOAT SPIKE (-0.3)

Location: CO. RD 200 SOUTH:

1/2 MILE EAST OF

CO. RD 100 EAST




Corner	Sec.	Twp.	Range
(6)	8	21	5

WITNESSES

	Description	Bearing	Distance
1	NE COR NW 1/4 (MNF)	WEST	2413.59
2	TRAV NAIL	N5°E	13.70
3	PK NAIL IN SE SIDE OF POWER POLE	N45°E	28.48
4	PK NAIL IN N SIDE OF ROUND FORCE POST	S45°E	24.51

DRAWING

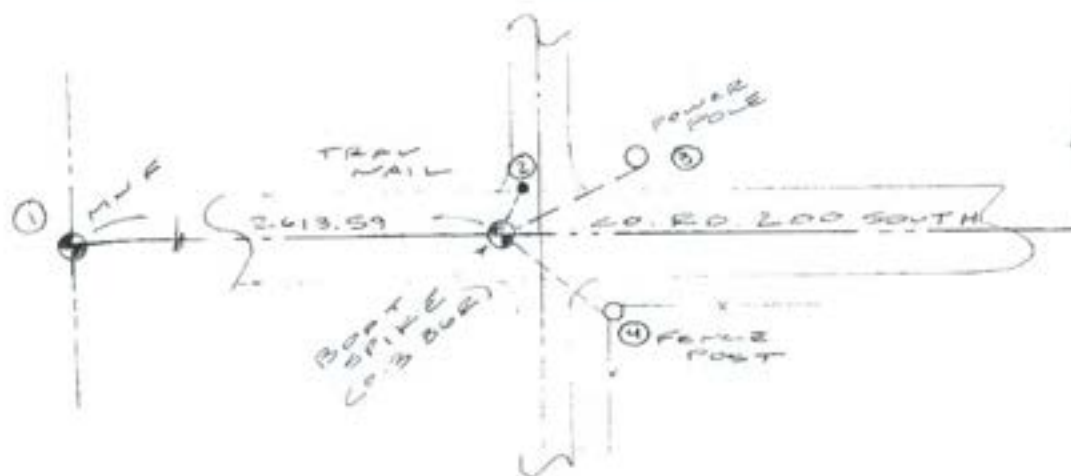

Inspection Report

Date:	Surveyor	Remarks
1/26/05	REW (REV)	FOUND BOAT SPIKE 0.3 B&E - WITHHELD.

LAND SURVEYOR CERTIFICATE

I, Richard E. Ward hereby certify that I am a Land Surveyor, licensed in compliance with the laws of the State of Indiana; and that to the best of my knowledge and belief, the drawing within represents a survey made under my supervision in accordance with Title 865, Article 1, Rule 12 of the Indiana Administrative Code. The Field work for said survey was complete on 1/26/05.


Richard E. Ward, L.S.
Indiana Reg. No. S 0432



**RICHARD E. WARD
& ASSOCIATES**
PROFESSIONAL LAND SURVEYORS


LOT & FARM SURVEYS · SUBDIVISION LAYOUTS · MORTGAGE SURVEYS
P. O. BOX 172 · ANDERSON, INDIANA 46015 · (765 643-8078)



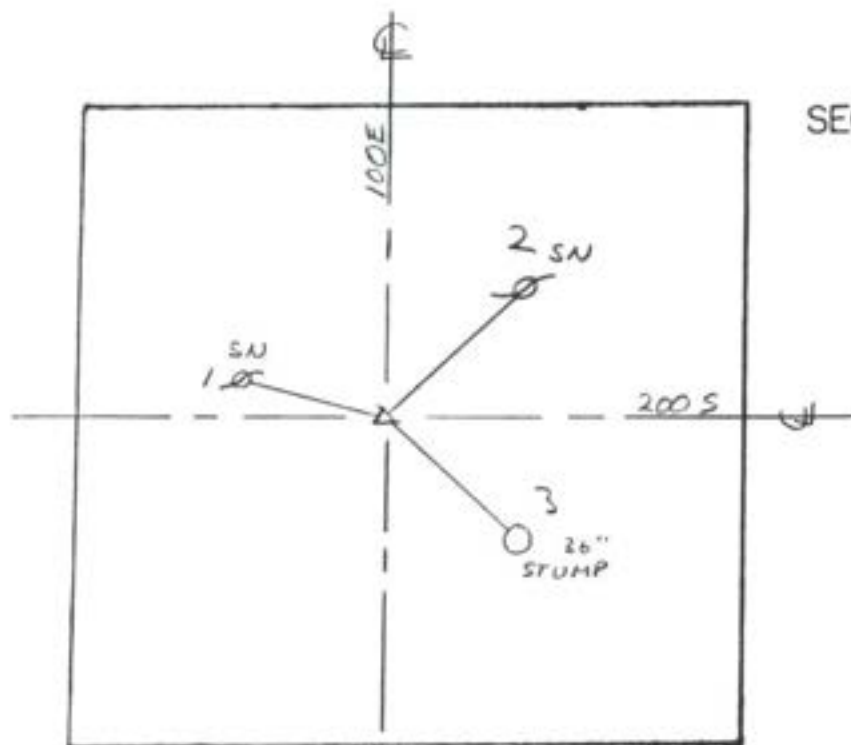

GRAPHIC TIES
(SKETCHED)


SEC 8 TWP 21 RANGE 5

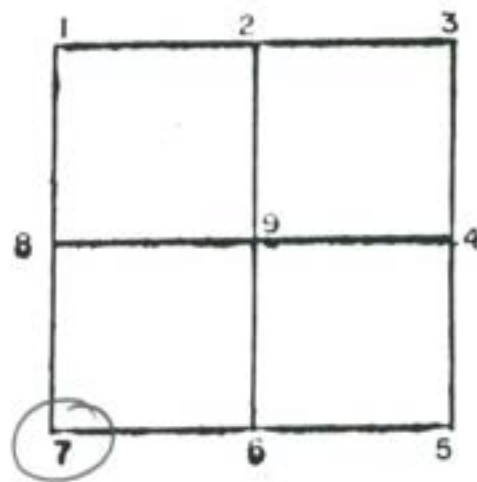

CORNER IDENT. 7 FOUND IRON PIN 3/4" ϕ


TIES: 1. 67.10' SN 121 PWP
2. 34.1' SN 121 PWP
3. 42.94 SN 36" TREE STUMP

SEC 8 TWP 21 RANGE 5

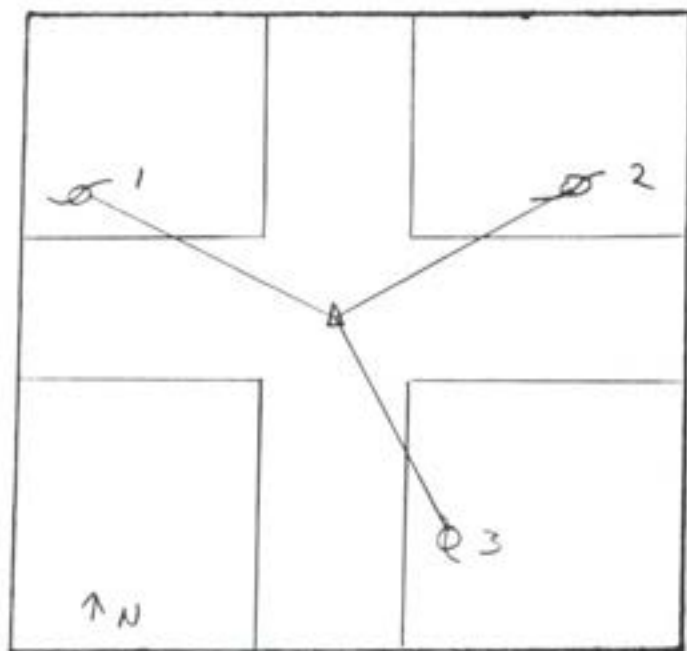

GRAPHIC TIES
(SKETCHED)

SEC 8 TWP 21 RANGE 5

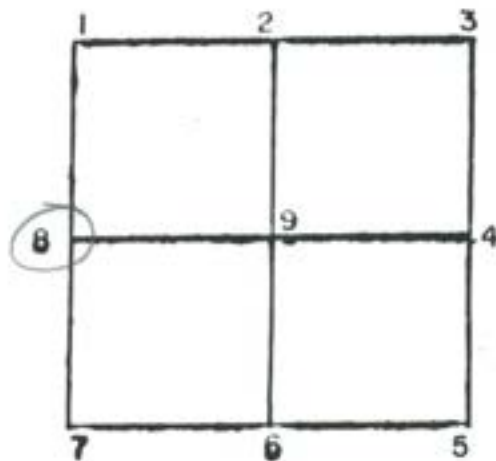


CORNER IDENT. _____

TIES: 1. 82.91' PK IN PWP
2. 54.15' PK IN PWP
3. 29.81' PK IN PWP

To reference PK Nail found on 3-5-79
 No other monumentation located


STATE HIGHWAY DEPT SURVEYORS WERE IN 7/31/85
 SAID THEY HAVE LOCATED ABOVE CORNER.
 SET 4 PK NAILS IN LINE TO FIND CORNER.
 9' OFF & PAVEMENT. ALMOST OFF PAVEMENT.

SEC 8 TWP 21 RANGE 5

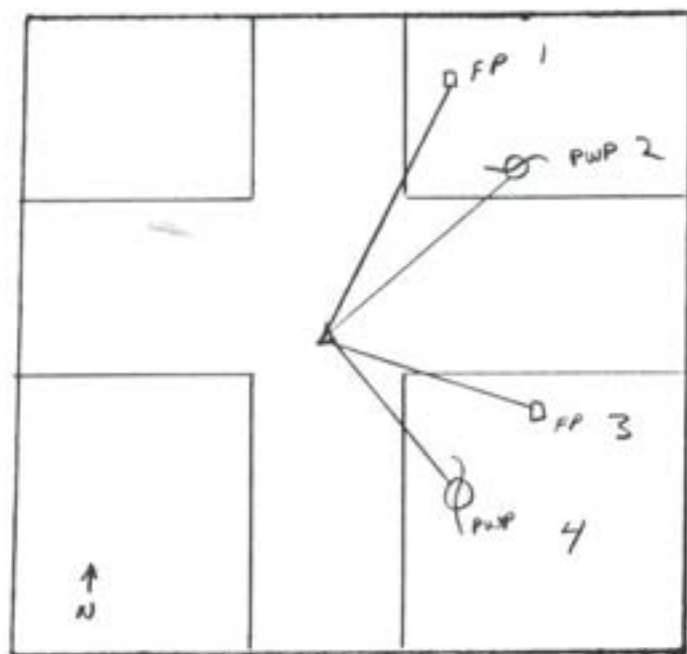

GRAPHIC TIES
(SKETCHED)

SEC. 8 TWP 21 RANGE 5

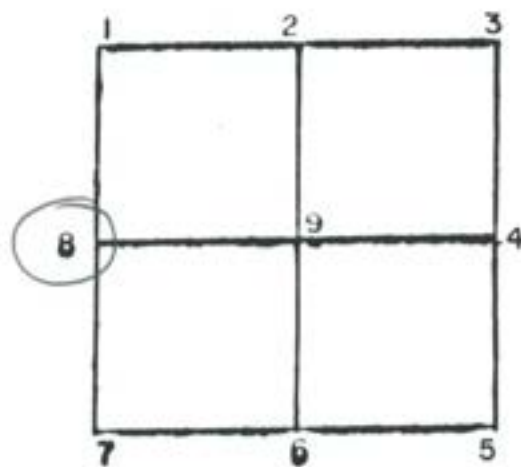

CORNER IDENT. GRASS PLUG 2' NORTH OF SOUTH EASEMENT


TIES:

1.	61.15'	FENCE POST
2.	53.70'	PWP
3.	40.13'	FENCE POST
4.	30.83'	PWP


SEC 8 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 9 TWP. 21 RANGE 5

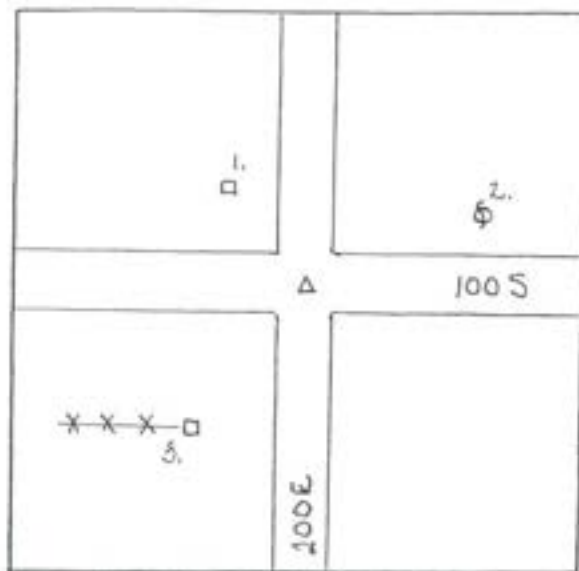

GRAPHIC TIES (SKETCHED)

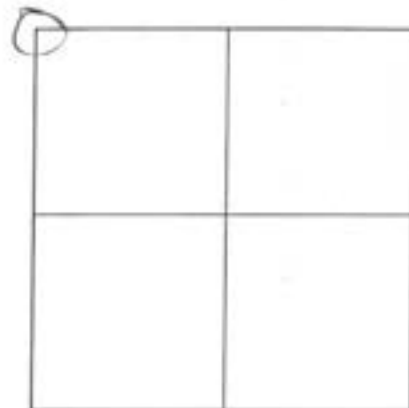

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: I. P. L. 6" DEEP

TIES:


1. 28.47' AZ 319° PKN (JOHNSON) IN WOOD POST

2. 57.20' AZ 77° N.E.C. IN PWP


3. 23.66' AZ 230° PKN (JOHNSON) END WOOD POST

SECTION 9 TWP. 21 RANGE 5

SEC. 9 TWP. 21 RANGE 5

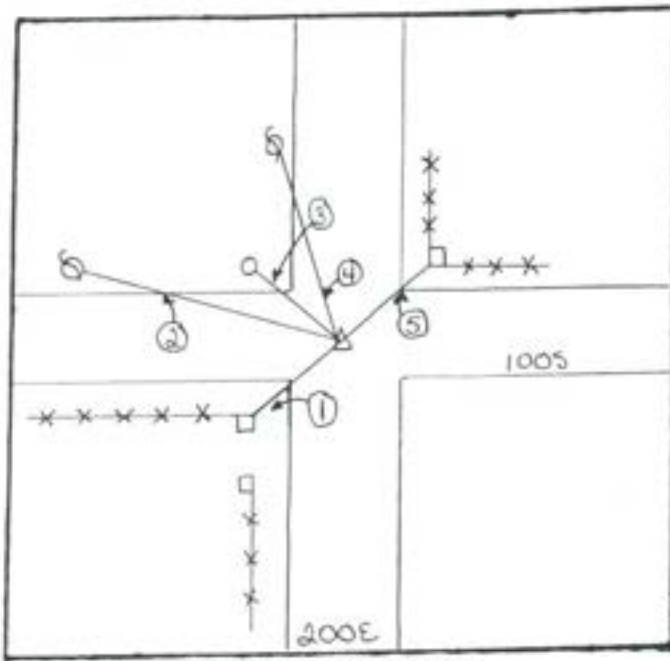

GRAPHIC TIES
(SKETCHED)

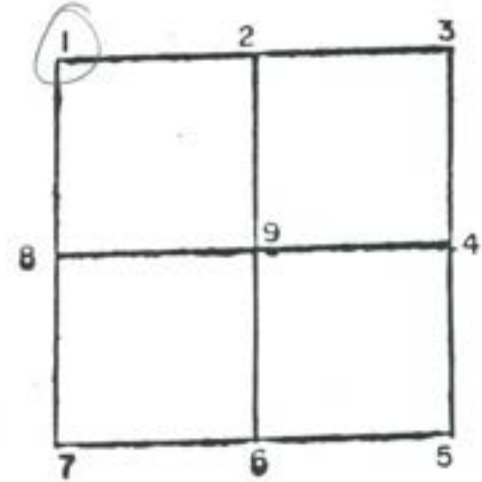


CORNER IDENT. Δ-FIR 3/4" - 6" DEEP


- TIES:
- 1. 23.65 POST w/ FL
 - 2 58.60 PWP
 - 3 28.50 CUT OFF PWP/POST
 - 4 58.85 PWP
 - 5 31.85 DECORATIVE FENCE

* P.K. NAILS IN ALL POSTS + POLES

SEC. 9 TWP. 21 RANGE 5

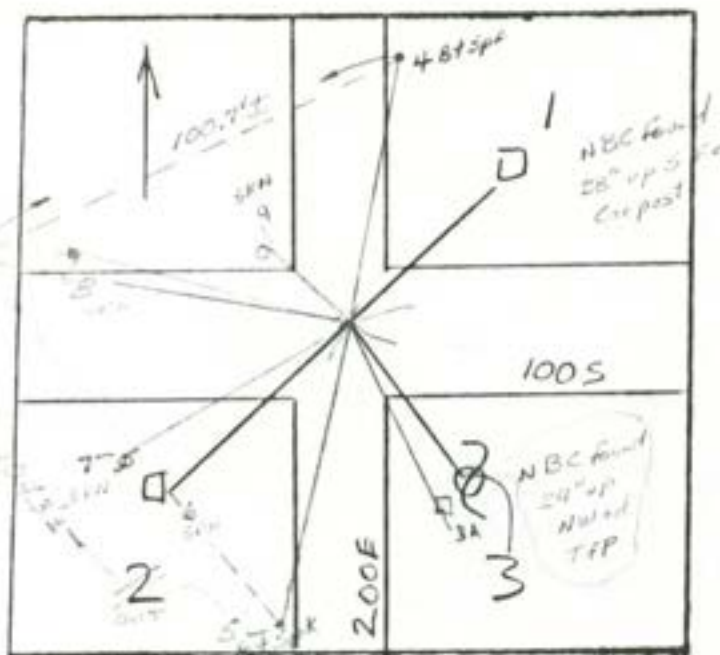

SEC 9 TWP 21 RANGE 5

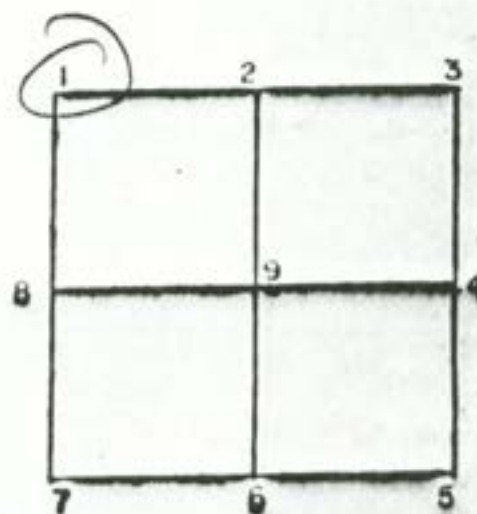

GRAPHIC TIES
(SKETCHED)


CORNER IDENT. NOT STATED Stone down?

- TIES:
- | | | |
|-----|--------|---|
| 1. | 26.69' | Nail in bottle cap found 28" up S face wood car. post |
| 2. | 23.70' | Nail in bottle cap found 28" up S face wood car. post |
| 3. | 25.20' | Nail in bottle cap found 25" up NW sd TFP |
| 3A | 25.27' | Small road nail set 15" up W face wood post |
| 4. | 46.52' | Post Spike set flush |
| 5. | 57.97' | Post Spike set flush |
| 6. | 23.31' | Small Road Nail set 3" up E Fe wood post |
| 7. | 26.91' | Small Road Nail set 16" up NW sd TFP |
| 8. | 58.37' | Small Road Nail set 16" up SW sd PwP |
| 9. | 28.32' | Small Road Nail set 11" up NE sd wood post |
| 10. | 56.22' | Post Spike set flush |


SEC 9 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 9 TWP. 21 RANGE 5

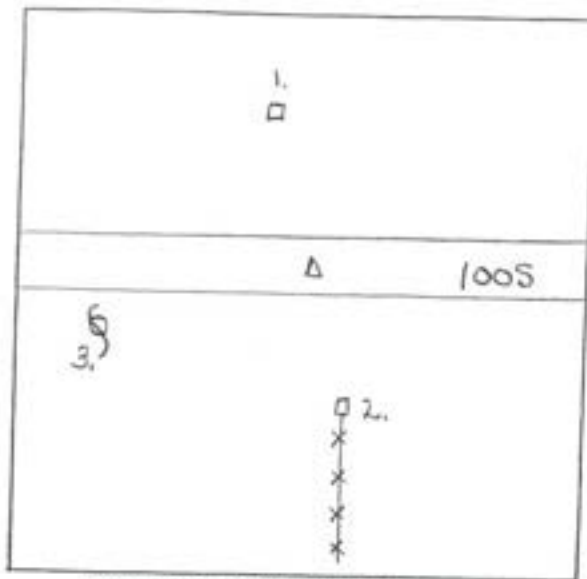

GRAPHIC TIES (SKETCHED)

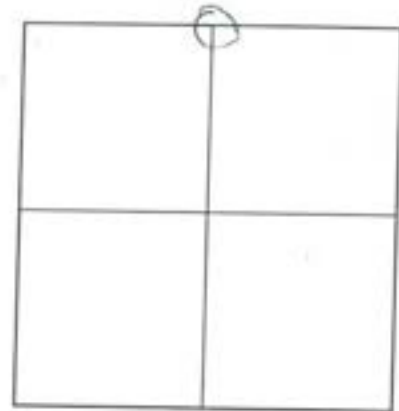

REFERENCED BY:

CORNER IDENTIFIED: 1/2" rebar located 4" DEED


TIES:

1. 17.62' AZ 3° PK NAIL IN WOOD POST

2. 18.28' AZ 183° PK NAIL IN END WOOD F.P.


3. 68.98' AZ 259° PK NAIL IN PWP

SECTION 9 TWP. 21 RANGE 5

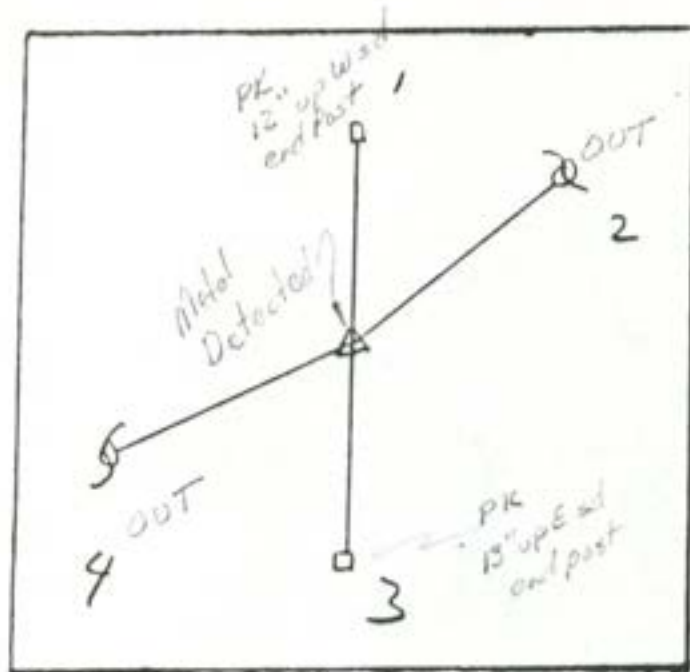

GRAPHIC TIES
(SKETCHED)

SEC 9 TWP 21 RANGE 5

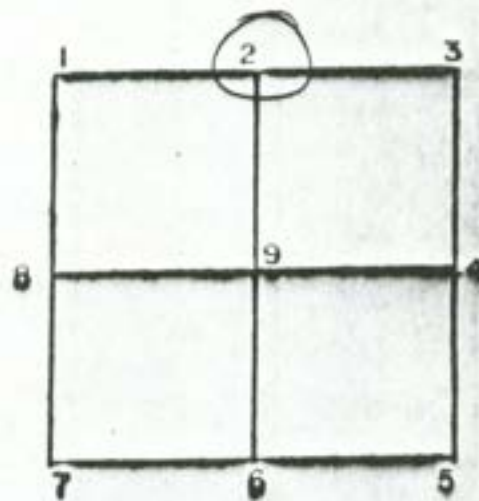


CORNER IDENT. NOT STATED

TIES:	1.	17.78'	HP
	2.	19.67'	PWP
	3.	18.20'	HP
	4.	71.49'	PWP


SEC 9 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 9 TWP. 21 RANGE 5

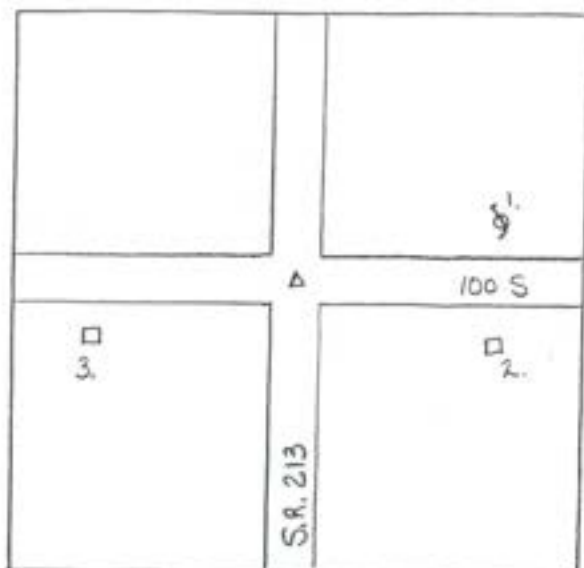

GRAPHIC TIES (SKETCHED)

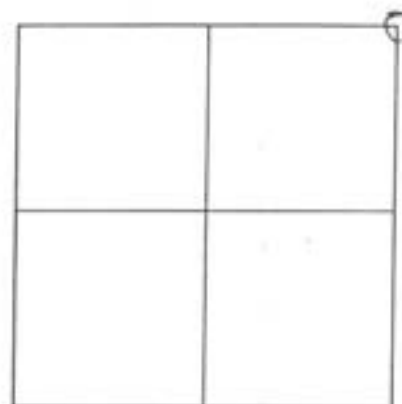

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 2" ± DEEP


TIES:

1. 78.90' AZ 79° PK NAIL IN PWP

2. 75.46' AZ 110° PK NAIL IN 6" WOOD POST


3. 44.45' AZ 260° NW COR R/W MARKER

SECTION 9 TWP. 21 RANGE 5

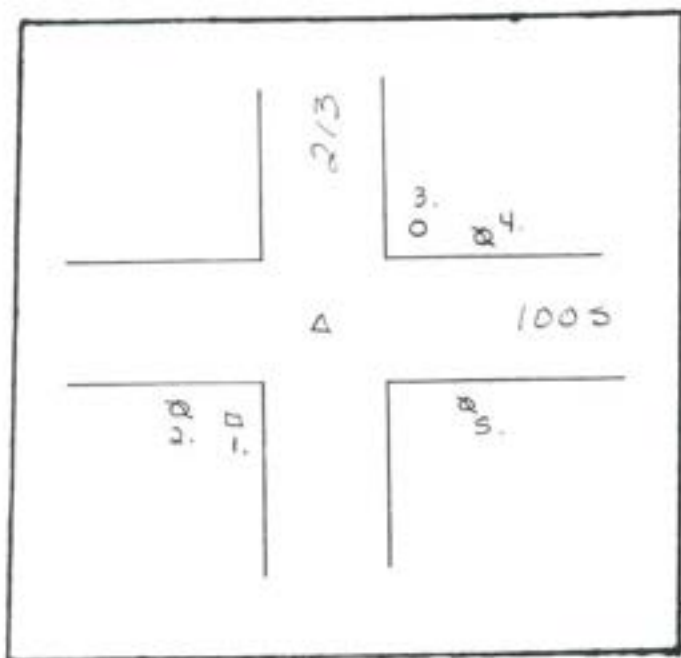

GRAPHIC TIES
(SKETCHED)

SEC 9 TWP 21 RANGE 5

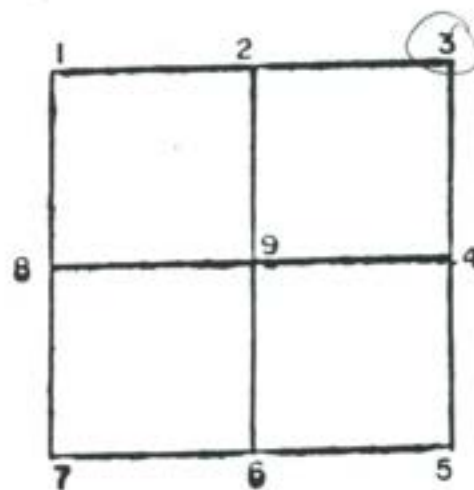

CORNER IDENT. BRASS PEN

- TIES:
1. 42.26' NW FLAT OF R/W MARKER
 2. 69.03 PK IN PWP
 3. 45.50 '+' IN CENTER OF USGS BENCH MARK
 4. 78.85 PK IN PWP
 5. 75.34 PK IN SHORT POLE BY TELEPHONE PED.


SEC 9 TWP 21 RANGE 5

DATE: 11/14/01

SECTION 9 TWP. 21 RANGE 5



GRAPHIC TIES (SKETCHED)

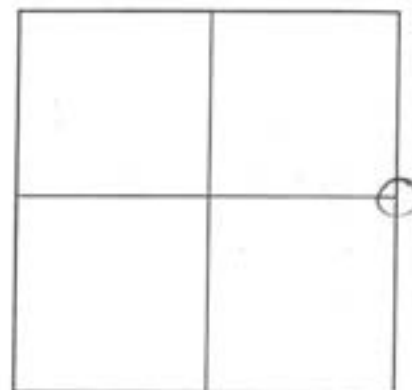

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: RR SPIKE LOCATED 4" ± DEEP

TIES:

1. 84.08' AZ. 62° SW COR OF BRICK HOUSE


2. 39.75' AZ. 125° N&C IN PWP

3. 50.90' AZ. 250° N&C IN PWP


.....
.....
.....
.....
.....
.....

SECTION 9 TWP. 21 RANGE 5

SEC 9 TWP 21 RANGE 5

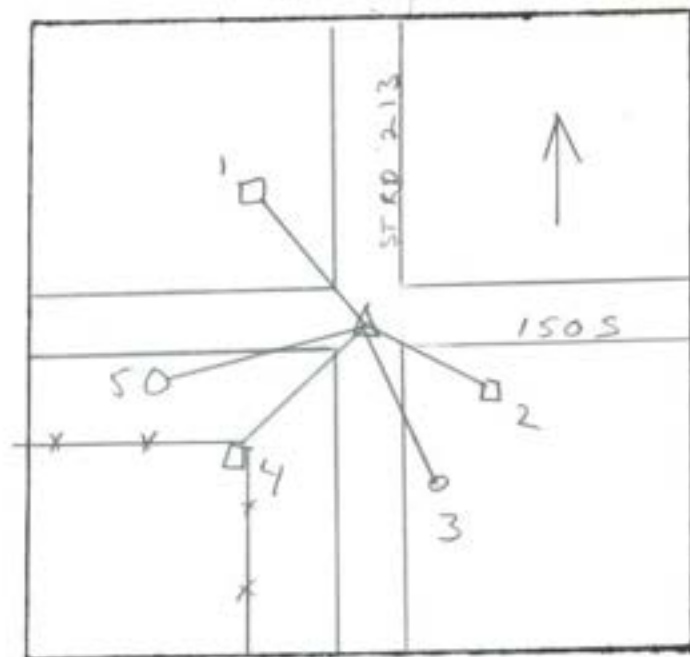

GRAPHIC TIES
(SKETCHED)

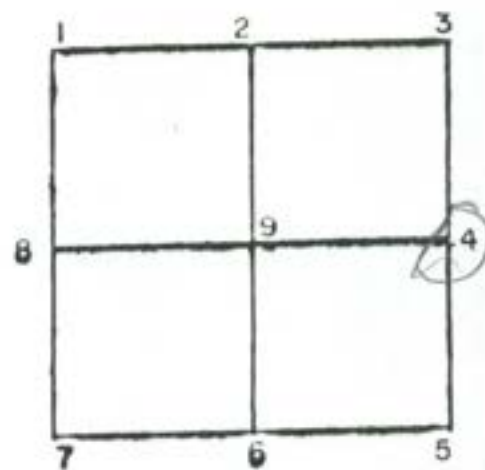


CORNER IDENT. RAIL ROAD SPIKE

TIES: 1 TOP CENTER R/W MONUMENT 44.25
2 SN POST 45.55
3 SN PWP 35.75
4 SN COR POST 44.75
5 SN PWP 50.80


SEC 9 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 9 TWP. 21 RANGE 5

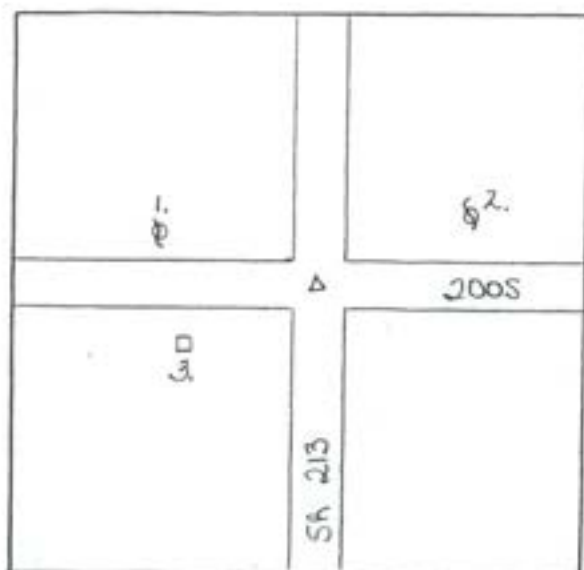

GRAPHIC TIES (SKETCHED)

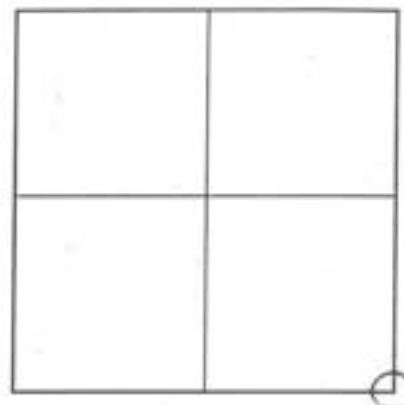

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: MAG NAIL FOUND AT SURFACE

TIES:

1. 46.73' AZ 294° MAG NAIL IN PWP (211-767)

2. 40.37' AZ 69° MAG NAIL IN PWP (211-641)

3. 45.05' AZ 249° NE COR R/W MKR

WYATT JOHNSON 50302


SECTION 9 TWP. 21 RANGE 5

DATE: 11/15/01

SECTION 9 TWP. 21 RANGE 5



GRAPHIC TIES (SKETCHED)

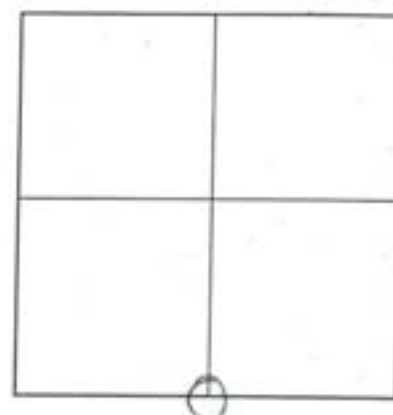

REFERENCED BY:

CORNER IDENTIFIED: REBAR LOCATED 5" ± DEEP

TIES:


1. 54.12' AZ 76° NEC IN PWP

2. 31.49' AZ 156° PK NAIL IN PWP


3. 42.20' AZ 246° PK NAIL IN WOOD POST

SECTION 9 TWP. 21 RANGE 5

SEC 9 TWP 21 RANGE 5

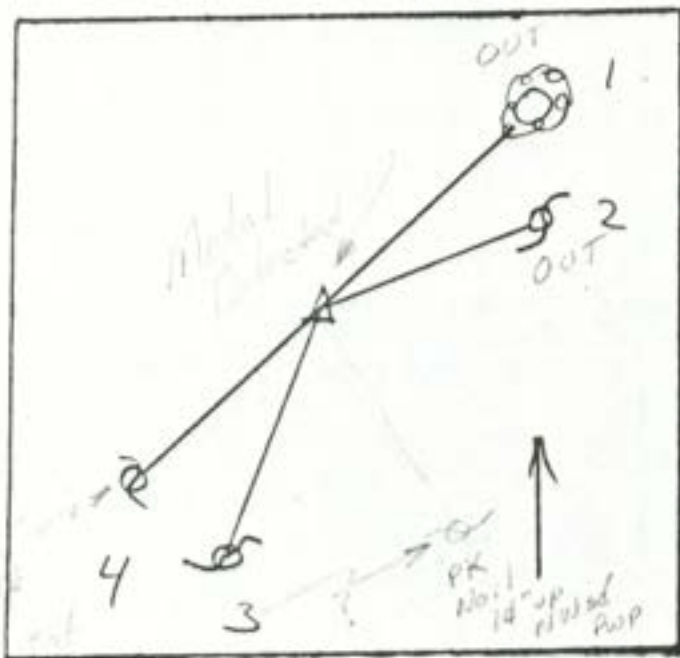

GRAPHIC TIES
(SKETCHED)

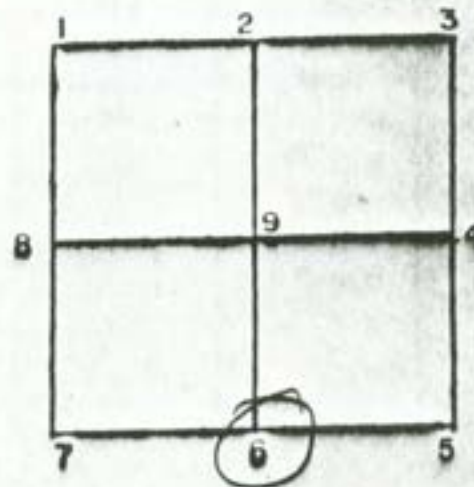

CORNER IDENT. NOT STATED

TIES:	1. 82.92'	WALNUT TREE
	2. 53.07'	PWP
	3. 31.80	PWP
	4. 42.44'	PWP

SEC 9 TWP 21 RANGE 5


A 2x2 grid with numbers at the intersections. The numbers are: Top-left (1), Top-center (2), Top-right (3), Middle-left (8), Middle-center (9), Middle-right (4), Bottom-left (7), Bottom-center (6), and Bottom-right (5). The number 6 is circled.

TIES:	1.	82.92'	
			WALNUT TREE
	2.	53.07'	PWP
	3.	31.80	PWP
	4.	42.44'	PWP


SEC 9 TWP 21 RANGE 5

DATE: 1/13/01

SECTION 9 TWP. 21 RANGE 5

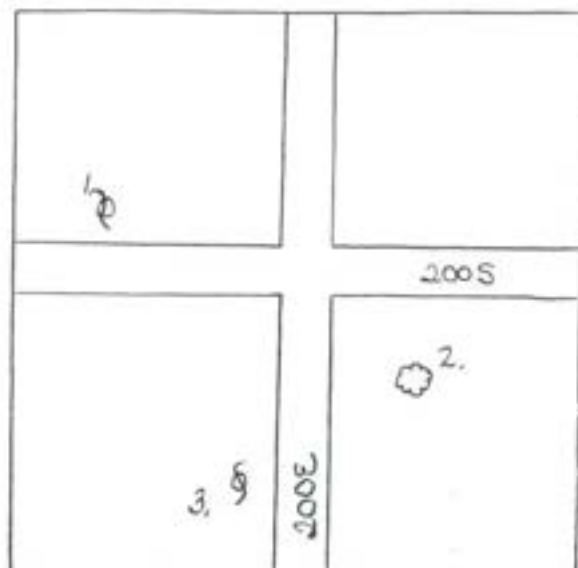

GRAPHIC TIES (SKETCHED)

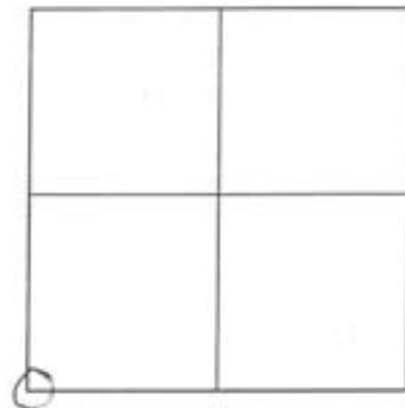

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 6" ± DEEP

TIES:

1. 61.65' AZ 289° N&C IN PWP

2. 24.48' AZ 136° N&C IN 48" CRT.

3. 54.00' AZ 197° PKN W. SD. PWP

.....

.....

.....

.....


.....

.....


SECTION 9 TWP. 21 RANGE 5

DATE: 11/14/01

SECTION 9 TWP. 21 RANGE 5

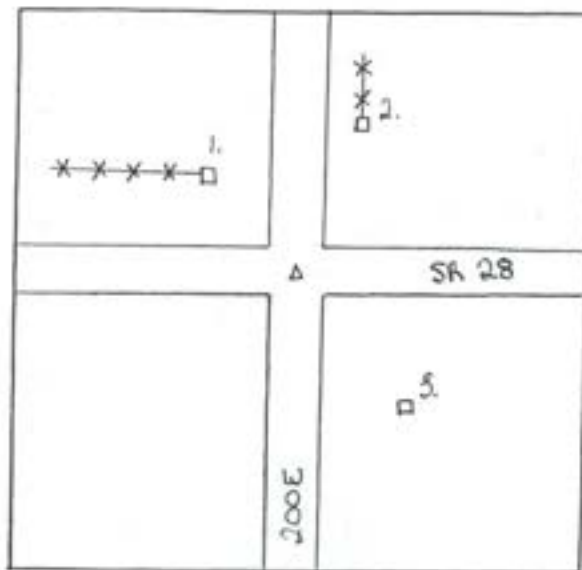

GRAPHIC TIES (SKETCHED)

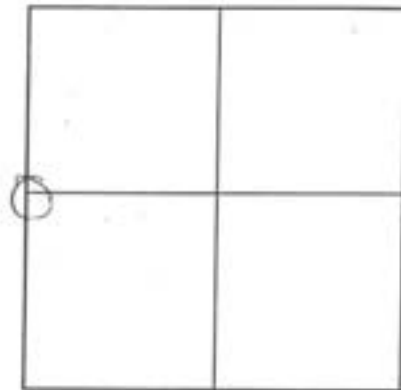

REFERENCED BY:

.....
.....

(BENT)
CORNER IDENTIFIED: RR SPIKE LOCATED 3" ± DEEP RESET SPIKE

TIES:

1. 50.85' AZ 327° N&C COR WOOD F.P.


2. 60.85' AZ 21° END WOOD F.P.

3. 27.01' AZ 140° DH TOP R/W MARKER


SECTION 9 TWP. 21 RANGE 5

DATE: 1/14/01

SECTION 9 TWP. 21 RANGE 5

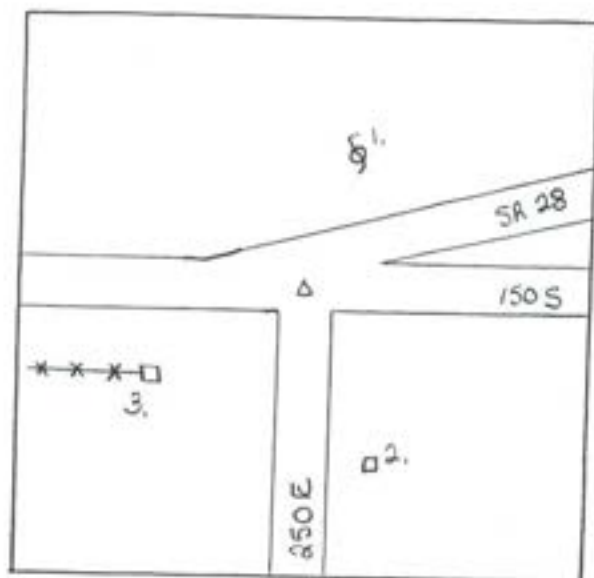

GRAPHIC TIES (SKETCHED)

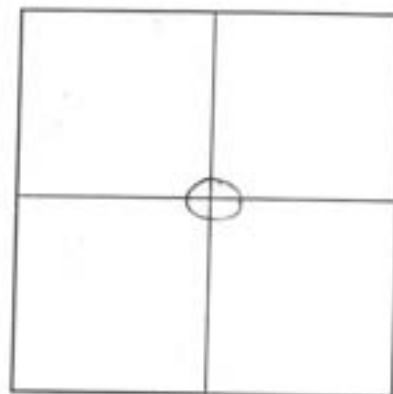

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: BOLT SPIKE, LOCATED 2"± DEEP

TIES:

1. 42.58' AZ. 5° N E C IN PWP


2. 40.57' AZ. 161° N E C IN WOOD FENCE POST

3. 30.28' AZ. 241° N E C IN END WOOD FENCE POST


.....
.....
.....
.....
.....
.....
.....

SECTION 9 TWP. 21 RANGE 5

SEC. 9 TWP. 21 RANGE 5

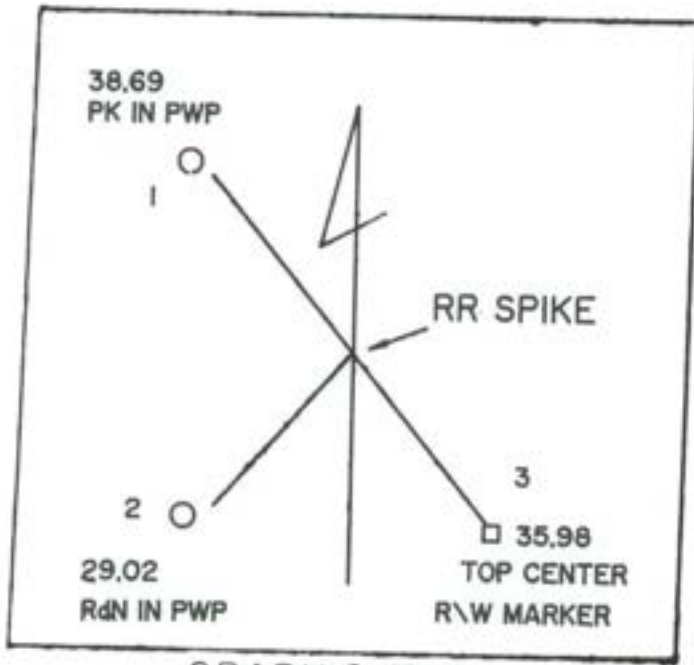

GRAPHIC TIES
(SKETCHED)

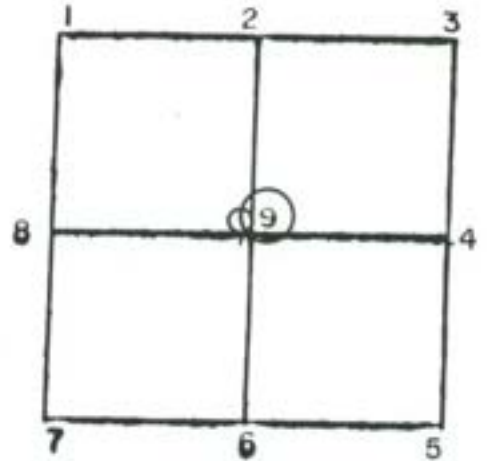


CORNER IDENT. RR SPIKE

THIS:	1	38.69	PK IN PWP
	2	29.02	RdN IN PWP
	3	35.98	TOP CENTER R\W MARKER


SEC 9 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 10 TWP. 21 RANGE 5

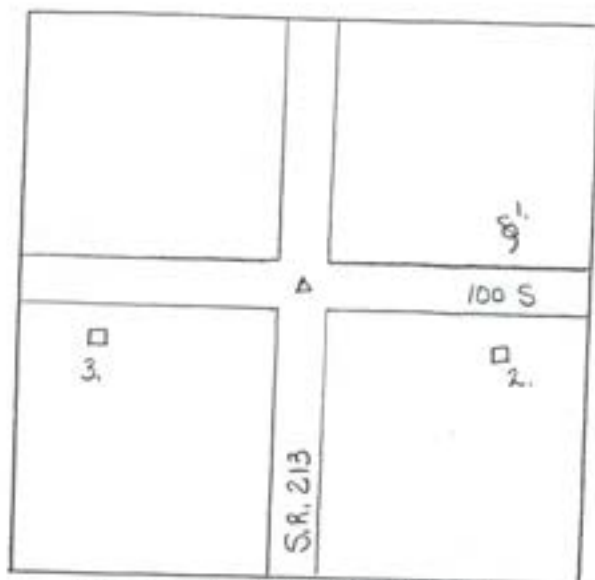

GRAPHIC TIES (SKETCHED)

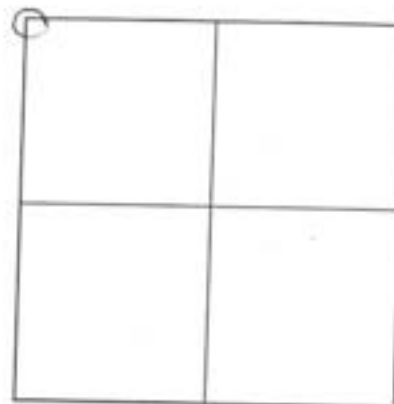

REFERENCED BY:

CORNER IDENTIFIED: REBAR LOCATED 2" ± DEEP


TIES:

1. 78.90' AZ 79° PK NAIL IN PWP

2. 75.46' AZ 110° PK NAIL IN 6" WOOD POST


3. 44.45' AZ 260° NW COR R/W MARKER

SECTION 10 TWP. 21 RANGE 5

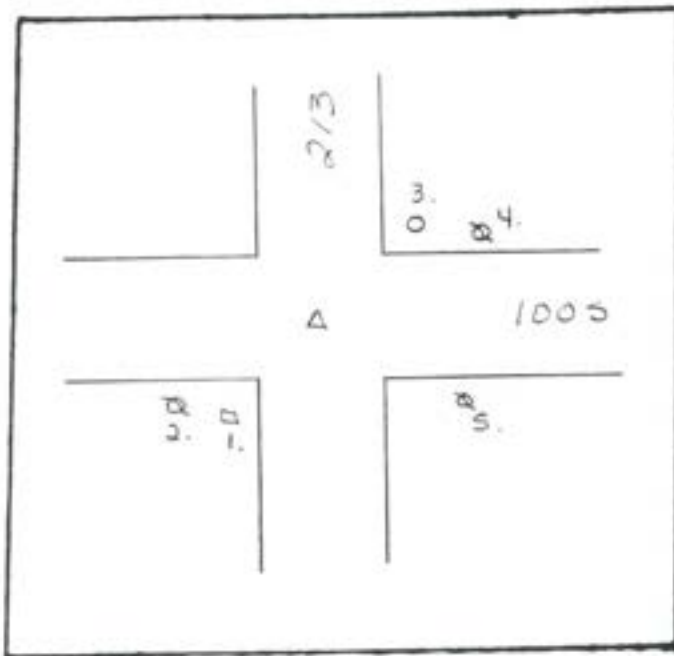

GRAPHIC TIES
(SKETCHED)

SEC. 10 TWP. 21 RANGE 5

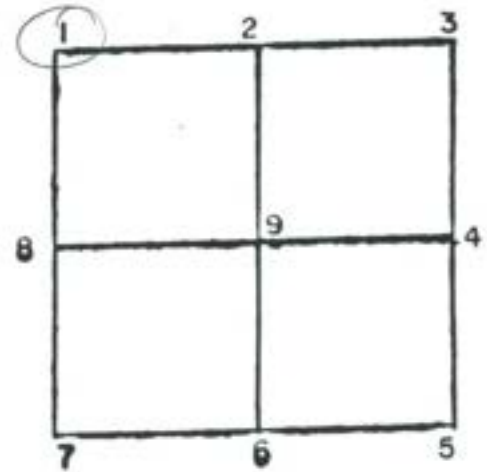


CORNER IDENT. BRASS PEN

TIES: 1. 42.26' NW FLAT OF RIW MARKER
2. 69.03 PK IN PWP
3. 45.50 '+' IN CENTER OF USGS BENCH MARK
4. 78.85 PK IN PWP
5. 75.34 PK IN SHORT POLE BY TELEPHONE PED.


SEC. 10 TWP. 21 RANGE 5

DATE: 11/13/01

SECTION 10 TWP. 21 RANGE 5

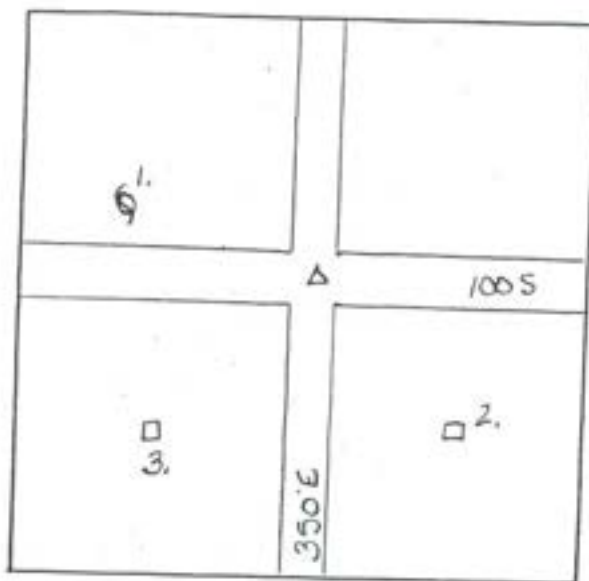

GRAPHIC TIES (SKETCHED)

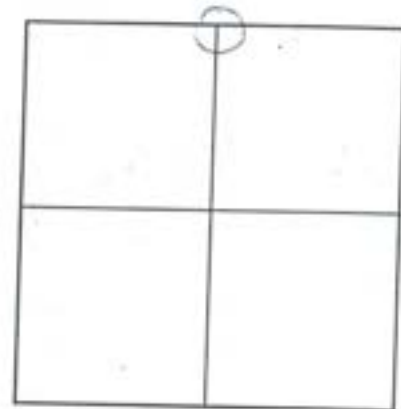

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: PK NAIL LOCATED 1" ± DEEP

TIES:

1. 48.11' AZ 298° PK NAIL IN P.W.P


2. 44.44' AZ 118° PK NAIL IN WOOD POST

3. 29.17' AZ 226° PK NAIL IN WOOD CORNER POST


SECTION 10 TWP. 21 RANGE 5

DATE: 11/13/01

SECTION 10 TWP. 21 RANGE 5

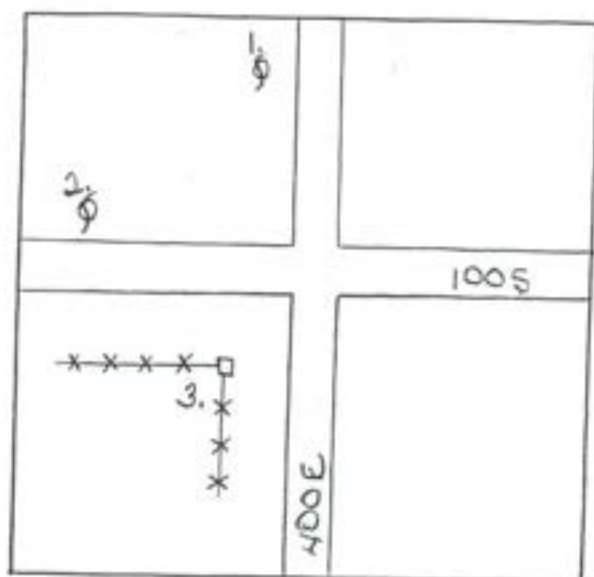

GRAPHIC TIES (SKETCHED)

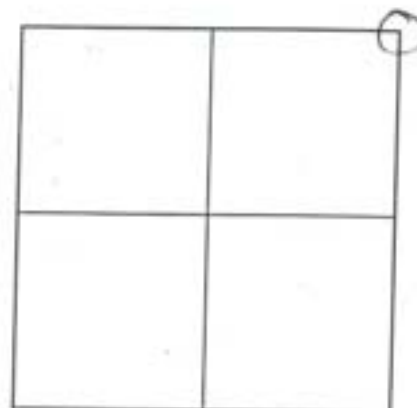

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: A.R. SPIKE FOUND AT SURFACE

TIES:


1. 83.00' AZ 355° N & C IN PWP

2. 37.13' AZ 300° PK NAIL IN PWP


3. 20.31' AZ 187° N & C IN WOOD CORNER POST

SECTION 10 TWP. 21 RANGE 5

SEC 10 TWP 21 RANGE 5

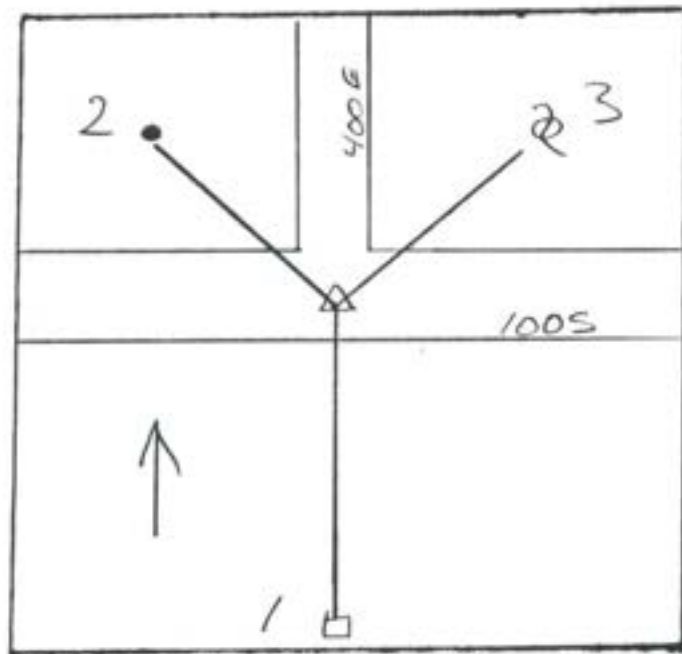

GRAPHIC TIES
(SKETCHED)

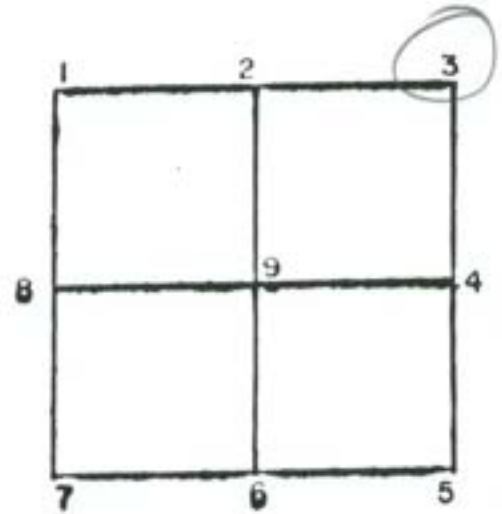


CORNER IDENT. NOT STATED

TIES: 1. 20.30' HP

2. 25.10' METAL FP

3. 35.75' PWP


SEC 10 TWP 21 RANGE 5

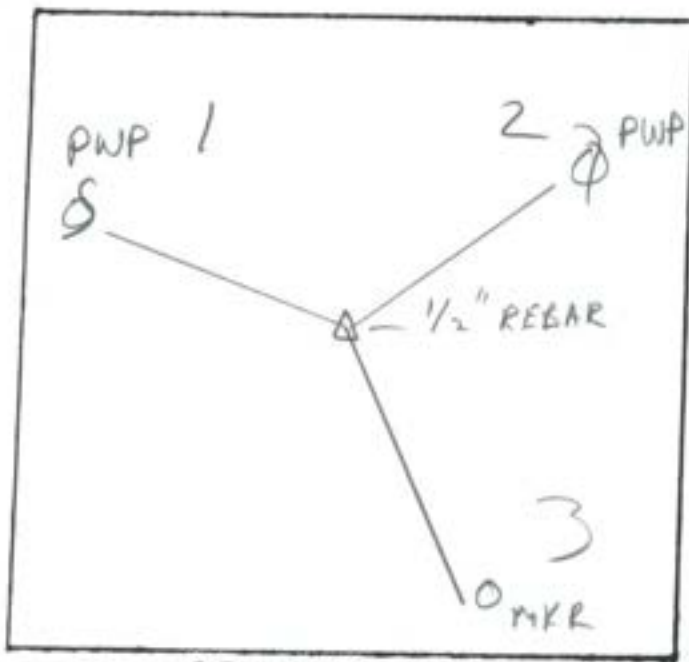

GRAPHIC TIES
(SKETCHED)

SEC 10 TWP 21 RANGE 5

DEC 1988

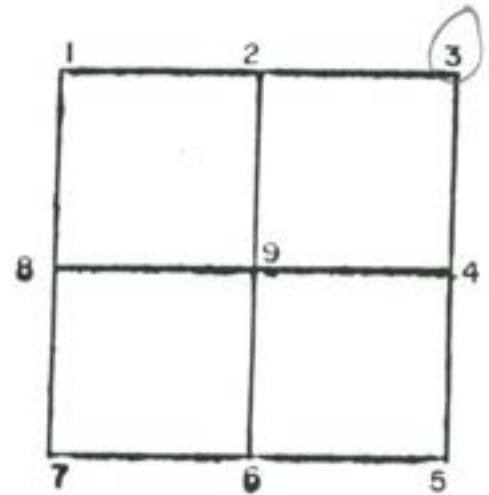

CORNER IDENT. 1/2" REBAR 1" ±


TIES:

1. PWP 37.12 PK
2. PWP 45.91 PK
3. PROPERTY CORNER MCR 19.78


SEC 10 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 10 TWP. 21 RANGE 5

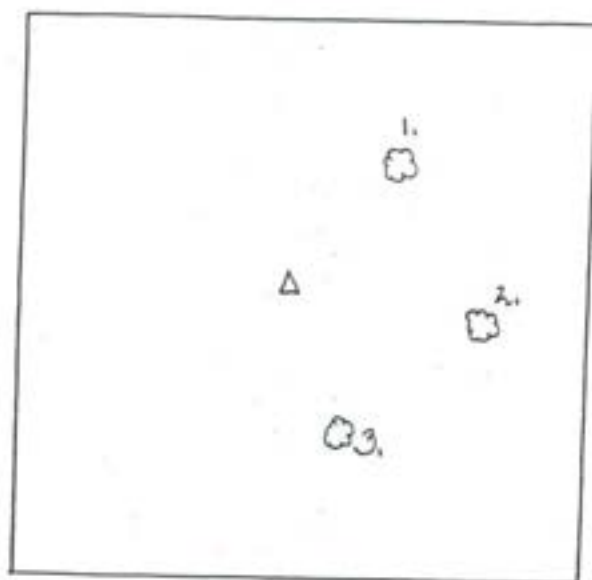

GRAPHIC TIES (SKETCHED)

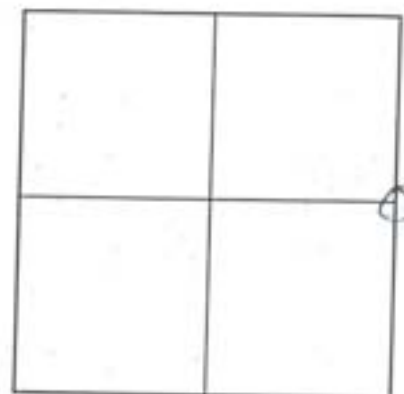

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR & CAP AT SURFACE (WHITT JOHNSON 50302)


TIES:

1. 10.05' AZ 65° 6" ELM TREE

2. 23.18' AZ 117° 4" E.C. UP 4' IN 12" MAPLE TREE


3. 9.30' AZ 175° 10" ELM TREE

SECTION 10 TWP. 21 RANGE 5

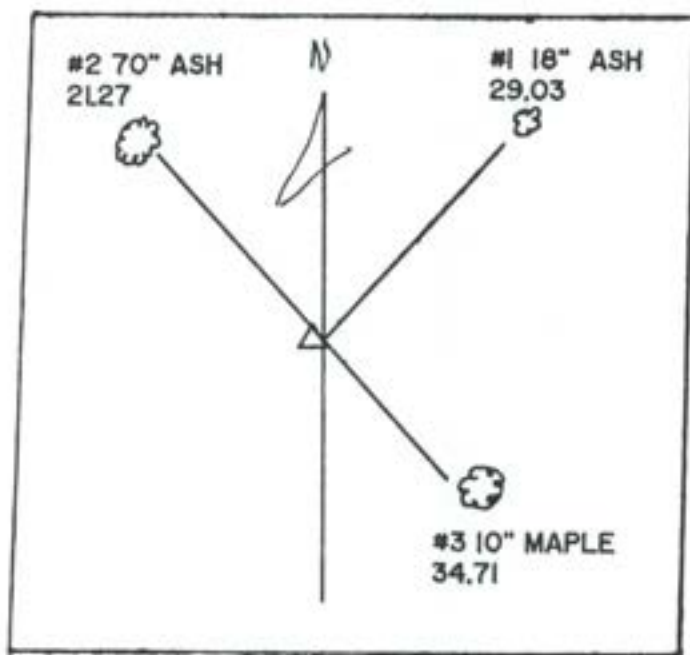

GRAPHIC TIES
(SKETCHED)

SEC. 10 TWP. 21 RANGE 5

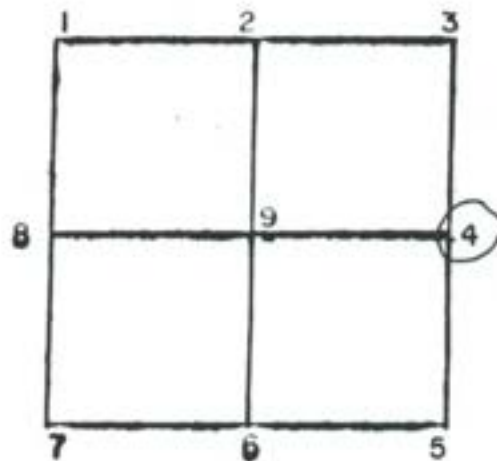


CORNER IDENT. STONE DEPTH 1" ±

TIES: #1 18" ASH 29.03
#2 70" ASH 21.27
#3 10" MAPLE 34.71


SEC. 10 TWP. 21 RANGE 5

DATE: 11/15/01

SECTION 10 TWP. 21 RANGE 5

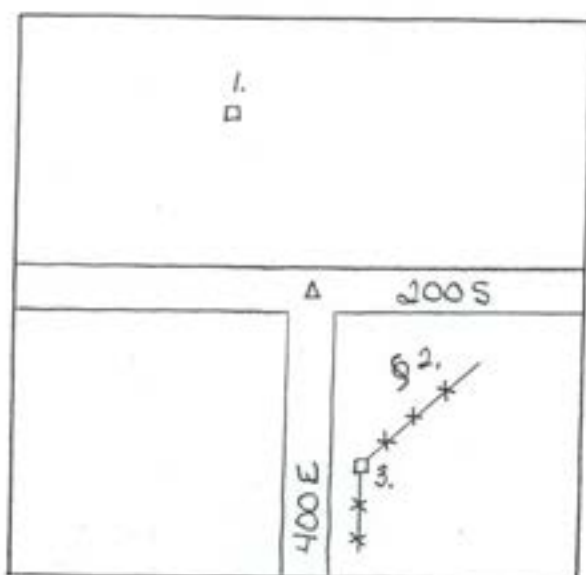

GRAPHIC TIES (SKETCHED)

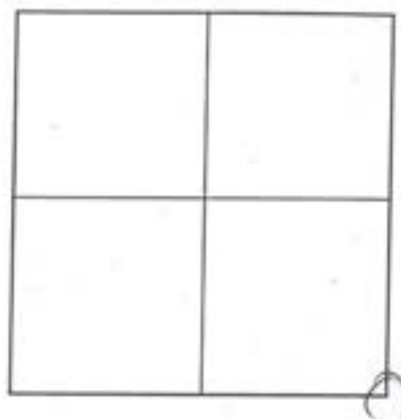

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: HARRISON MKY FOUND 5" ± DEEP


TIES:

1. 19.15' AZ 2° MAG NAIL IN WOOD POST

2. 32.12' AZ 125° N&C IN TFP


3. 40.19' AZ 158° N&C IN WOOD COR POST

SECTION 10 TWP. 21 RANGE 5

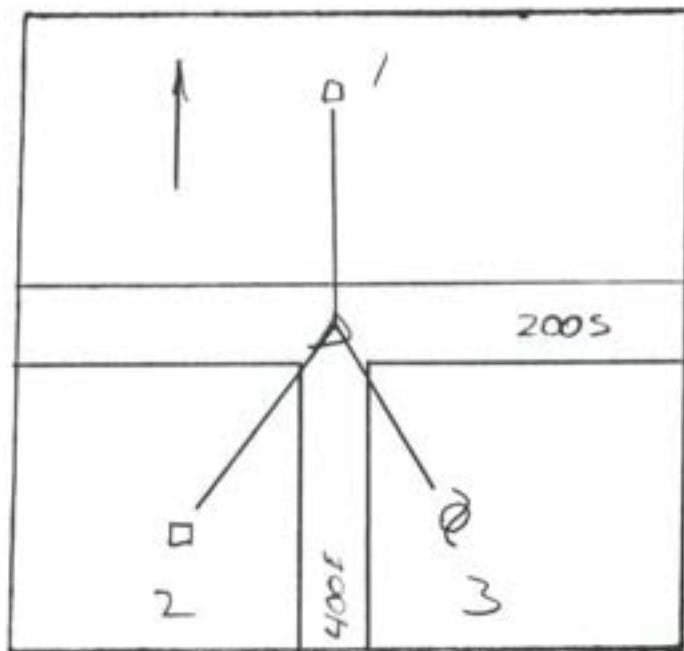

GRAPHIC TIES
(SKETCHED)

SEC 10 TWP 21 RANGE 5


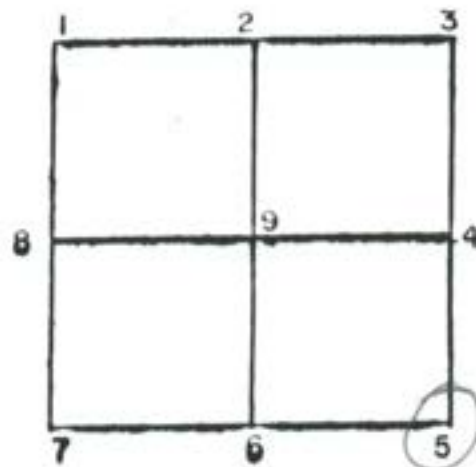


CORNER IDENT. NOT STATED

TIES: 1. 19.10' FP
2. 33.10' FP
3. 32.80' PWP

SEC 10 TWP 21 RANGE 5

SEC. 10 TWP. 21 RANGE 5

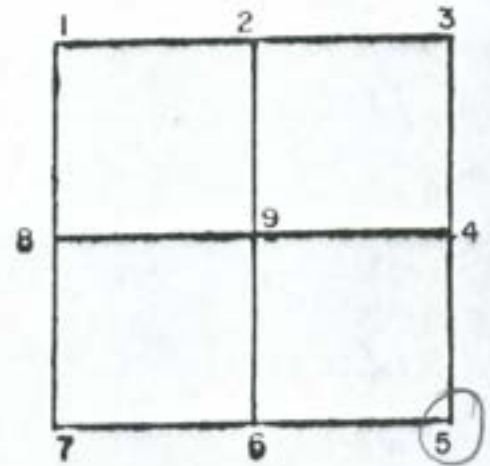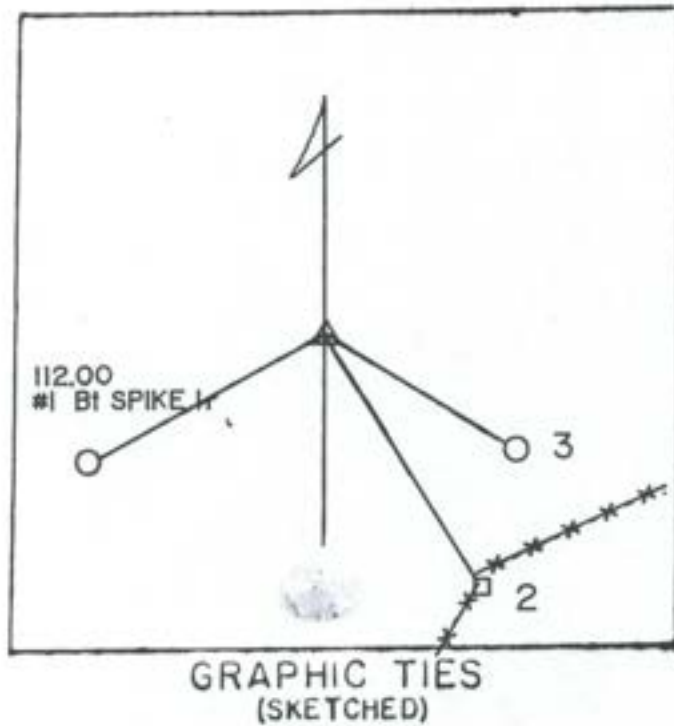

CORNER IDENT. HARR MARKER

TIES: #2 WOOD FENCE POST 40.12


#1 Bt SPIKE

#3 PK IN PWP 32.10


SEC. 10 TWP. 21 RANGE 5

DATE: 11/14/01

SECTION 10 TWP. 21 RANGE 5

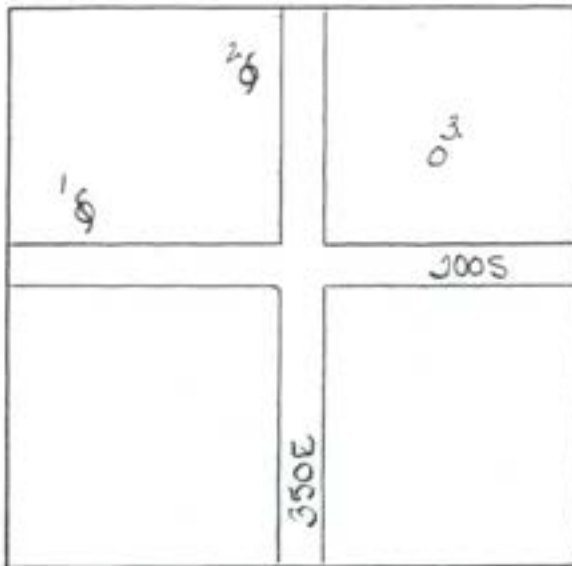

GRAPHIC TIES (SKETCHED)

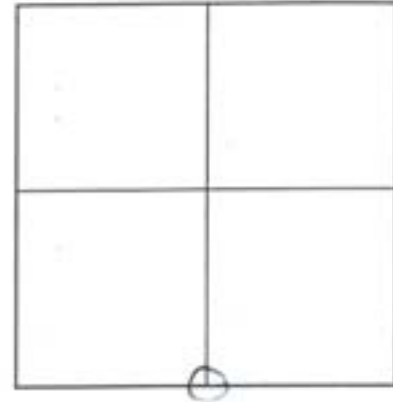

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 2' ± DEEP

TIES:

1. 91.80' AZ 283° MAG NAIL IN PWP

2. 80.73' AZ 350° N.E.C IN PWP

3. 27.12' AZ 51° + CUT IN CONC. POST

.....

.....


.....

.....

.....


.....

SECTION 10 TWP. 21 RANGE 5

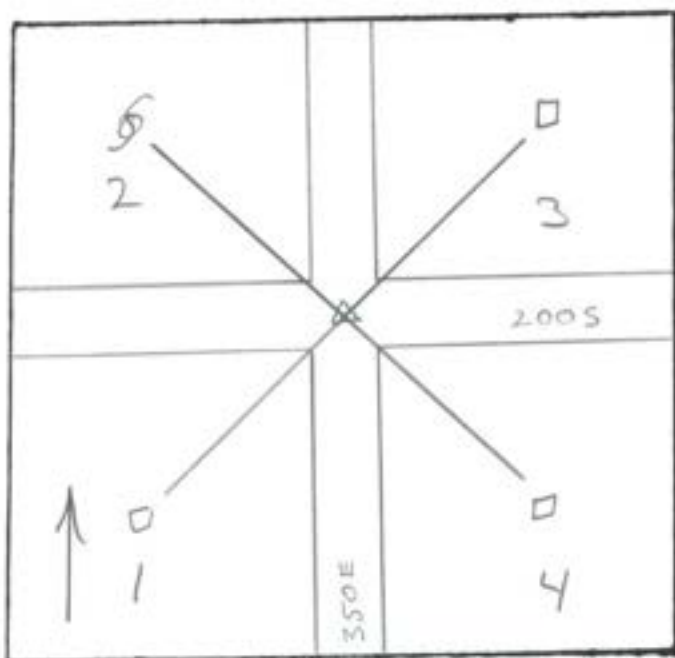

GRAPHIC TIES
(SKETCHED)

SEC 10 TWP 21 RANGE 5

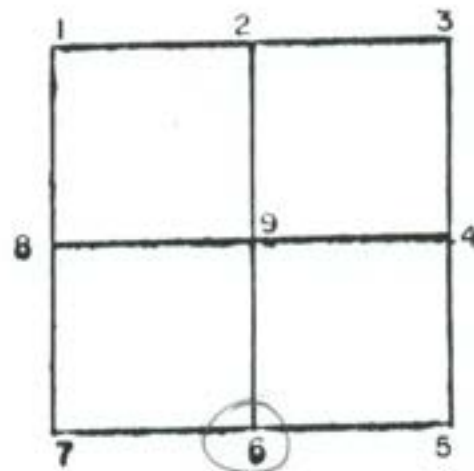

CORNER IDENT. NOT STATED

TIES: 1. 24.80' HP

2. 31.80' PWP


3. 26.70' HP

4. 31.80' HP


SEC 10 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 10 TWP. 21 RANGE 5

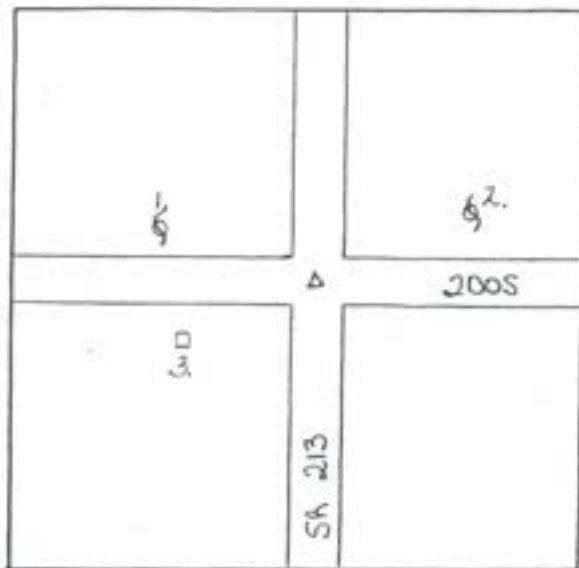

GRAPHIC TIES (SKETCHED)

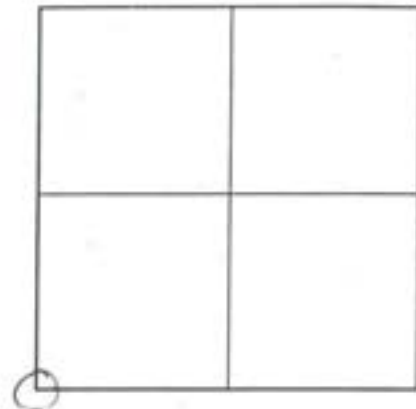

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: MAG NAIL FOUND AT SURFACE

TIES:

1. 46.73' AZ 294° MAG NAIL IN PWP (211-767)

2. 40.37' AZ 69° MAG NAIL IN PWP (211-641)


3. 45.05' AZ 249° NE COR R/W MKR

WYATT JOHNSON 50302


SECTION 10 TWP. 21 RANGE 5

DATE: 11/14/01

SECTION 10 TWP. 21 RANGE 5

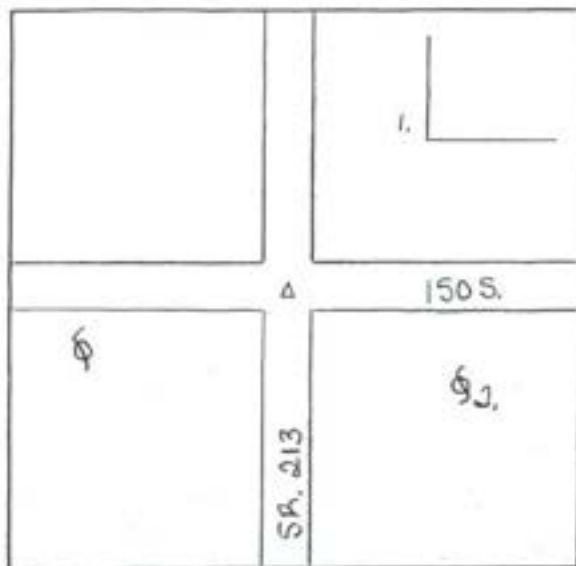

GRAPHIC TIES (SKETCHED)

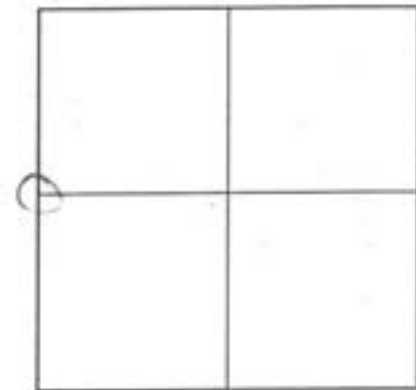

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: RR SPIKE LOCATED 4" ± DEEP

TIES:

1. 84.08' AZ. 62° SW COR OF BRICK HOUSE



2. 39.75' AZ. 125° NEC IN PWP

3. 50.90' AZ. 250° NEC IN PWP

.....
.....
.....
.....
.....
.....

SECTION 10 TWP. 21 RANGE 5

SEC 10 TWP 21 RANGE 5

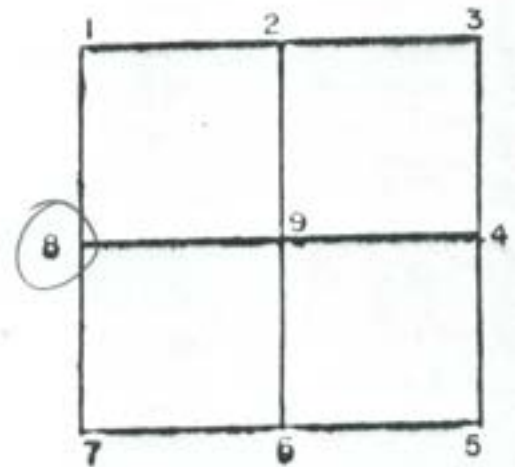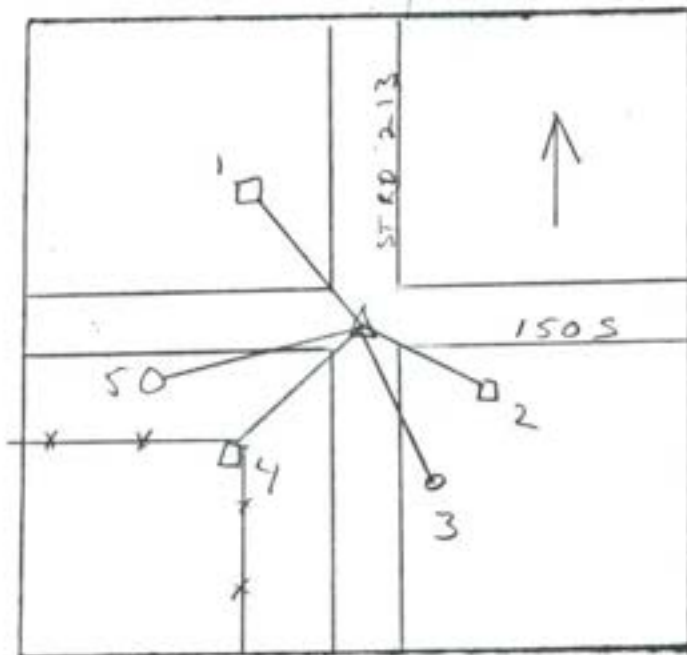


CORNER IDENT. RAIL ROAD SPIKE

TIES: 1 TOP CENTER R/W MONUMENT 44.35
2 SN POST 45.55
3 SN PWP 35.75
4 SN COR POST 44.75
5 SN PWP 50.80


SEC 10 TWP 21 RANGE 5

DATE: 11/14/01

SECTION 10 TWP. 21 RANGE 5

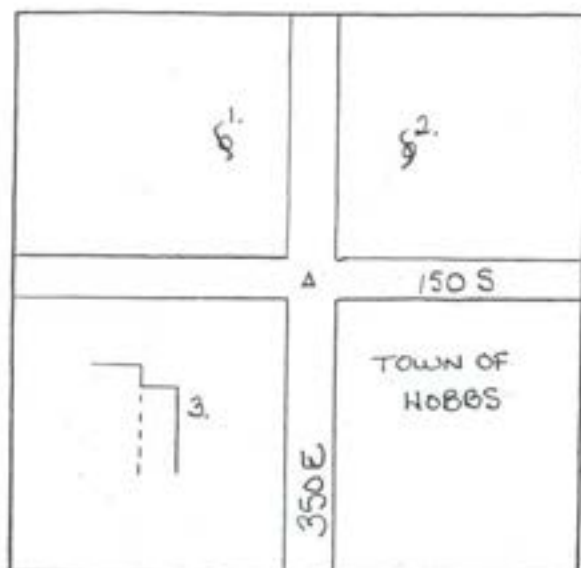

GRAPHIC TIES (SKETCHED)

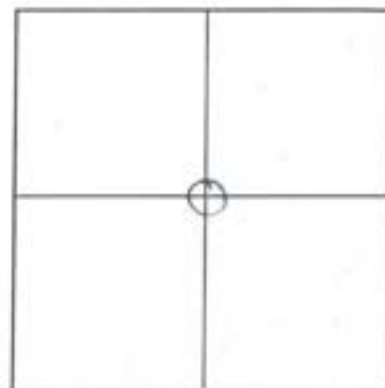

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: AA SPIKE FOUND AT SURFACE

TIES:

1. 26.35' AZ 335° N&C IN PWP

2. 33.49' AZ 63° PK NAIL IN PWP

3. 41.83' AZ 235° N.E. COR CONC. PORCH

.....

.....


.....

.....

.....

.....

SECTION 10 TWP. 21 RANGE 5

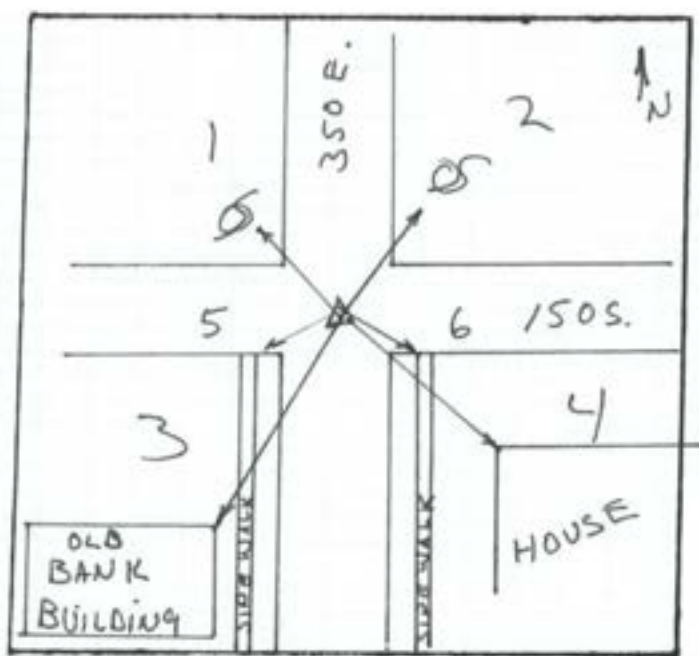


GRAPHIC TIES
(SKETCHED)

SEC. 10 TWP 21 RANGE 5

BY MILLER LAND SURVEYING

OCT. 3, 1991

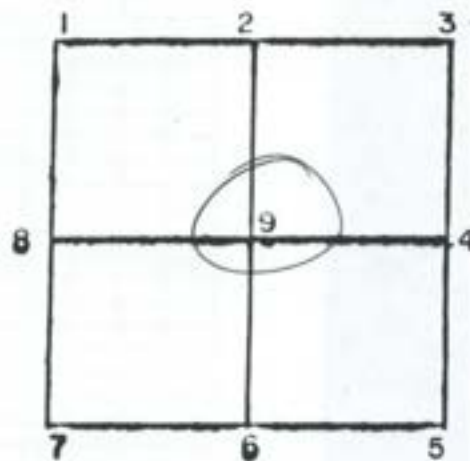


CORNER IDENT. STONE FND. w/ High Point $\pm$ 1.3' BELOW SURFACE. RR SPIKE WAS PLACED OVER STONE

- TIES:
1. 26.32' NW POWER POLE
 2. 33.45' NE POWER POLE
 3. 78.50 NE CORNER OF OLD BANK BUILDING
 4. 42.25' NW CORNER OF HOUSE
 5. 25.25' NE CORNER OF THE SW SIDEWALK
 6. 25.26' NW CORNER OF THE SE SIDEWALK

REBAR IRON PIN 3' $\pm$ N.W. OF STONE
SET BY MITCHELL

SE REVERSE SIDE


SEC. 10 TWP 21 RANGE 5

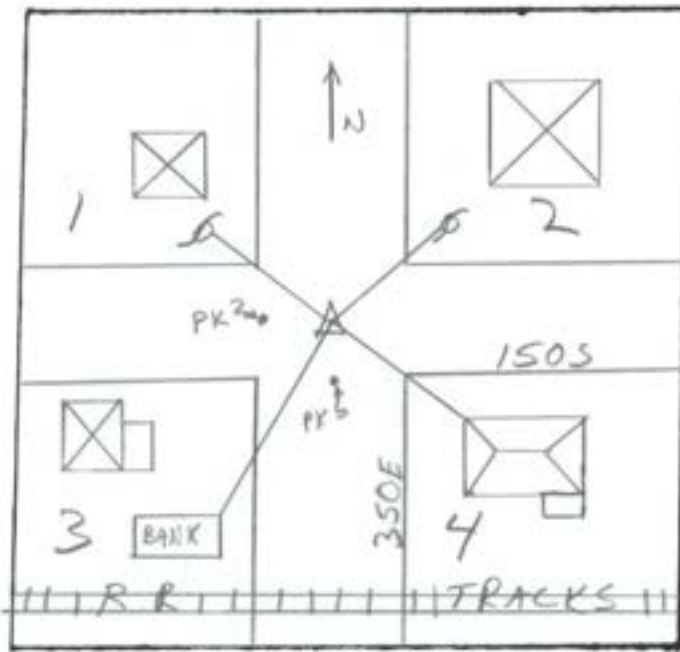

GRAPHIC TIES
(SKETCHED)

SEC 10 TWP 21 RANGE 5

8-26-80

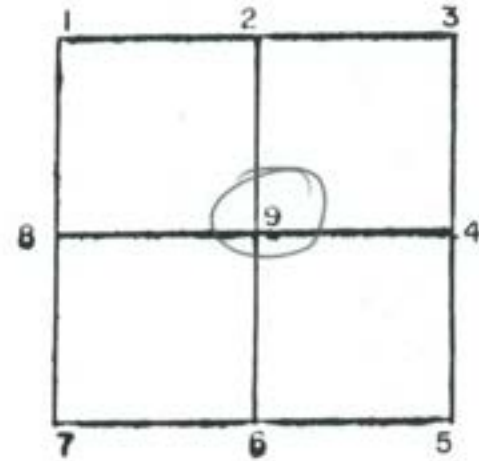

CORNER IDENT. 9 STONE FND


TIES: 1. 26.35' PWP
2. 33.5' PK - PWP
3. 78.55' OLD BANK BUILDING NE CORNER
4. 42.53' HOUSE NW CORNER

2 PK NAILS SET / ① 6' WEST
AND ① 6' SOUTH W. JOHNSON


SEC 10 TWP 21 RANGE 5

DATE: 11/13/01

SECTION 11 TWP. 21 RANGE 5

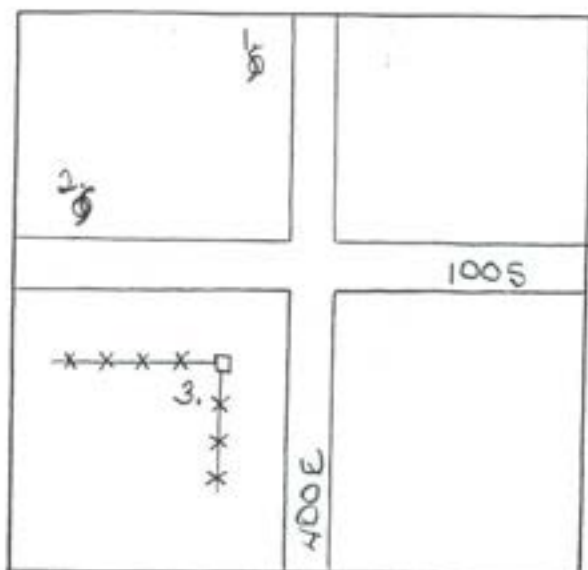

GRAPHIC TIES (SKETCHED)

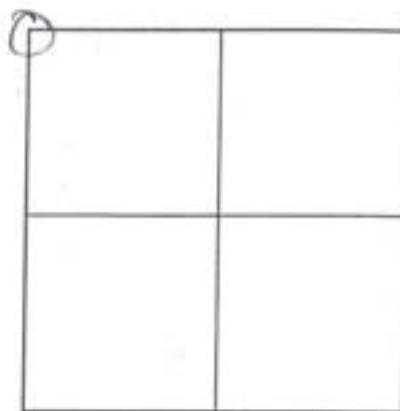

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: R.R. SPIKE FOUND AT SURFACE


TIES:

1. 83.00' AZ. 355° N & C IN PWP

2. 37.13' AZ. 300° PK NAIL IN PWP

3. 20.31' AZ. 187° N & C IN WOOD CORNER POST


SECTION 11 TWP. 21 RANGE 5

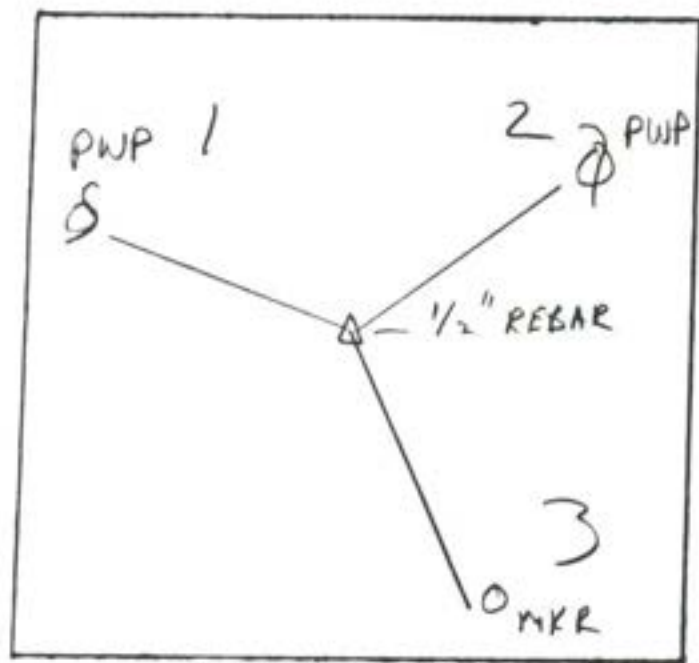

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 21 RANGE 5

DEC 1988

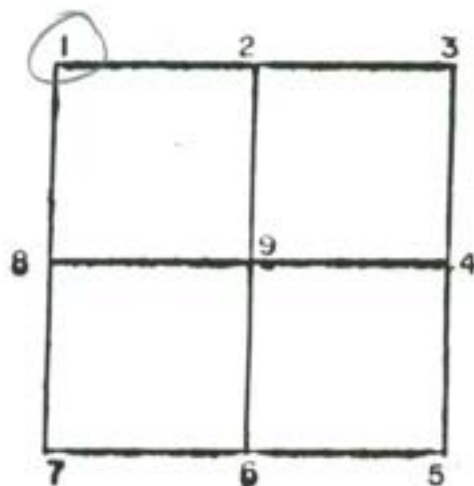

CORNER IDENT. 1/2" REBAR 1" ±


TIES:

1. PWP 37.12 PK

2. PWP 45.91 PK


3. PROPERTY CORNER MKR 19.78

SEC 11 TWP 21 RANGE 5

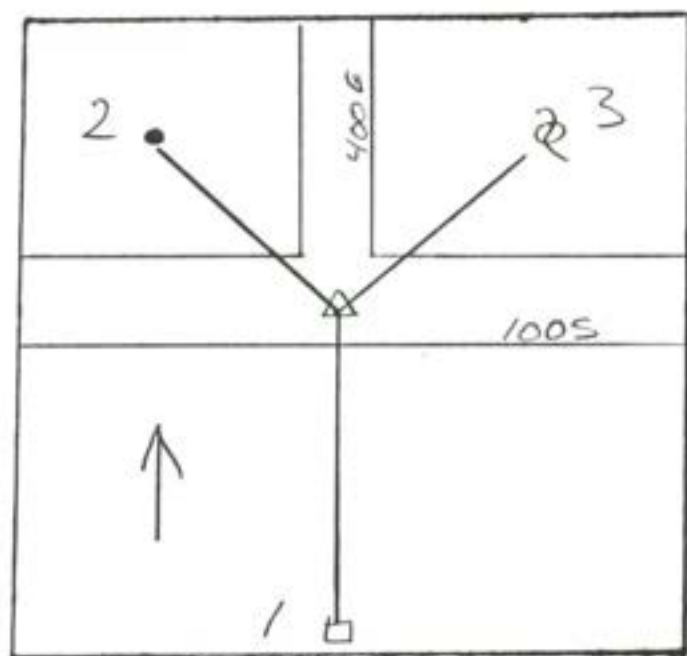

GRAPHIC TIES
(SKETCHED)

SEC. 11 TWP 21 RANGE 5

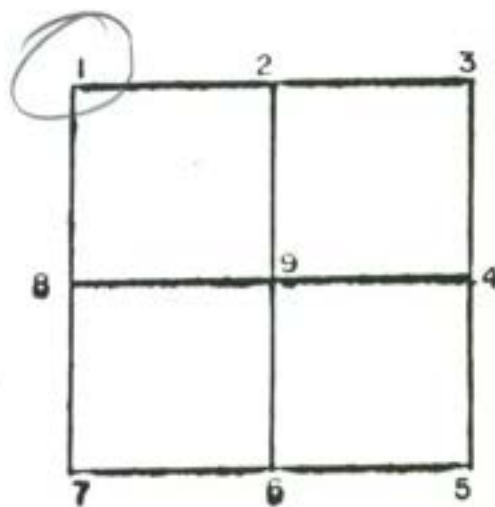

CORNER IDENT. NOT STATED

TIES: 1. 20.30' HP

2. 25.10' METAL FP



3. 35.75' PWP

SEC. 11 TWP 21 RANGE 5

SECTION 11 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY APRIL 30, 2002

REFERENCE SHEET

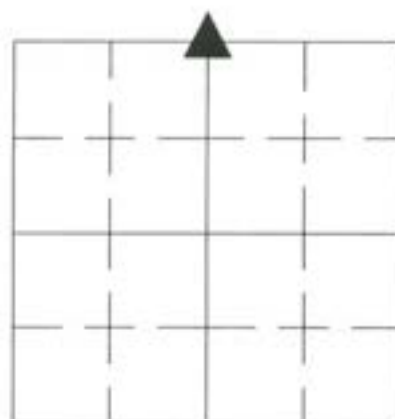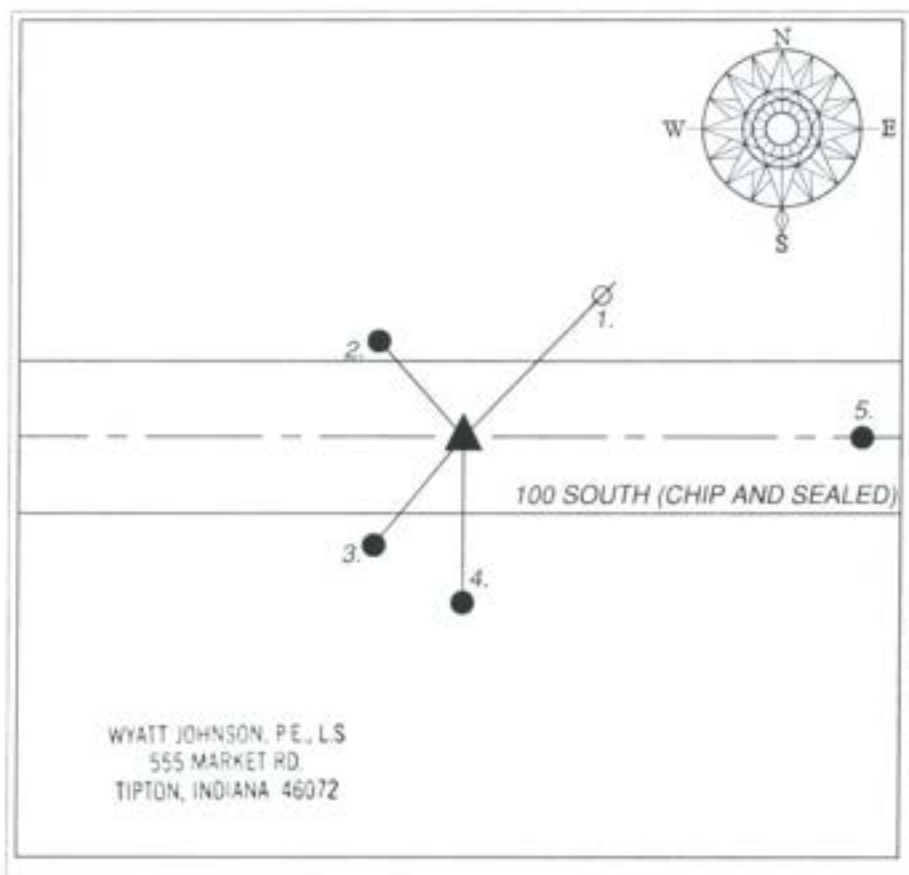

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: 04/30/02

CREW:

NORTH: 1836735.96 EAST: 255074.31

ELEVATION:

LATITUDE: 40°17'26.8517"

LONGITUDE: 85°55'42.1807"

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY

JOB # 02-051


TYPE OF MARKER IDENTIFIED: STONE FLUSH

HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO REFERENCE IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT BESIDES THE ORIGINAL NOTES FROM COUNTY SURVEYOR'S OFFICE.

REFERENCE	DISTANCE	DESCRIPTION	FOUND SET	
1.	45.97'	MAG NAIL W/ IDENTIFYING WASHER IN POWERPOLE	☐	☒
2.	18.26'	IRON ROD W/ IDENTIFYING CAP 1' NORTH OF EDGE OF ROAD	☐	☒
3.	16.43'	IRON ROD W/ IDENTIFYING CAP 4' SOUTH OF EDGE OF ROAD	☐	☒
4.	16.52'	IRON ROD W/ IDENTIFYING CAP @ APPARENT R/W	☐	☒
5.	400.00'	RAILROAD SPIKE IN CENTERLINE OF ROAD	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐

SEC 11 TWP 21 RANGE 5

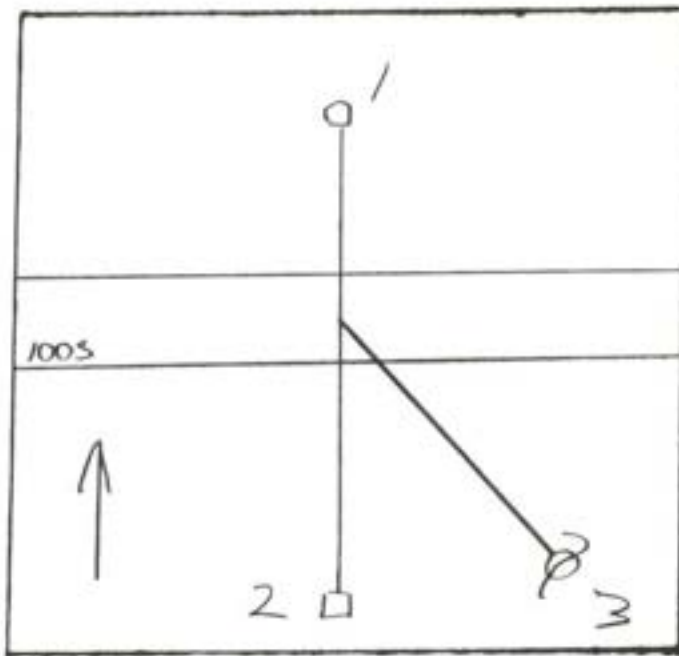

GRAPHIC TIES
(SKETCHED)

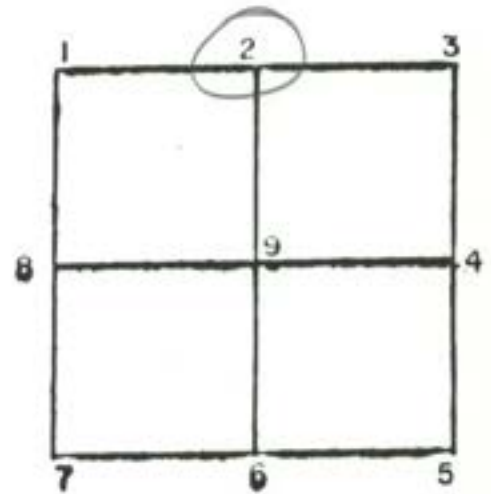


CORNER IDENT. NOT STATED

TIES: 1. 25.05' HP

2. 19.50' HP


3. 18.55' PWD

SEC 11 TWP 21 RANGE 5

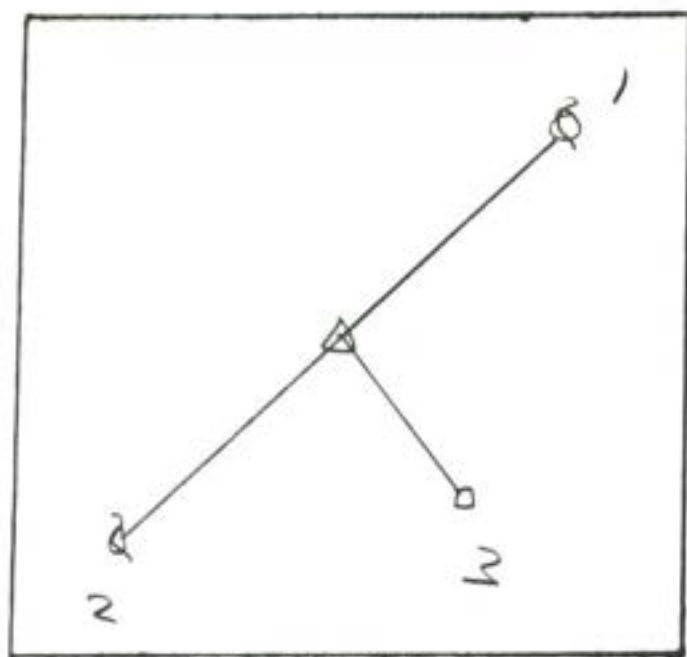

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 21 RANGE 5

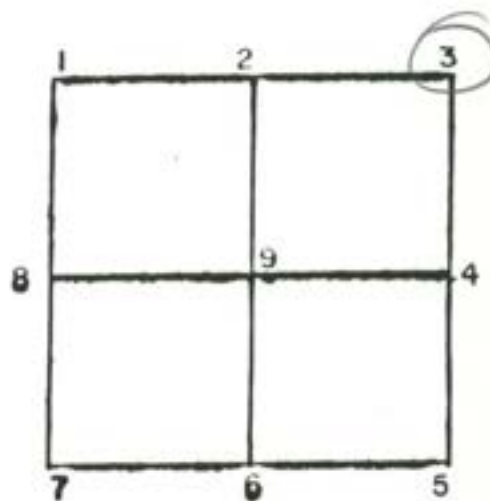


CORNER IDENT. NOT STATED

TIES: 1. 24.55' PWP
2. 30.75' PWP
3. 26.00" HP


SEC 11 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 11 TWP. 21 RANGE 5

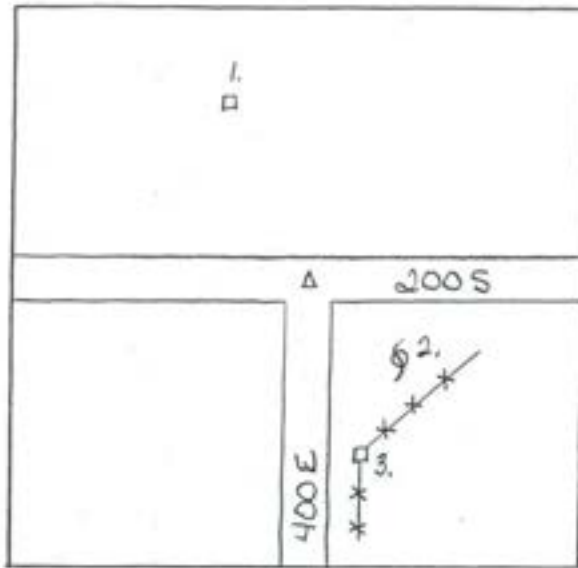

GRAPHIC TIES (SKETCHED)

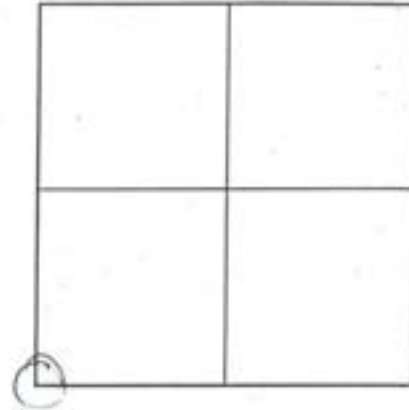

REFERENCED BY:

.....

.....

CORNER IDENTIFIED: HARRISON MKK FOUND 5" ± DEEP

TIES:

1. 19.15' AZ 2° MAG NAIL IN WOOD POST

2. 32.12' AZ 12.5° N & C IN T&P

3. 40.19' AZ 158° N & C IN WOOD COR POST

.....

.....


.....

.....

.....


.....

SECTION 11 TWP. 21 RANGE 5

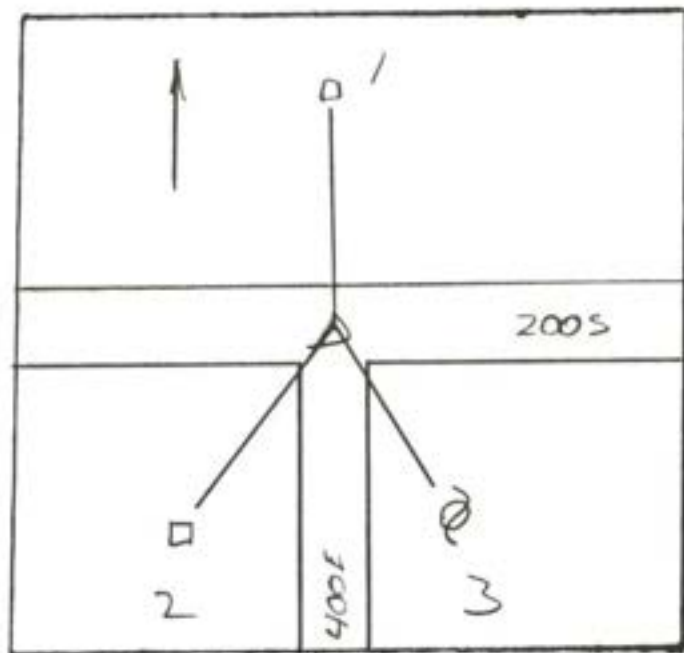

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 21 RANGE 5


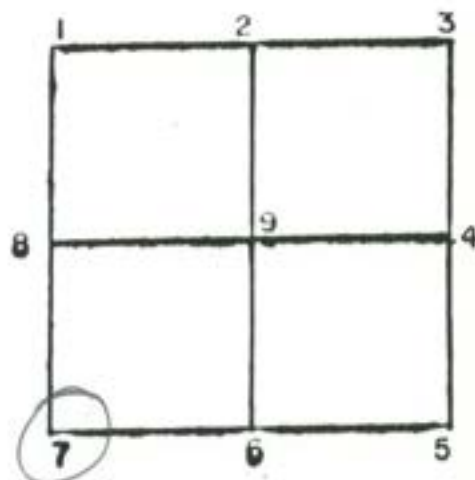


CORNER IDENT. NOT STATED

TIES: 1. 19.10' FP
2. 33.10' FP
3. 32.80' PWP

SEC 11 TWP 21 RANGE 5

SEC 11 TWP 21 RANGE 5

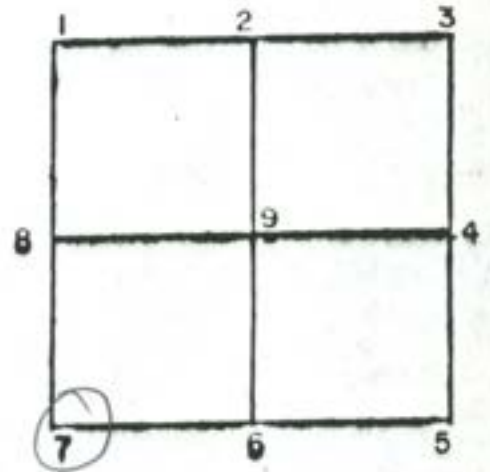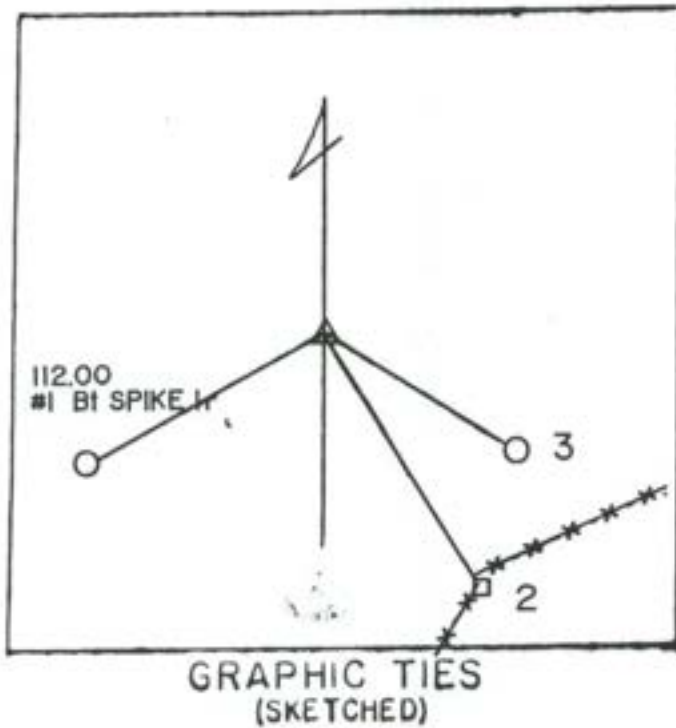

CORNER IDENT. HARR MARKER

TIES: #2 WOOD FENCE POST 40.12


#1 Bl SPIKE

#3 PK IN PWP 32.10


SEC 11 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 11 TWP. 21 RANGE 5

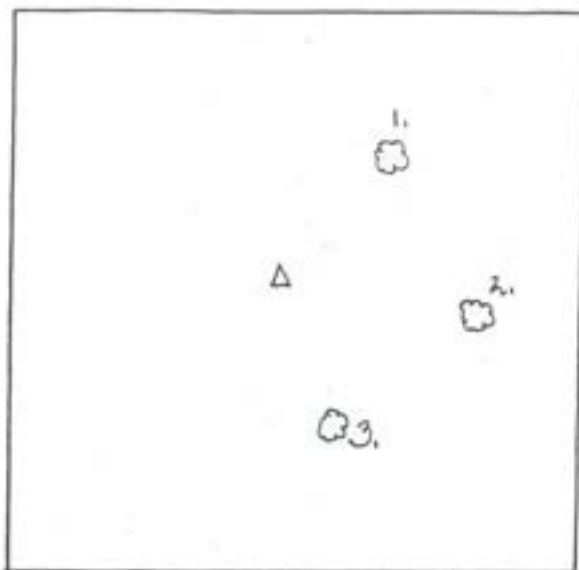

GRAPHIC TIES (SKETCHED)

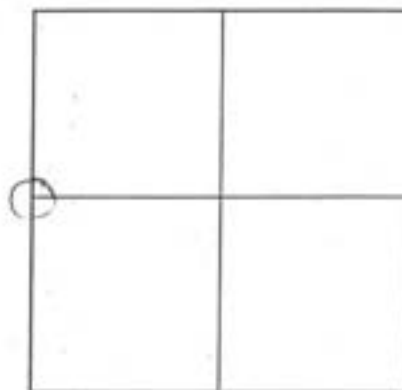

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR & CAP AT SURFACE (WATT JOHNSON 50302)


TIES:

1. 10.05' AZ 65° 6" ELM TREE

2. 23.18' AZ 117° 4" E.C. UP 4' IN 12" MAPLE TREE


3. 9.30' AZ 175° 10" ELM TREE

SECTION 11 TWP. 21 RANGE 5

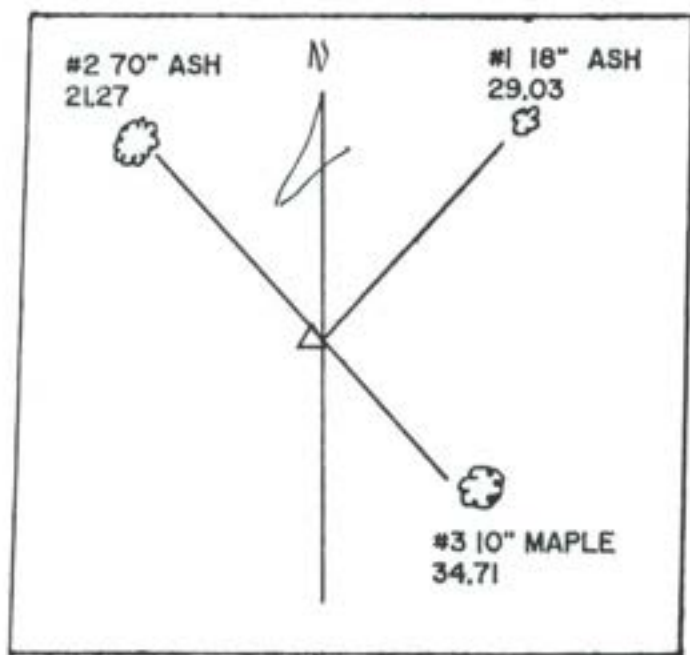

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 21 RANGE 5

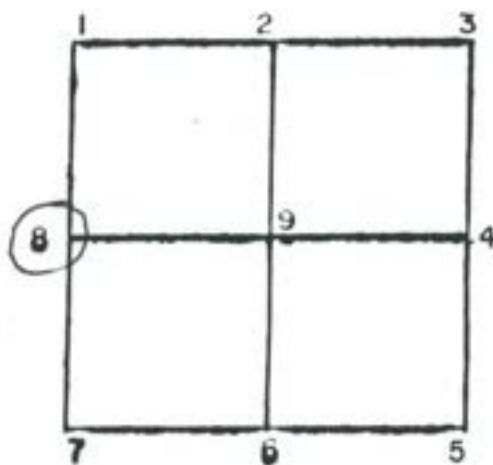


CORNER IDENT. STONE DEPTH 1" ±


TIES: #1 18" ASH 29.03
#2 70" ASH 21.27
#3 10" MAPLE 34.71

SEC 11 TWP 21 RANGE 5

SEC 12 TWP 21 RANGE 5

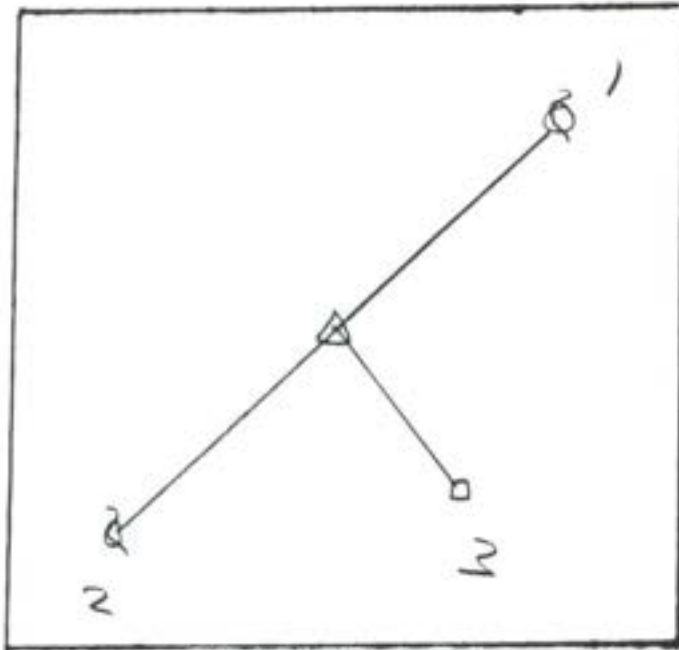


GRAPHIC TIES
(SKETCHED)

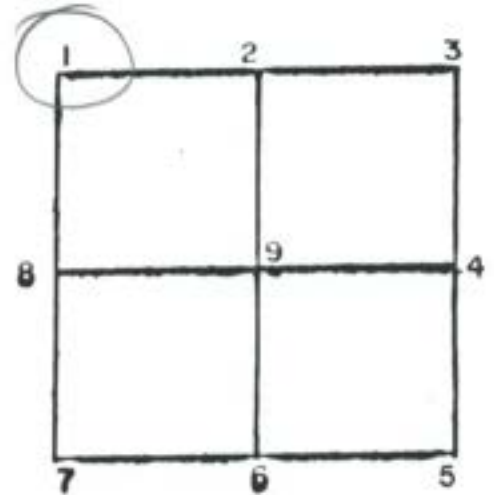

CORNER IDENT. NOT STATED


TIES: 1. 24.55' PWP
2. 30.75' PWP
3. 26.00" HP

SEC 12 TWP 21 RANGE 5

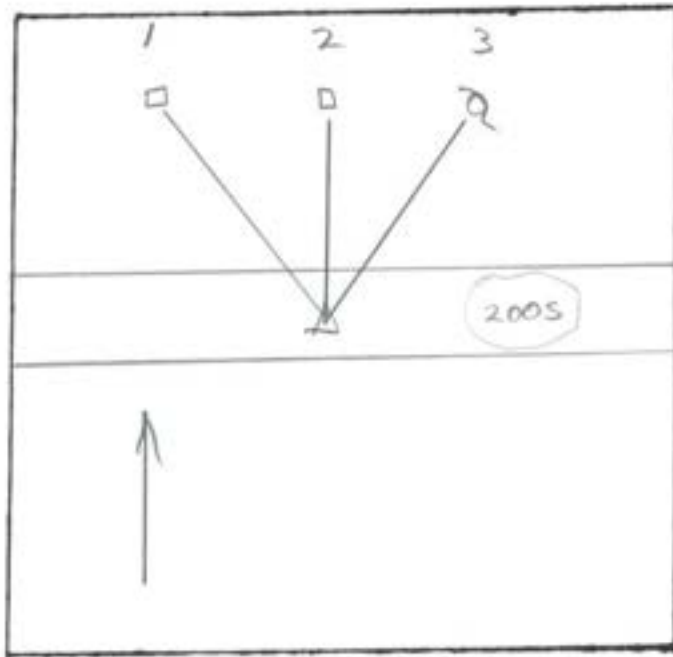

GRAPHIC TIES
(SKETCHED)

SEC 12 TWP 21 RANGE 5

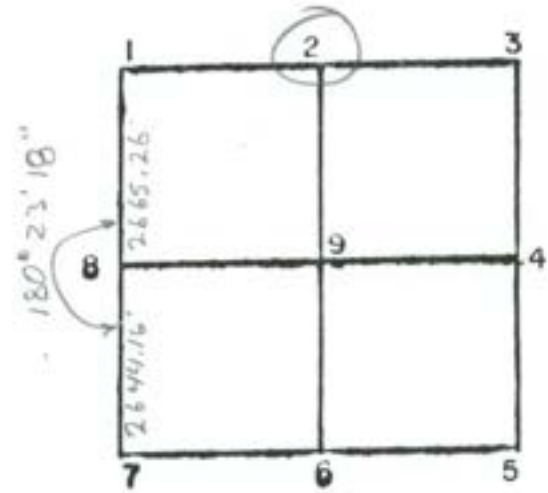


CORNER IDENT. NOT STATED


TIES: 1. 21.85' FP
2. 18.10' FP
3. 16.05' PWP

SEC 12 TWP 21 RANGE 5

SEC. 12 TWP. 21 RANGE 5

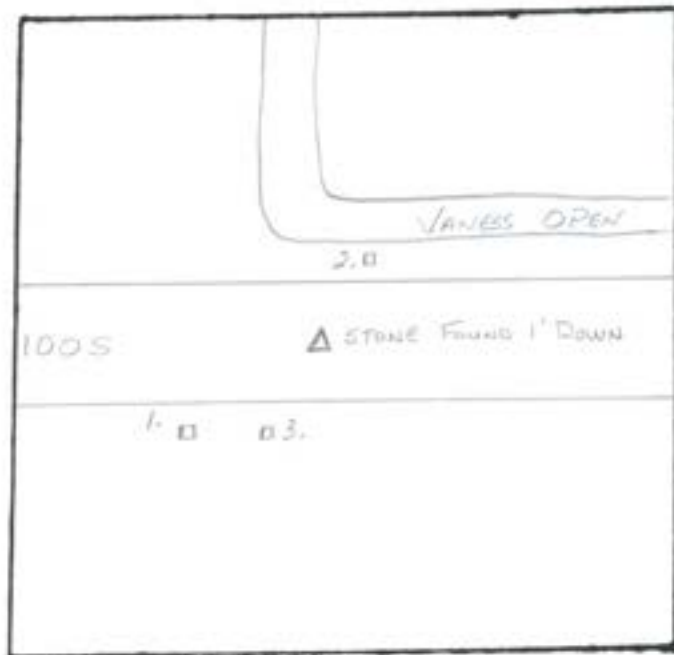

GRAPHIC TIES
(SKETCHED)

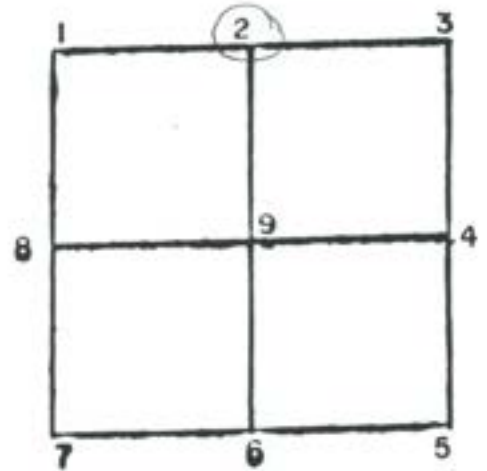


CORNER IDENT. Stone

THIS: 1. HEADPOST 30.42'

2. FENCE POST 30.70'

3. Headpost 24.80'


SEC 12 TWP 21 RANGE 5

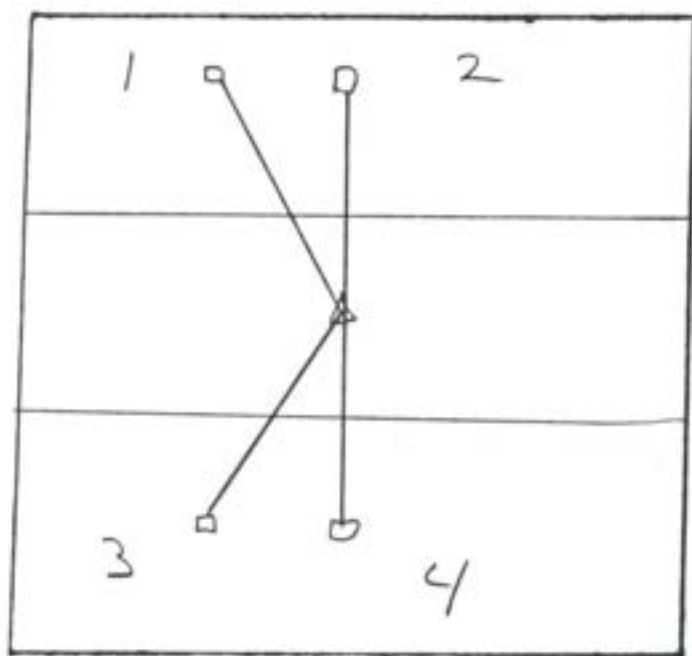

GRAPHIC TIES
(SKETCHED)

SEC 12 TWP 21 RANGE 5

8-7-72

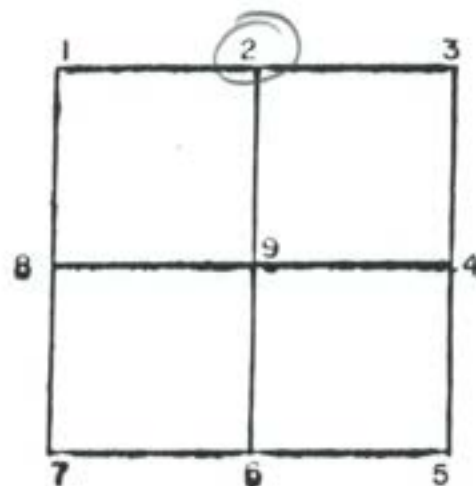


CORNER IDENT. 2 IRON PIN


TIES: 1. 31.5' FENCE POST
2. 11.8' HEADPOST
3. 30.4' FENCE POST
4. 24.6' HEADPOST

SEC 12 TWP 21 RANGE 5

SEC. 12 TWP. 21 RANGE 5

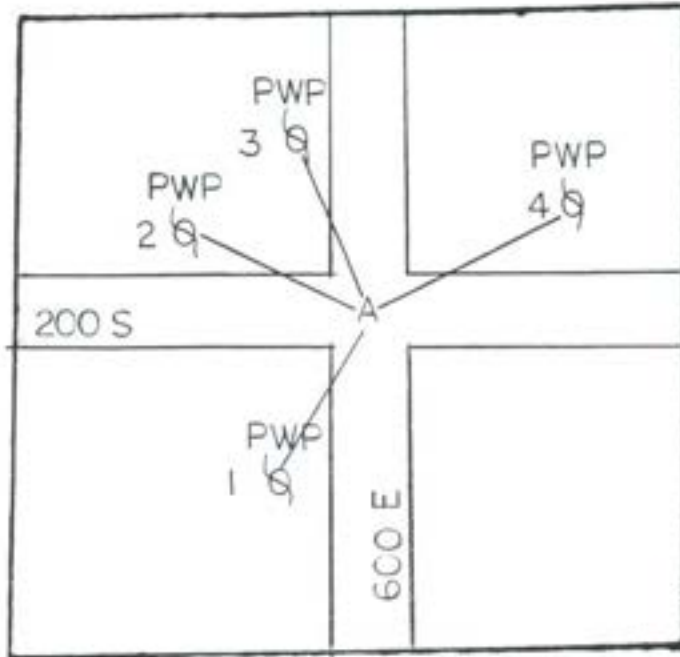

GRAPHIC TIES
(SKETCHED)

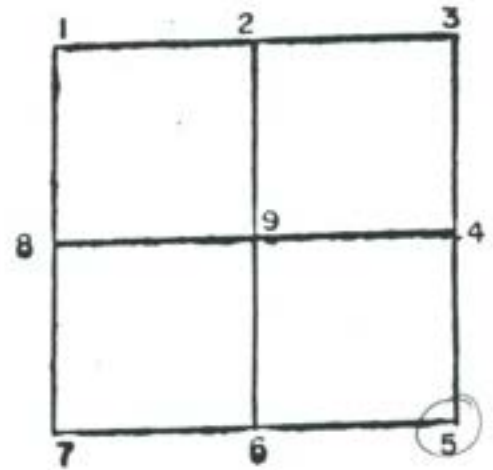

CORNER IDENT. "A" IRON PIN

TIES:


A

1. 26.80' PWP
2. 59.70' PWP
3. 50.60' PWP
4. 36.60' PWP

SEC. 12 TWP. 21 RANGE 5



SEC 13 TWP 21 RANGE 5

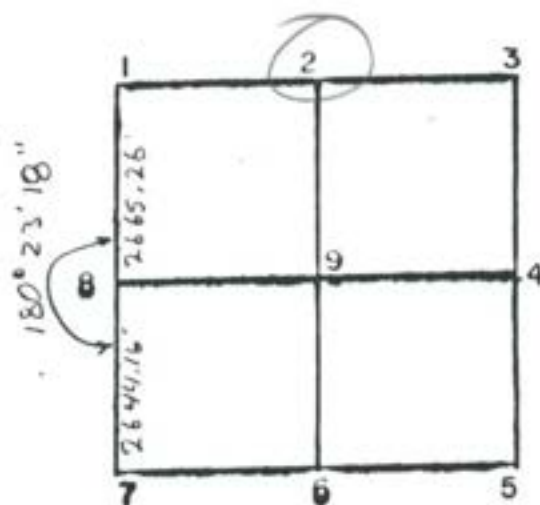

CORNER IDENT. NOT STATED

THIS: 1. 21.85' FP

2. 18.10' FP

3. 16.05' PWP

SEC 13 TWP 21 RANGE 5

A 2x2 grid with numbers at the intersections. The top row has numbers 1, 2, and 3. The bottom row has numbers 7, 6, and 5. The left side has numbers 8 and 4. The right side has number 9. The number 3 is circled.

TIME:

A

1.	26.80'	PWP
2.	59.70'	PWP
3.	50.60'	PWP
4.	36.60'	PWP

SEC 13 TWP 21 RANGE 5

A 2x2 grid with numbers 1-9. The top row contains 1, 2, and 3. The bottom row contains 7, 6, and 5. The left column contains 8 and 9. The right column contains 4 and 5. The number 4 is circled.


TIPS:

A


1. 20.7'
2. 35.1'

SEC 13 TWP 21 RANGE 5

SEC. 13 TWP. 21 RANGE 5

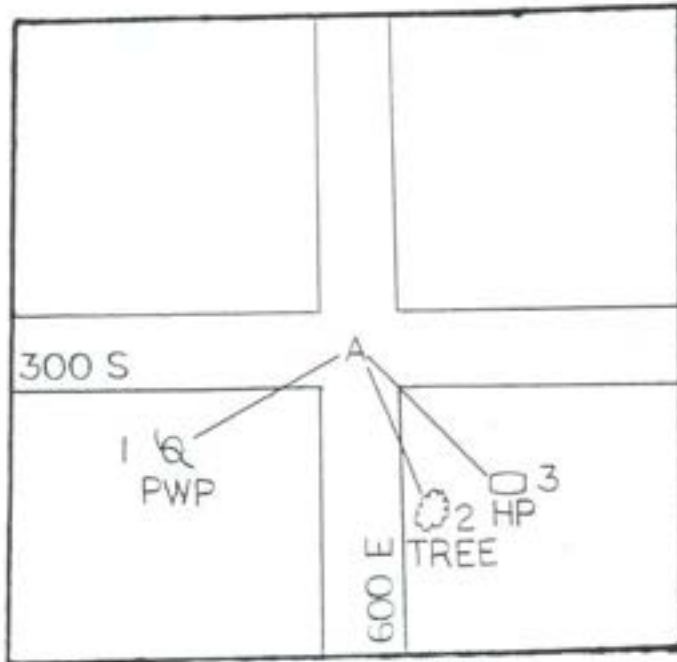

GRAPHIC TIES
(SKETCHED)

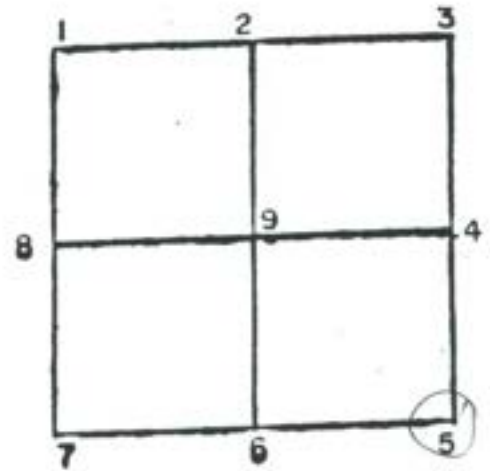


CORNER IDENT. "A" IRON PIN

TIES:


- A
- 1. 27.10' PWP
 - 2. 31.90' TREE
 - 3. 23.5 HP (CONCRETE)

SEC. 13 TWP. 21 RANGE 5

SEC 13 TWP 21 RANGE 5

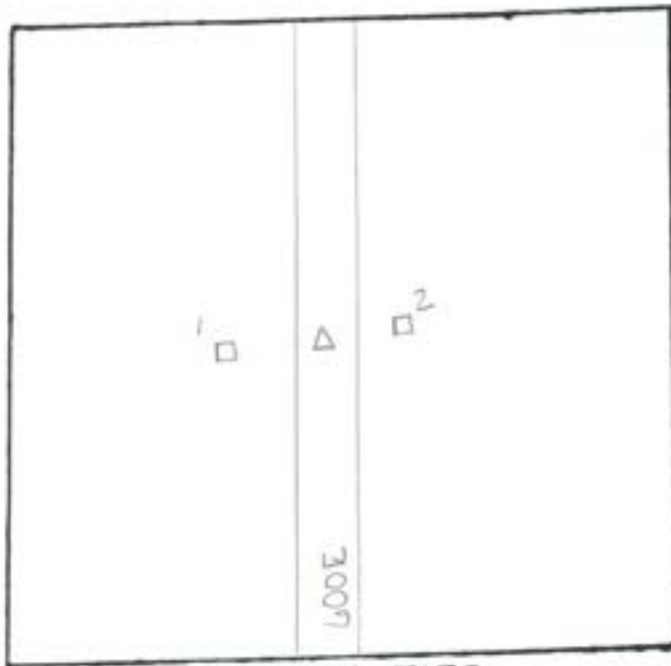

GRAPHIC TIES
(SKETCHED)

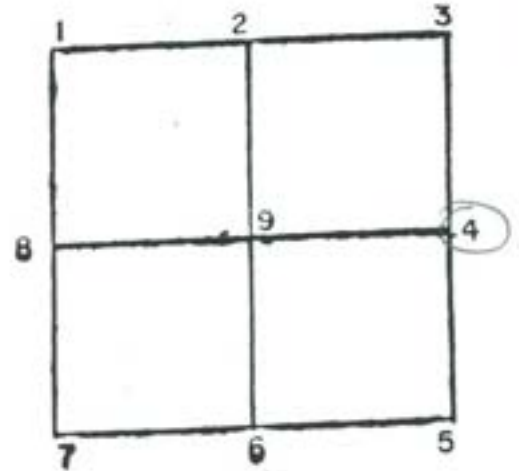


CORNER IDENT. BOLT SPIKE FOUND


TIES: 1. 20.70 PK IN HP
2 35.10 PK IN HP

SEC 13 TWP 21 RANGE 5

SEC 13 TWP 21 RANGE 5

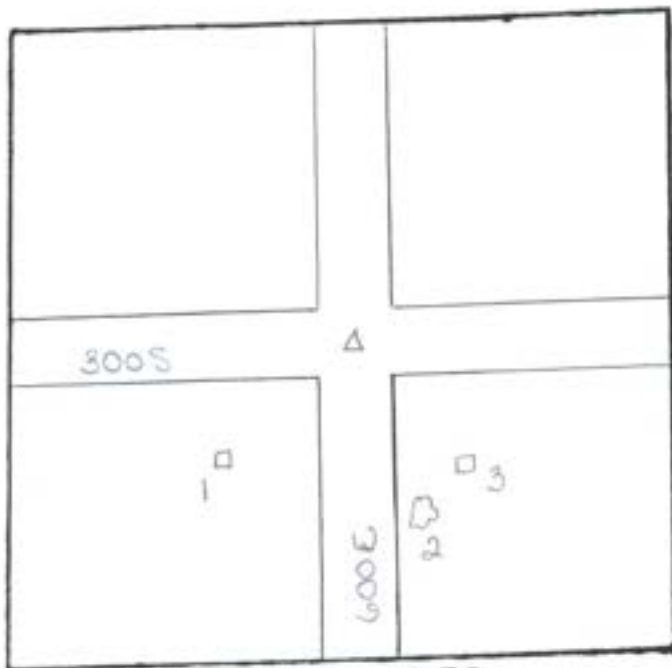


GRAPHIC TIES
(SKETCHED)

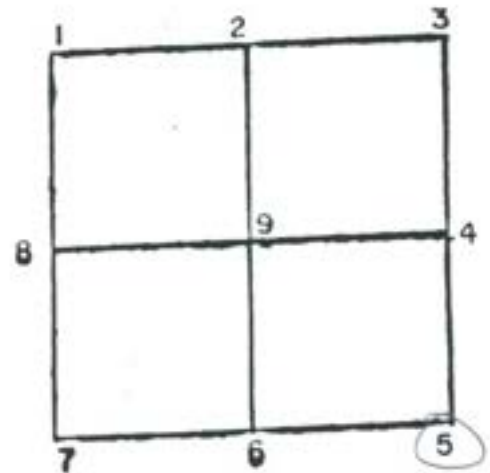

CORNER IDENT. IRON PIN

TIES: 1. 27.10 PWP
2. 31.90 PK NAIL IN TREE
3. 23.50 H.P. NW CORNER


SEC 13 TWP 21 RANGE 5

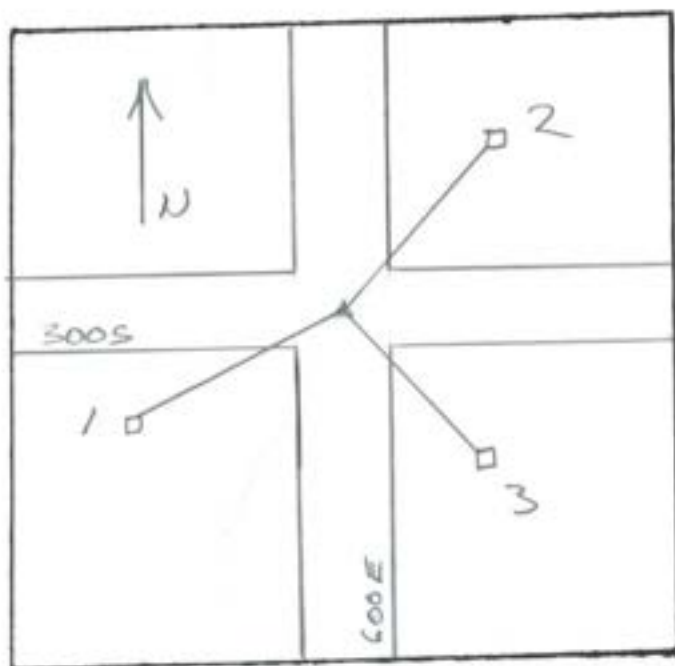

GRAPHIC TIES
(SKETCHED)

SEC. 13 TWP. 21 RANGE 5

8-21-71

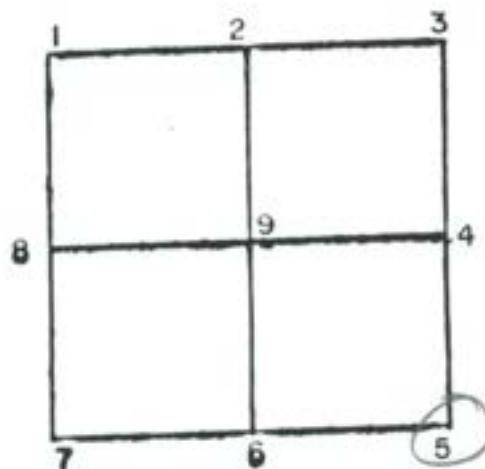


CORNER IDENT. 5 IRON PIN


TIES: 1. 35.0' HEAD POST
2. 56.0' HEAD POST
3. 23.6' CONCRETE HEAD POST

SEC. 13 TWP. 21 RANGE 5

SEC. 13 TWP 21 RANGE 5

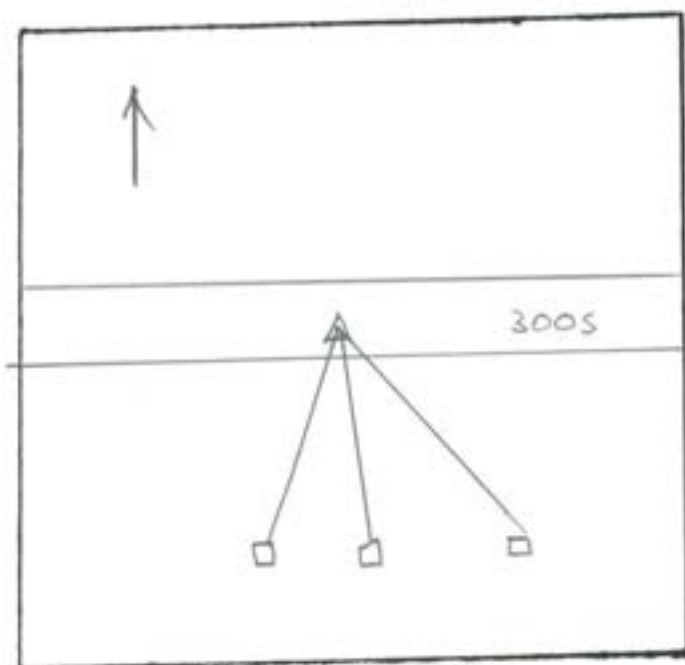

GRAPHIC TIES
(SKETCHED)

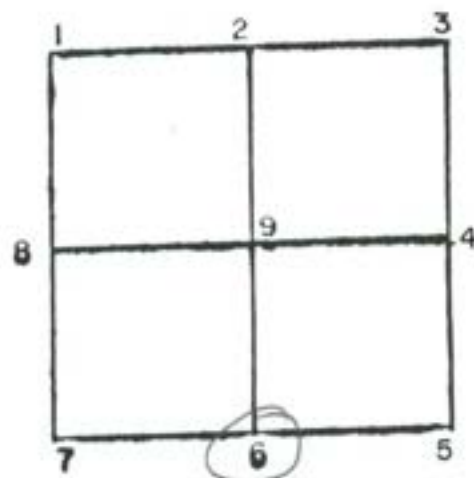


CORNER IDENT. STONE FND


TIES: 1. 26.70' FP
2. 22.80' FP
3. 39.80' FP

SEC 13 TWP 21 RANGE 5

SEC 13 TWP 21 RANGE 5

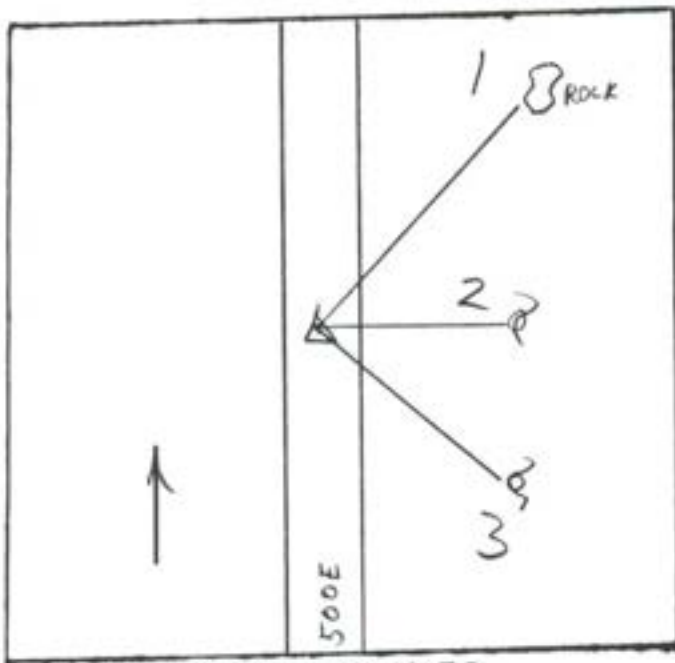

GRAPHIC TIES
(SKETCHED)

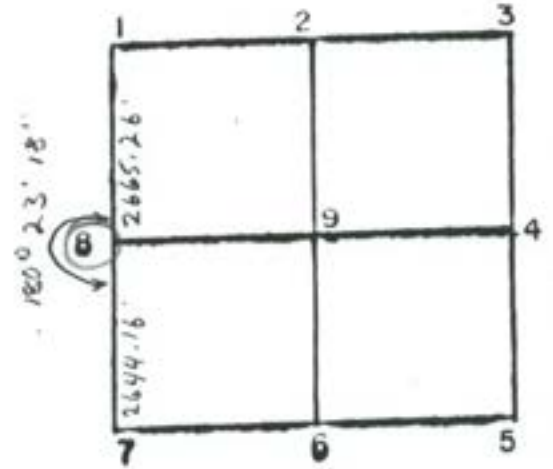


CORNER IDENT. 8 NOT STATED


TIME: 1. 19.2' ROCK
2. 52.75' PWP
3. 48.2' PWP

SEC 13 TWP 21 RANGE 5

SEC. 13 TWP. 21 RANGE 5

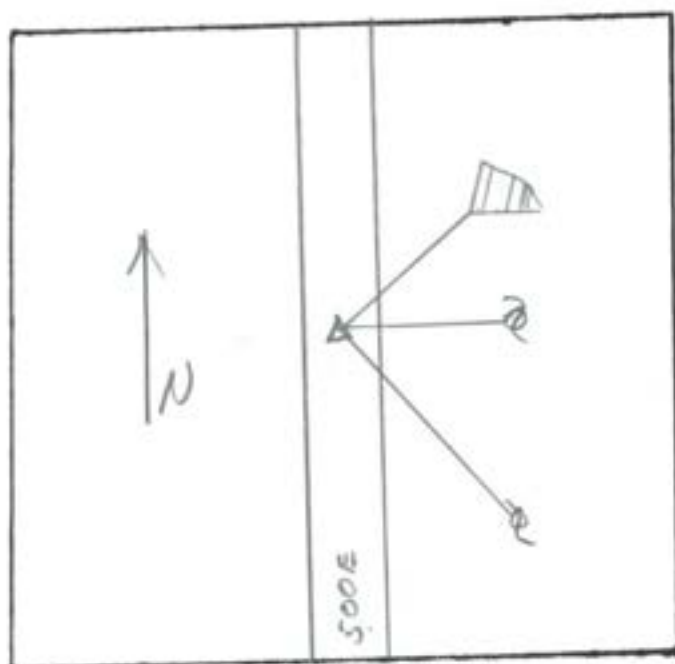

GRAPHIC TIES
(SKETCHED)

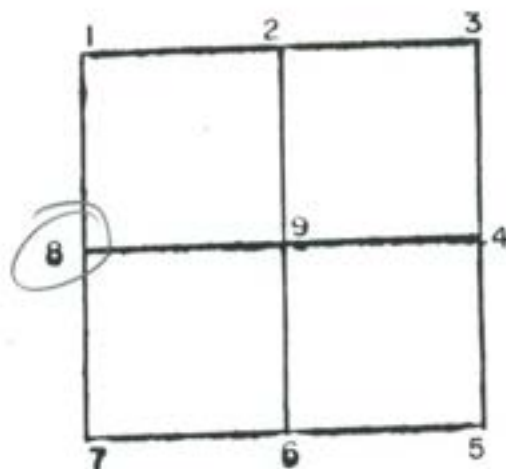

CORNER IDENT. 8 STONE FND $\frac{5}{8}$ " REBAR SET OVER POINT

TIES:

1. 19.2' X IN STONE


2. 52.75' SN - PWP

3. 48.2' SN - PWP


SEC. 13 TWP. 21 RANGE 5

DATE: 11/15/01

SECTION 14 TWP. 21 RANGE 5

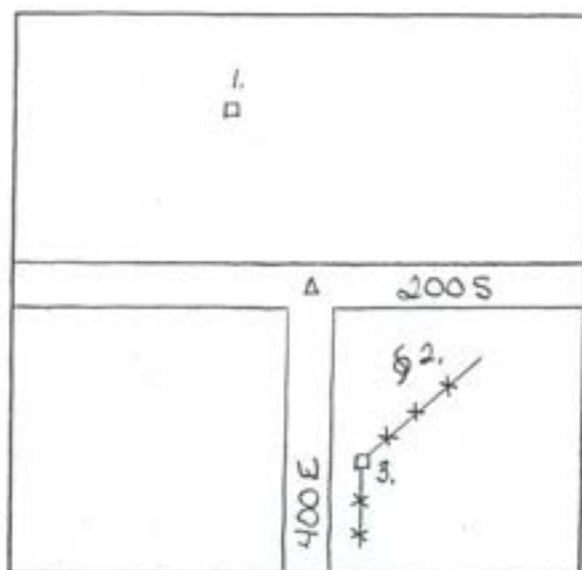

GRAPHIC TIES (SKETCHED)

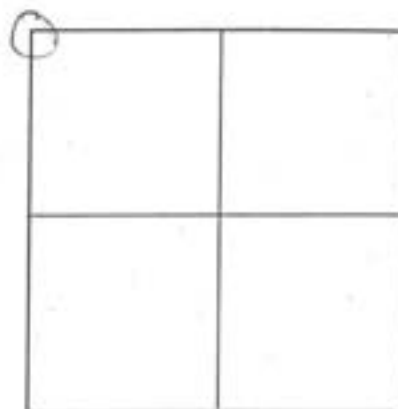

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: HARRISON MKL FOUND 5" ± DEEP

TIES:

1. 19.15' AZ 2° MAG NAIL IN WOOD POST

2. 32.12' AZ 125° N & C IN TFP

3. 40.19' AZ 158° N & C IN WOOD COR POST

.....

.....


.....

.....

.....


.....

SECTION 14 TWP. 21 RANGE 5

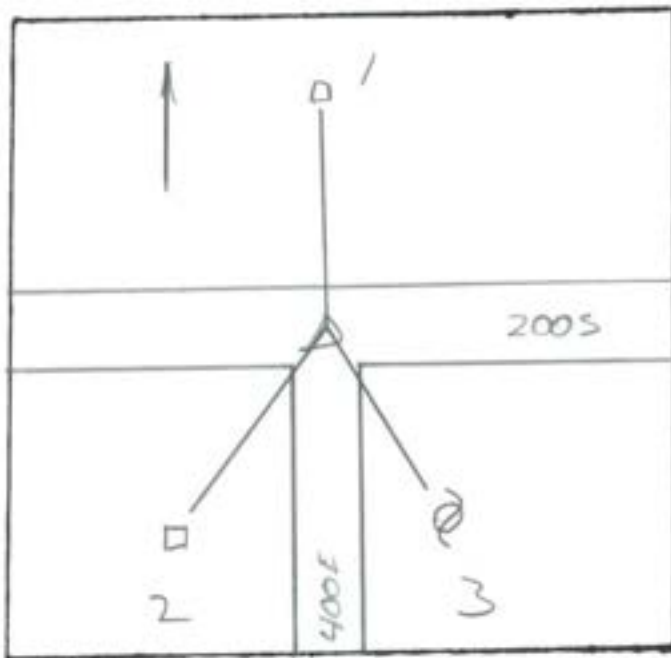

GRAPHIC TIES
(SKETCHED)

SEC 14 TWP 21 RANGE 5


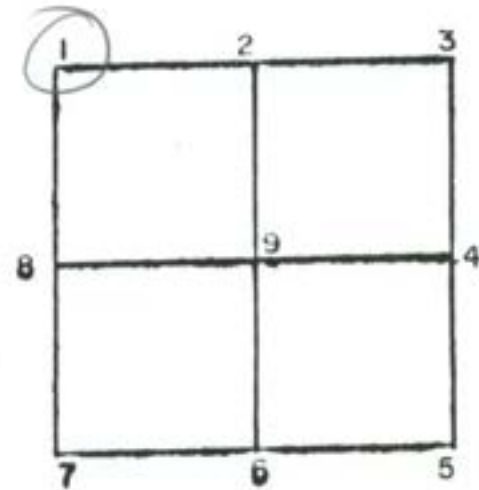


CORNER IDENT. NOT STATED

TIES: 1. 19.10' FP
2. 33.10' FP
3. 32.80' PWP

SEC 14 TWP 21 RANGE 5

SEC. 14 TWP. 21 RANGE 5

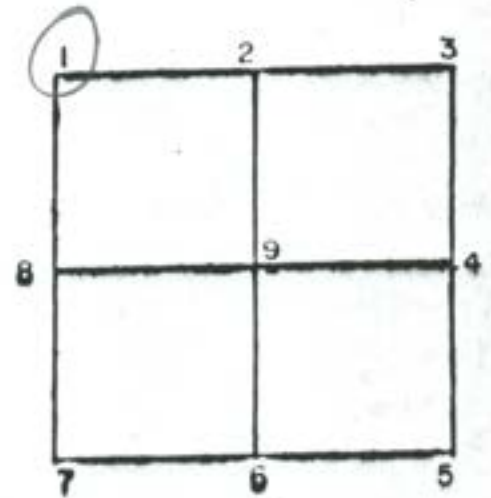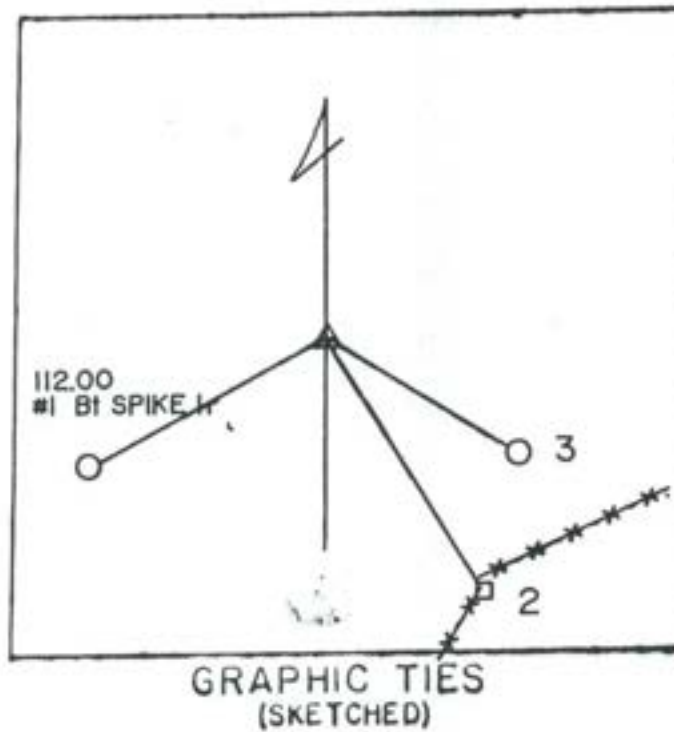


CORNER IDENT. HARR MARKER

TIES: #2 WOOD FENCE POST 40.12

#1 Bl SPIKE


#3 PK IN PWP 32.10

SEC. 14 TWP. 21 RANGE 5

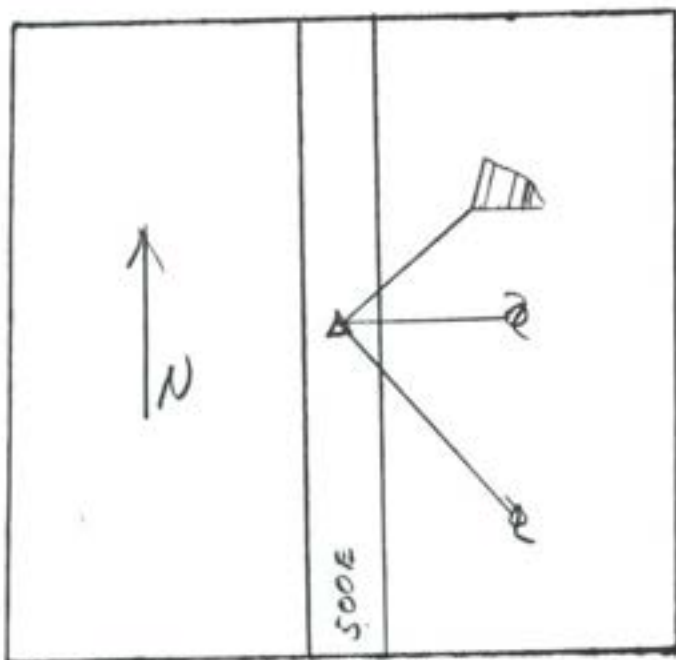

GRAPHIC TIES
(SKETCHED)

SEC. 14 TWP. 21 RANGE 5

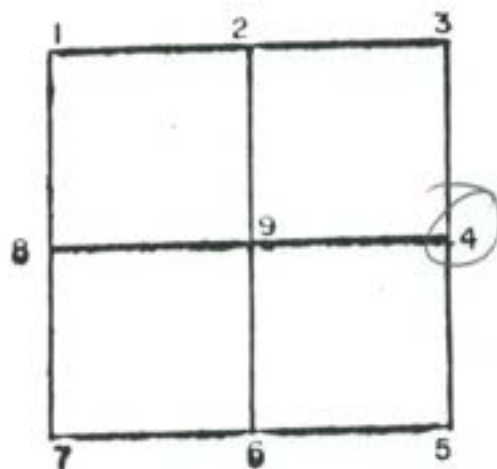


CORNER IDENT. 4 STONE AND $\frac{5}{8}$ " REBAR SET OVER POINT


- TIES:
1. 19.2' X IN STONE
 2. 52.75' SN - PWP
 3. 48.2' SN - PWP
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -

SEC. 14 TWP. 21 RANGE 5

SEC. 14 TWP. 21 RANGE 5

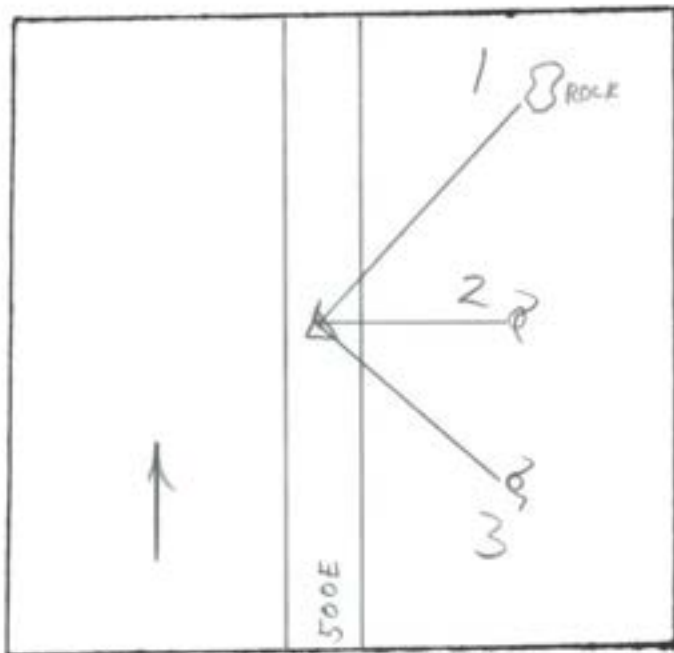


GRAPHIC TIES
(SKETCHED)

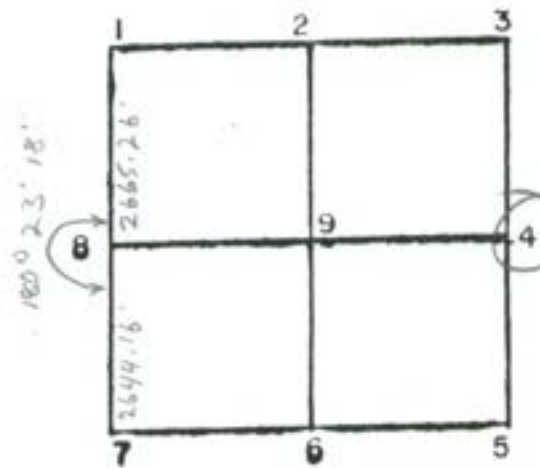


CORNER IDENT. NOT STATED

TIME	1. 19.2'	ROCK
	2. 52.75'	PWP
	3. 48.2'	PWP

SEC 14 TWP 21 RANGE 5

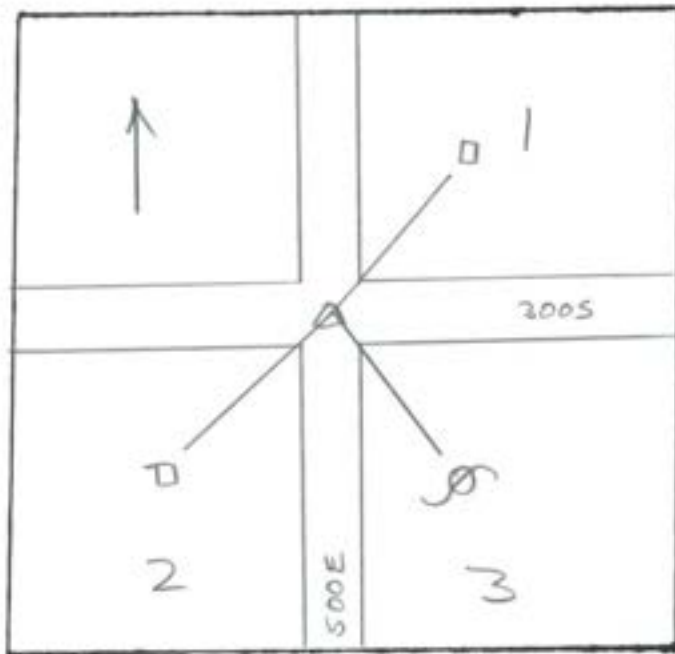

SEC 14 TWP 21 RANGE 5

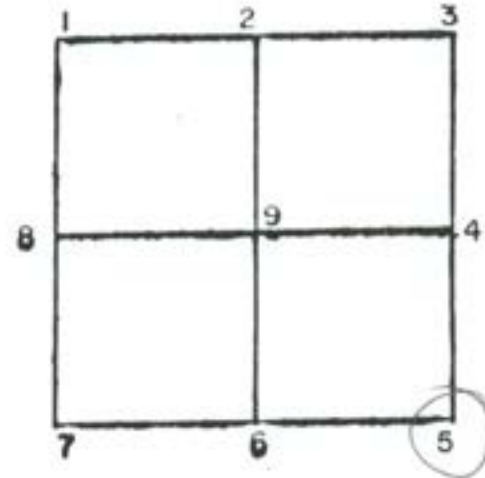

CORNER IDENT. NOT STATED



TIES: 1. 29.5' FP
2. 24.5' FP
3. 23.9' P&P

SEC 14 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 14 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY SEPTEMBER 03, 2002

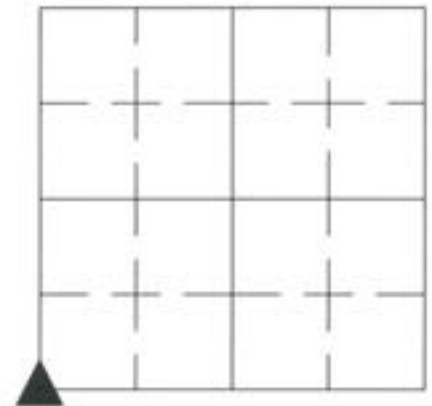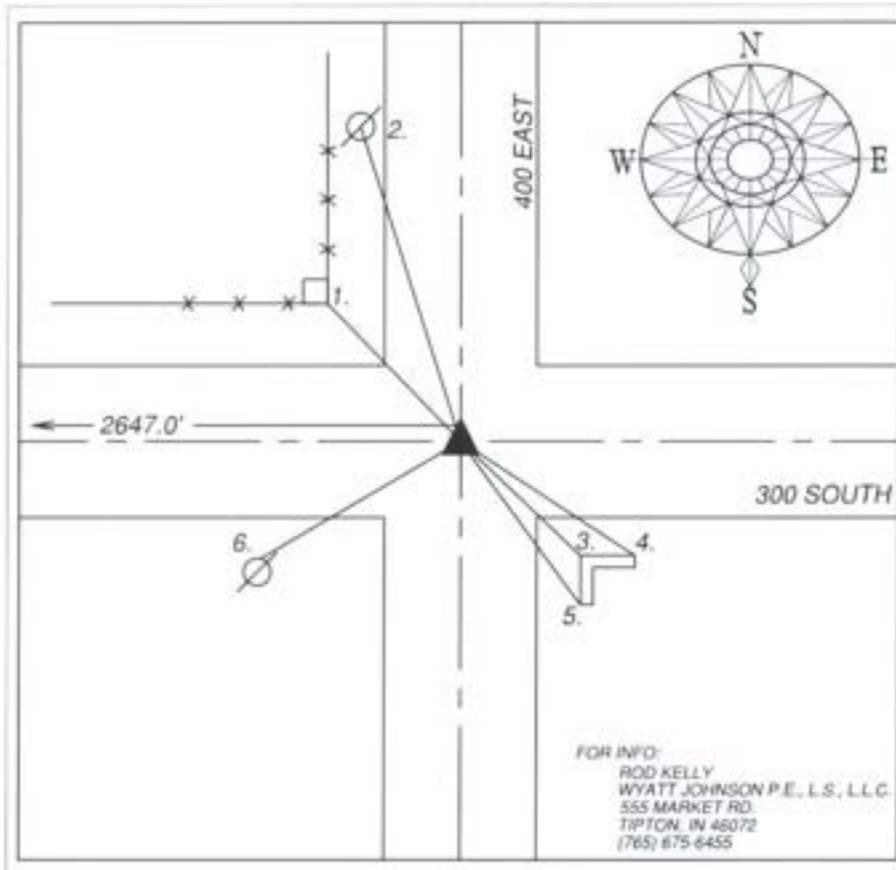

INDIANA COORDINATE VALUES (NAD83)
OBSERVATION DATE: -
CREW: -
NORTH: - EAST: -
ELEVATION: -
LATITUDE: -
LONGITUDE: -


DRAWN BY: R.K.
CREW: ROD KELLY, JARED HENRY
JOB # 02-120

TYPE OF MARKER IDENTIFIED: FIR 5/8" FOUND 1.4' BELOW SURFACE


HISTORY AND DESCRIPTION OF RECOVERED POINT:

THE PREVIOUS REFERENCE STATED A STONE WAS RECOVERED W/ A 5/8" REBAR. WE WERE 8" BELOW THE TOP OF THE REBAR AND DID NOT RECOVER A STONE. THE TIE FROM THE NORTHWEST CORNER OF THE CONCRETE WINGWALL AND A DISTANCE OF 2647' WAS USED FOR THE LOCATION TO DIG. THE 5/8" REBAR REVEALED NO MAGNETIC SOUNDING FROM THE LOCATOR. WE PLACED A NEW 5/8" ALUM. CAPPED REBAR IN CONCRETE WITHIN A 8" PLASTIC PIPE OVER THE LOCATION OF THE OLD ONE FLUSH WITH THE CHIP AND SEALED ROAD.

REFERENCE	DISTANCE	DESCRIPTION	FOUND	SET
1.	24.09'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POST	☐	☒
2.	46.77'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POWER POLE	☐	☒
3.	23.87'	NORTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
4.	29.50'	NORTHEAST CORNER OF CONCRETE WINGWALL	☒	☐
5.	27.26'	SOUTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
6.	48.41'	MAG NAIL WITH ID WASHER IN NORTH SIDE OF POWER POLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐

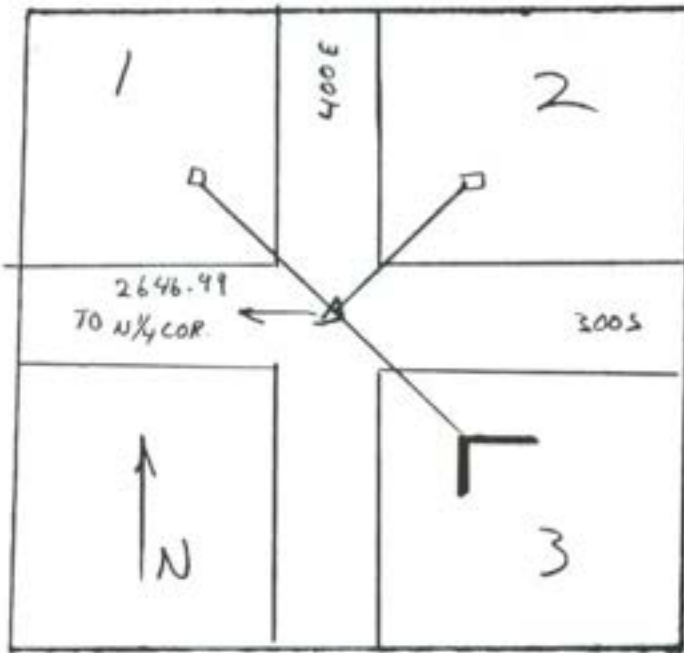

SEC 14 TWP 21 RANGE 5

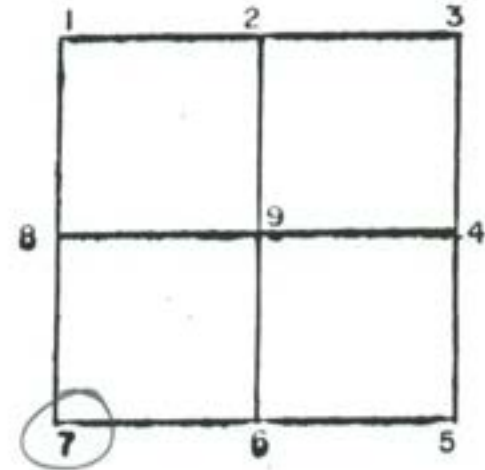


CORNER IDENT. 7 STONE W/5/8" REBAR

TIES: 1. 24.7' CORNER POST

2. 25.00' CORNER POST


3. 23.95' CONCRETE WING WALL

SEC 14 TWP 21 RANGE 5

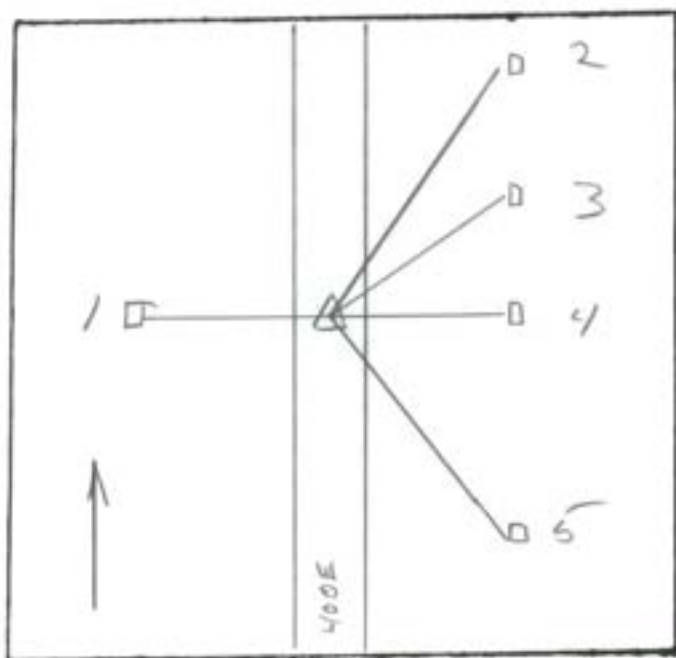

GRAPHIC TIES
(SKETCHED)

SEC 14 TWP 21 RANGE 5

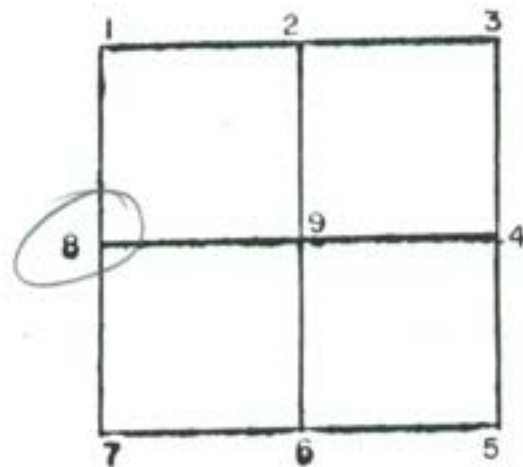


CORNER IDENT. NOT STATED

TIES: 1. 19.55'
2. 38.60'
3. 31.25'
4. 19.55'
5. 20.66'


SEC 14 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 15 TWP. 21 RANGE 5

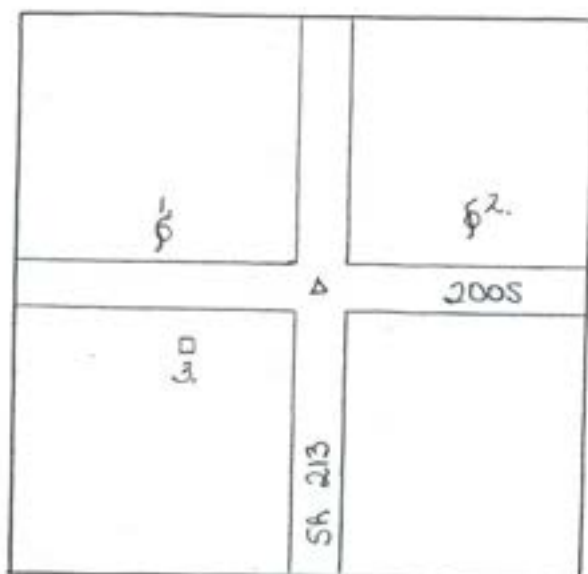

GRAPHIC TIES (SKETCHED)

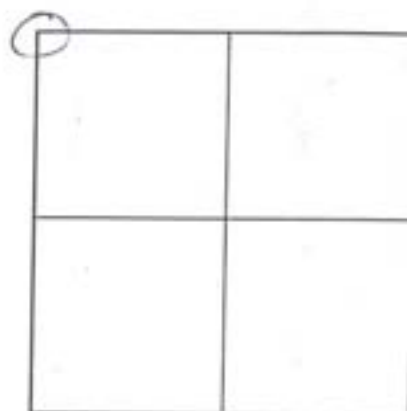

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: MAG NAIL FOUND AT SURFACE.....

TIES:

1. 46.73' AZ 294° MAG NAIL IN PWP (211-767).....

2. 40.37' AZ 69° MAG NAIL IN PWP (211-641).....


3. 45.05' AZ 249° NE COR R/W MKR.....

.....
WYATT JOHNSON 50302.....


SECTION 15 TWP. 21 RANGE 5

DATE: 11/14/01

SECTION 15 TWP. 21 RANGE 5

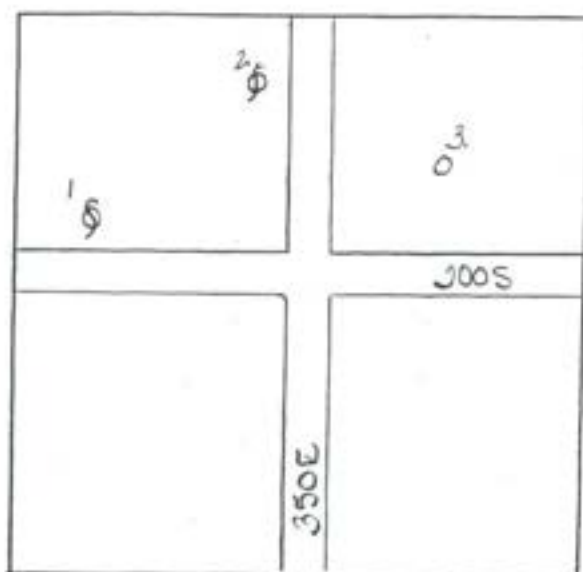

GRAPHIC TIES (SKETCHED)

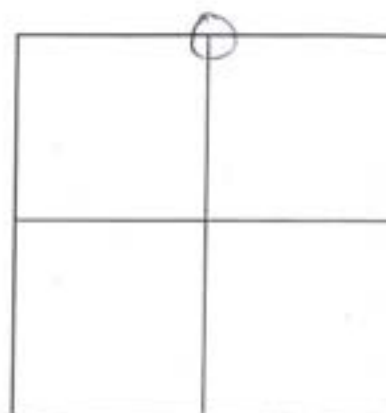

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 2' ± DEEP

TIES:


1. 91.80' AZ 283° MAG NAIL IN PWP

2. 80.73' AZ 350° N.E.C IN PWP


3. 27.12' AZ 51° + CUT IN CONC. POST

SECTION 15 TWP. 21 RANGE 5

SEC 15 TWP 21 RANGE 5

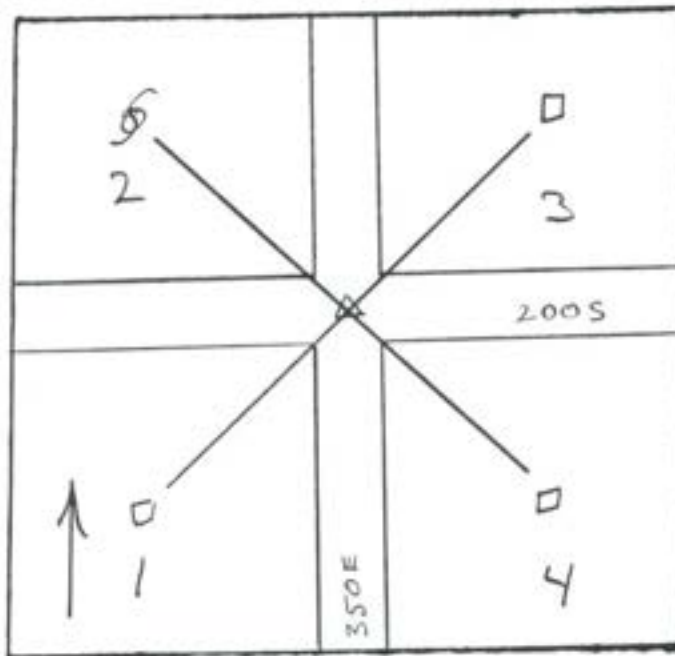

GRAPHIC TIES
(SKETCHED)

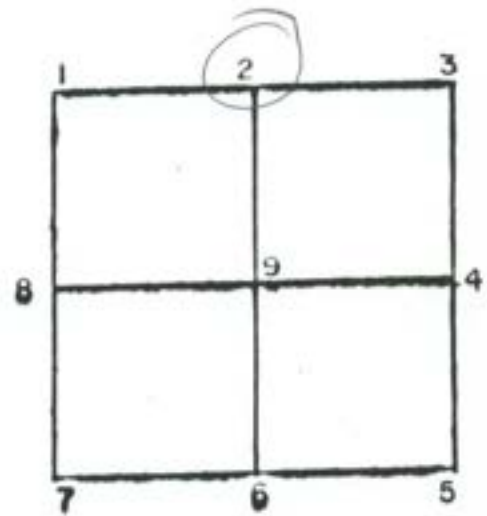

CORNER IDENT. NOT STATED

TIES: 1. 24.80' HP
 2. 31.80' PWP
 3. 26.70' HP
 4. 31.80' HP


SEC 15 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 15 TWP. 21 RANGE 5



GRAPHIC TIES (SKETCHED)

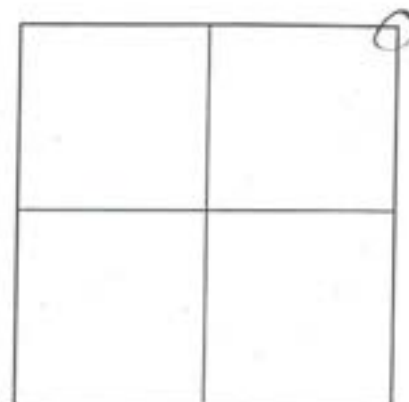

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: HARRISON MKK FOUND 5" ± DEEP

TIES:


1. 19.15' AZ 2° MAG NAIL IN WOOD POST

2. 32.12' AZ 125° N & C IN T&P


3. 40.19' AZ 158° N & C IN WOOD COR POST

SECTION 15 TWP. 21 RANGE 5

SEC 15 TWP 21 RANGE 5

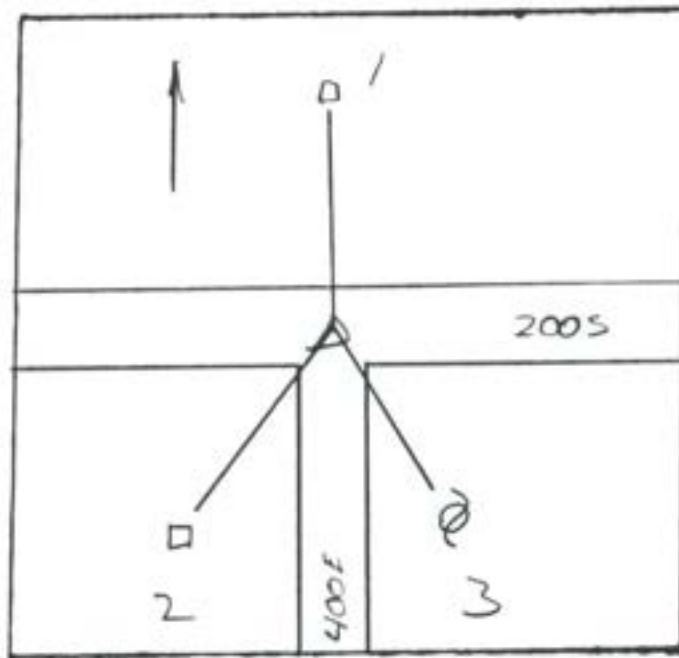

GRAPHIC TIES
(SKETCHED)

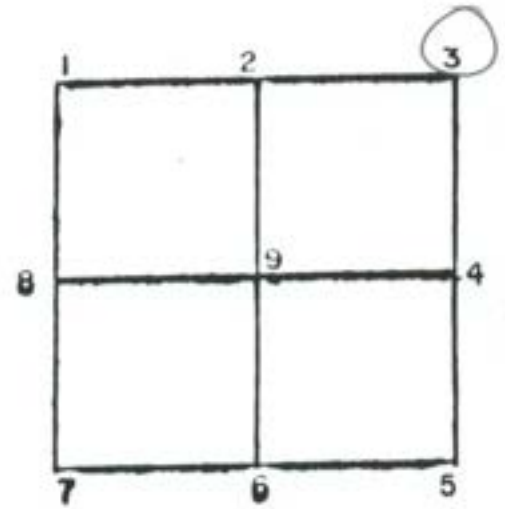

CORNER IDENT. NOT STATED


TIES: 1. 19.10' FP

2. 33.10' FP


3. 32.80' PWP

SEC 15 TWP 21 RANGE 5

SEC 15 TWP 21 RANGE 5

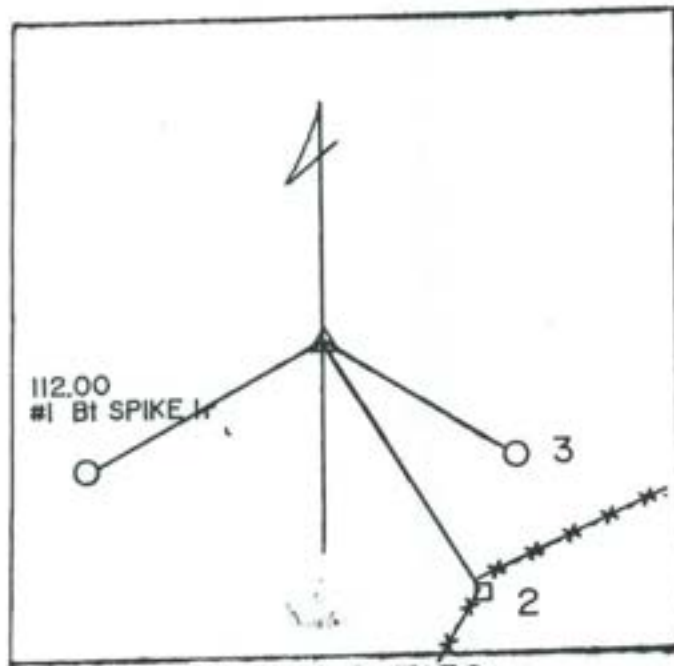

GRAPHIC TIES
(SKETCHED)

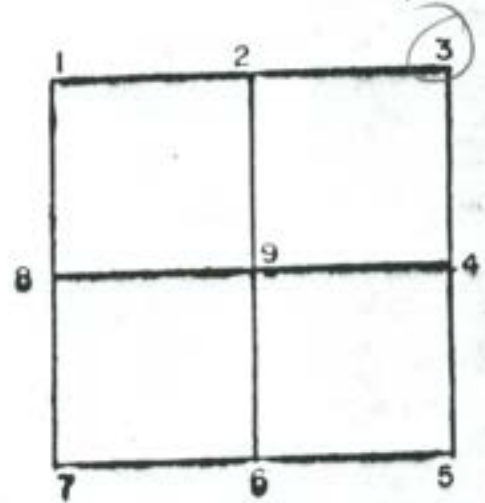


CORNER IDENT. HARR MARKER

TIES: #2 WOOD FENCE POST 40.12

#1 Bl SPIKE


#3 PK IN PWP 32.10

SEC 15 TWP 21 RANGE 5

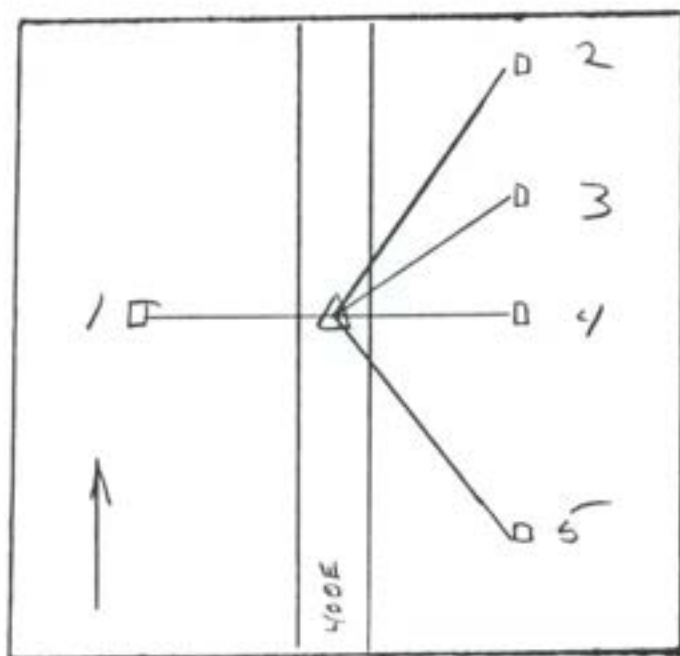

GRAPHIC TIES
(SKETCHED)

SEC 15 TWP 21 RANGE 5

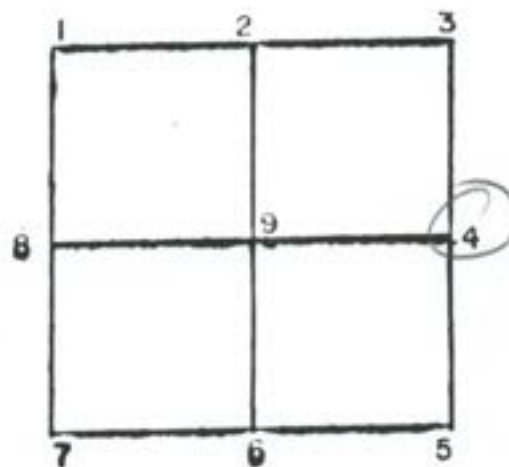

CORNER IDENT. NOT STATED


TIES: 1. 19.55'
2. 38.60'
3. 31.25'
4. 19.55'
5. 20.66'

SEC 15 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 15 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY SEPTEMBER 03, 2002

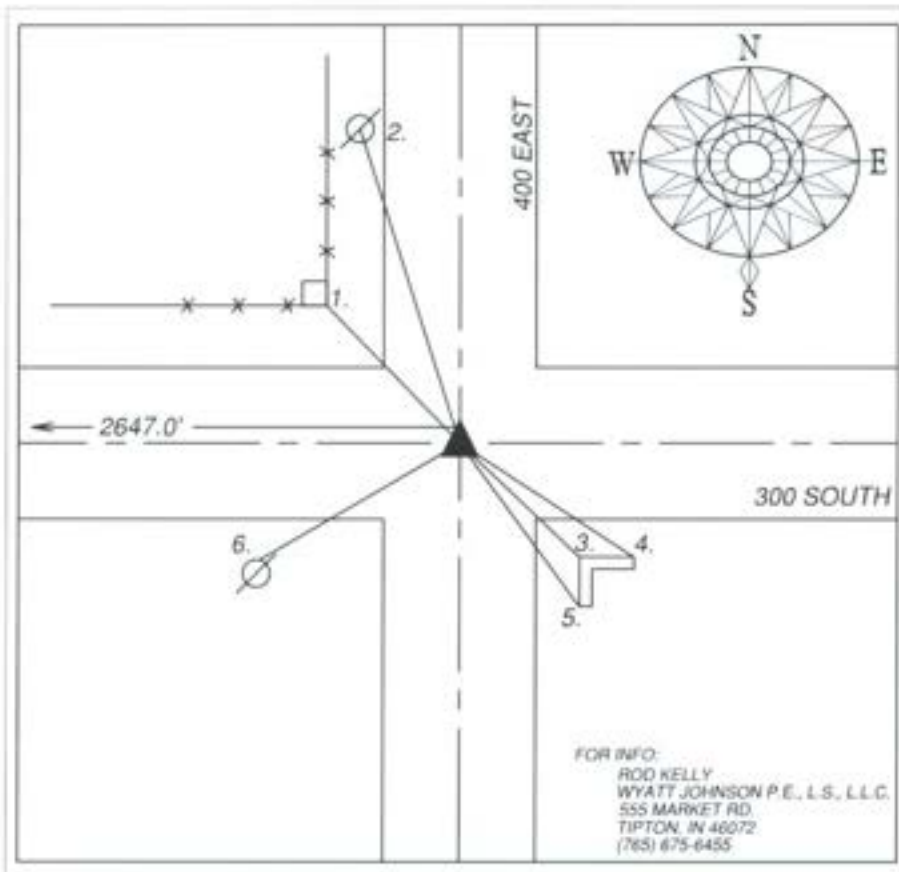

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: -

CREW: -

NORTH: - EAST: -

ELEVATION: -

LATITUDE: -

LONGITUDE: -

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY


JOB # 02-120

TYPE OF MARKER IDENTIFIED: FIR 5/8" FOUND 1.4' BELOW SURFACE


HISTORY AND DESCRIPTION OF RECOVERED POINT:

THE PREVIOUS REFERENCE STATED A STONE WAS RECOVERED W/ A 5/8" REBAR. WE WERE 8" BELOW THE TOP OF THE REBAR AND DID NOT RECOVER A STONE. THE TIE FROM THE NORTHWEST CORNER OF THE CONCRETE WINGWALL AND A DISTANCE OF 2647' WAS USED FOR THE LOCATION TO DIG. THE 5/8" REBAR REVEALED NO MAGNETIC SOUNDING FROM THE LOCATOR. WE PLACED A NEW 5/8" ALUM. CAPPED REBAR IN CONCRETE WITHIN A 8" PLASTIC PIPE OVER THE LOCATION OF THE OLD ONE FLUSH WITH THE CHIP AND SEALED ROAD.

REFERENCE	DISTANCE	-DESCRIPTION-	FOUND SET	
1.	24.09'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POST	☐	☒
2.	46.77'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POWER POLE	☐	☒
3.	23.87'	NORTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
4.	29.50'	NORTHEAST CORNER OF CONCRETE WINGWALL	☒	☐
5.	27.26'	SOUTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
6.	48.41'	MAG NAIL WITH ID WASHER IN NORTH SIDE OF POWER POLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐

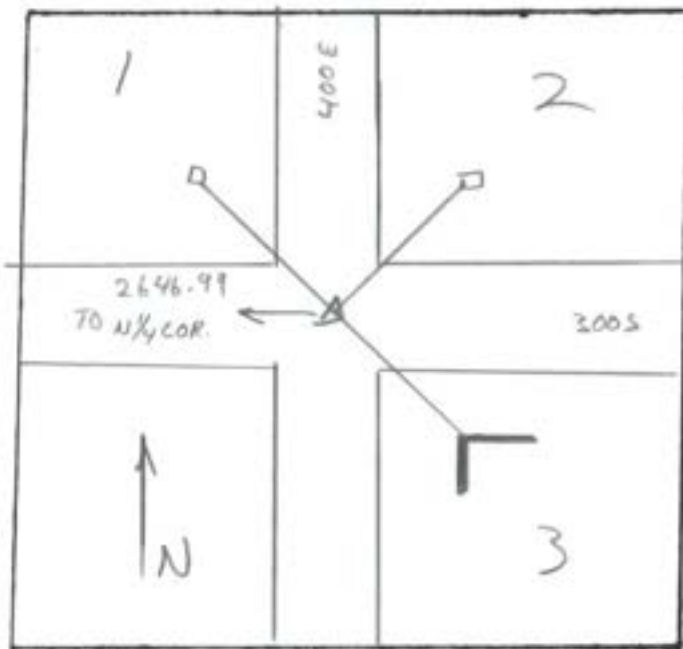

SEC 15 TWP 21 RANGE 5

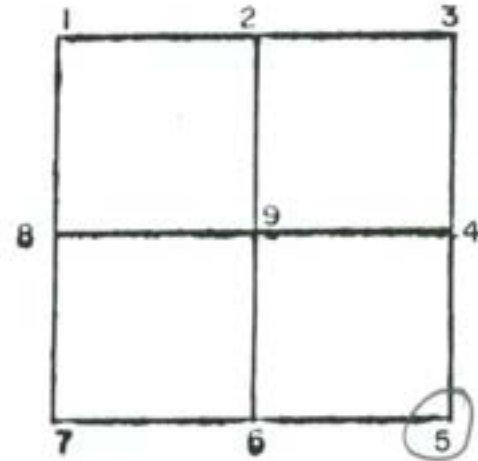

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 5 STONE W/5/8" REBAR

TIES: 1. 24.7' CORNER POST

2. 25.00' CORNER POST



3. 23.95' CONCRETE WING WALL

SEC 15 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 15 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY APRIL 26, 2001, VERIFIED 8/30/02

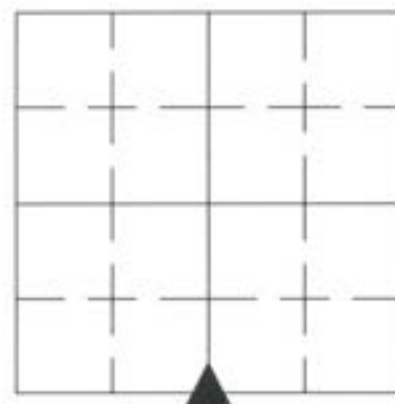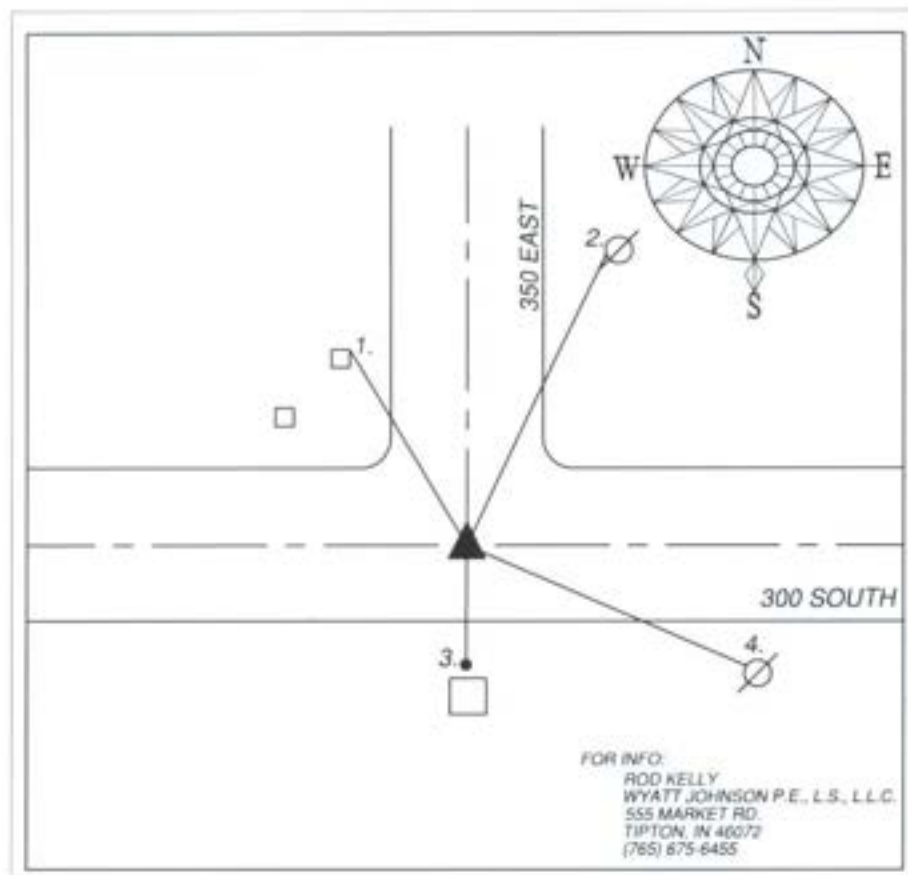

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: -

CREW: -

NORTH: - EAST: -

ELEVATION: -

LATITUDE: -

LONGITUDE: -

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY

JOB # 01-048, 02-116

TYPE OF MARKER IDENTIFIED: STONE FOUND 0.60' BELOW ROAD SURFACE

HISTORY AND DESCRIPTION OF RECOVERED POINT:

THE STONE WAS RECOVERED BY US FIRST IN JULY, 1982 AND LATER IN 2001 AND 2002. A PREVIOUS REFERENCE WAS SUBMITTED BY US FROM JOB # 1214 IN 1982 FOUND IN THE C.S. OFFICE. ONLY ONE OF THE TIES REMAIN FROM THAT REFERENCE. A CAST ALUMINUM MONUMENT ACCESS BOX WAS PLACED OVER THE STONE IN CONCRETE FLUSH WITH THE ROAD SURFACE.

REFERENCE	DISTANCE	DESCRIPTION	FOUND	SET
1.	31.08'	PK NAIL IN POST	☒	☐
2.	41.76'	MAG NAIL WITH ID WASHER IN POWER POLE	☐	☒
3.	18.05'	R.E. MITCHELL CAPPED ROD IN CONCRETE	☒	☐
4.	24.13'	MAG NAIL WITH ID WASHER IN POWER POLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐




A 2x2 grid with numbers at the intersections. The numbers are: 1 (top-left), 2 (top-middle), 3 (top-right), 4 (middle-right), 5 (bottom-right), 6 (bottom-middle, circled), 7 (bottom-left), 8 (middle-left), and 9 (center).

TIES:

1.	24.7'	CORNER POST
2	39.64'	PWP
3.	18.0'	IRON PIN IN CONCRETE
4.	23.75'	PWP

SEC 15 TWP 21 RANGE 5

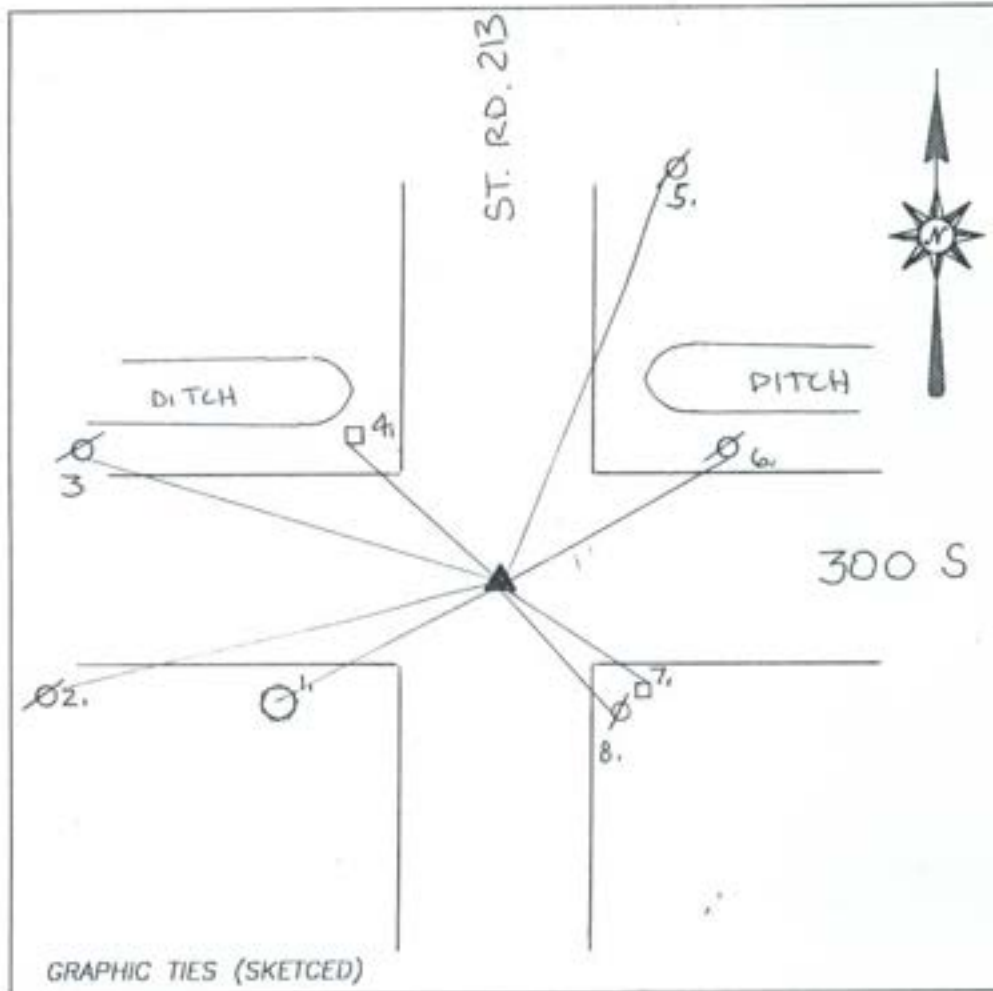

DATE 04-26-01
 JOB # 01-048

REFERENCED BY:


R. KELLY

J. HENRY

CORNER IDENTIFIED: SET MAG NAIL PER OLD REFERENCES
 w/ 10 WASHER * OLD REF.


TIES:

- * 1. 56.30' ϕ 48" TREE STUMP
- 2. 103.75' ~~SPK~~ SET PK NAIL W/ 10 WASHER IN PP
- 3. 91.70' " "
- * 4. 45.60 SW CORNER R/W MARKER
- 5. 98.53 SET PK NAIL W/ 10 WASHER IN PP
- * 6. 59.20 FOUND PK NAIL ~~W/ 10 WASHER~~ IN PP
- * 7. 42.03 NE CORNER R/W MARKER
- * 8. 40.38 FOUND PK NAIL IN PP

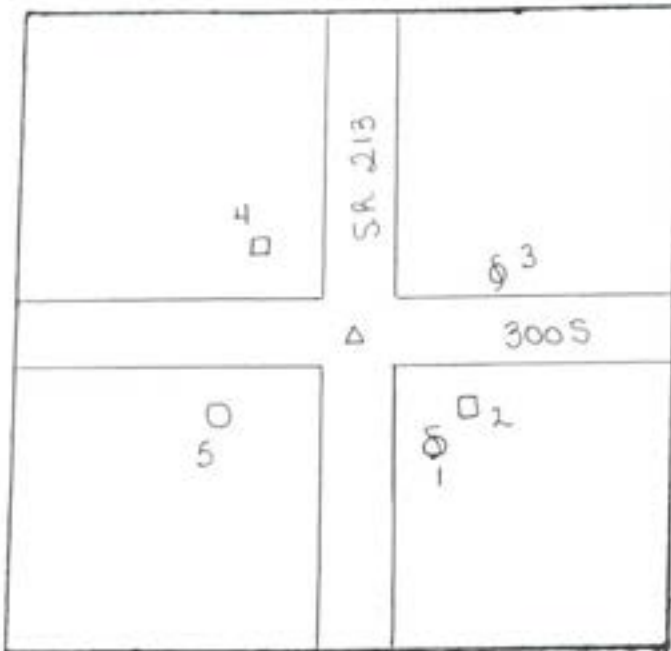

GRAPHIC TIES
(SKETCHED)



SEC 15 TWP 21 RANGE 5

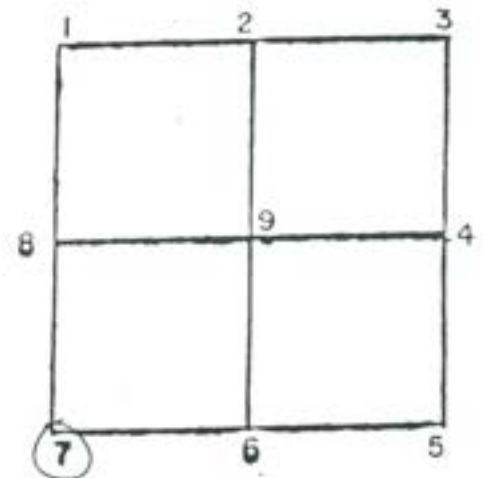

CORNER IDENT. PK. NAIL

TIES: 1. 40.38 PK PWP
 2. 42.03 R/W MARKER NE CORNER
 3. 59.20 PK PWP
 4. 45.6 R/W MARKER SW CORNER
 5. 56.3 48" TREE STUMP

SEC 15 TWP 21 RANGE 5

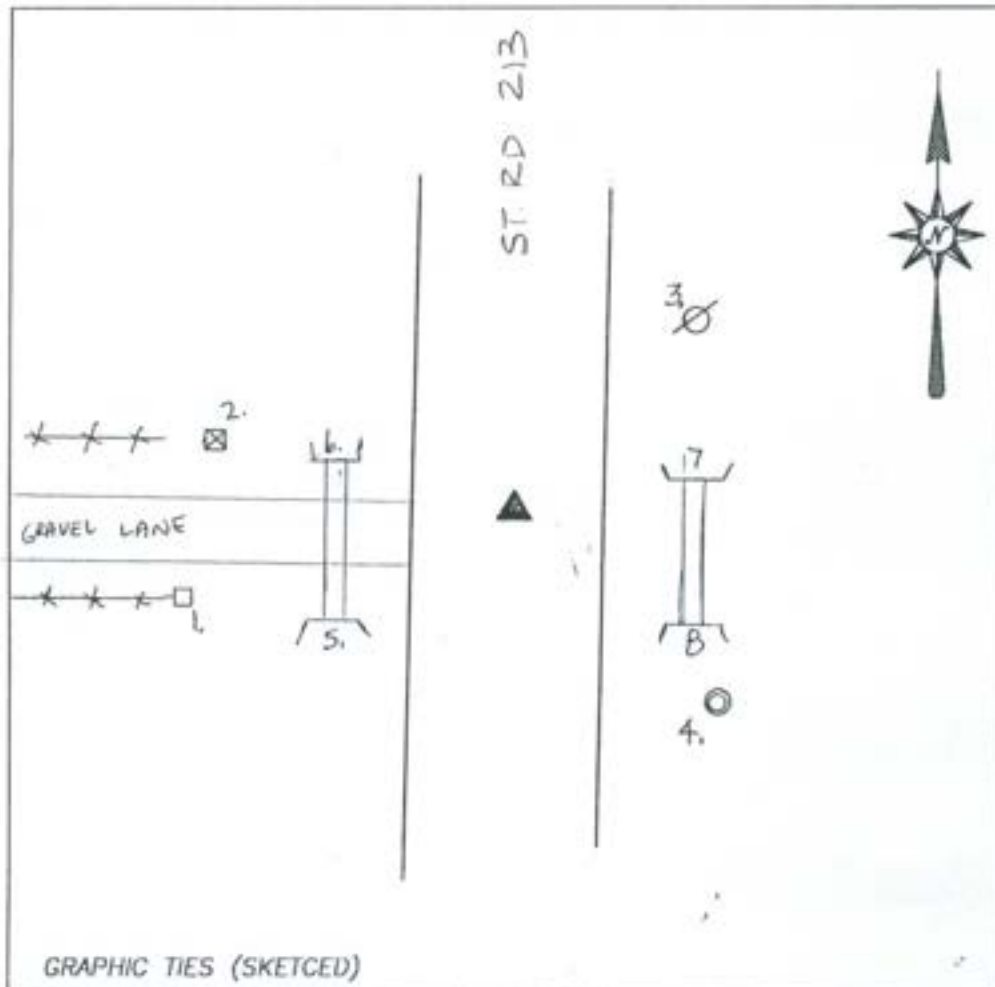

DATE 04-26-01
JOB # 01-048

REFERENCED BY:

R. KELLY


J. HENRY

CORNER IDENTIFIED: SET MAG NAIL W/ ID. WASHER PER OLD REF.
* OLD REF.


TIES:

1. 53.45' FOUND PK NAIL IN POST (OFF EXACTLY 10' FROM OLD REF)
2. 40.95' NE CORNER OF R/W MARKER
- * 3. 43.90' FOUND PK NAIL IN P.P.
- * 4. 40.65' 8" STEEL CASING 2' ABOVE GRADE
- * 5. 37.01' CENTER OF CULVERT PIPE
- * 6. 31.60' " "
- * 7. 28.60' " "
- * 8. 32.60' " "

SEC 15 TWP 21 RANGE 5

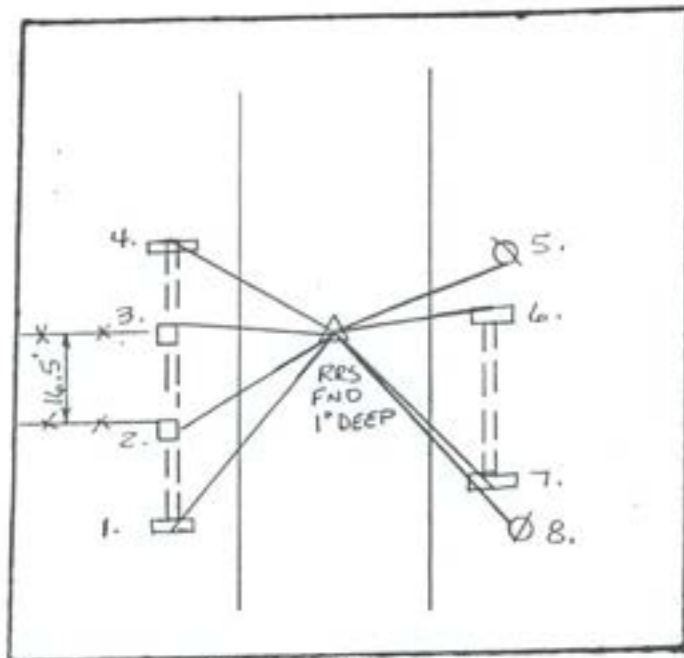

GRAPHIC TIES
(SKETCHED)

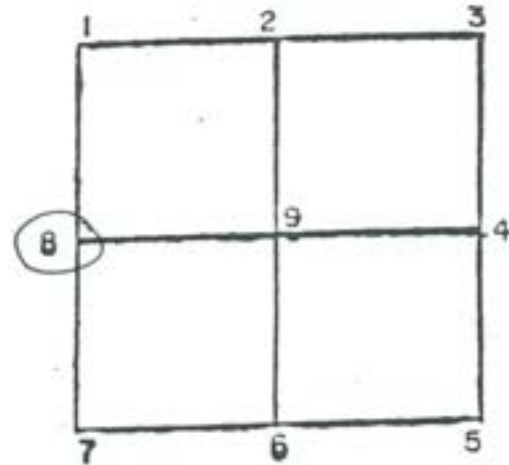


CORNER IDENT. RRS FND. 1" DEEP


TIES: 1. 37.01' CENTER OF PIPE - TOP OF HEADWALL
 2. 63.45' PK IN FENCE POST
 3. 41.55' NE CORNER R/W MARKER
 4. 31.60' CENTER OF PIPE - TOP OF HEADWALL
 5. 43.90' P.K. NAIL IN PWP
 6. 28.5' CENTER OF PIPE - TOP OF HEADWALL
 7. 32.1' " " " " " "
 8. 40.65' 8" STEEL CASING

SEC 15 TWP 21 RANGE 5

SEC. 16 TWP. 21 RANGE 5

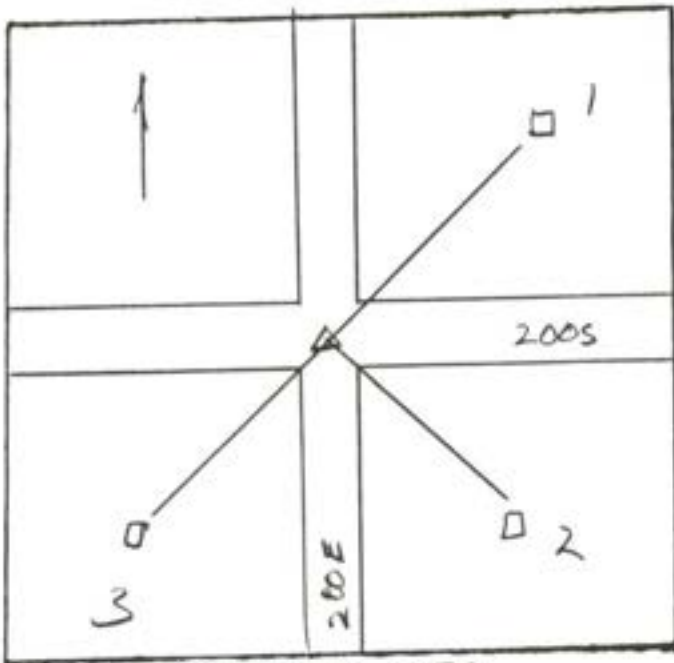

GRAPHIC TIES
(SKETCHED)

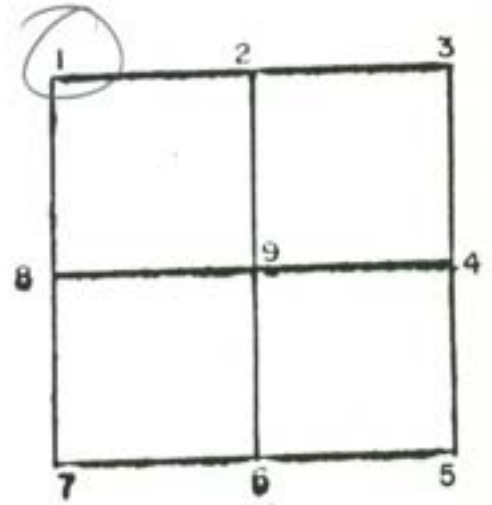

CORNER IDENT. NOT STATED

TIME: 1. 21.65' HP


2. 23.30' HP

3. 23.60' HP


SEC 16 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 16 TWP. 21 RANGE 5

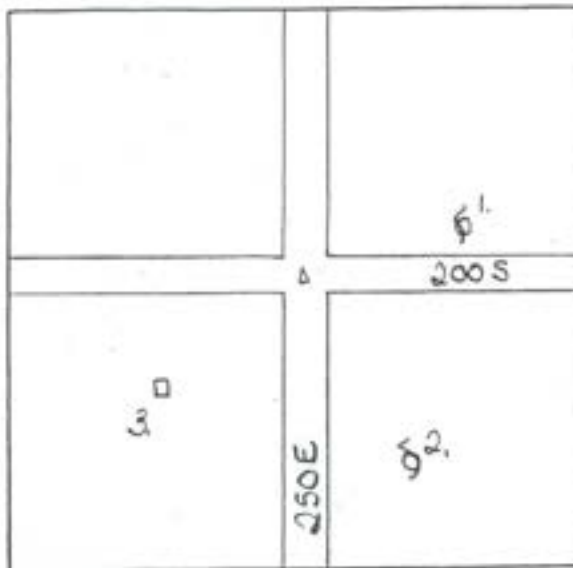

GRAPHIC TIES (SKETCHED)

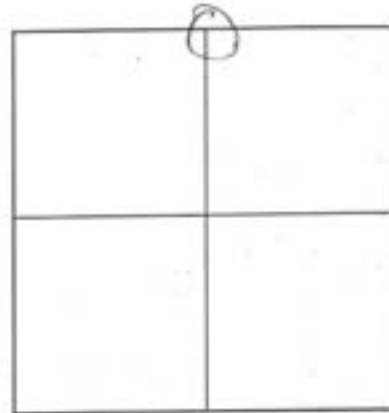

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 5" ± DEEP

TIES:

1. 54.12' AZ 76° NEC IN PWP


2. 31.49' AZ 156° PK NAIL IN PWP

3. 42.20' AZ 246° PK NAIL IN WOOD POST


.....
.....
.....
.....
.....

SECTION 16 TWP. 21 RANGE 5

SEC 16 TWP 21 RANGE 5

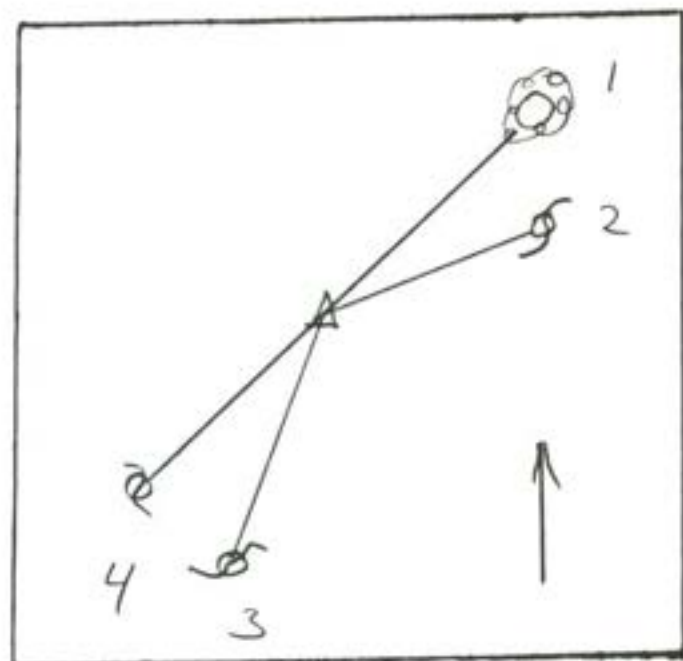

GRAPHIC TIES
(SKETCHED)

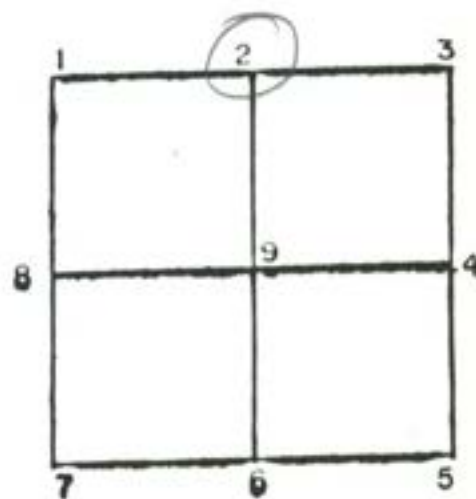


CORNER IDENT. NOT STATED

THIS		
1.	82.92'	WALNUT TREE
2.	53.07'	PWP
3.	31.80	PWP
4.	42.44'	PWP


SEC 16 TWP 21 RANGE 5

DATE: 11/15/01

SECTION 16 TWP. 21 RANGE 5

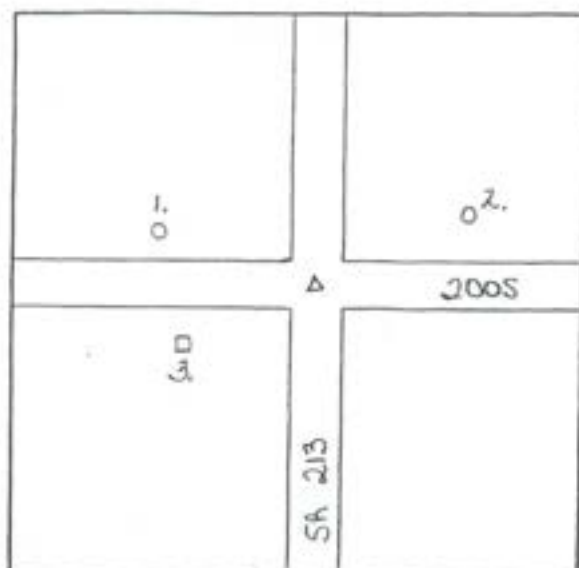

GRAPHIC TIES (SKETCHED)

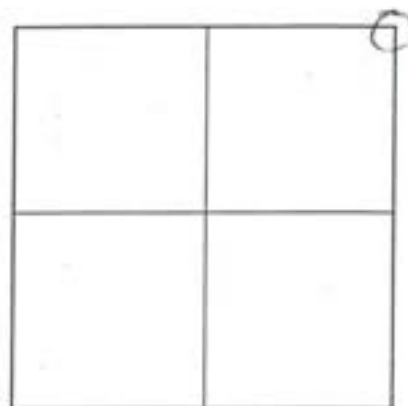

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: MAG NAIL FOUND AT SURFACE.....

TIES:


1. 46.73' AZ 294° MAG NAIL IN PWP (211-767).....

2. 40.37' AZ 69° MAG NAIL IN PWP (211-641).....

3. 45.05' AZ 249° NE COR R/W MKR.....

WYATT JOHNSON 50302.....

SECTION 16 TWP. 21 RANGE 5

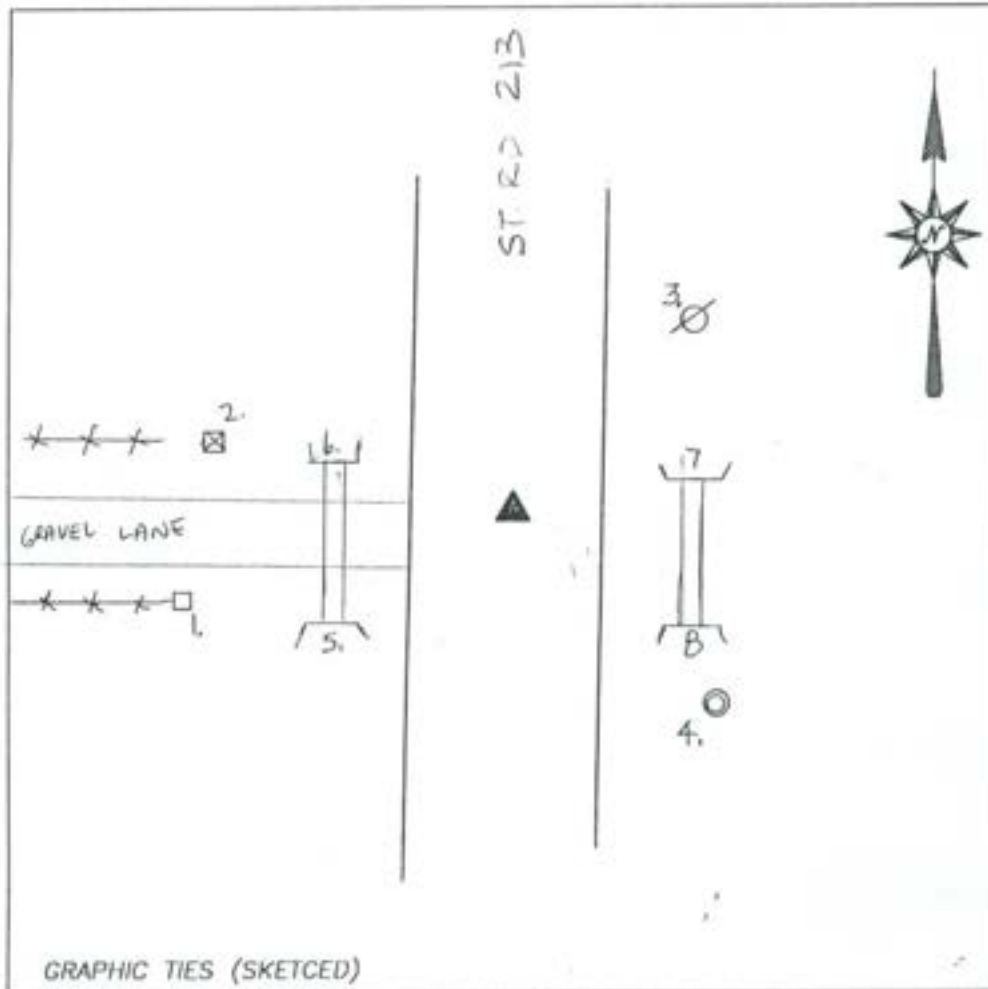

DATE 04-26-01
JOB # 01-048

REFERENCED BY:

R. KELLY


J. HENRY

CORNER IDENTIFIED: SET MAG NAIL W/ ID. WASHER PER OLD REF.
* OLD REF.


TIES: _____

1. 53.45' FOUND PK NAIL IN POST (OFF EXACTLY 10' FROM OLD REF)
2. 40.95' NE CORNER OF R/W MARKER
- * 3. 43.90' FOUND PK NAIL IN P.P.
- * 4. 40.65' 8" STEEL CASING 2' ABOVE GRADE
- * 5. 37.01' CENTER OF CULVERT PIPE
- * 6. 31.60' " "
- * 7. 28.60' " "
- * 8. 32.60' " "

SEC 16 TWP 21 RANGE 5

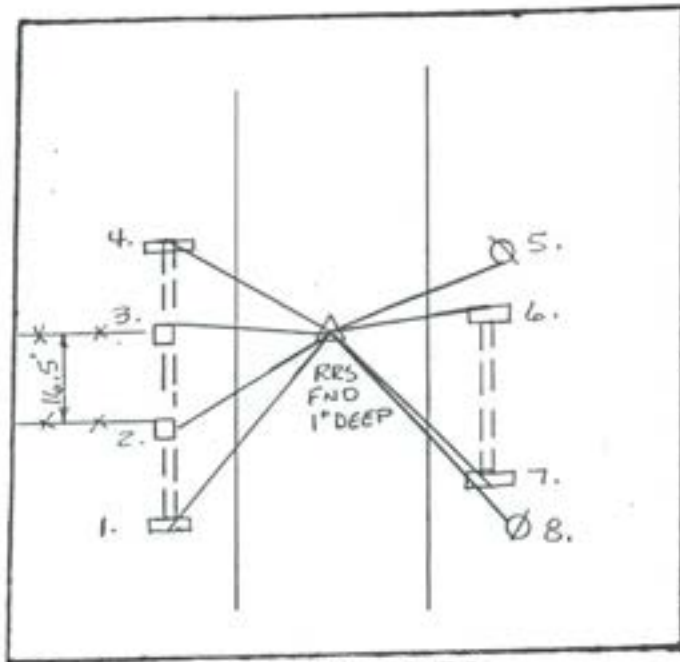


GRAPHIC TIES
(SKETCHED)

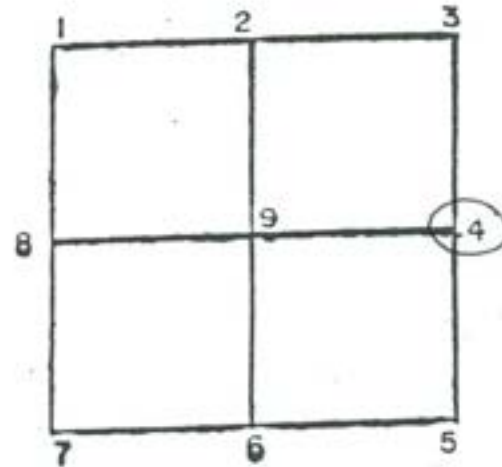

CORNER IDENT. RRS FND. 1" DEEP

- TIES:
- 1. 37.01' CENTER OF PIPE - TOP OF HEADWALL
 - 2. 63.45' PK IN FENCE POST
 - 3. 41.55' NE CORNER R/W MARKER
 - 4. 31.60' CENTER OF PIPE - TOP OF HEADWALL
 - 5. 43.90' P.K. NAIL IN PWP
 - 6. 28.5' CENTER OF PIPE - TOP OF HEADWALL
 - 7. 32.1' " " " " " "
 - 8. 40.65' 8" STEEL CASING

SEC 16 TWP 21 RANGE 5

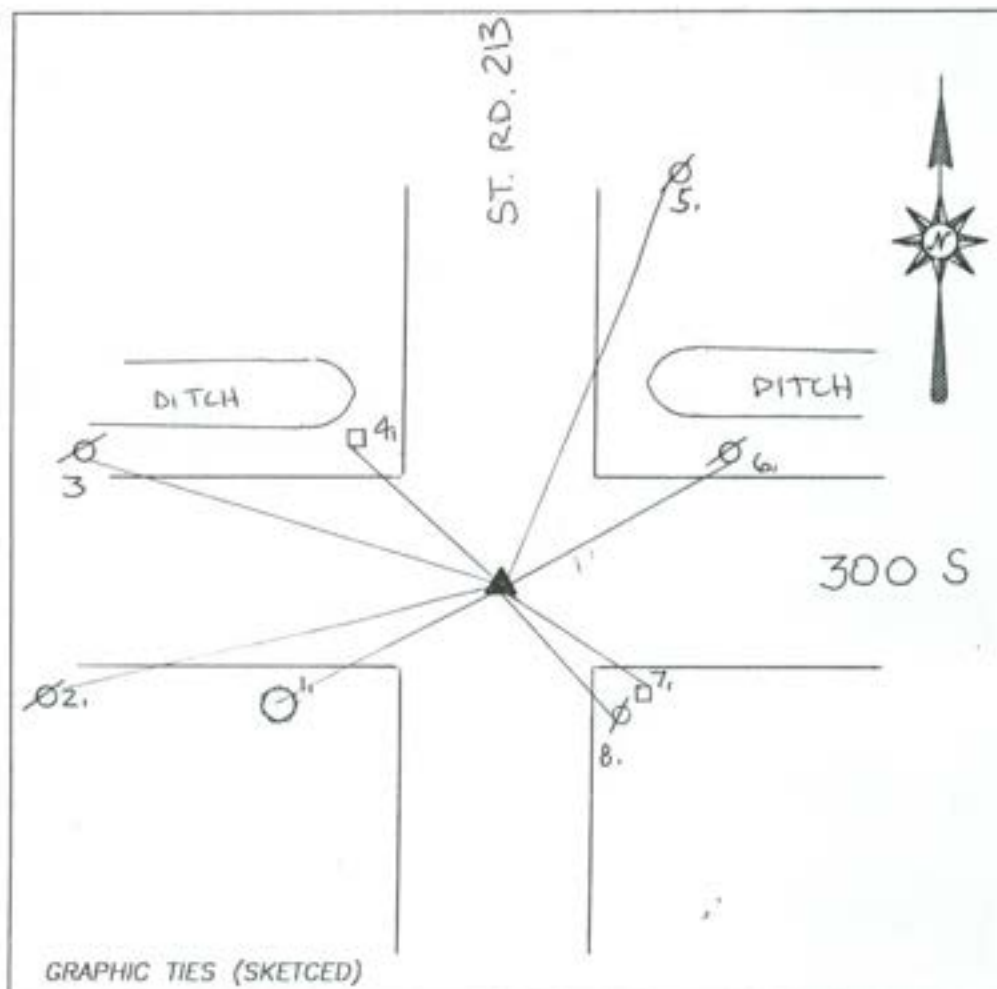

DATE 4-26-01
 JOB # 01-048

REFERENCED BY:

R. KELLY

J. HENRY


CORNER IDENTIFIED: SET MAG NAIL PER OLD REFERENCES
w/ 10 WASHER * OLD REF.

TIES:


- * 1. 56.30' ϕ 48" TREE STUMP
- 2. 103.75' ~~BRK~~ SET PK NAIL W/ 10 WASHER IN PP
- 3. 91.70' " "
- * 4. 45.60 SW CORNER R/W MARKER
- 5. 98.53 SET PK NAIL W/ 10 WASHER IN PP
- * 6. 59.20 FOUND PK NAIL ~~W/ 10 WASHER~~ IN PP
- * 7. 42.03 NE CORNER R/W MARKER
- * 8. 40.38 FOUND PK NAIL IN PP

DATE: 1/13/01

SECTION 16 TWP. 21 RANGE 5

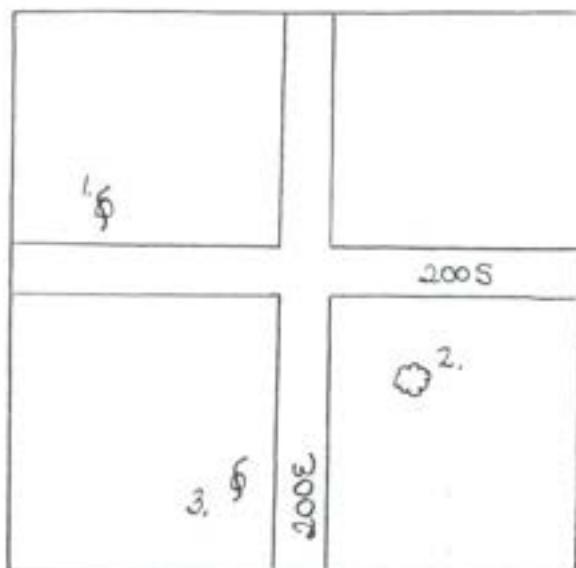

GRAPHIC TIES (SKETCHED)

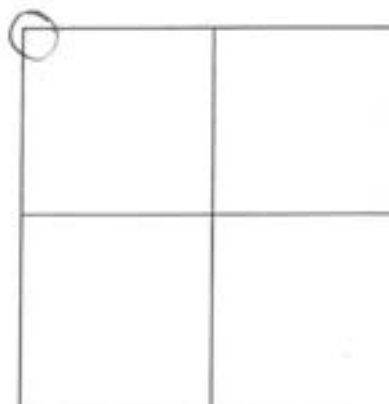

REFERENCED BY:

.....

CORNER IDENTIFIED: REBAR LOCATED 6" ± DEEP

TIES:

1. 61.65' AZ 289° N.E.C. IN PWP

2. 24.48' AZ 136° N.E.C. IN 48" CAT.

3. 54.00' AZ 197° PKN W. SD. PWP

.....

.....

.....

.....


.....

.....


.....

SECTION 16 TWP. 21 RANGE 5

SEC. 16 TWP. 21 RANGE 5

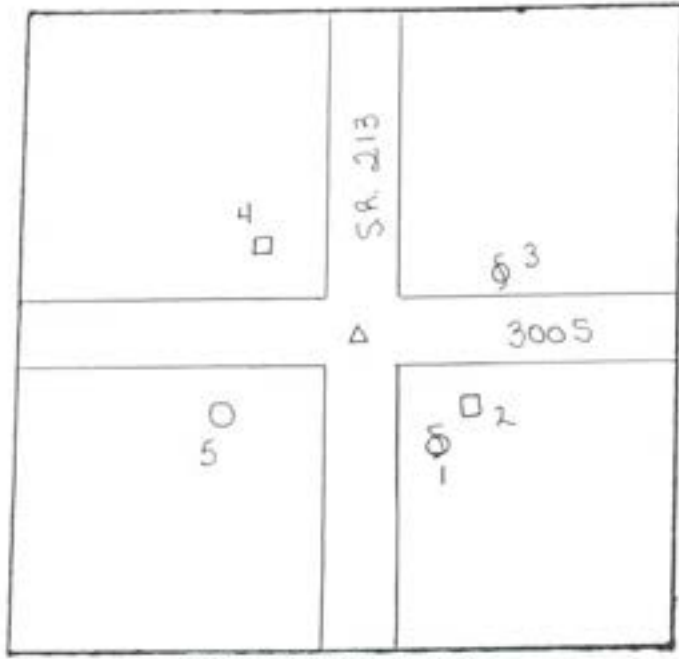


GRAPHIC TIES
(SKETCHED)

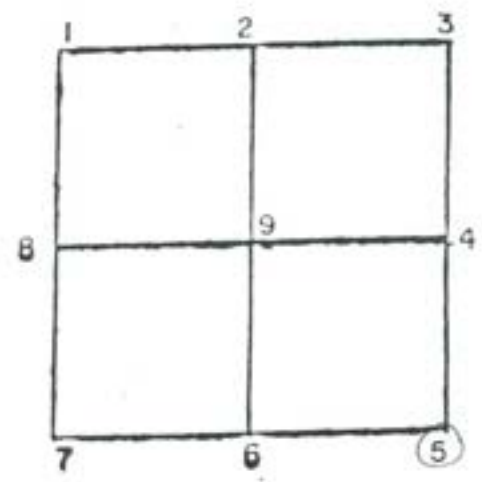


CORNER IDENT. PK. NAIL

- TIES:
- 1. 40.38 PK PWP
 - 2. 42.03 R/W MARKER NE CORNER
 - 3. 59.20 PK PWP
 - 4. 45.6 R/W MARKER SW CORNER
 - 5. 56.3 48" TREE STUMP
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -

SEC. 16 TWP. 21 RANGE 5

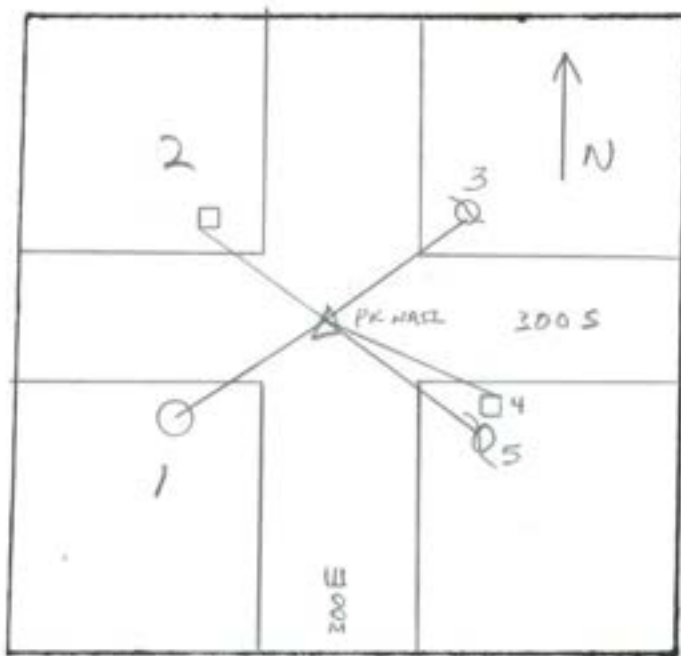

SEC. 16 TWP. 21 RANGE 5

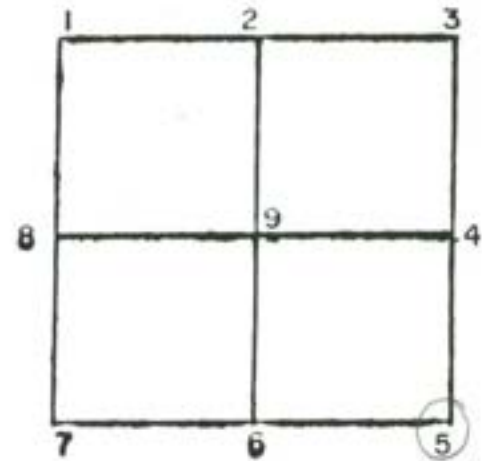

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 5 P.K. NAIL FOUND

TIES: 1 56.30' & 48" TREE STUMP

2. 45.60' SW CORNER R/W MARKER


3. 59.20' PK IN PWP

4. 42.03' NE CORNER R/W MARKER


5. 40.38' PK IN PWP

SEC. 16 TWP. 21 RANGE 5

SEC. 16 TWP. 21 RANGE 5

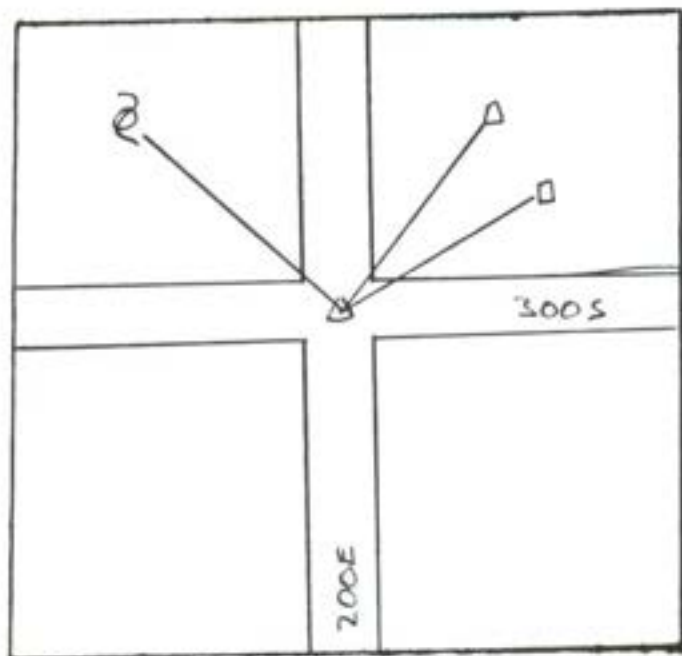

GRAPHIC TIES
(SKETCHED)

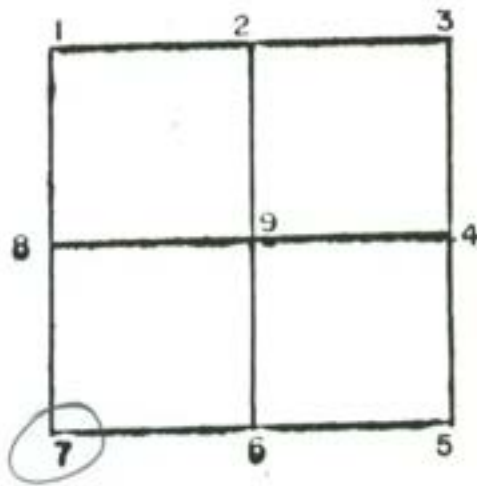


CORNER IDENT. NOT STATED


TIES:	1. 27.55'	PWP
	2. 25.25'	FP
	3. 33.30'	HP

SEC 16 TWP 21 RANGE 5

SEC 16 TWP 21 RANGE 5

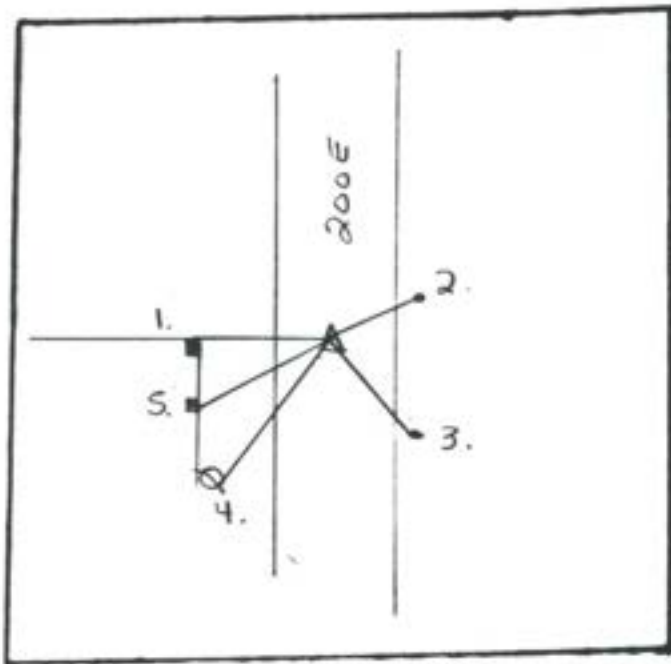

GRAPHIC TIES
(SKETCHED)

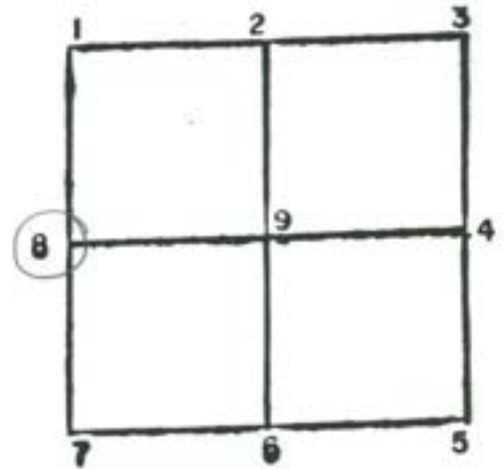


CORNER IDENT. STONE FOUND $\pm 1.3'$ BELOW SURFACE 4-6-92
5/8" REBAR SET OVER HIGH PT.

TIES:


1.	PK NAIL IN HEADPOST	16.58'
2.	5/8" IRON ROD SET OFF EDGE ROAD	21.47'
3.	" " " " " " "	15.77'
4.	PK NAIL IN PWP	27.28'
5.	" " " HEADPOST	17.68'

SEC 16 TWP 21 RANGE 5

SEC. 17 TWP. 21 RANGE 5

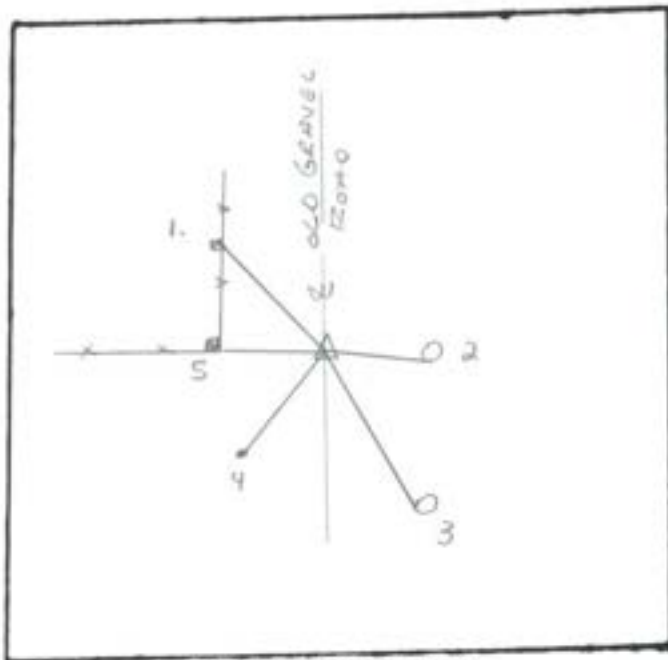


GRAPHIC TIES
(SKETCHED)

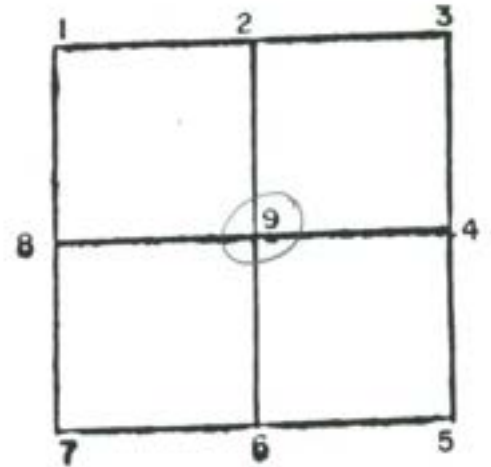


CORNER IDENT. STONE FOUND W/ CUT "X" 1.5' ± BELOW GROUND LEVEL 4/16/92

TIES:	1. PK NAIL IN POST	19.05'
	2. PK NAIL IN PWP	15.65'
	3. " " " "	25.60'
	4. RRS	20.0'
	5. PK NAIL IN HEADPOST	15.1'

SEC. 17 TWP. 21 RANGE 5

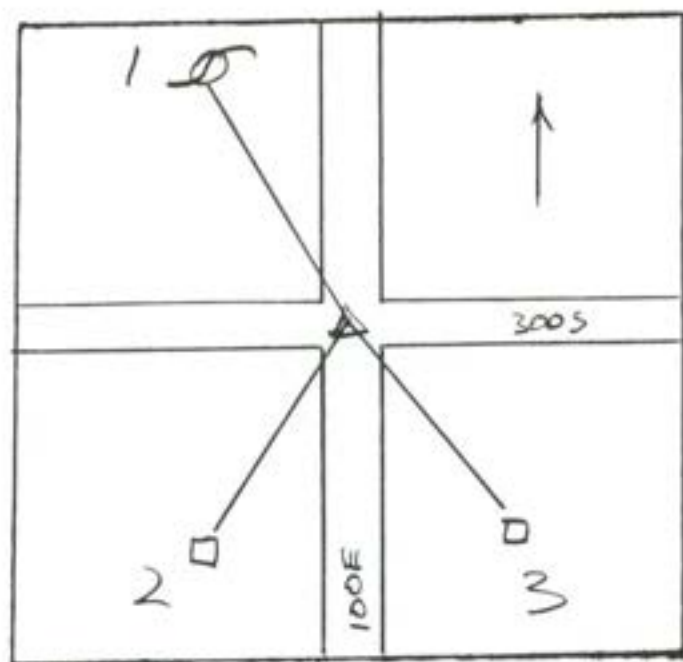

SEC 17 TWP 21 RANGE 5

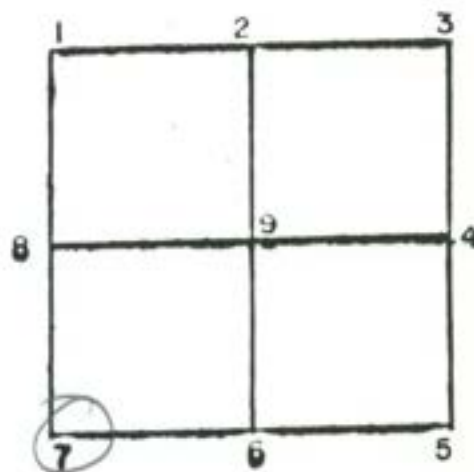


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED


TIES: 1. 31.70' PWP
2. 24.45' HP
3. 26.00' HP

SEC 17 TWP 21 RANGE 5

SEC. 17 TWP. 21 RANGE 5

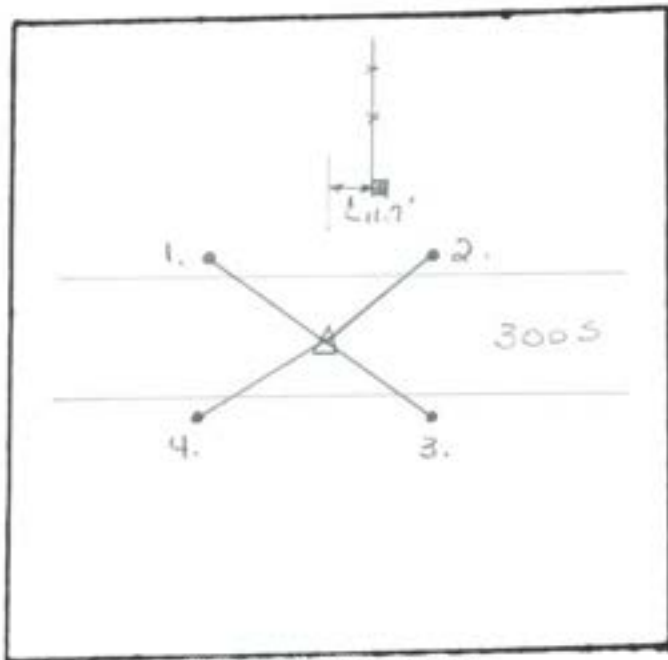

GRAPHIC TIES
(SKETCHED)

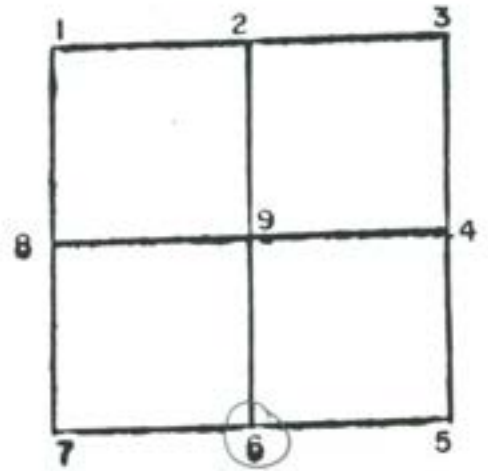


CORNER IDENT. R.R. SPARK SET 4-16-92


TIES: 1. 5/8" Iron Rod $\pm 2'$ FROM EDGE ROAD 20.7'
 2. " " " " " " 23.3'
 3. " " " " " " 22.74'
 4. " " " " " " 19.9'

SEC. 17 TWP. 21 RANGE 5

SEC. 17 TWP 21 RANGE 5

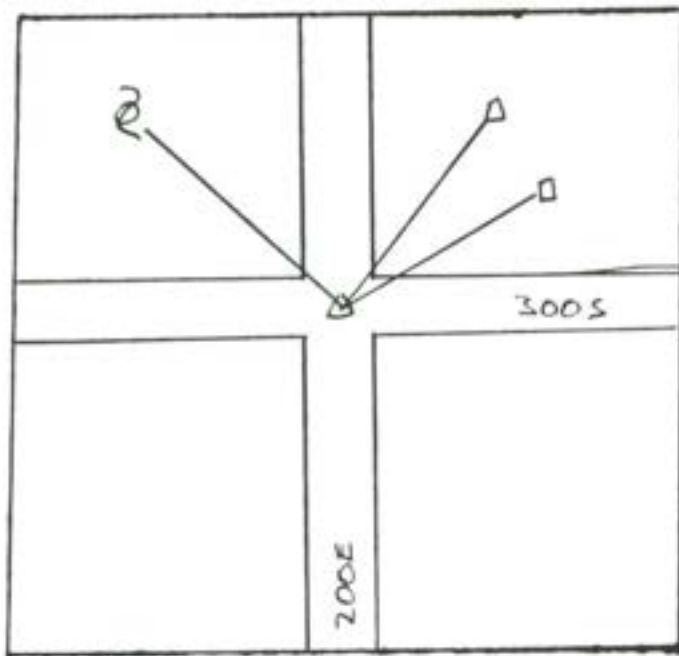

GRAPHIC TIES
(SKETCHED)

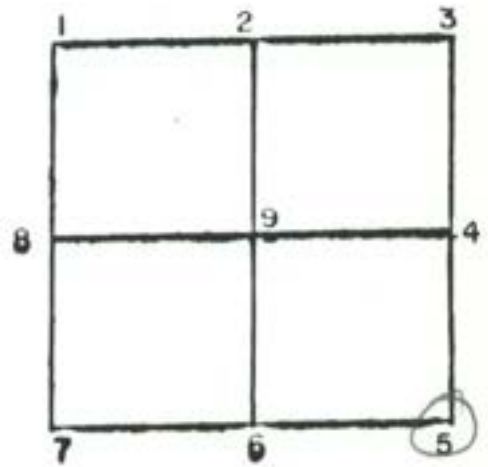


CORNER IDENT. NOT STATED


TIES: 1. 27.55' PWP
2. 25.25' FP
3. 33.30' HP

SEC 17 TWP 21 RANGE 5

SEC 17 TWP 21 RANGE 5

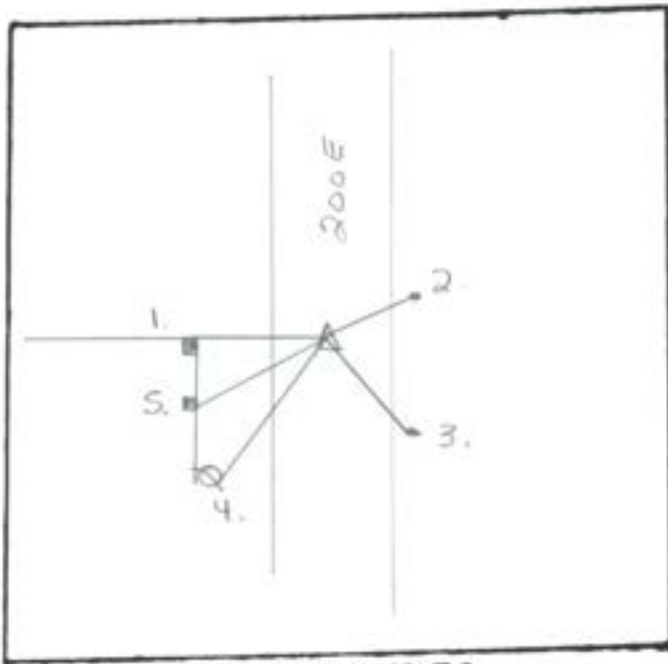

GRAPHIC TIES
(SKETCHED)

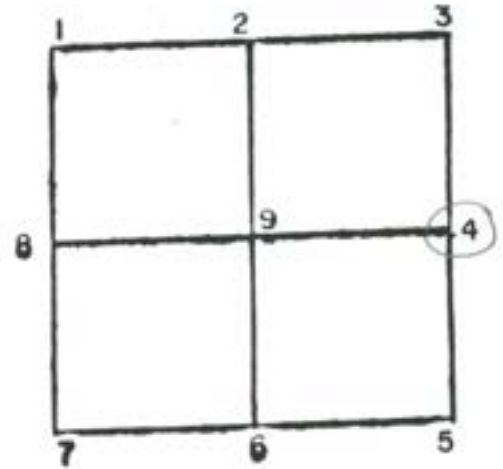


CORNER IDENT. STONE FOUND $\pm 1.3'$ BELOW SURFACE 4-6-92
5/8" REBAR SET OVER HIGH PT.


TIES:

1.	PK NAIL IN HEADPOST	16.58'
2.	5/8" IRON ROD SET OFF EDGE ROAD	21.47'
3.	" " " " " "	15.77'
4.	PK NAIL IN PWP	27.28'
5.	" " " HEADPOST	17.63'

SEC 17 TWP 21 RANGE 5

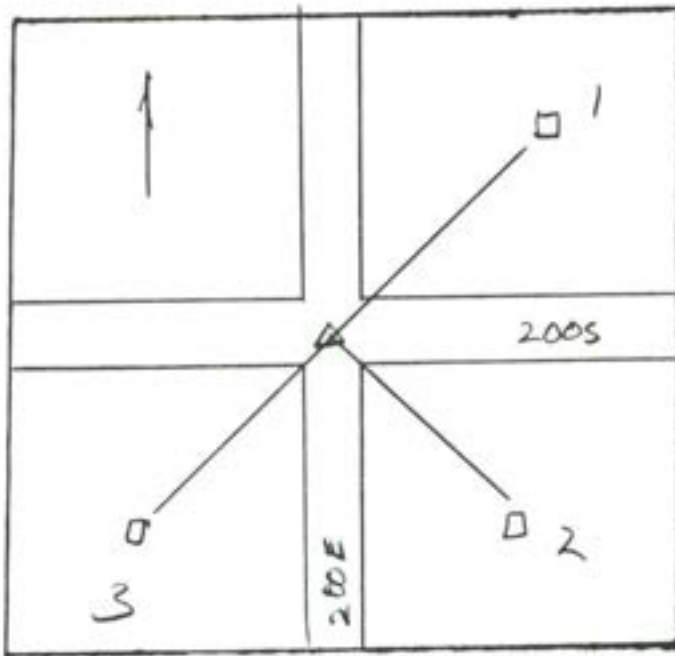

SEC. 17 TWP 21 RANGE 5

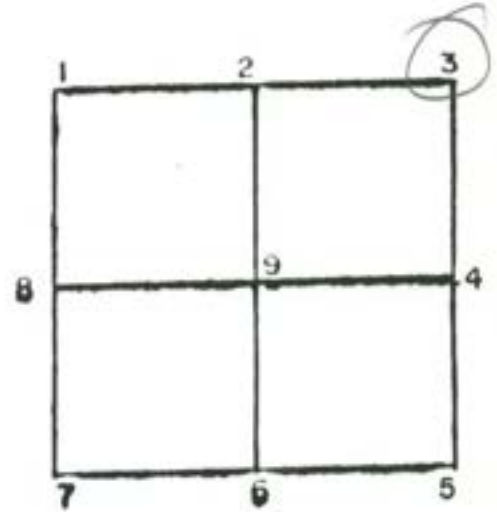

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED

TIES: 1. 21.65' HP


2. 23.30' HP

3. 23.60' HP


SEC 17 TWP 21 RANGE 5

DATE: 1/13/01

SECTION 17 TWP. 21 RANGE 5

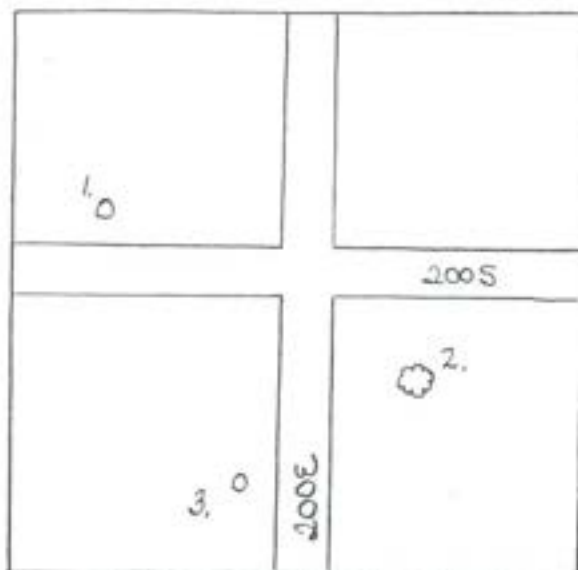

GRAPHIC TIES (SKETCHED)

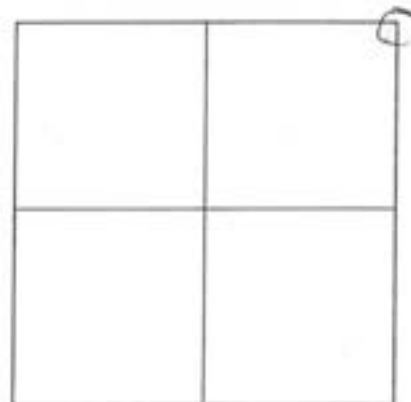

REFERENCED BY:

.....
.....

CORNER IDENTIFIED: REBAR LOCATED 6" ± DEEP


TIES:

1. 61.65' AZ 289° N.E.C. IN PWP

2. 24.48' AZ 136° N.E.C. IN 48" CAT.


3. 54.00' AZ 197° P.K.N. W. SD. PWP

SECTION 17 TWP. 21 RANGE 5

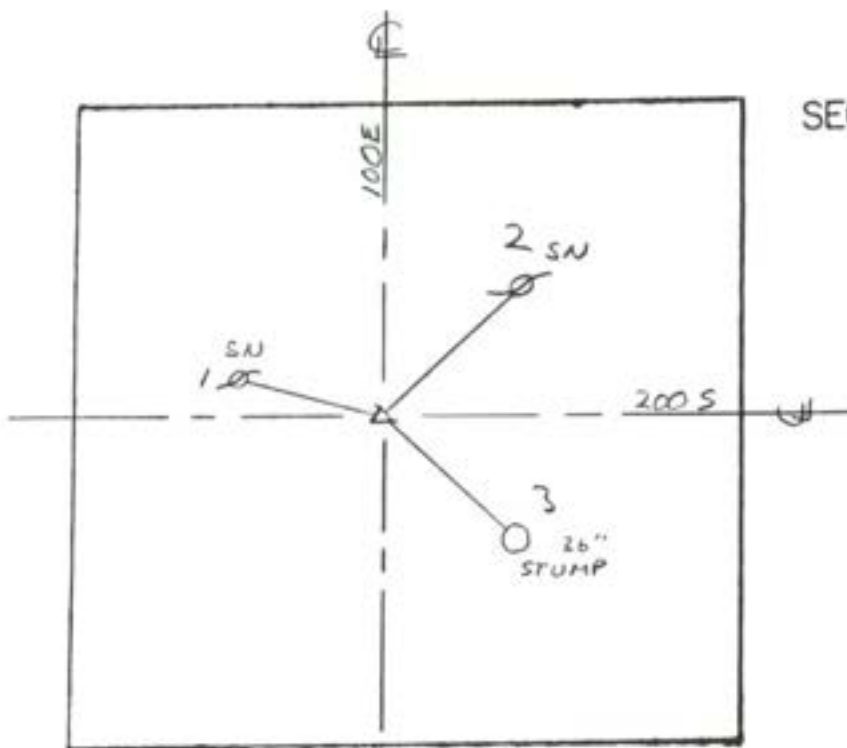

GRAPHIC TIES
(SKETCHED)

SEC. 17 TWP 21 RANGE 5

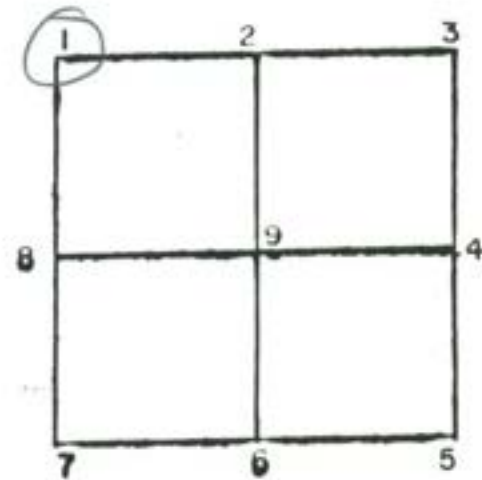

CORNER IDENT. 1 FOUND IRON PIN 3/4" ϕ

TIES: 1. 67.10' SN IN PWP
2. 34.1' SN IN PWP
3. 42.94 SN 36" TREE STUMP

SEC 17 TWP 21 RANGE 5

☐ ok


Date: 1/26/2005

Corner: BOAT SPIKE (-0.3)

Location: CO. RD 200 SOUTH:

1/2 MILE EAST OF

CO. RD 100 EAST




Corner	Sec.	Twp.	Range
(2)	17	21	5

WITNESSES

	Description	Bearing	Distance
1	NE COR NW 1/4 (MNF)	WEST	2613.59
2	TRAV NAIL	N5°E	13.70
3	PK NAIL IN SE SIDE OF POWER POLE	N45°E	28.48
4	PK NAIL IN N SIDE OF ROUND FENCE POST	S45°E	24.51

DRAWING

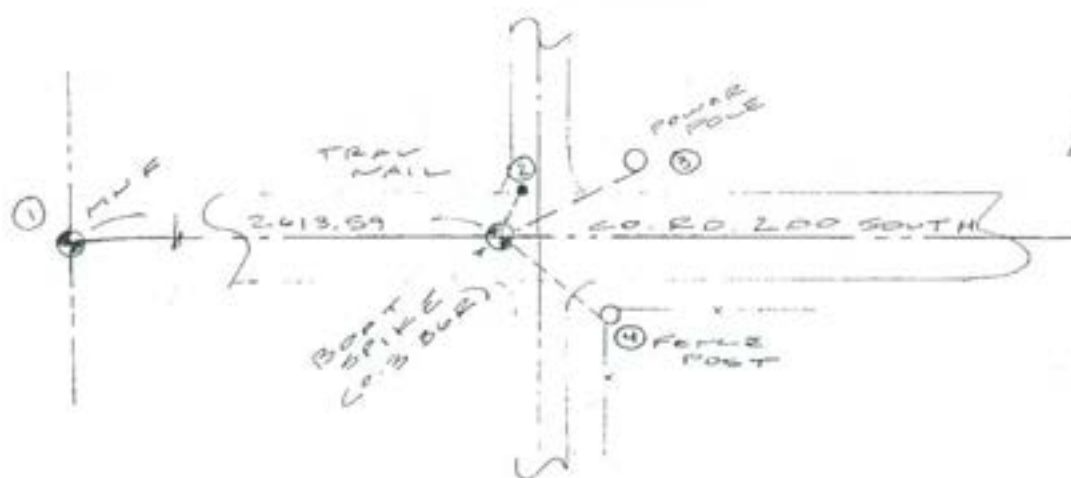

Inspection Report

Date:	Surveyor	Remarks
1/26/05	REW (KSV)	FOUND BOAT SPIKE 0.3 BURE ? WITNESSED.

LAND SURVEYOR CERTIFICATE

I, Richard E. Ward hereby certify that I am a Land Surveyor, licensed in compliance with the laws of the State of Indiana; and that to the best of my knowledge and belief, the drawing within represents a survey made under my supervision in accordance with Title 865, Article 1, Rule 12 of the Indiana Administrative Code. The Field work for said survey was complete on 1/26/05.


Richard E. Ward, L.S.
Indiana Reg. No. S 0432



RICHARD E. WARD
& ASSOCIATES
PROFESSIONAL LAND SURVEYORS


LOT & FARM SURVEYS • SUBDIVISION LAYOUTS • MORTGAGE SURVEYS
P. O. BOX 172 • ANDERSON, INDIANA 46015 • (765 643-8078)



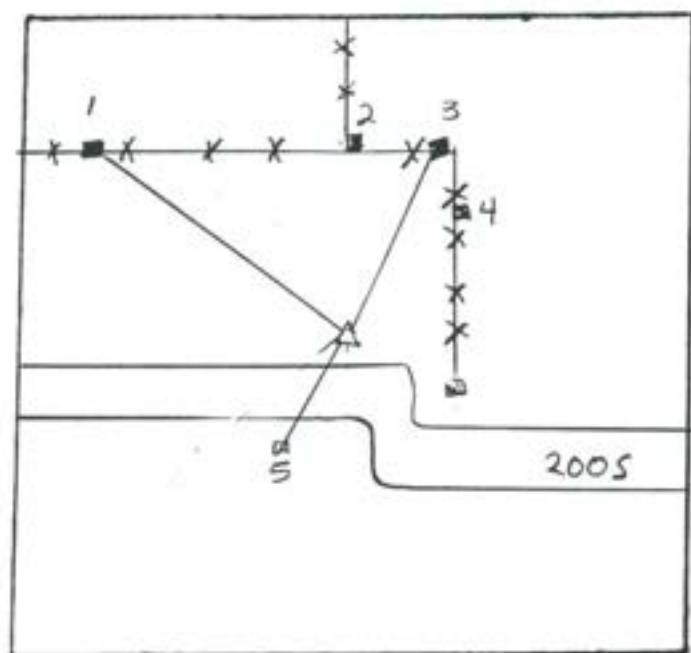

GRAPHIC TIES
(SKETCHED)

SEC. 18 TWP. 21 RANGE 5
8/31/94

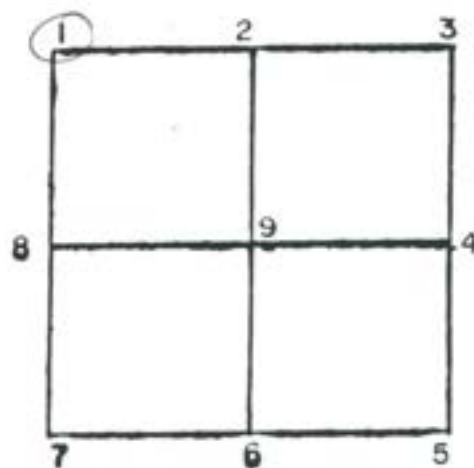

CORNER IDENT. 1 Stone Found w/ 't' cut in Top 1' DEEP

TIES:

1. 18.85' BRACE POST


2 18.00 HEADPOST

3 23.37 HEADPOST

4. 18.35 BRACE POST


5 38.46 HEADPOST

SEC 18 TWP 21 RANGE 5

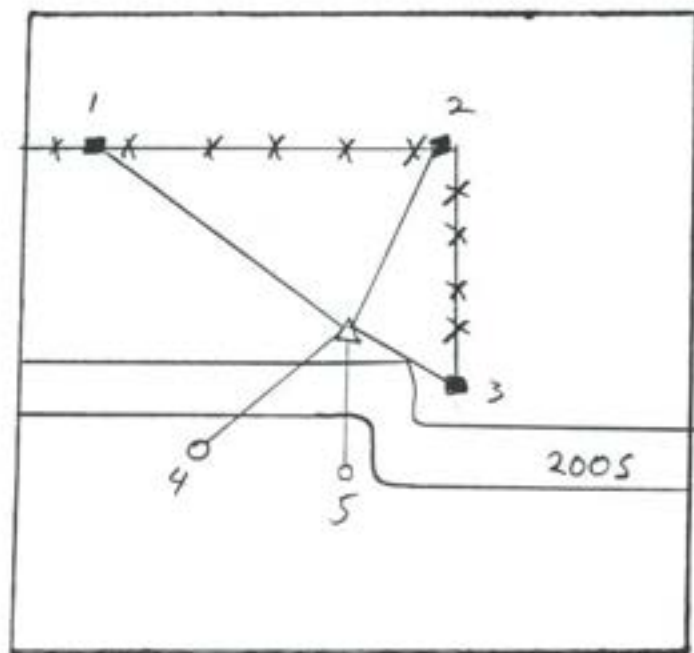

GRAPHIC TIES
(SKETCHED)

SEC 18 TWP 21 RANGE 5

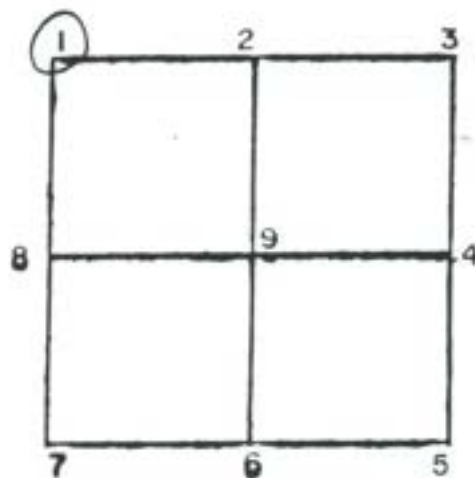

CORNER IDENT. 1 NOT STATED

TIES: 1. 21.0' FENCE POST
2. 12.9' FENCE POST
3. 10.2' FENCE POST
4. 68.0' POST
5. 38.6 CENTER POST

SEC 18 TWP 21 RANGE 5

☐ ok

Date: 212105

Corner: RAILROAD SPIKE SET

Location: CO. RD. 200 SOUTH

+ 1/2 MILE EAST OF

MERIDIAN ROAD




Corner	Sec.	Twp.	Range
2	18	21	5

WITNESSES

	Description	Bearing	Distance
1	NAIL IN NORTH SIDE OF FENCE POST	S00°E	14.13
2	MAU SET IN NWSIDE 20" OAK TREE	S80°W	73.04
3	MAS SET IN WEST SIDE FENCE POST	N00°E	14.25
4	MAU SET IN SE SIDE 30" OAK TREE	N10°E	33.15

DRAWING

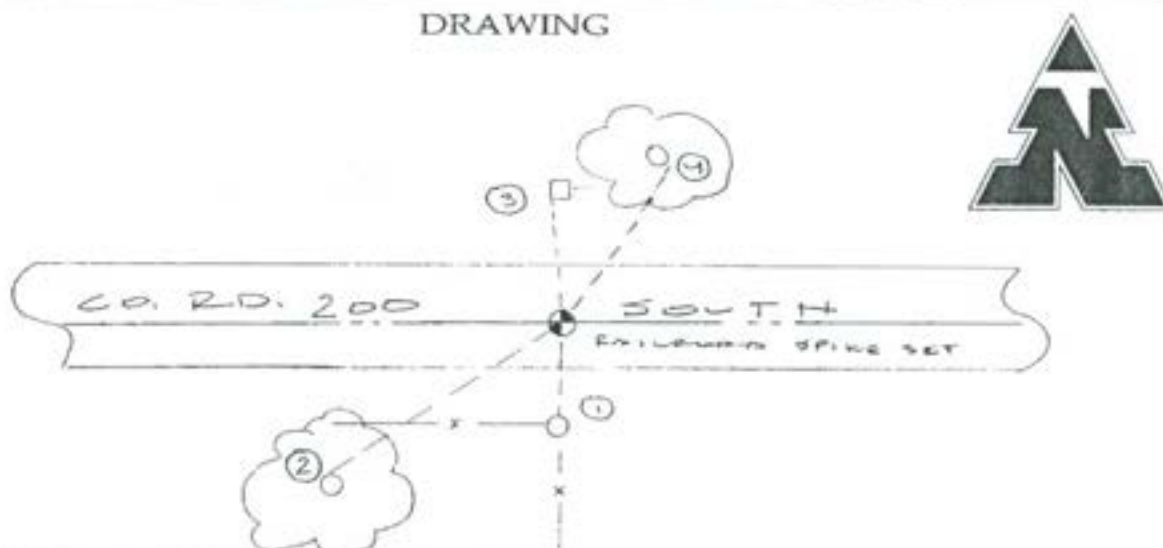


Inspection Report

Date:	Surveyor	Remarks
212105	REW (Ward)	SET RAILROAD SPIKE FROM EXISTING SURVEY - WITNESSED

LAND SURVEYOR CERTIFICATE

I, Richard E. Ward hereby certify that I am a Land Surveyor, licensed in compliance with the laws of the State of Indiana; and that to the best of my knowledge and belief, the drawing within represents a survey made under my supervision in accordance with Title 865, Article 1, Rule 12 of the Indiana Administrative Code. The Field work for said survey was complete on 212105.


[Signature]
 Richard E. Ward, L.S.
 Indiana Reg. No. S 0432




RICHARD E. WARD
 & ASSOCIATES
 PROFESSIONAL LAND SURVEYORS

LOT & FARM SURVEYS - SUBDIVISION LAYOUTS - MORTGAGE SURVEYS
 P. O. BOX 172 - ANDERSON, INDIANA 46016 - (785 643-8078)



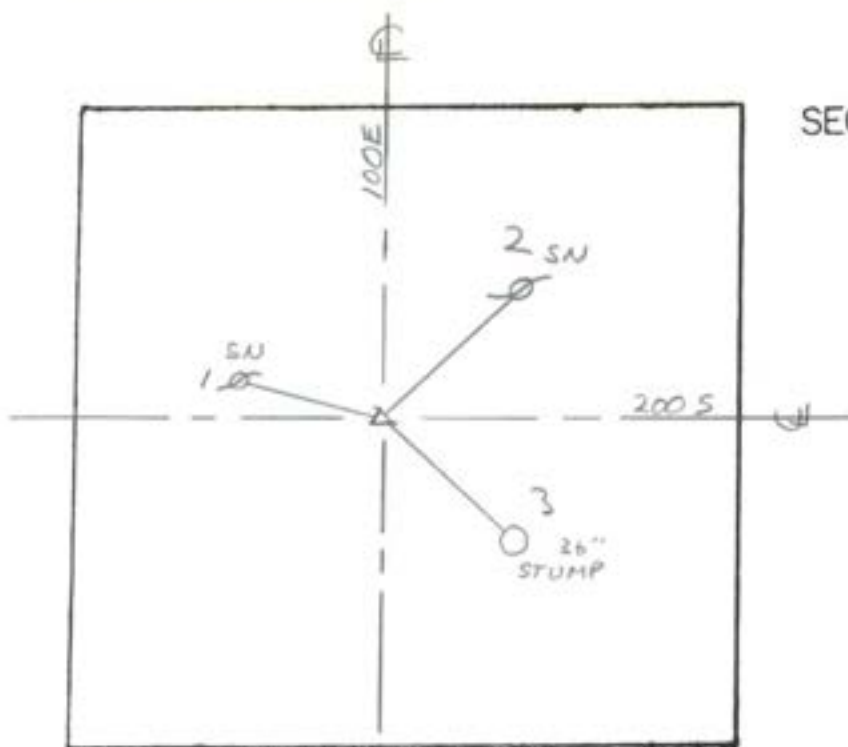

SEC 18 TWP 21 RANGE 5

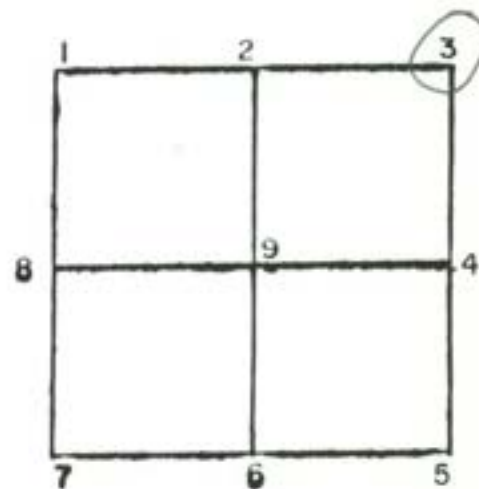

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 3 FOUND IRON PIN 3/4" ϕ


TIES:

1. 67.10' SN IN PWP


2. 34.1' SN IN PWP

3. 42.94 SN 36" TREE STUMP

SEC 18 TWP 21 RANGE 5

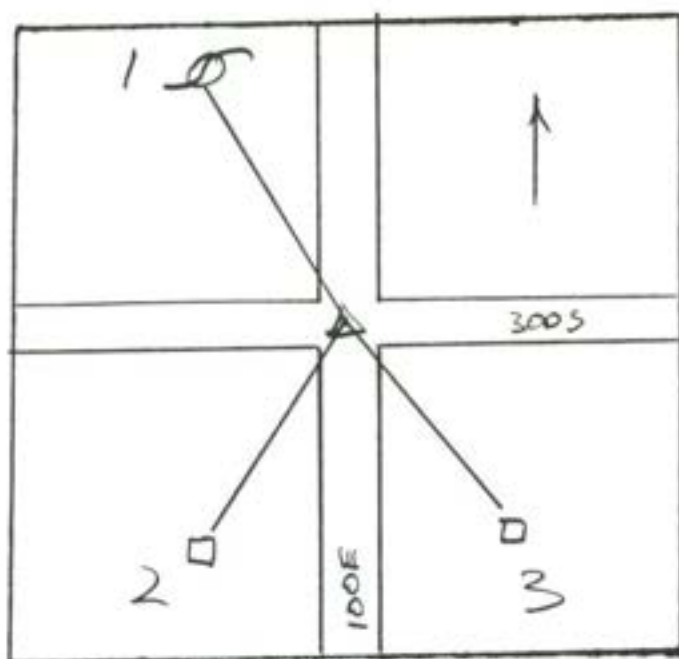

SEC 18 TWP 21 RANGE 5

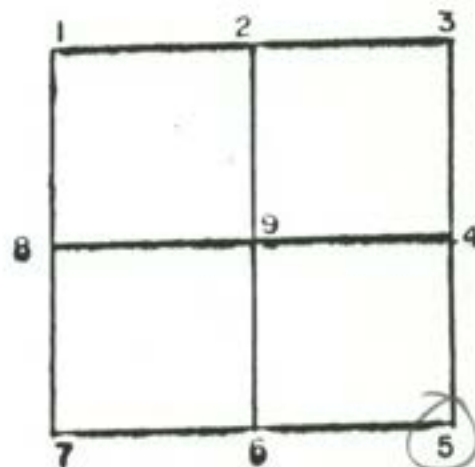


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED

TIES: 1. 31.70' PWP
2. 24.45' HP
3. 26.00' HP


SEC 18 TWP 21 RANGE 5

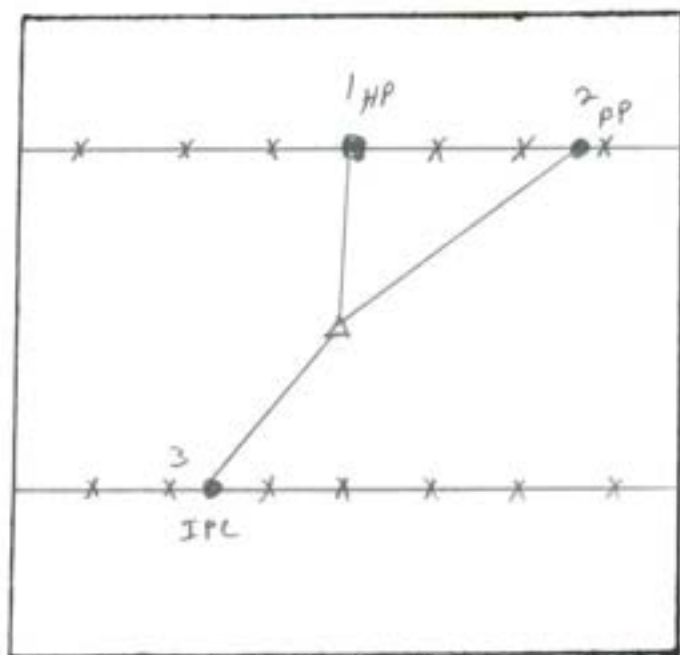

GRAPHIC TIES
(SKETCHED)

SEC. 18 TWP. 21 RANGE 5

5-4-71

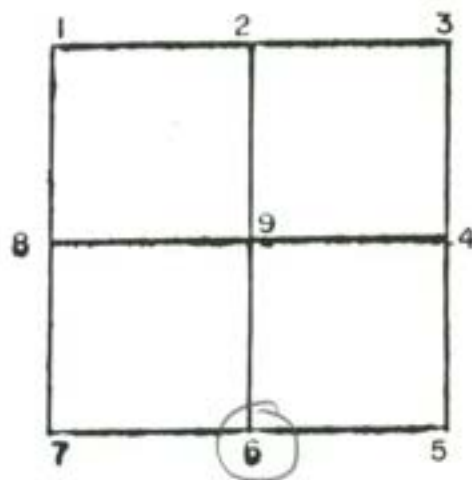

CORNER IDENT. 6 STONE

TIES: 1. 19.0'
2. 30.7' FENCE POST
3. 21.8' FENCE POST

SEC. 18 TWP. 21 RANGE 5

☐ ok

Date: 2/2/05

Corner: MAG NAIL SET

Location: CO. RD. 300 SOUTH

1/2 MILE WEST

OF CO. RD. 100 EAST




Corner	Sec.	Twp.	Range
6	18	21	5

WITNESSES

	Description	Bearing	Distance
1	MAG SET IN NE SIDE POWER POLE	N45°W	21.63
2	MAG SET IN EAST SIDE EVERGREEN	S05°W	33.78
3	MAG SET IN SOUTH SIDE POWER POLE	N85°W	104.02
4			

DRAWING

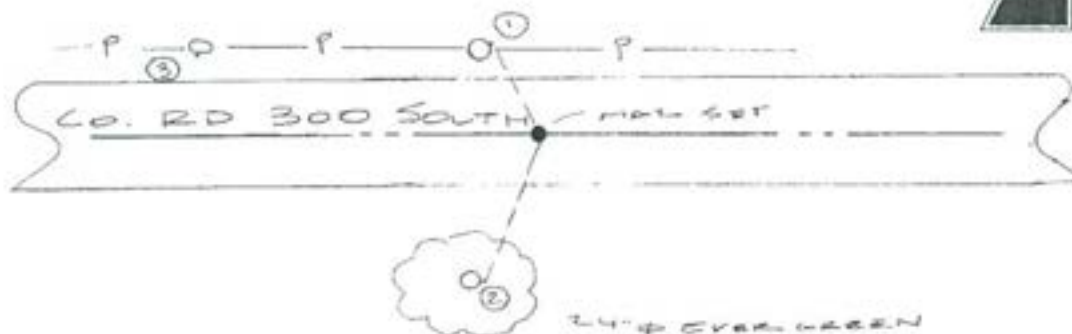

Inspection Report

Date:	Surveyor	Remarks
2/2/05	REW (KGV)	SET MAG NAIL FROM EXISTING SURVEYS & WITNESSED

LAND SURVEYOR CERTIFICATE

I, Richard E. Ward hereby certify that I am a Land Surveyor, licensed in compliance with the laws of the State of Indiana; and that to the best of my knowledge and belief, the drawing within represents a survey made under my supervision in accordance with Title 865, Article 1, Rule 12 of the Indiana Administrative Code. The Field work for said survey was complete on 2/2/05.

Richard E. Ward, L.S.
Indiana Reg. No. S 0432



**RICHARD E. WARD
& ASSOCIATES**
PROFESSIONAL LAND SURVEYORS

LOT & FARM SURVEYS • SUBDIVISION LAYOUTS • MORTGAGE SURVEYS
P. O. BOX 172 • ANDERSON, INDIANA 46015 • (765 643-8078)



☐ ok

Date: 2/2/05		Corner	Sec.	Twp.	Range
Corner: HARRISON MON		4	18	21	5
Location: MERIDIAN FND					
CO. RD 250 SOUTH					

WITNESSES

	Description	Bearing	Distance
1	PK IN EAST SIDE FENCE POST	N45°E	18.25
2	PK IN EAST SIDE FENCE POST	N70°W	14.15
3	PK IN NE SIDE POWER POLE W/LIGHT	S15°W	61.28
4	MARK SET IN NE SIDE POWER POLE	S15°E	76.10

DRAWING




Inspection Report

Date:	Surveyor	Remarks
2/2/05	REW (KBV)	HARRISON MON FND, CHECKED / SET WITNESSES

LAND SURVEYOR CERTIFICATE

I, Richard E. Ward hereby certify that I am a Land Surveyor, licensed in compliance with the laws of the State of Indiana; and that to the best of my knowledge and belief, the drawing within represents a survey made under my supervision in accordance with Title 865, Article 1, Rule 12 of the Indiana Administrative Code. The Field work for said survey was complete on 2.12.05



 Richard E. Ward, L.S.
 Indiana Reg. No. S 0432



RICHARD E. WARD
 & ASSOCIATES
 PROFESSIONAL LAND SURVEYORS

LOT & FARM SURVEYS · SUBDIVISION LAYOUTS · MORTGAGE SURVEYS
 P. O. BOX 172 · ANDERSON, INDIANA 46015 · (765 643-8078)




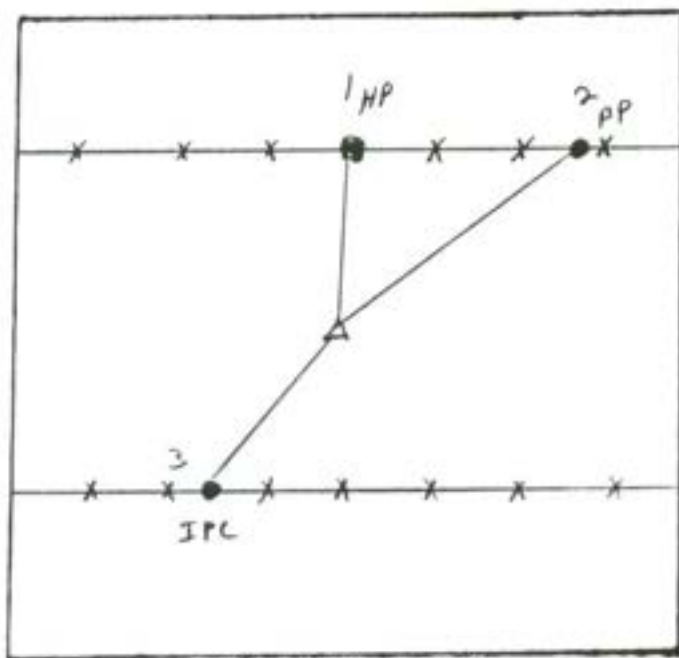

GRAPHIC TIES
(SKETCHED)

SEC 19 TWP 21 RANGE 5

5-4-71

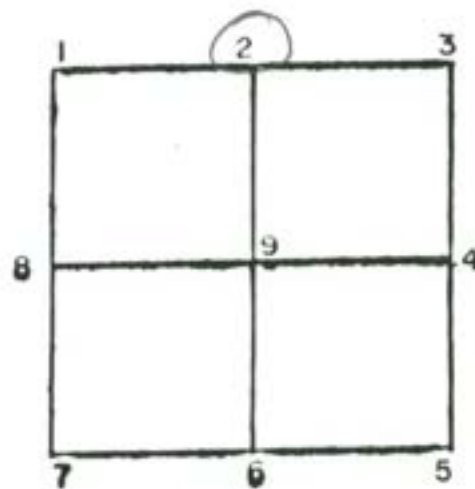

CORNER IDENT. 2 STONE

TIES:

1. 19.0'

2. 30.7' FENCE POST

3. 21.8' FENCE POST

SEC 19 TWP 21 RANGE 5

☐ ok

Date: 2/2/05

Corner: MAG NAIL SET

Location: CO. RD. 300 SOUTH

+ 1/2 MILE WEST

OF CO. RD. 100 EAST




Corner	Sec.	Twp.	Range
6	19	21	5

WITNESSES

	Description	Bearing	Distance
1	MAG SET IN NE SIDE POWER POLE	N45°W	21.43
2	MAG SET IN EAST SIDE EVERGREEN	S00°W	33.78
3	MAG SET IN SOUTH SIDE POWER POLE	N85°W	104.02
4			

DRAWING

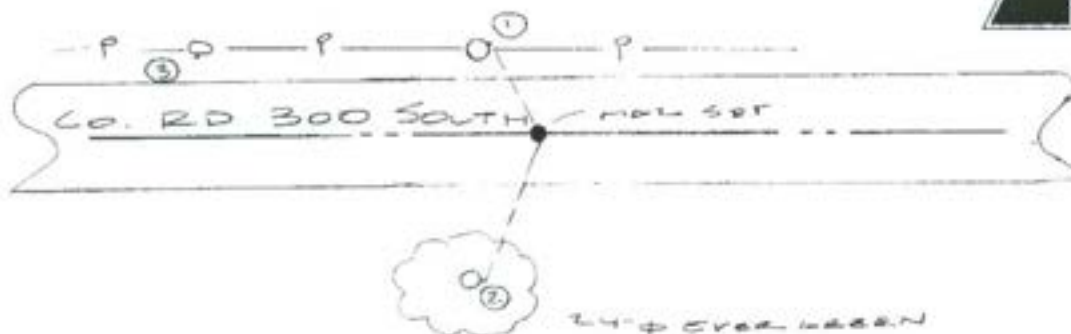

Inspection Report

Date:	Surveyor	Remarks
2/2/05	RW (KEV)	SET MAG NAIL FROM EXISTING SURVEYS & WITNESSED

LAND SURVEYOR CERTIFICATE

I, Richard E. Ward hereby certify that I am a Land Surveyor, licensed in compliance with the laws of the State of Indiana; and that to the best of my knowledge and belief, the drawing within represents a survey made under my supervision in accordance with Title 865, Article 1, Rule 12 of the Indiana Administrative Code. The Field work for said survey was complete on 2/2/05.


Richard E. Ward, L.S.
Indiana Reg. No. S 0432




**RICHARD E. WARD
& ASSOCIATES**
PROFESSIONAL LAND SURVEYORS

LOT & FARM SURVEYS • SUBDIVISION LAYOUTS • MORTGAGE SURVEYS
P. O. BOX 172 • ANDERSON, INDIANA 46015 • (765) 643-8078



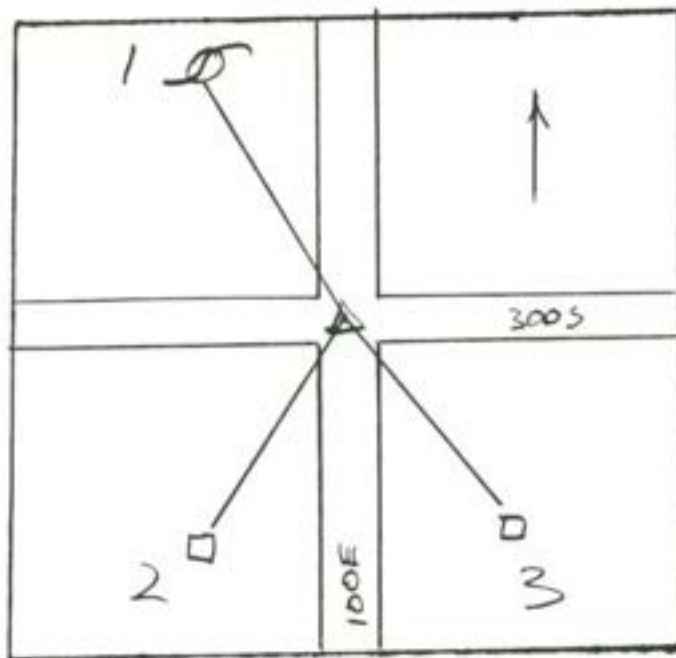

SEC 19 TWP 21 RANGE 5

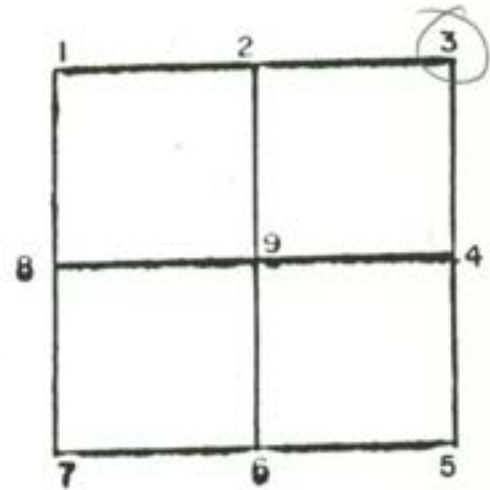

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED

TIES: 1. 31.70' PWP
2. 24.45' HP
3. 26.00' HP

SEC 19 TWP 21 RANGE 5


TIME: 1. 27.30'

2. 29.30'

3. 24.30'


4. 16.50'

SEC 19 TWP 21 RANGE 5

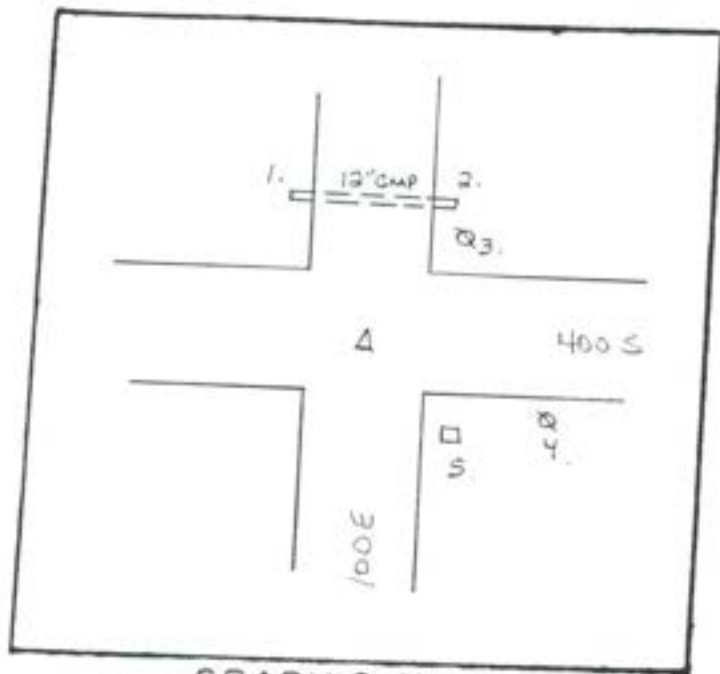

GRAPHIC TIES
(SKETCHED)


SEC 19 TWP 21 RANGE 5

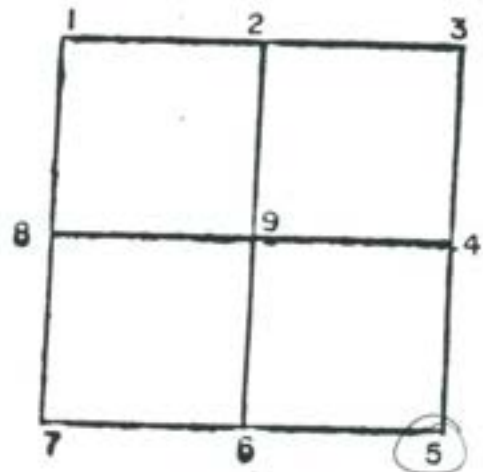

CORNER IDENT. BOLT SPIKE

- TIES:
1. 31.85' South Edge of West End of 12" CMP
 2. 31.47' " " " East " " " "
 3. 26.53' PK Nail in Power Pole
 4. 55.25' " " " " "
 5. 23.77' SW Corner of Wood Headpost


SEC 19 TWP 21 RANGE 5

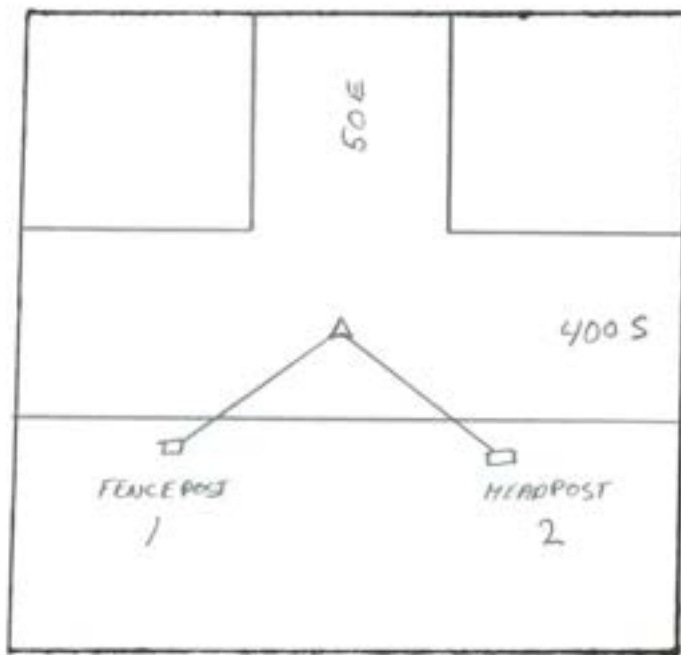

GRAPHIC TIES
(SKETCHED)

SEC. 19 TWP. 21 RANGE 5

7-10-84

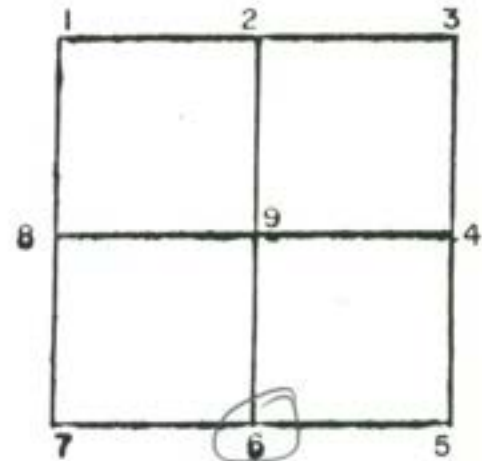


CORNER IDENT. 6


TIES: 1. 30.55 TO FENCE POST

2. 18.40 TO HEAD POST

SEC. 19 TWP. 21 RANGE 5

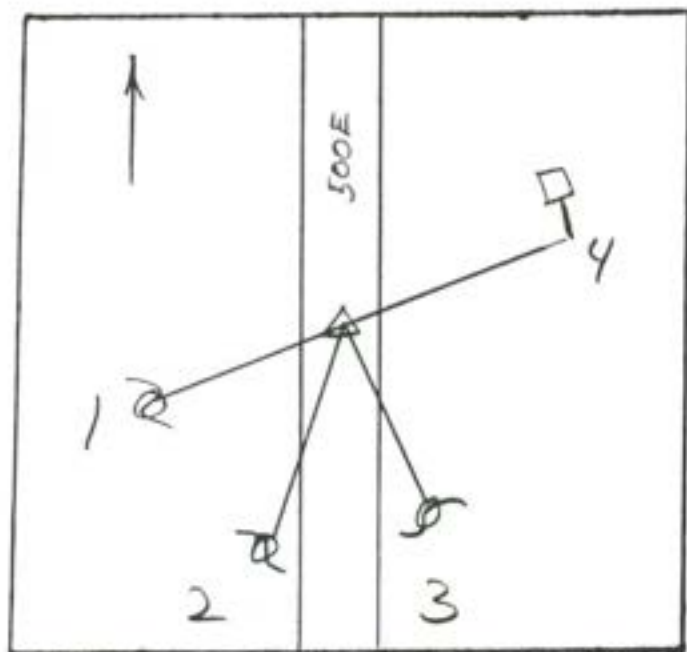

SEC 19 TWP 21 RANGE 5

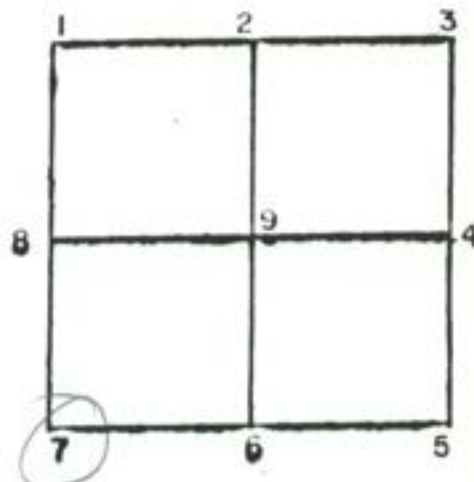


GRAPHIC TIES
(SKETCHED)


CORNER IDENT. NOT STATED

TIES: 1. 51.60' PWP
2. 40.50' PWP
3. 33.30' PWP
4. 40.10' SIGN POST

SEC 19 TWP 21 RANGE 5

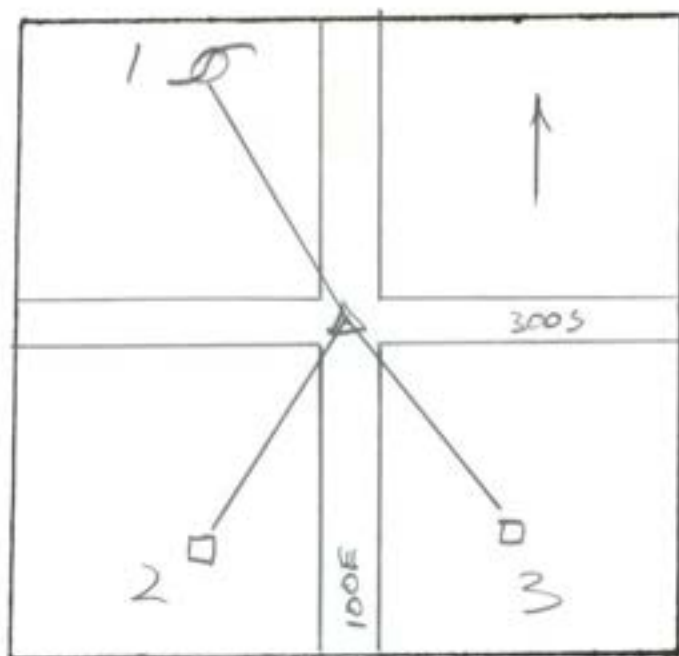

SEC. 20 TWP 21 RANGE 5

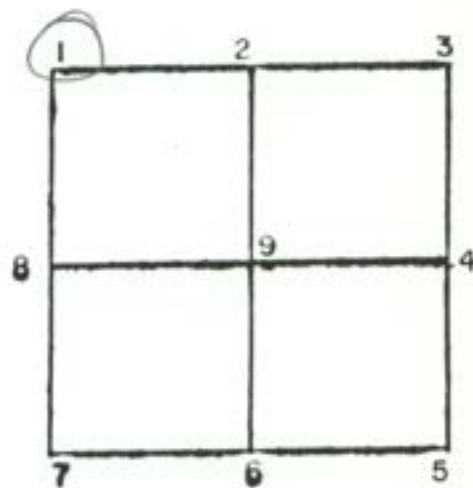

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED


TIES: 1. 31.70' PWP

2. 24.45' HP


3. 26.00' HP

SEC 20 TWP 21 RANGE 5

SEC 20 TWP 21 RANGE 5

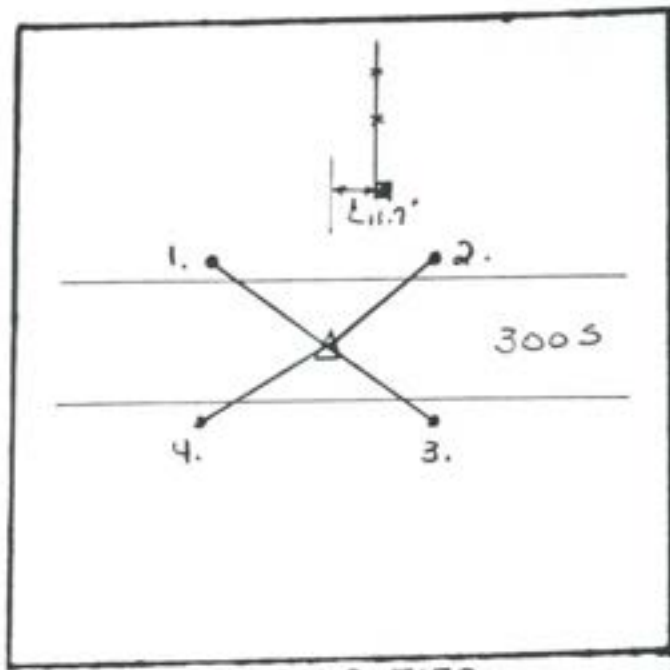

GRAPHIC TIES
(SKETCHED)

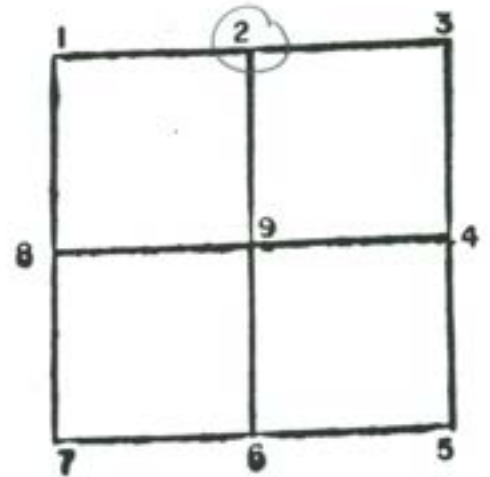


CORNER IDENT. R.R. Spike Set 4-16-92


TIES:	1.	5/8" Iron Rod $\pm 2'$ FROM EDGE ROAD	20.7'
	2.	" " " " " "	23.3'
	3.	" " " " " "	22.74'
	4.	" " " " " "	19.9'

SEC 20 TWP 21 RANGE 5

SEC 20 TWP 21 RANGE 5

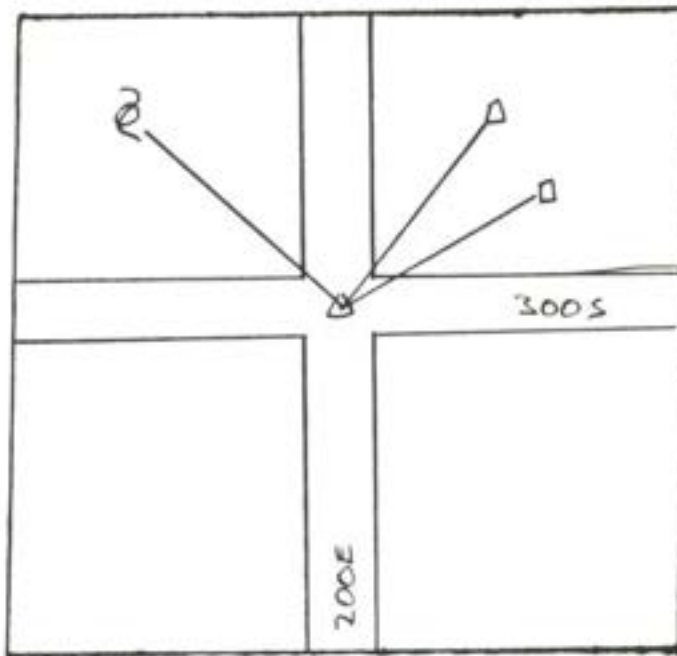

GRAPHIC TIES
(SKETCHED)

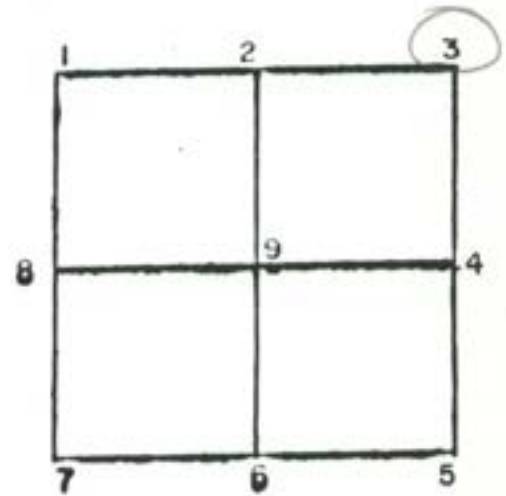

CORNER IDENT. NOT STATED


TIES: 1. 27.55' PWP

2. 25.25' FP


3. 33.30' HP

SEC 20 TWP 21 RANGE 5

SEC 20 TWP 21 RANGE 5

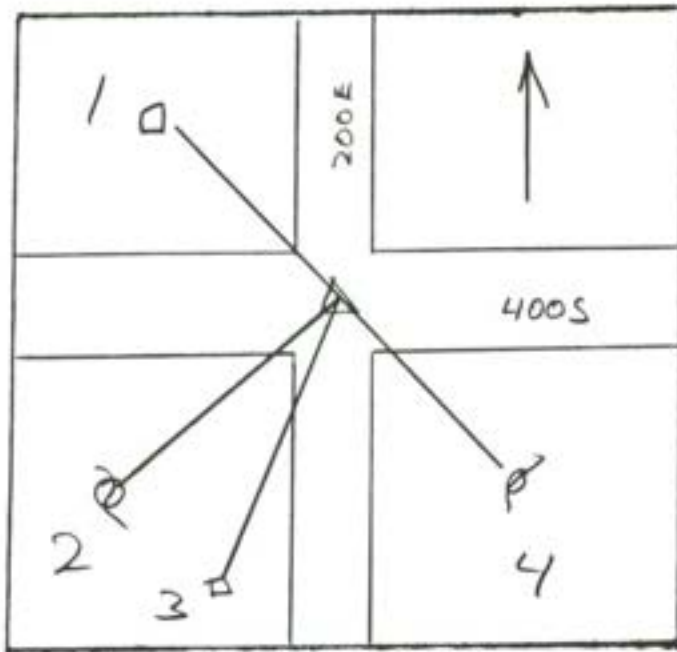

GRAPHIC TIES
(SKETCHED)

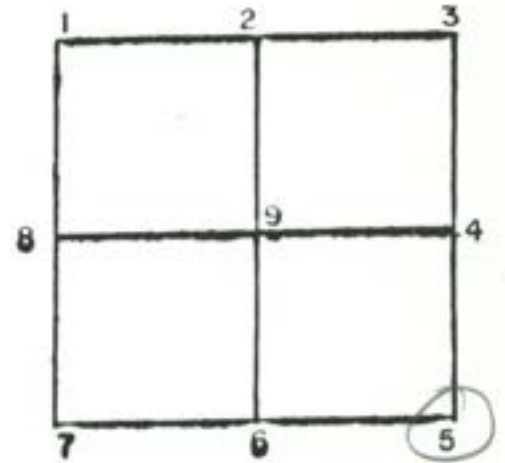


CORNER IDENT. NOT STATED

TIES:


1.	30.30'	HP
2.	38.20'	PWP
3.	29.00'	HP
4.	54.80'	PWP

SEC 20 TWP 21 RANGE 5

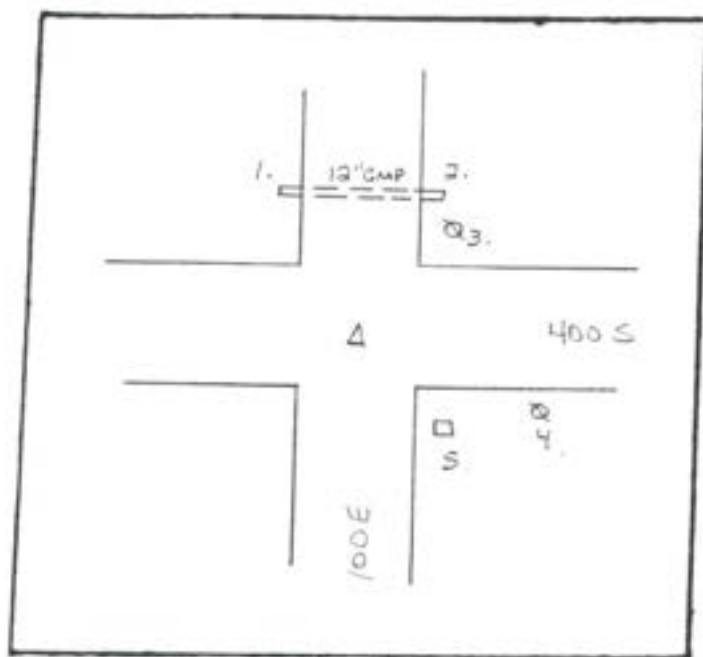

GRAPHIC TIES
(SKETCHED)

SEC 20 TWP 21 RANGE 5

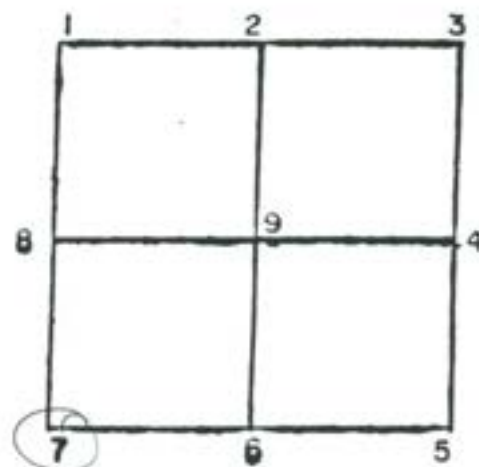


CORNER IDENT. BOLT SPIKE


- TIES:
1. 31.85' SOUTH EDGE OF WEST END OF 12" CMP
 2. 31.47' " " " EAST " " " "
 3. 24.53' PK NAIL IN POWER POLE
 4. 55.25' " " " " "
 5. 23.77' SW CORNER OF WOOD HEADPOST

SEC 20 TWP 21 RANGE 5

SEC 20 TWP 21 RANGE 5

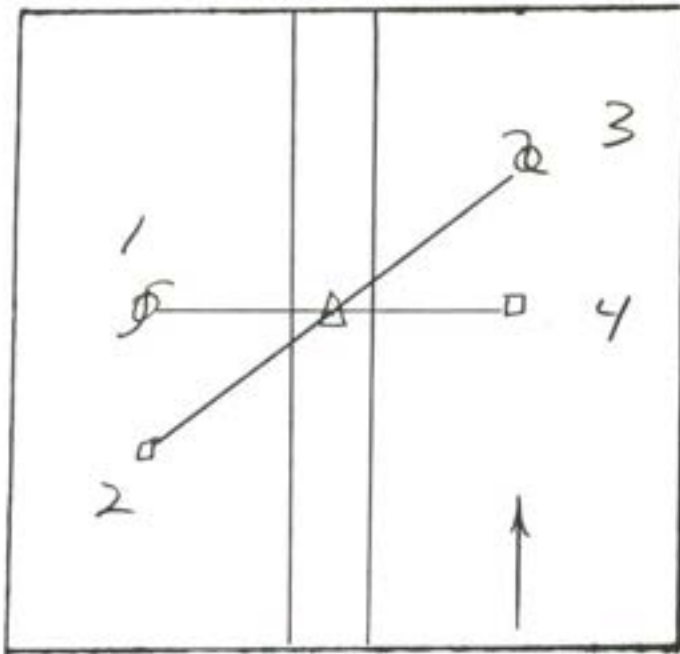

GRAPHIC TIES
(SKETCHED)

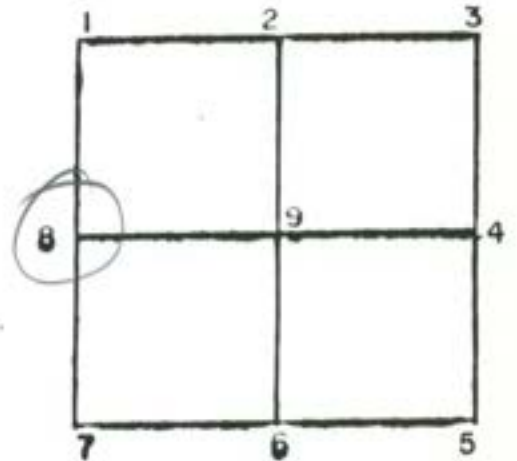

CORNER IDENT. NOT STATED


TIES: 1. 27.30'

2. 29.30'

3. 24.30'


4. 16.50'

SEC 20 TWP 21 RANGE 5

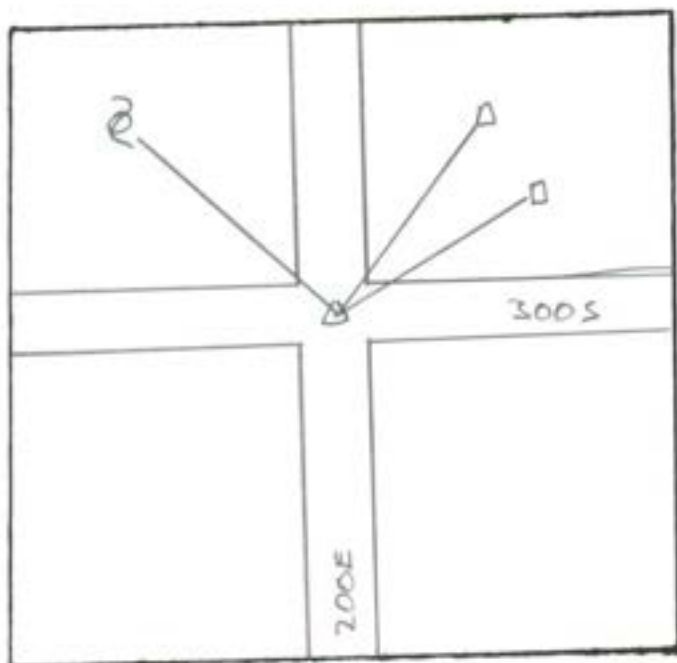

GRAPHIC TIES
(SKETCHED)


SEC 21 TWP 21 RANGE 5

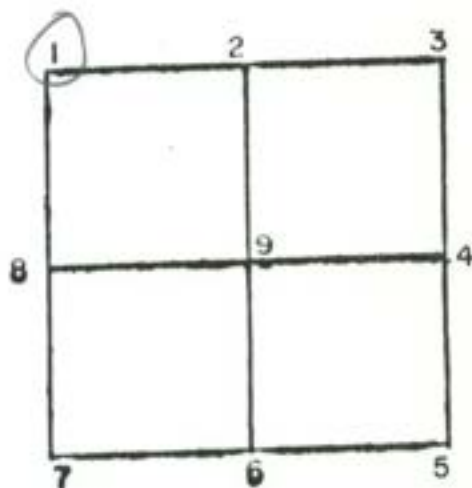

CORNER IDENT. NOT STATED

TIES: 1. 27.55' PWP
2. 25.25' FP
3. 33.30' HP

SEC 21 TWP 21 RANGE 5

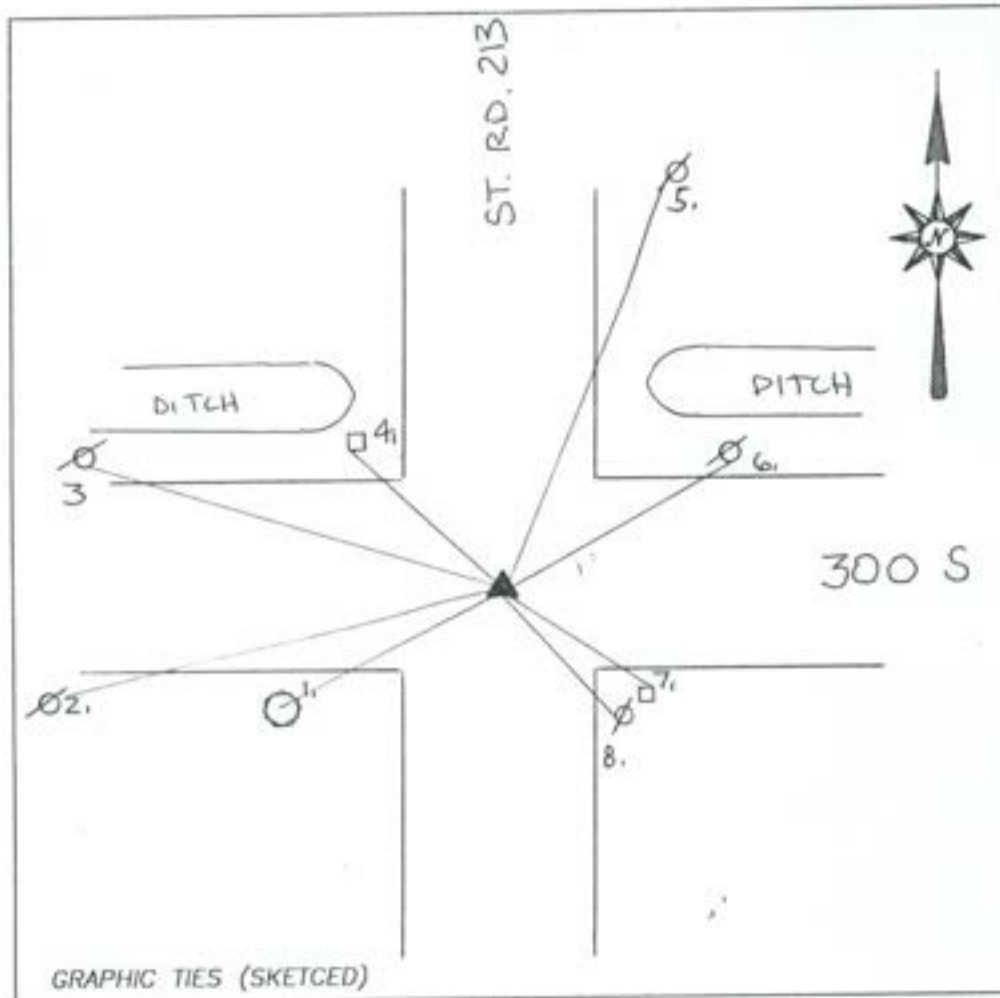DATE 04-26-01JOB # 01-048

REFERENCED BY:


R. KELLYJ. HENRY

CORNER IDENTIFIED: SET MAG NAIL PER OLD REFERENCES
w/ 10 WASHER * OLD REF.


TIES:

- * 1. 56.30' ϕ 48" TREE STUMP
- 2. 103.75' ~~BRK~~ SET PK NAIL W/ 10 WASHER IN PP
- 3. 91.70' " " "
- * 4. 45.60 SW CORNER R/W MARKER
- 5. 98.53 SET PK NAIL W/ 10 WASHER IN PP
- * 6. 59.20 FOUND PK NAIL ~~W/ 10 WASHER~~ IN PP
- * 7. 42.03 NE CORNER R/W MARKER
- * 8. 40.38 FOUND PK NAIL IN PP

SEC 21 TWP 21 RANGE 5

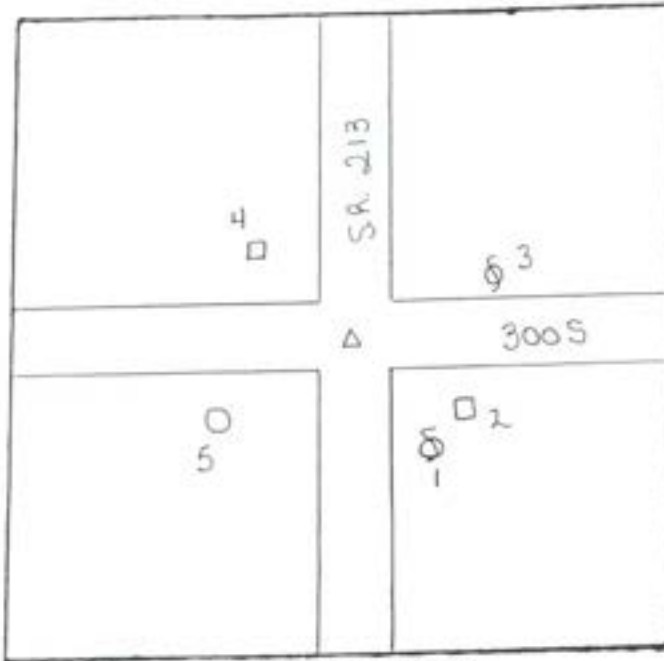

GRAPHIC TIES
(SKETCHED)

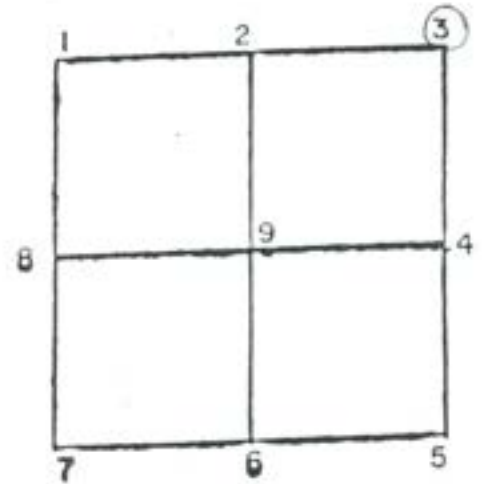


CORNER IDENT. PK. NAIL

TIES: 1. 40.38 PK PWP
 2. 42.03 R/W MARKER NE CORNER
 3. 59.20 PK PWP
 4. 45.6 R/W MARKER SW CORNER
 5. 56.3 48" TREE STUMP

SEC 21 TWP 21 RANGE 5


[illegible]

SEC 21 TWP 21 RANGE 5

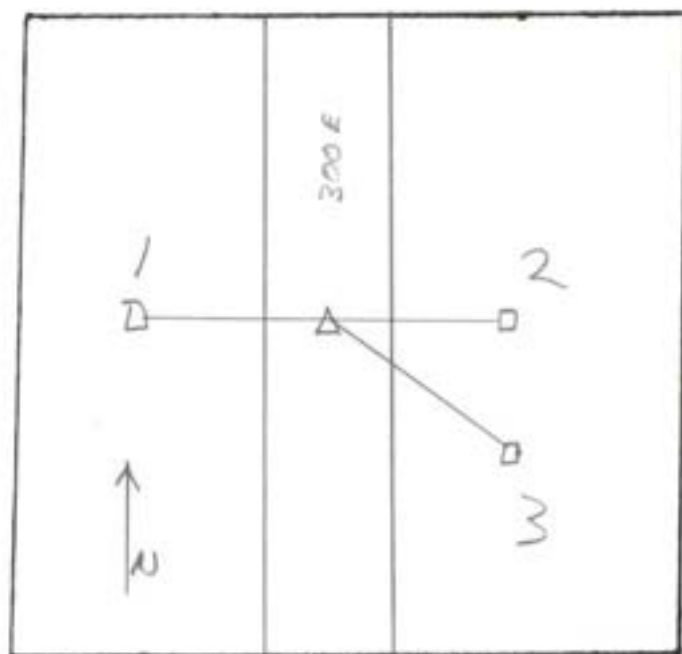

GRAPHIC TIES
(SKETCHED)


SEC. 21 TWP 21 RANGE 5

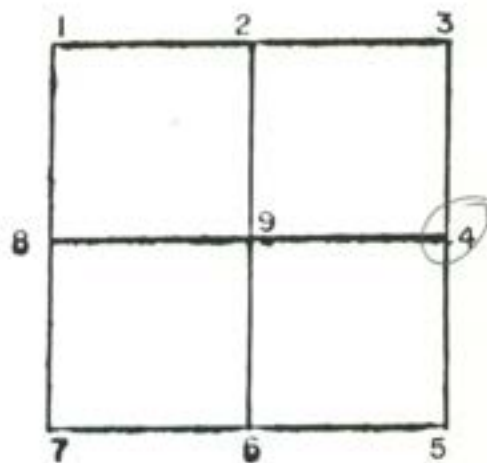

CORNER IDENT. Y (NO DESCRIPTION GIVEN)


TIES:	<u>1. 40.68'</u>	<u>POST</u>
	<u>2. 40.89'</u>	<u>POST</u>
	<u>3. 41.77'</u>	<u>POST</u>

SEC 21 TWP 21 RANGE 5

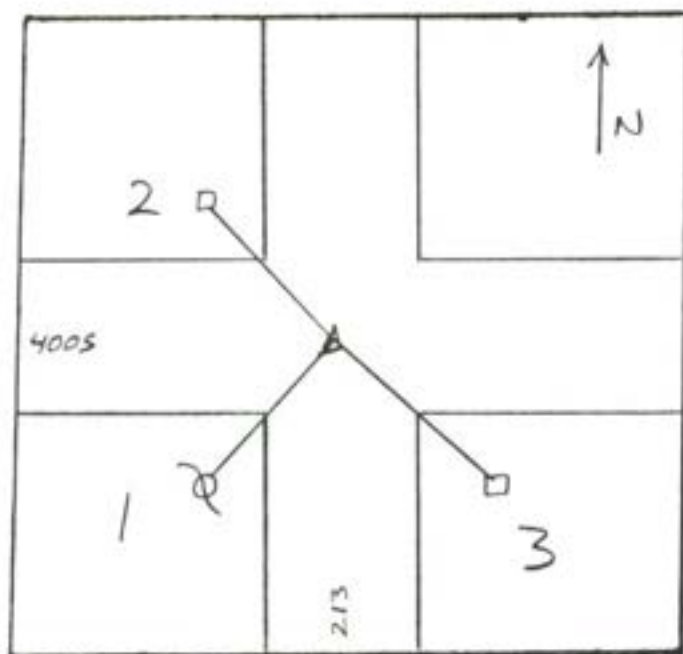

GRAPHIC TIES
(SKETCHED)


SEC 21 TWP 21 RANGE 5

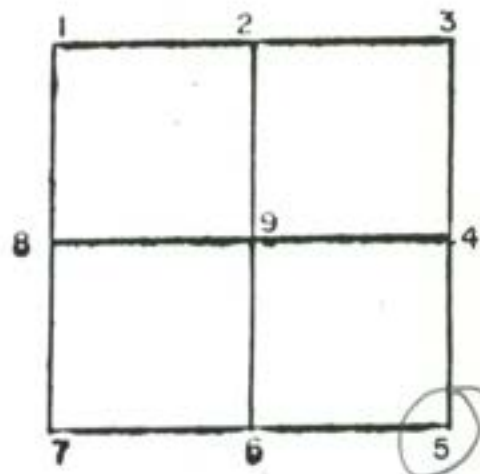


CORNER IDENT. NO DESCRIPTION GIVEN

TIES: 1. 42.05 PWP
2. 43.23 CORNER POST
3. 44.15 CORNER POST

SEC 21 TWP 21 RANGE 5

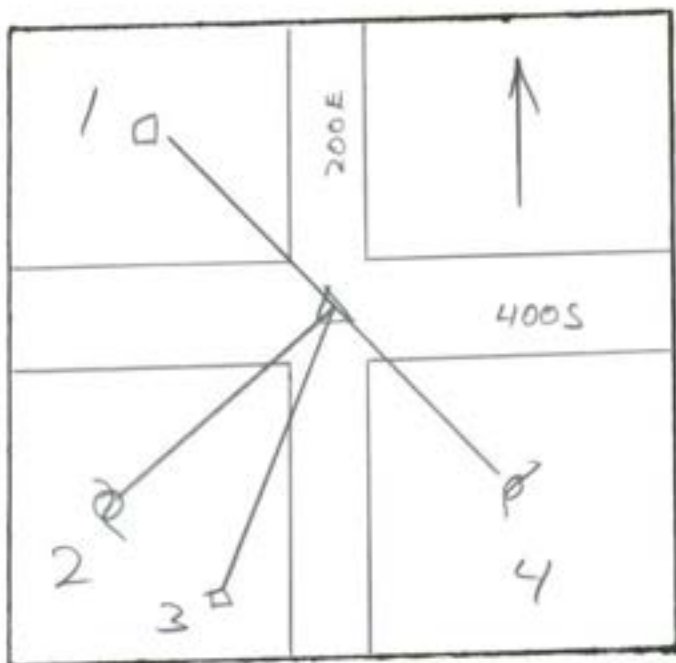

SEC 21 TWP 21 RANGE 5

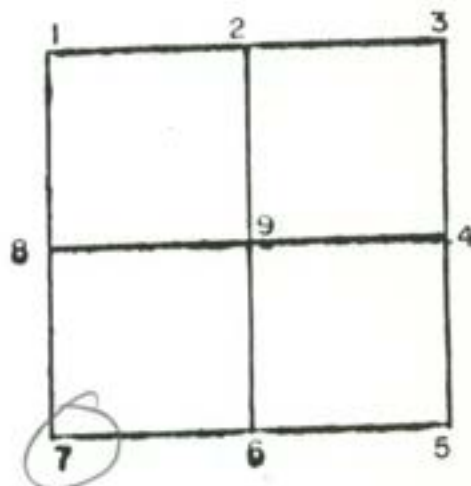


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED

TIES:	1. 30.30'	HP
	2. 38.20'	PWP
	3. 29.00'	HP
	4. 54.80'	PWP

SEC 21 TWP 21 RANGE 5

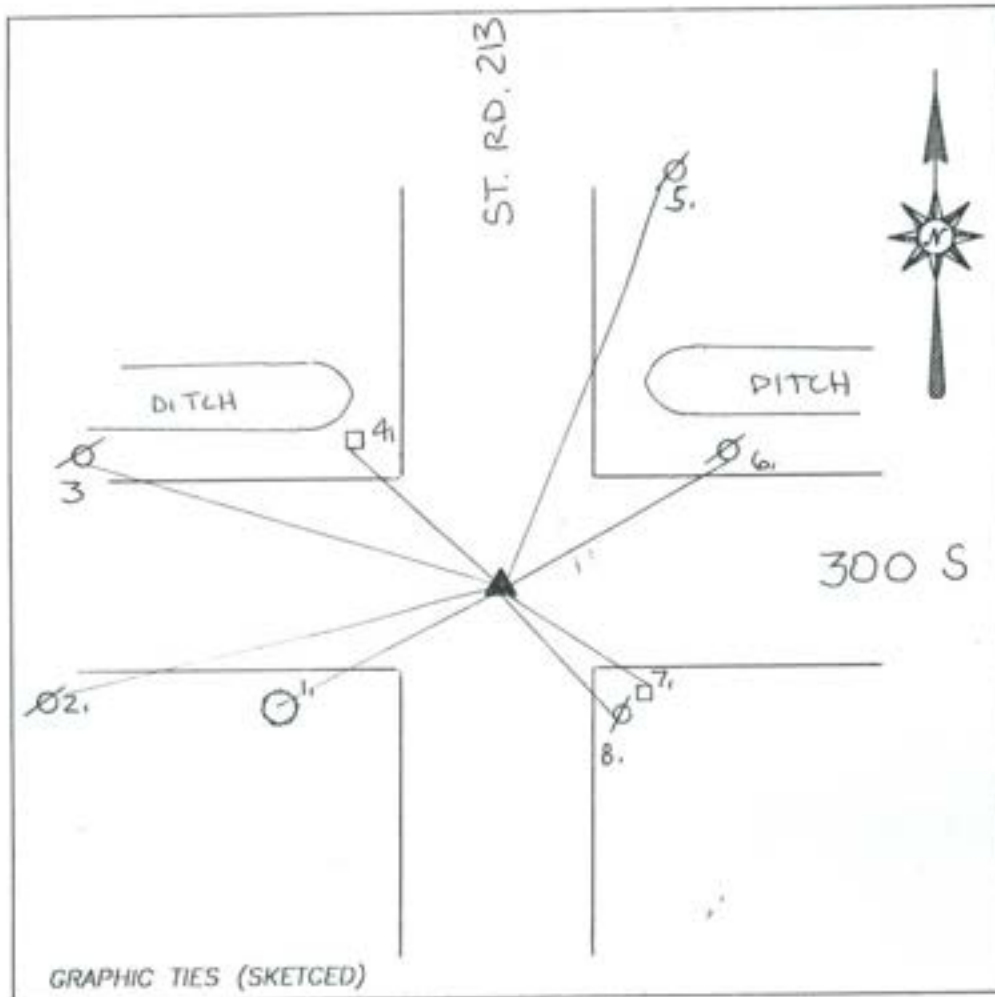

DATE 04-26-01
 JOB # 01-048

REFERENCED BY:


R. KELLY

J. HENRY


CORNER IDENTIFIED: SET MAG NAIL PER OLD REFERENCES
 w/ 10 WASHER * OLD REF.

TIES:

- * 1. 56.30' ϕ 48" TREE STUMP
- 2. 103.75' ~~BRK~~ SET PK NAIL W/ 10 WASHER IN PP
- 3. 91.70' " "
- * 4. 45.60 SW CORNER R/W MARKER
- 5. 98.53 SET PK NAIL W/ 10 WASHER IN PP
- * 6. 59.20 FOUND PK NAIL ~~W/ 10 WASHER~~ IN PP
- * 7. 42.03 NE CORNER R/W MARKER
- * 8. 40.38 FOUND PK NAIL IN PP

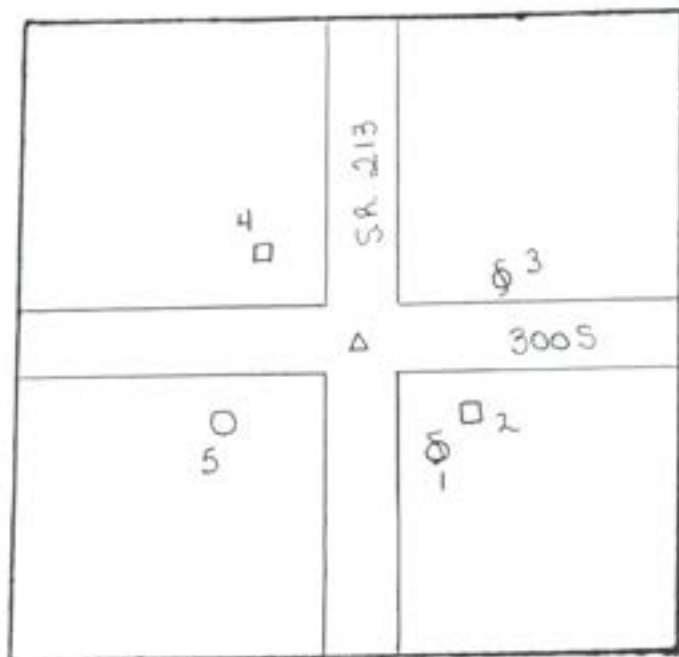

SEC. 22 TWP 21 RANGE 5

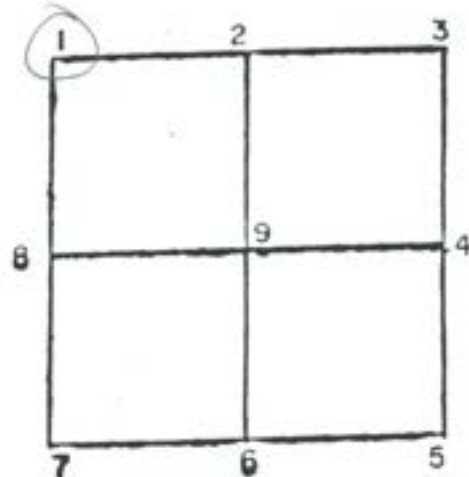

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. PK, NAIL

TIES: 1. 40.38 PK PWP
 2. 42.03 R/W MARKER NE CORNER
 3. 59.20 PK PWP
 4. 45.6 R/W MARKER SW CORNER
 5. 56.3 48" TREE STUMP

SEC 22 TWP 21 RANGE 5



TIME: 1. 47.58' PK PWP

2. 44.56' PK PWP



3. 40.28' PK PWP

SEC 22 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 22 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY APRIL 26, 2001, VERIFIED 8/30/02

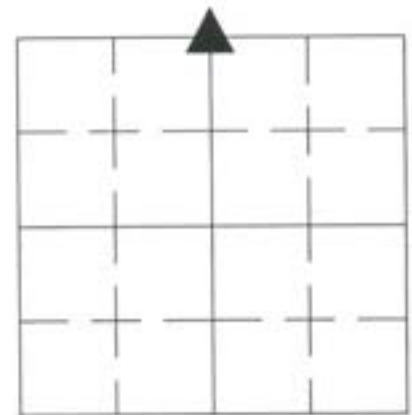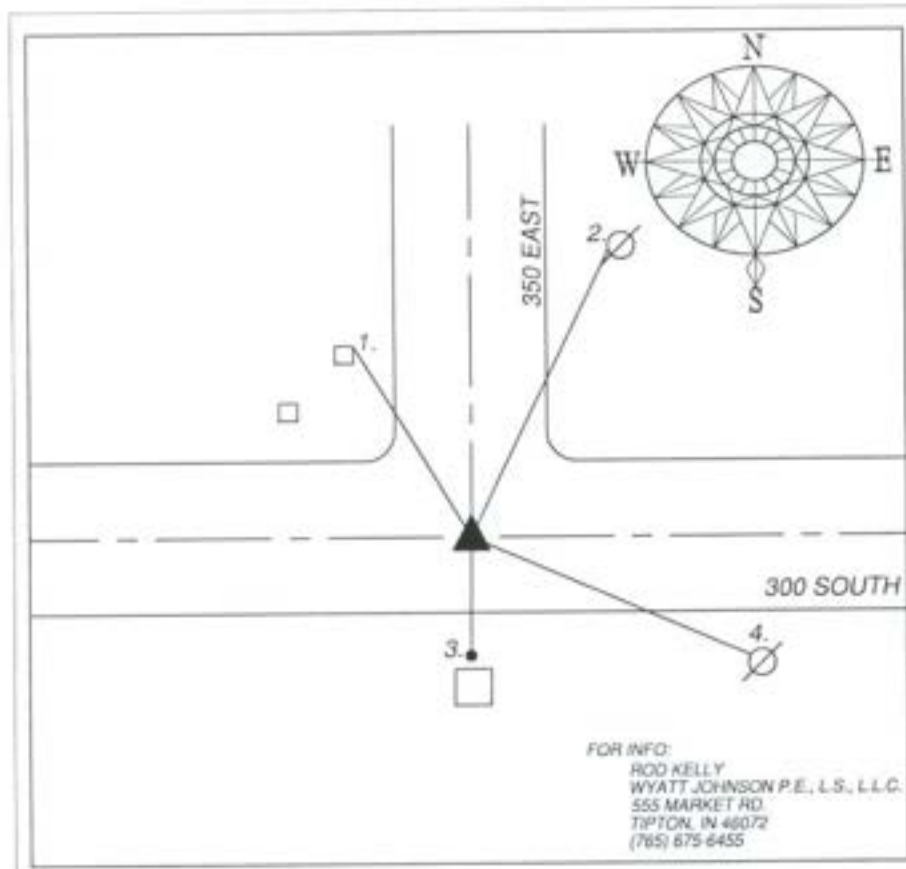

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: -

CREW: -

NORTH: - EAST: -

ELEVATION: -

LATITUDE: -

LONGITUDE: -

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY



JOB # 01-048, 02-116

TYPE OF MARKER IDENTIFIED: STONE FOUND 0.60' BELOW ROAD SURFACE

HISTORY AND DESCRIPTION OF RECOVERED POINT:

THE STONE WAS RECOVERED BY US FIRST IN JULY, 1982 AND LATER IN 2001 AND 2002. A PREVIOUS REFERENCE WAS SUBMITTED BY US FROM JOB # 1214 IN 1982 FOUND IN THE C.S. OFFICE. ONLY ONE OF THE TIES REMAIN FROM THAT REFERENCE. A CAST ALUMINUM MONUMENT ACCESS BOX WAS PLACED OVER THE STONE IN CONCRETE FLUSH WITH THE ROAD SURFACE.

REFERENCE	DISTANCE	-DESCRIPTION-	FOUND SET	
1.	31.08'	PK NAIL IN POST	☒	☐
2.	41.76'	MAG NAIL WITH ID WASHER IN POWER POLE	☐	☒
3.	18.05'	R.E. MITCHELL CAPPED ROD IN CONCRETE	☒	☐
4.	24.13'	MAG NAIL WITH ID WASHER IN POWER POLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐

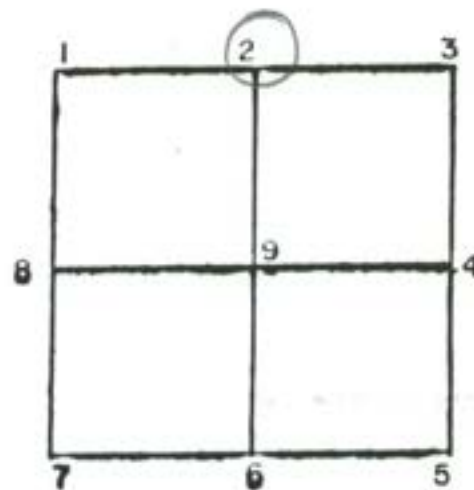

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 2 STONE FND 5" BELOW SURFACE

THIS:


1.	24.7'	CORNER POST
2	39.64'	PWP
3.	18.0'	IRON PIN IN CONCRETE
4.	23.75'	PWP

SEC 22 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 22 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY SEPTEMBER 03, 2002

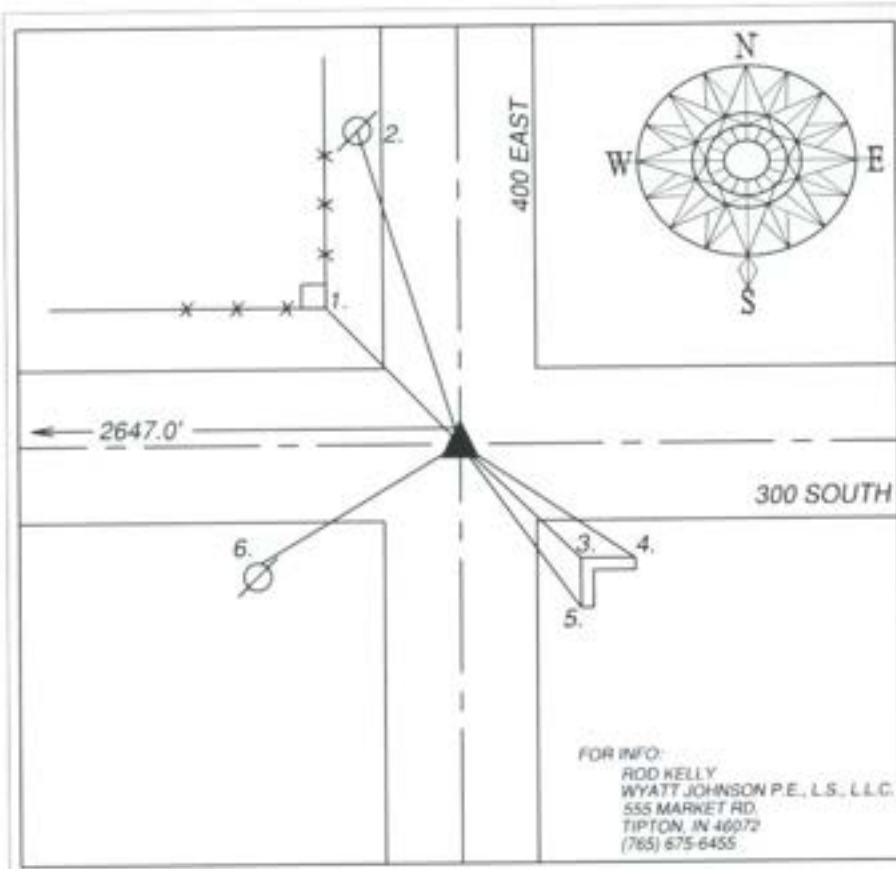

INDIANA COORDINATE VALUES (NAD83)
OBSERVATION DATE: -
CREW: -
NORTH: - EAST: -
ELEVATION: -
LATITUDE: -
LONGITUDE: -

DRAWN BY: R.K.
CREW: ROD KELLY, JARED HENRY
JOB # 02-120

TYPE OF MARKER IDENTIFIED: FIR 5/8" FOUND 1.4' BELOW SURFACE

HISTORY AND DESCRIPTION OF RECOVERED POINT:

THE PREVIOUS REFERENCE STATED A STONE WAS RECOVERED W/ A 5/8" REBAR. WE WERE 8" BELOW THE TOP OF THE REBAR AND DID NOT RECOVER A STONE. THE TIE FROM THE NORTHWEST CORNER OF THE CONCRETE WINGWALL AND A DISTANCE OF 2647' WAS USED FOR THE LOCATION TO DIG. THE 5/8" REBAR REVEALED NO MAGNETIC SOUNDING FROM THE LOCATOR. WE PLACED A NEW 5/8" ALUM. CAPPED REBAR IN CONCRETE WITHIN A 8" PLASTIC PIPE OVER THE LOCATION OF THE OLD ONE FLUSH WITH THE CHIP AND SEALED ROAD.


REFERENCE	DISTANCE	DESCRIPTION	FOUND SET	
1.	24.09'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POST	☐	☒
2.	46.77'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POWER POLE	☐	☒
3.	23.87'	NORTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
4.	29.50'	NORTHEAST CORNER OF CONCRETE WINGWALL	☒	☐
5.	27.26'	SOUTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
6.	48.41'	MAG NAIL WITH ID WASHER IN NORTH SIDE OF POWER POLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐

A hand-drawn diagram of a four-way intersection. The intersection is divided into four quadrants labeled 1, 2, 3, and 4. Quadrant 1 (top-left) is labeled '1'. Quadrant 2 (top-right) is labeled '2'. Quadrant 3 (bottom-right) is labeled '3'. Quadrant 4 (bottom-left) is labeled '4'. A north arrow is drawn in the bottom-left quadrant, pointing upwards and labeled 'N'. A road runs horizontally across the intersection, and another runs vertically. A car is shown in the center of the intersection, moving from the bottom-left towards the top-right. A line with an arrow points to the car, labeled '2646.99 TO N^W COR.'. The text '4000' is written vertically in the top-left quadrant, and '3000' is written horizontally in the top-right quadrant. A right-angle symbol is drawn in the bottom-right quadrant.

A 2x2 grid with numbers at the intersections. The top row has 1, 2, and 3. The bottom row has 8, 9, and 4. The left column has 7 and 6. The right column has 5. The number 3 is circled.


TIME	DESCRIPTION
1. 24.7'	CORNER POST
2. 25.00'	CORNER POST
3. 23.95'	CONCRETE WING WALL

SEC 22 TWP 21 RANGE 5

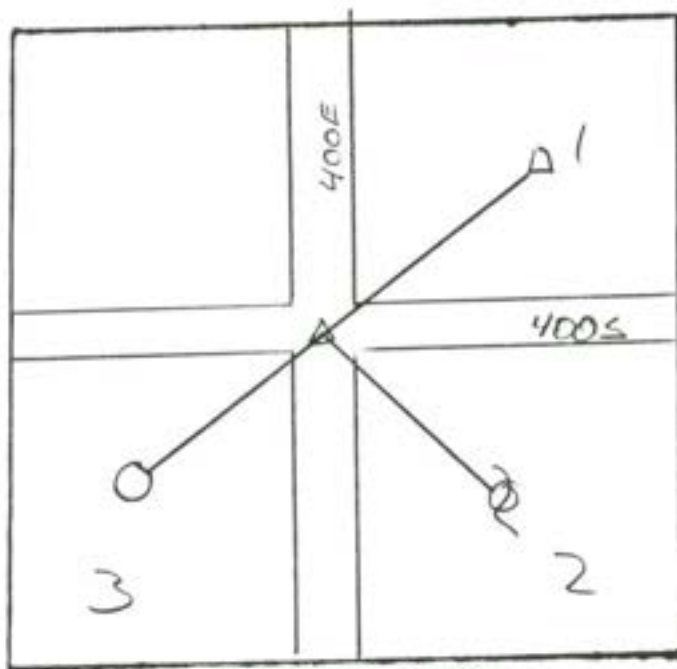

GRAPHIC TIES
(SKETCHED)

SEC 22 TWP 21 RANGE 5

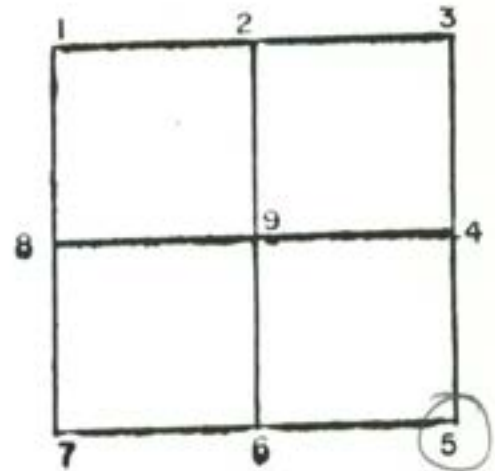

CORNER IDENT. STONE END

TIES: 1. 28.60' FP


2. 24.75' FP

3. 24.75' STONE POST


SEC 22 TWP 21 RANGE 5

SEC 22 TWP 21 RANGE 5

DEC. 21, 1987

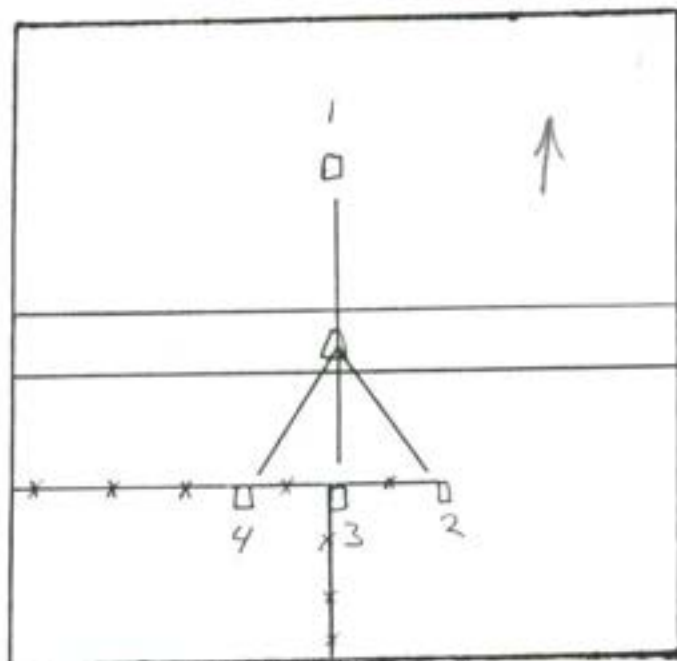

GRAPHIC TIES
(SKETCHED)


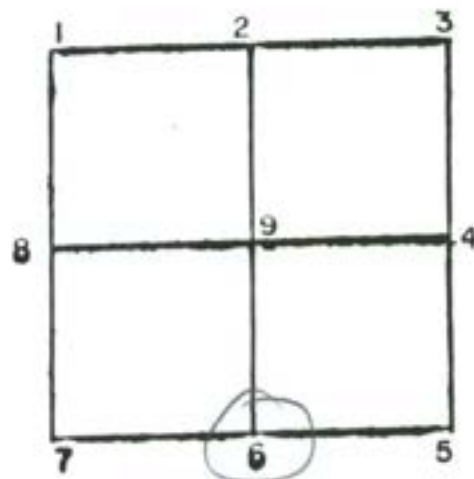


CORNER IDENT. STONE FIND

TIES: 1. 17.65' HP
2. 21.05' FENCE POST
3. 19.55' HP
4. 21.45' HP

PK'S FIND IN ALL HEADPOST

SEC 22 TWP 21 RANGE 5

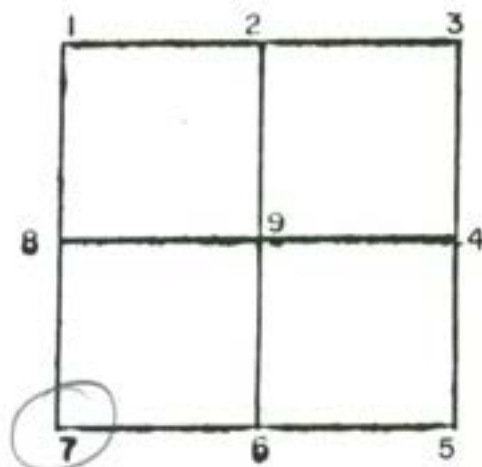

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NO DESCRIPTION GIVEN


T1424

1. 42.05 PWP

2. 43.23 CORNER POST.


3. 44.15 CORNER POST

SEC 22 TWP 21 RANGE 5

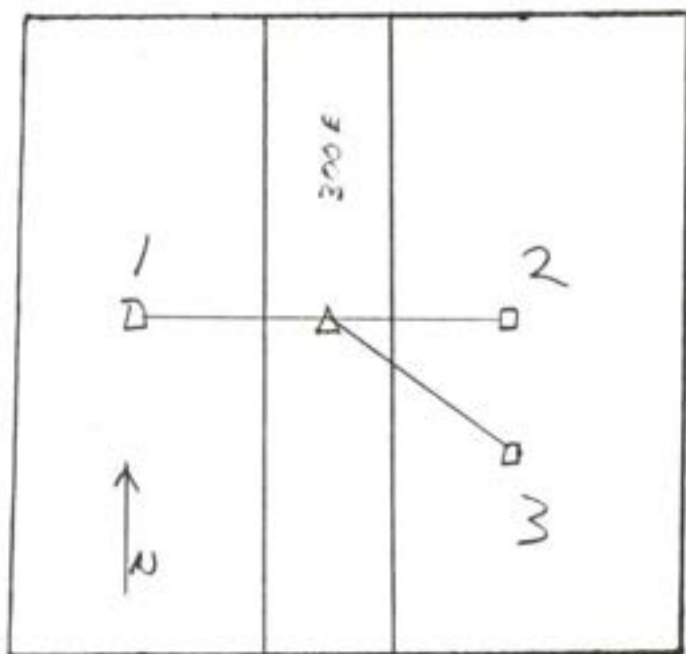

GRAPHIC TIES
(SKETCHED)

SEC 22 TWP 21 RANGE 5

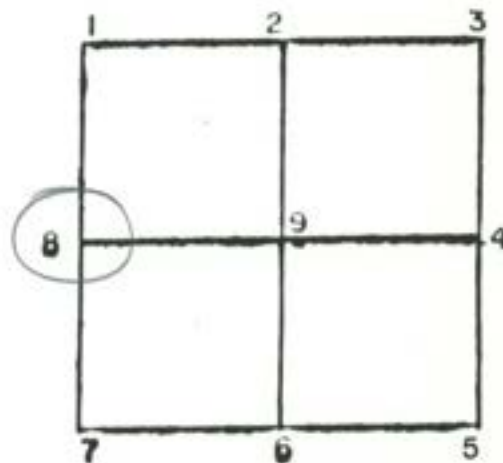

CORNER IDENT. 8 (NO DESCRIPTION GIVEN)


TIES:	<u>1. 40.68'</u>	<u>POST</u>
	<u>2. 40.89'</u>	<u>POST</u>
	<u>3. 41.77'</u>	<u>POST</u>

SEC 22 TWP 21 RANGE 5

SECTION 23 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY SEPTEMBER 03, 2002

REFERENCE SHEET

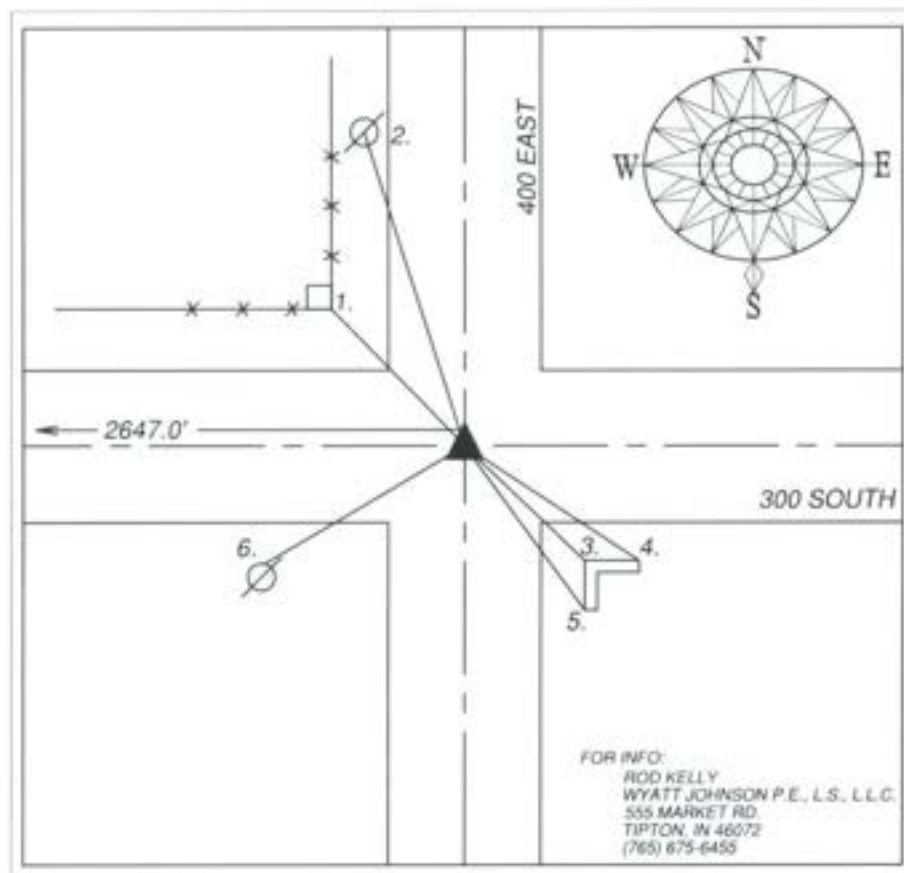

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: -

CREW: -

NORTH: - EAST: -

ELEVATION: -

LATITUDE: -

LONGITUDE: -

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY


JOB # 02-120

TYPE OF MARKER IDENTIFIED: FIR 5/8" FOUND 1.4' BELOW SURFACE


HISTORY AND DESCRIPTION OF RECOVERED POINT:

THE PREVIOUS REFERENCE STATED A STONE WAS RECOVERED W/ A 5/8" REBAR. WE WERE 8" BELOW THE TOP OF THE REBAR AND DID NOT RECOVER A STONE. THE TIE FROM THE NORTHWEST CORNER OF THE CONCRETE WINGWALL AND A DISTANCE OF 2647" WAS USED FOR THE LOCATION TO DIG. THE 5/8" REBAR REVEALED NO MAGNETIC SOUNDING FROM THE LOCATOR. WE PLACED A NEW 5/8" ALUM. CAPPED REBAR IN CONCRETE WITHIN A 8" PLASTIC PIPE OVER THE LOCATION OF THE OLD ONE FLUSH WITH THE CHIP AND SEALED ROAD.

REFERENCE	DISTANCE	DESCRIPTION	FOUND	SET
1.	24.09'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POST	☐	☒
2.	46.77'	MAG NAIL WITH ID WASHER IN EAST SIDE OF POWER POLE	☐	☒
3.	23.87'	NORTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
4.	29.50'	NORTHEAST CORNER OF CONCRETE WINGWALL	☒	☐
5.	27.26'	SOUTHWEST CORNER OF CONCRETE WINGWALL	☒	☐
6.	48.41'	MAG NAIL WITH ID WASHER IN NORTH SIDE OF POWER POLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐

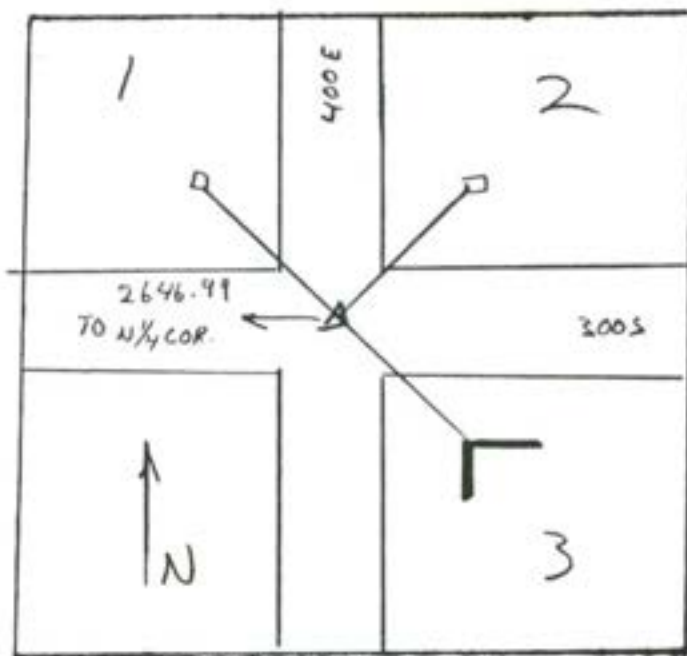

SEC 23 TWP 21 RANGE 5

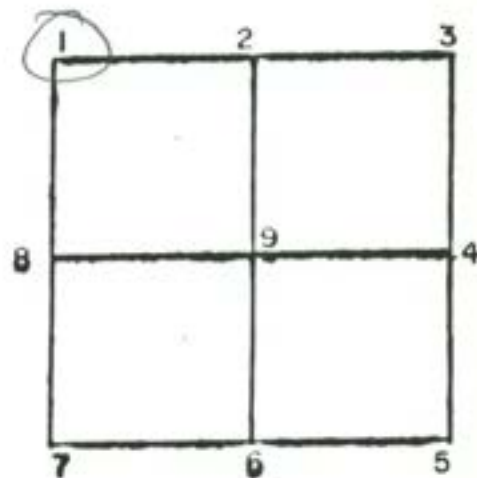

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 1 STONE W/5/8" REBAR


TIES: 1. 24.7' CORNER POST

2. 25.00' CORNER POST


3. 23.95' CONCRETE WING WALL

SEC 23 TWP 21 RANGE 5

SEC 23 TWP 21 RANGE 5

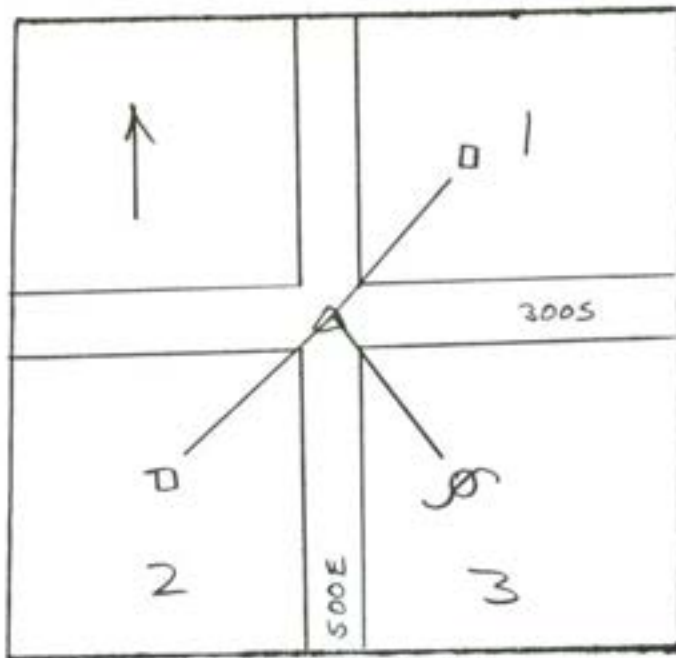

GRAPHIC TIES
(SKETCHED)

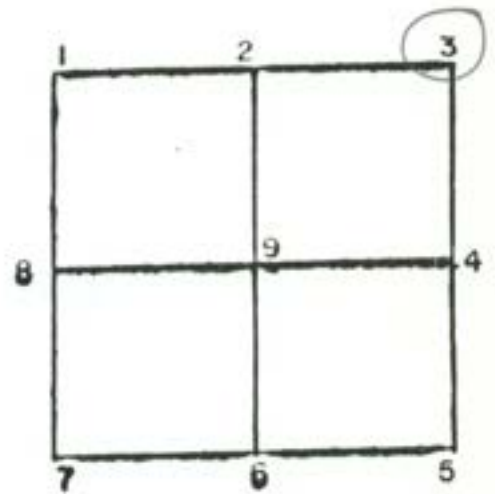

CORNER IDENT. NOT STATED



TIES: 1. 29.5' FP
2. 24.5' FP
3. 23.9' P&P

SEC 23 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 23 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY November 12, 2002

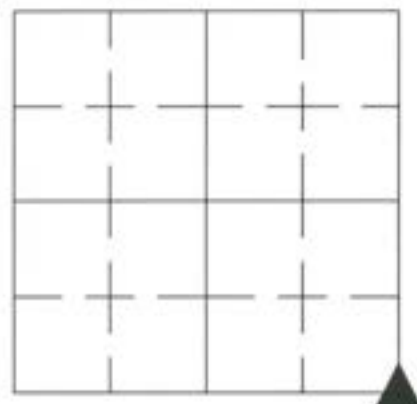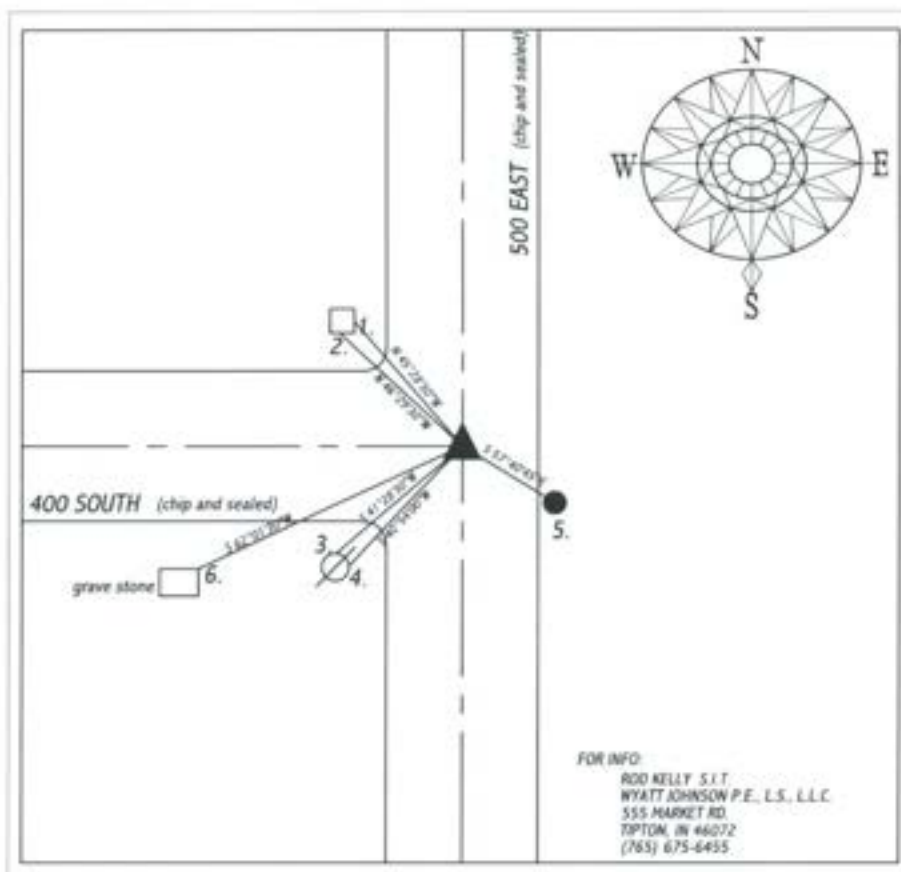

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: -

CREW: -

NORTH: - EAST: -

ELEVATION: -

LATITUDE: -

LONGITUDE: -

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY


JOB # 02-146 JUNG

TYPE OF MARKER IDENTIFIED: STONE FOUND 0.30' BELOW SURFACE

HISTORY AND DESCRIPTION OF RECOVERED POINT:

Martin Badgley did a survey in 1993 that shows stone was found then. A reference was found by our office in 1996 while doing a job for Mike Foor. One of the distances did not check. We found the stone to be in good standing with a "+" at the center of the high point.


REFERENCE	DISTANCE	-DESCRIPTION-	FOUND	SET
1.	27.83'	Nail in a bottle cap in east side of post.	☒	☐
2.	27.90'	P.K. nail in south side of post.	☒	☐
3.	28.57'	P.K. nail in north side of power pole.	☒	☐
4.	28.55'	Nail in a bottle cap in northeast side of power pole.	☒	☐
5.	12.04'	Iron rod w/ orange I.D. cap 1' east of edge of road.	☐	☒
6.	43.99'	Northeast corner of Lewis Smith grave marker.	☒	☐
-	-	-	☐	☐
-	-	-	☐	☐

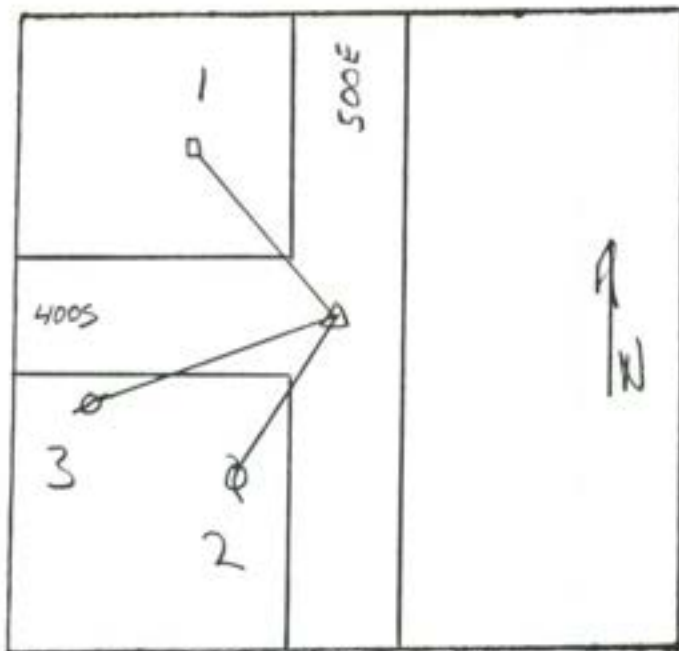

GRAPHIC TIES
(SKETCHED)

SEC 23 TWP 21 RANGE 5

8-21-87

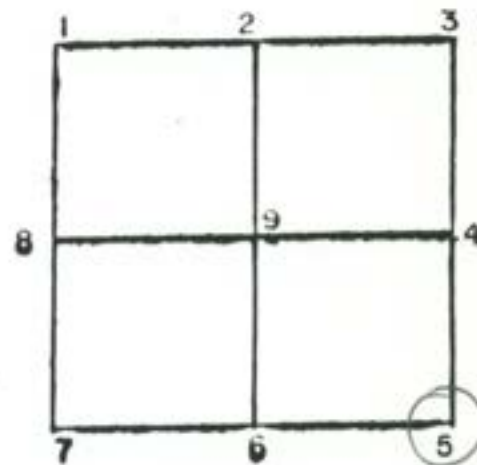


CORNER IDENT. 5 NO DESCRIPTION GIVEN


TIES: 1. 27.85 SN - HEADPOST
2. 28.60 SN - PWP
3. 55.60 SN - PWP

SEC 23 TWP 21 RANGE 5

SEC 23 TWP 21 RANGE 5

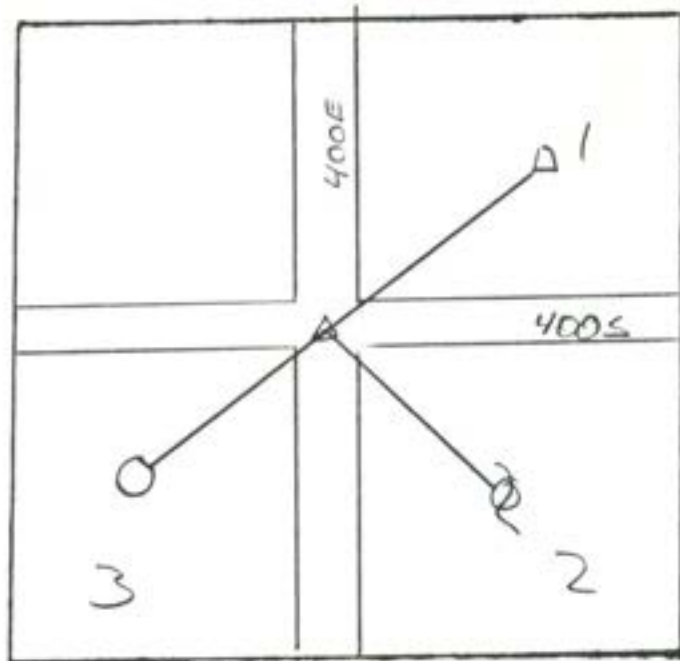

GRAPHIC TIES
(SKETCHED)

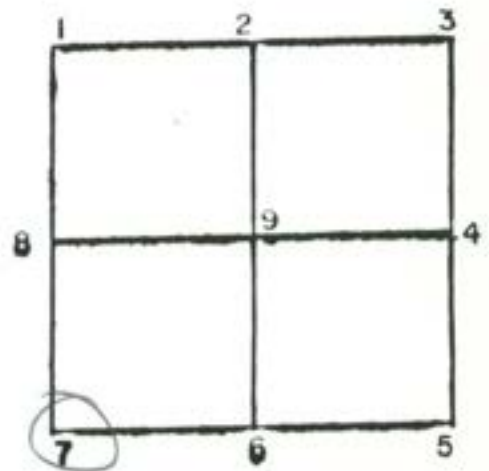


CORNER IDENT. STONE FND


TIES: 1. 28.60' FP
2. 24.75' FP
3. 24.75' STONE POST

SEC 23 TWP 21 RANGE 5

SEC 24 TWP 21 RANGE 5

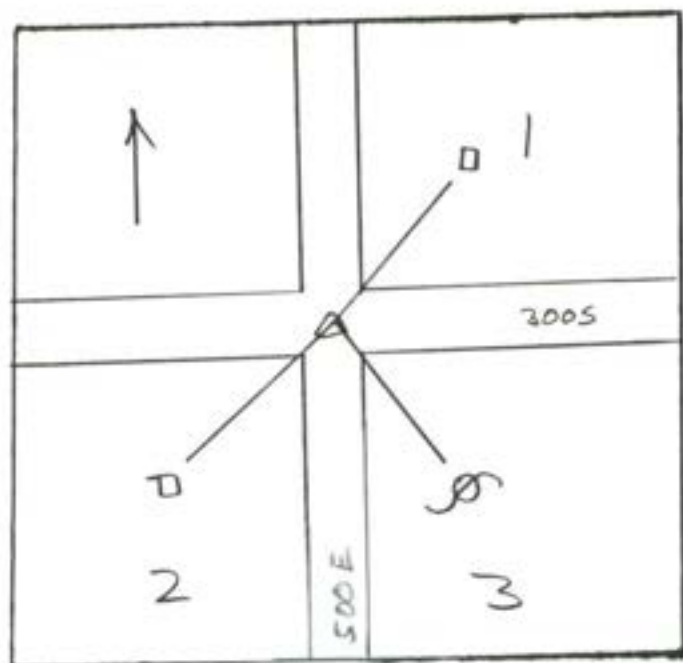


GRAPHIC TIES
(SKETCHED)

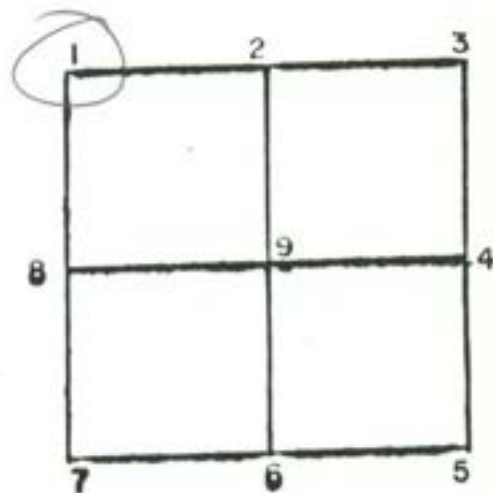

CORNER IDENT. NOT STATED


TIES: 1. 29.5' FP
2. 24.5' FP
3. 23.9' PNP

SEC 24 TWP 21 RANGE 5

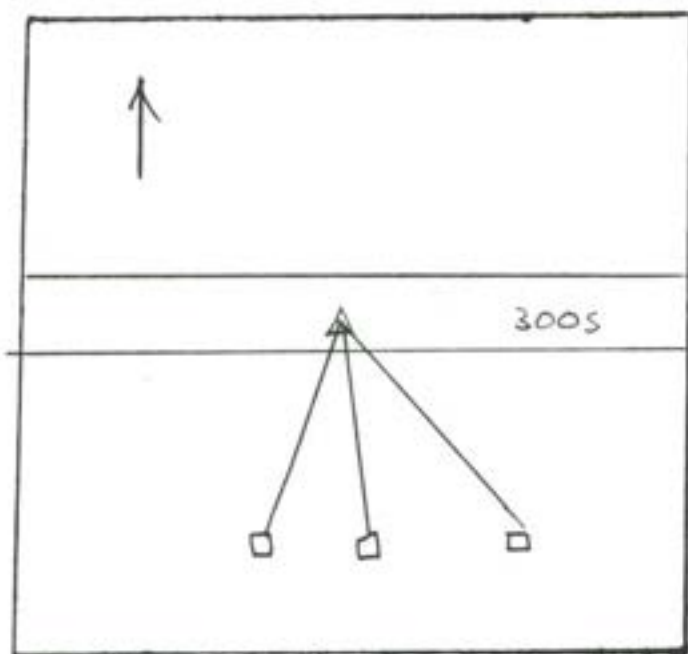

GRAPHIC TIES
(SKETCHED)

SEC 24 TWP 21 RANGE 5

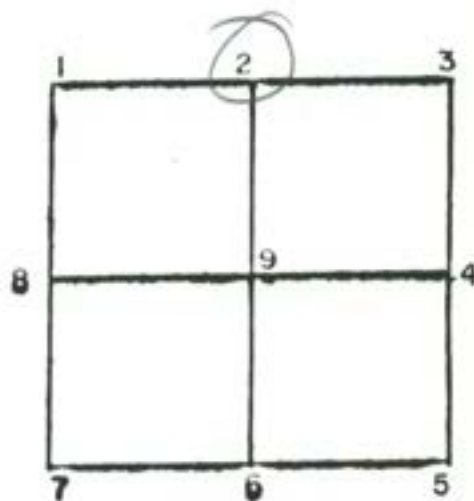

CORNER IDENT. STONE FND


TIES: 1. 26.70' FP

2. 22.80' FP


3. 39.80' FP

SEC 24 TWP 21 RANGE 5

SEC 24 TWP 21 RANGE 5

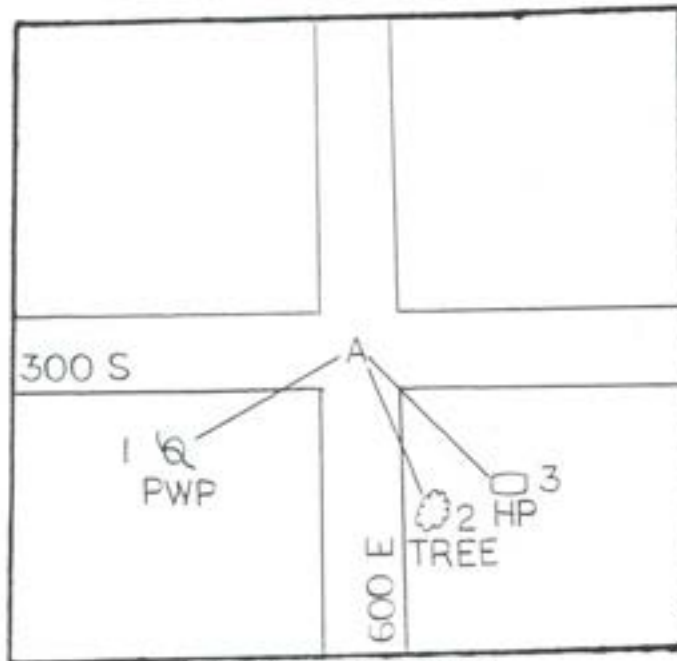

GRAPHIC TIES
(SKETCHED)

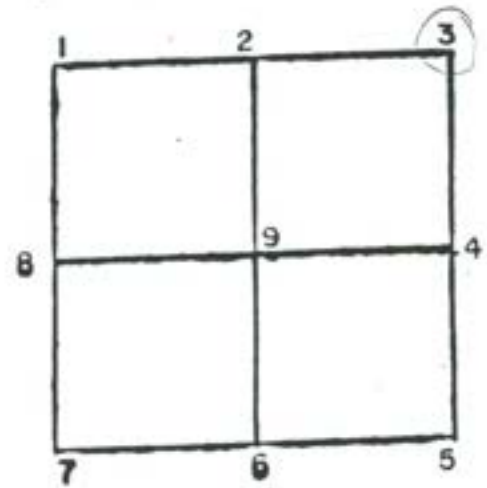


CORNER IDENT. "A" IRON PIN

TIES: A

1.	27.10'	PWP
2.	31.90'	TREE
3.	23.5	HP (CONCRETE)


SEC 24 TWP 21 RANGE 5

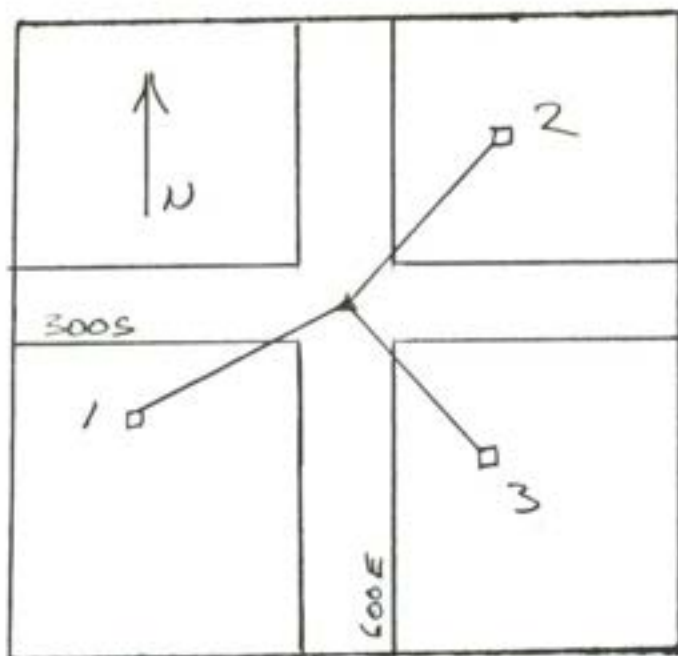

GRAPHIC TIES
(SKETCHED)

SEC 24 TWP 21 RANGE 5



8-21-71

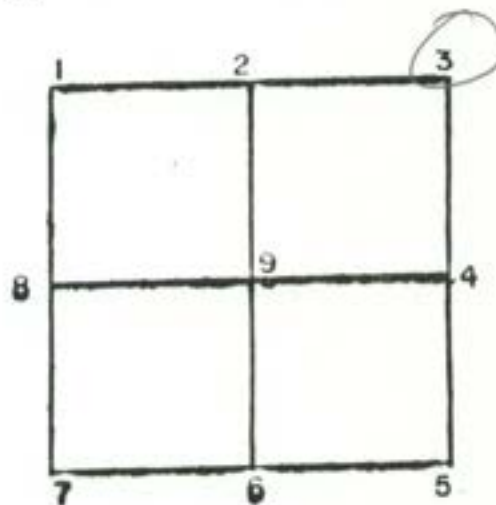

CORNER IDENT. 3 IRON PIN

TIES: 1. 35.0' HEAD POST
2. 56.0' HEAD POST
3. 23.6' CONCRETE HEAD POST


SEC 24 TWP 21 RANGE 5

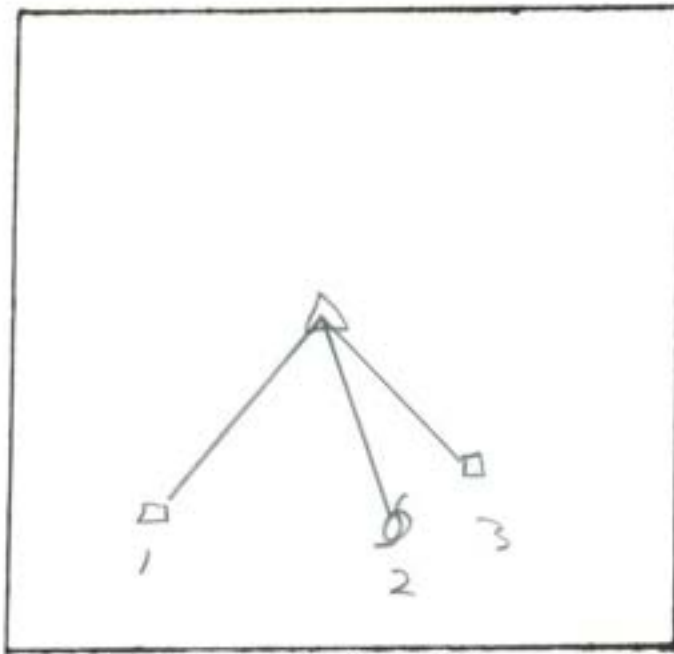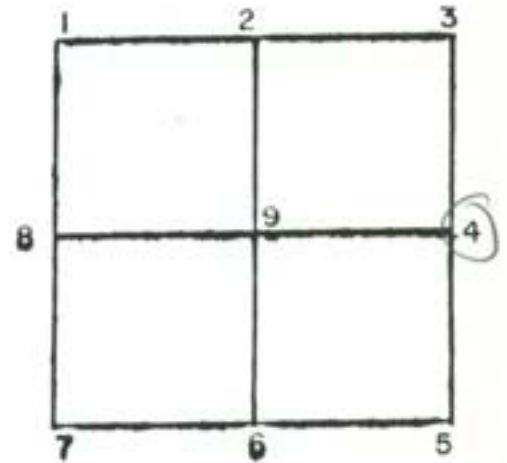SEC 24 TWP 21 RANGE 5GRAPHIC TIES
(SKETCHED)CORNER IDENT. NOT STATED


TIES: 1. 28.70' HP
2. 26.40' PWP
3. 26.28' HP

SEC 24 TWP 21 RANGE 5

SEC. 24 TWP 21 RANGE 5

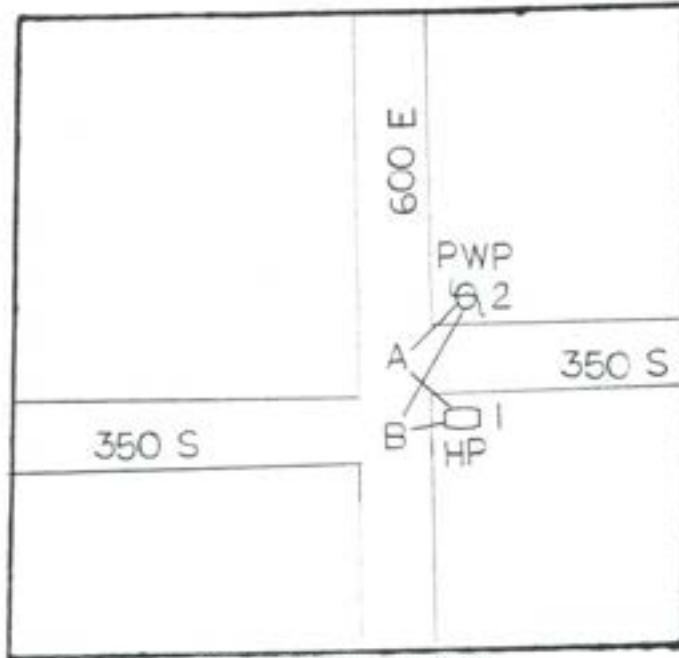

GRAPHIC TIES
(SKETCHED)

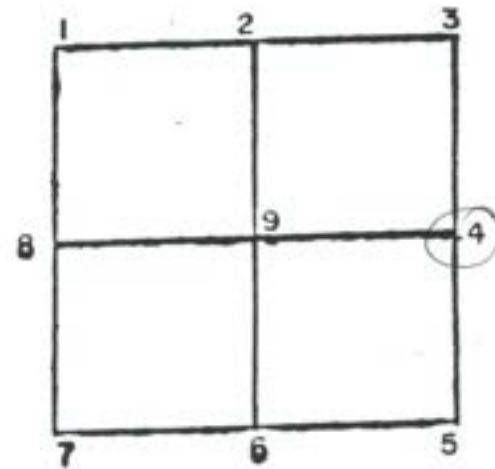


CORNER IDENT. "A" IRON PIN "B" IRON PIN

TIES:	A	B	
1.	64.9'	18.8'	HP
2.	25.7	83.5'	PWP

SEC 24 TWP 21 RANGE 5


	A	B	
1.	18.8'	64.9'	HP
2.	83.5'	25.7'	PWP

SEC 24 TWP 21 RANGE 5

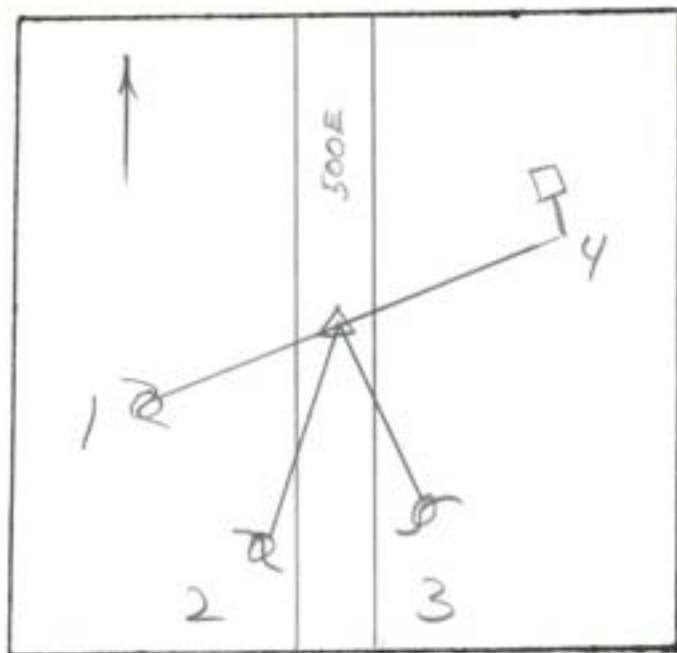

GRAPHIC TIES
(SKETCHED)

SEC 24 TWP 21 RANGE 5

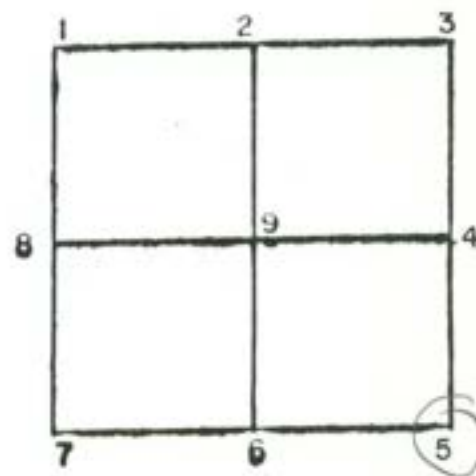

CORNER IDENT. NOT STATED



TIES: 1. 51.60' PWP
2. 40.50' PWP
3. 33.30' PWP
4. 40.10' SIGN POST

SEC 24 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 24 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY November 12, 2002

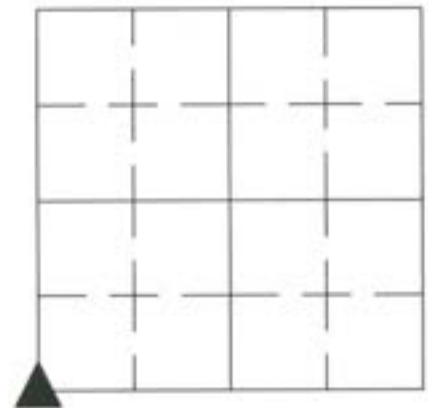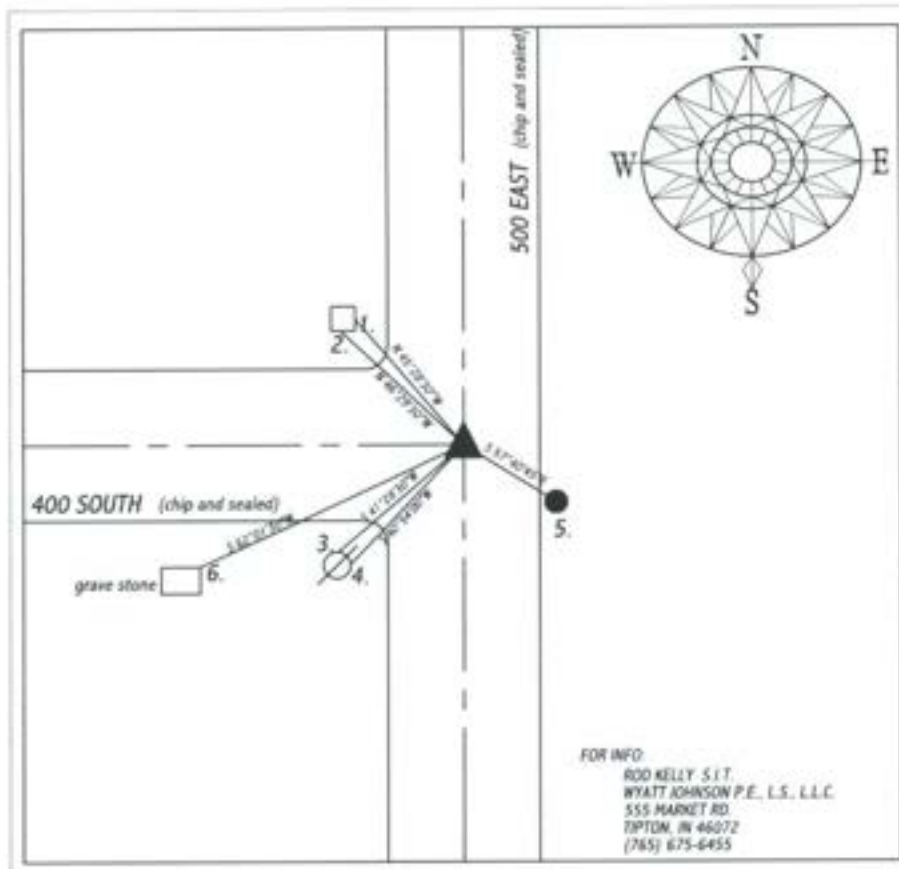

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: _____

CREW: _____

NORTH: _____ EAST: _____

ELEVATION: _____

LATITUDE: _____

LONGITUDE: _____

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY


JOB # 02-146 JUNG

TYPE OF MARKER IDENTIFIED: STONE FOUND 0.30' BELOW SURFACE

HISTORY AND DESCRIPTION OF RECOVERED POINT:

Martin Badgley did a survey in 1993 that shows stone was found then. A reference was found by our office in 1996 while doing a job for Mike Foor. One of the distances did not check. We found the stone to be in good standing with a "+" at the center of the high point.


REFERENCE	DISTANCE	-DESCRIPTION-	FOUND	SET
1.	27.83'	Nail in a bottle cap in east side of post.	☒	☐
2.	27.90'	P.K. nail in south side of post.	☒	☐
3.	28.57'	P.K. nail in north side of power pole.	☒	☐
4.	28.55'	Nail in a bottle cap in northeast side of power pole.	☒	☐
5.	12.04'	Iron rod w/ orange I.D. cap 1' east of edge of road.	☐	☒
6.	43.99'	Northeast corner of Lewis Smith grave marker.	☒	☐
-	-	-	☐	☐
-	-	-	☐	☐

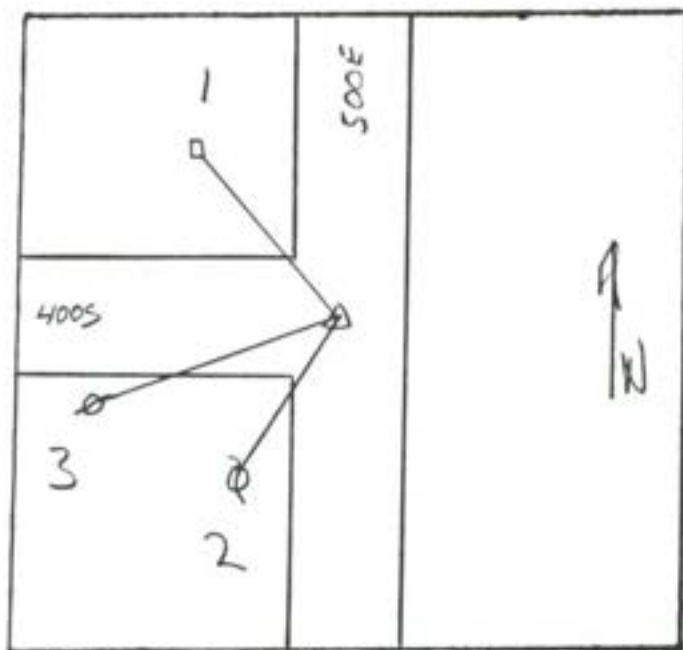

GRAPHIC TIES
(SKETCHED)

SEC 24 TWP 21 RANGE 5

8-21-87

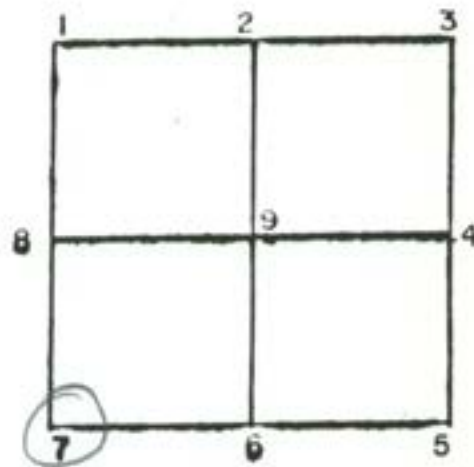

CORNER IDENT. 7 NO DESCRIPTION GIVEN



TIES: 1. 27.85 SN - HEADPOST
2. 28.60 SN - PWP
3. 55.60 SN - PWP

SEC 24 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 25 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY November 12, 2002

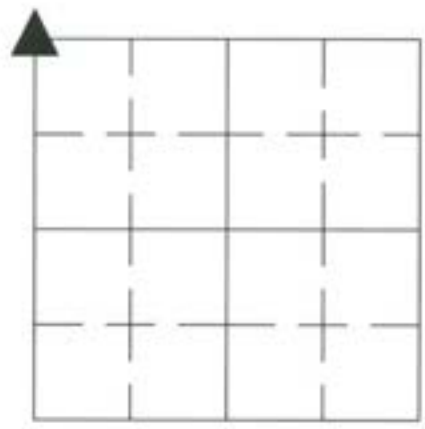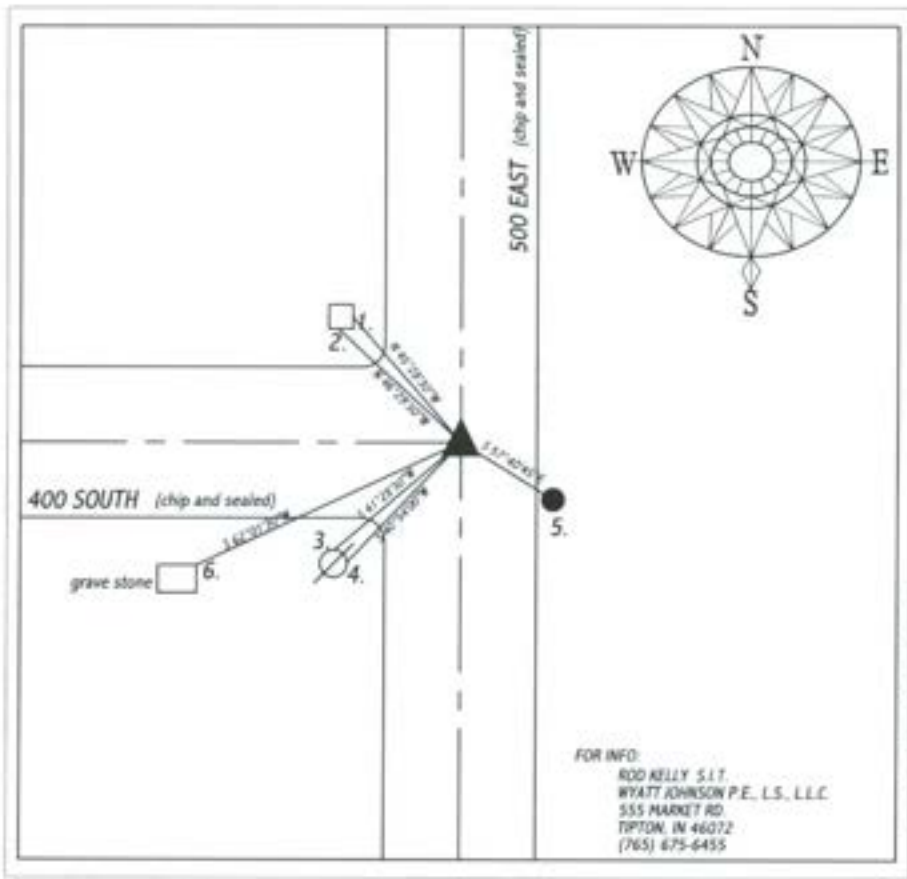


INDIANA COORDINATE VALUES (NAD83)
OBSERVATION DATE: _____
CREW: _____
NORTH: _____ EAST: _____
ELEVATION: _____
LATITUDE: _____
LONGITUDE: _____

DRAWN BY: R.K.
CREW: ROD KELLY, JARED HENRY
JOB # 02-146 JUNG

TYPE OF MARKER IDENTIFIED: STONE FOUND 0.30' BELOW SURFACE

HISTORY AND DESCRIPTION OF RECOVERED POINT:
Martin Badgley did a survey in 1993 that shows stone was found then. A reference was found by our office in 1996 while doing a job for Mike Foor. One of the distances did not check. We found the stone to be in good standing with a "+" at the center of the high point.


REFERENCE	DISTANCE	-DESCRIPTION-	FOUND	SET
1.	27.83'	Nail in a bottle cap in east side of post.	☒	☐
2.	27.90'	P.K. nail in south side of post.	☒	☐
3.	28.57'	P.K. nail in north side of power pole.	☒	☐
4.	28.55'	Nail in a bottle cap in northeast side of power pole.	☒	☐
5.	12.04'	Iron rod w/ orange I.D. cap 1' east of edge of road.	☐	☒
6.	43.99'	Northeast corner of Lewis Smith grave marker.	☒	☐
-	-	-	☐	☐
-	-	-	☐	☐

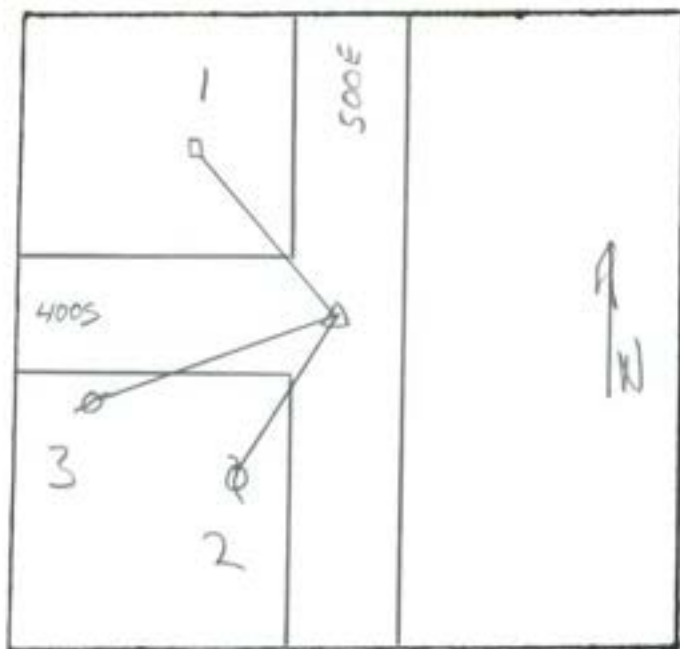

GRAPHIC TIES
(SKETCHED)

SEC 25 TWP 21 RANGE 5

8-21-87

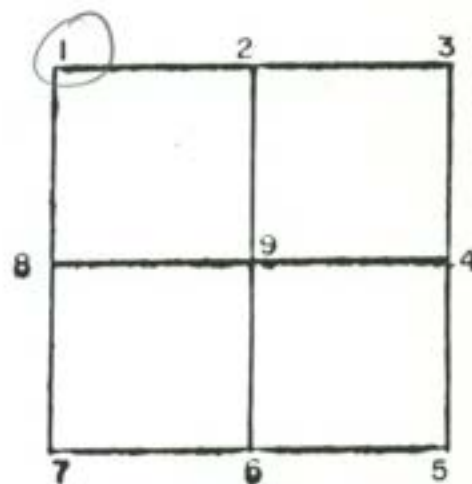

CORNER IDENT. 1 NO DESCRIPTION GIVEN

TIES: 1. 27.85 SN - HEADPOST
2. 28.60 SN - PWP
3. 55.60 SN - PWP

SEC 25 TWP 21 RANGE 5

A diagram showing a triangle with vertices labeled A, B, and C. Vertex C is at the top, and vertices A and B form the base. A vertical line segment is drawn from vertex C down to the base AB, labeled "600 m".


A 2x2 grid with numbers at the intersections. The top row has numbers 1, 2, and 3. The bottom row has numbers 7, 6, and 5. The left column has numbers 6 and 7. The right column has numbers 4 and 5. The center intersection is labeled 9.

THE:


	A	B	
1.	18.8'	64.9'	HP
2.	83.5'	25.7'	PWP

SEC 25 TWP 21 RANGE 5

SEC 25 TWP 21 RANGE 5

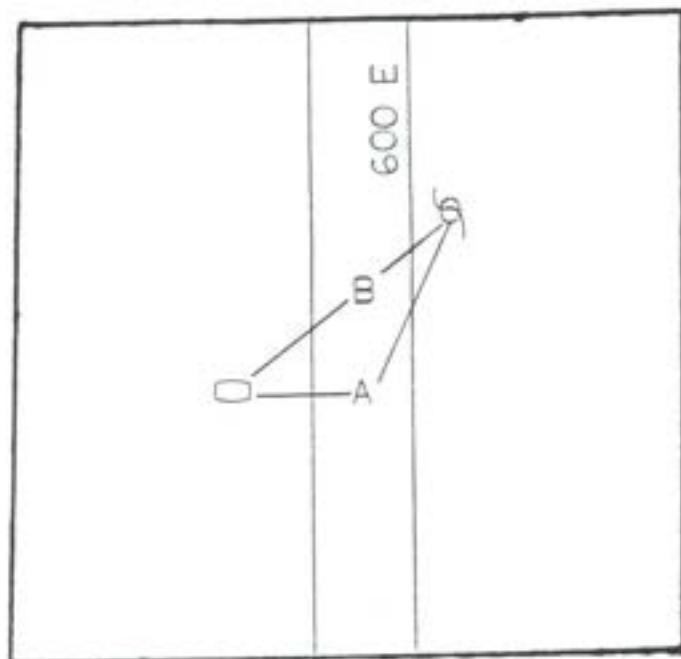

GRAPHIC TIES
(SKETCHED)

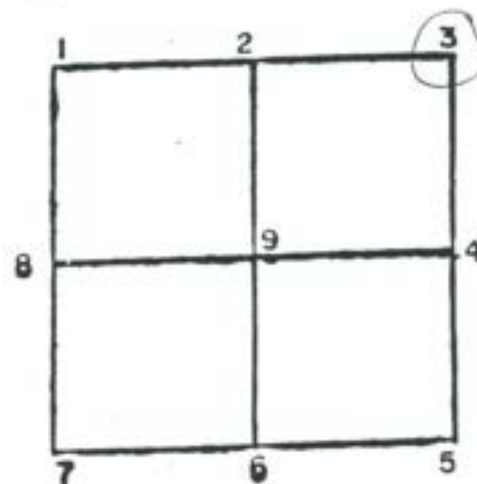


CORNER IDENT. "A" IRON PIN "B" IRON PIN

TIES:


	A	B
1.	18.8'	64.9' HP
2.	83.5'	25.7' PWP

SEC 25 TWP 21 RANGE 5

SEC 25 TWP 21 RANGE 5

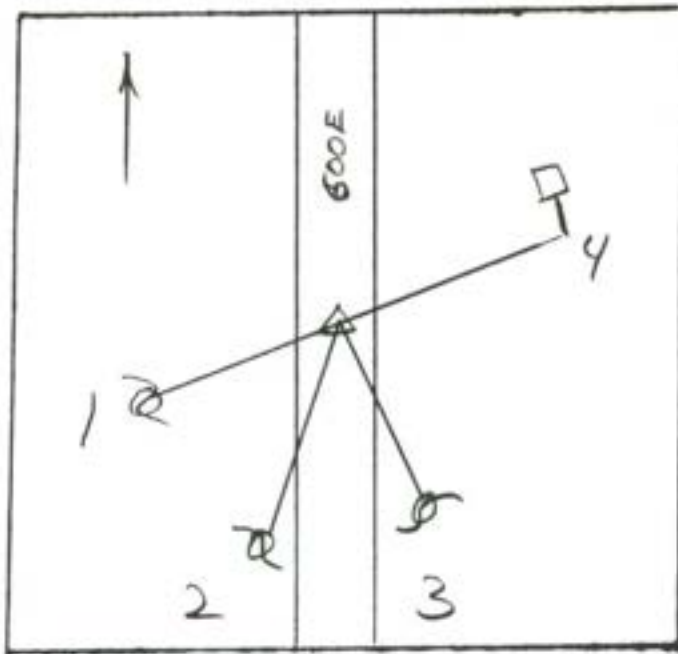

GRAPHIC TIES
(SKETCHED)

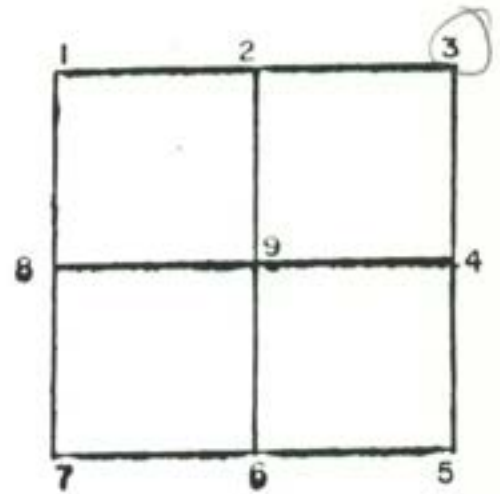

CORNER IDENT. NOT STATED

TIES: 1. 51.60' PWP
2. 40.50' PWP
3. 33.30' PWP
4. 40.10' S19N POST

SEC 25 TWP 21 RANGE 5

A 2x2 grid with numbers at the intersections: 1 (top-left), 2 (top-middle), 3 (top-right), 8 (middle-left), 9 (center), 4 (middle-right, circled), 7 (bottom-left), 6 (bottom-middle), and 5 (bottom-right).

TIES:

	A	B
1.	59.2'	16.9' HP
2.	50.1'	86.5' PWP
3.	54.0'	109.3' PWP

SEC 25 TWP 21 RANGE 5

A schematic diagram of a two-player game. A central node 'A' is connected to two nodes, 'HP 1' and 'HP 2'. 'HP 1' is in a box labeled '1' and 'HP 2' is in a box labeled '2'. A horizontal line labeled '500 S' is to the left of 'A', and a vertical line labeled '600 E' is below 'A'.


TIES:

A

55.4' HP

2. 21.4' HP


SEC 25 TWP 21 RANGE 5

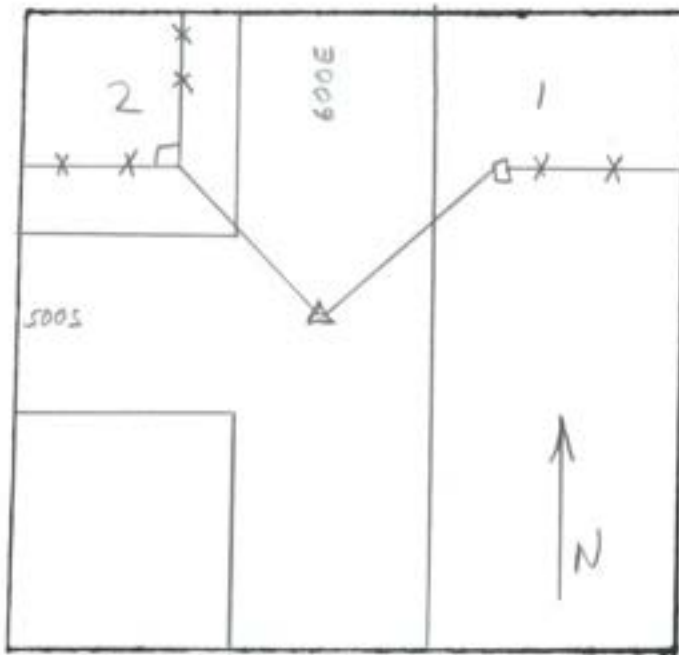

GRAPHIC TIES
(SKETCHED)

SEC 25 TWP 21 RANGE 5

MAY 1983

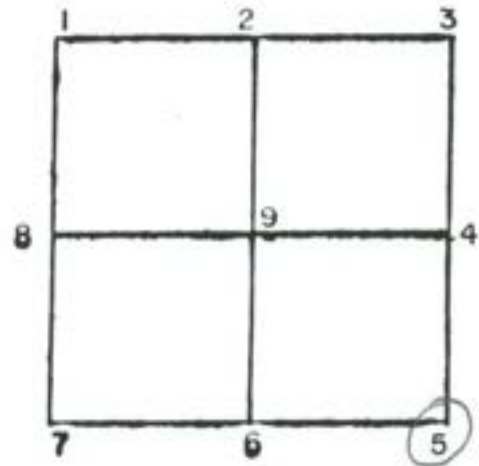


CORNER IDENT. 5 STONE FND 3" BELOW SURFACE


TIES: 1. 55.4' PK - HEADPOST
2. 21.4' PK - CORNER
3. 2707.13' TO STONE @ W 1/4 CORNER 30-21-6

SEC 25 TWP 21 RANGE 5

SEC 25 TWP 21 RANGE 5

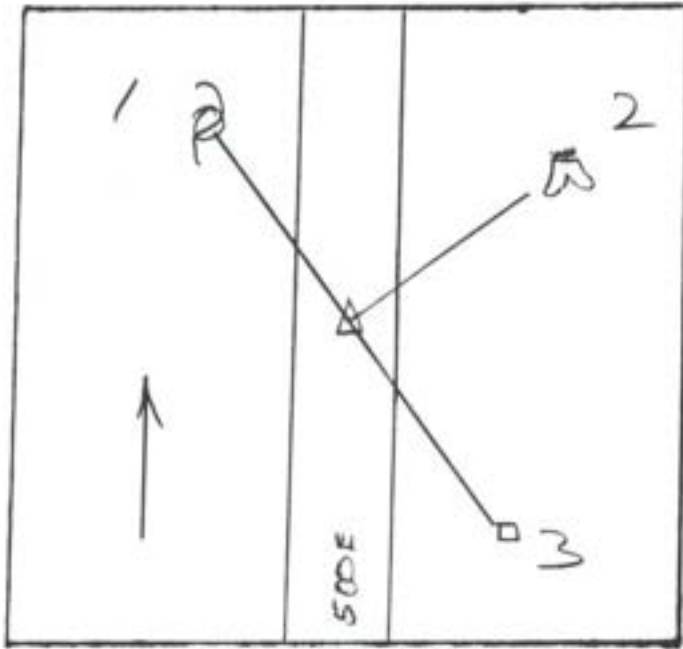

GRAPHIC TIES
(SKETCHED)

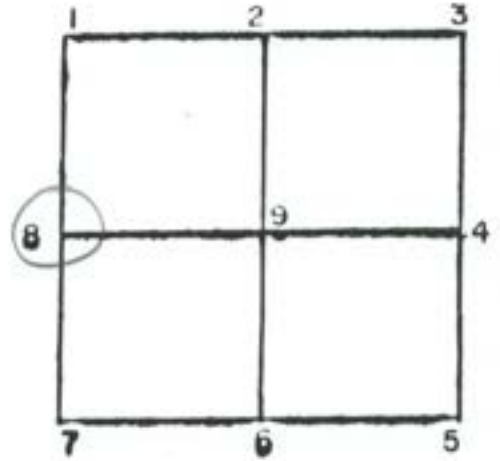


CORNER IDENT. NOT STATED


1.	51.15'	PWP
2.	44.25'	TREE STUMP
3.	25.35'	HP

SEC 25 TWP 21 RANGE 5

SEC 26 TWP 21 RANGE 5

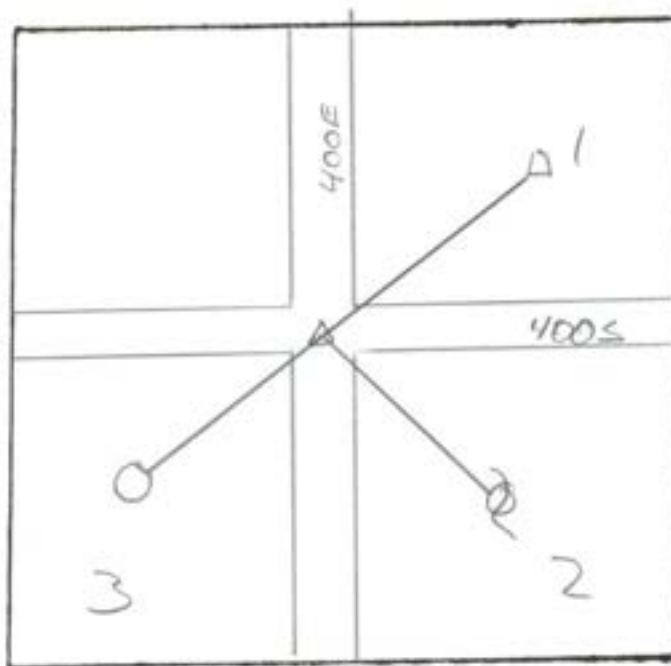

GRAPHIC TIES
(SKETCHED)

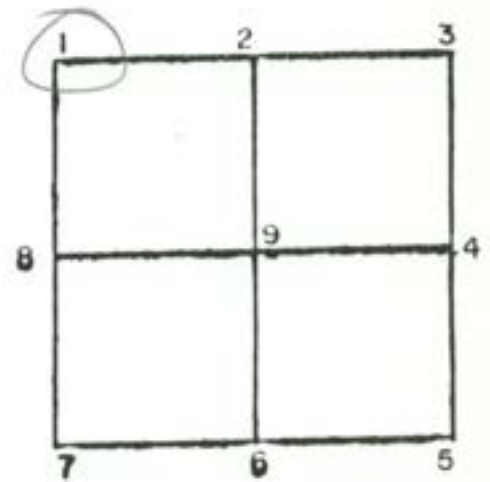

CORNER IDENT. STONE FND

TIES: 1. 28.60' FP

2. 24.75' FP


3. 24.75' STONE POST

SEC 26 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 26 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY November 12, 2002

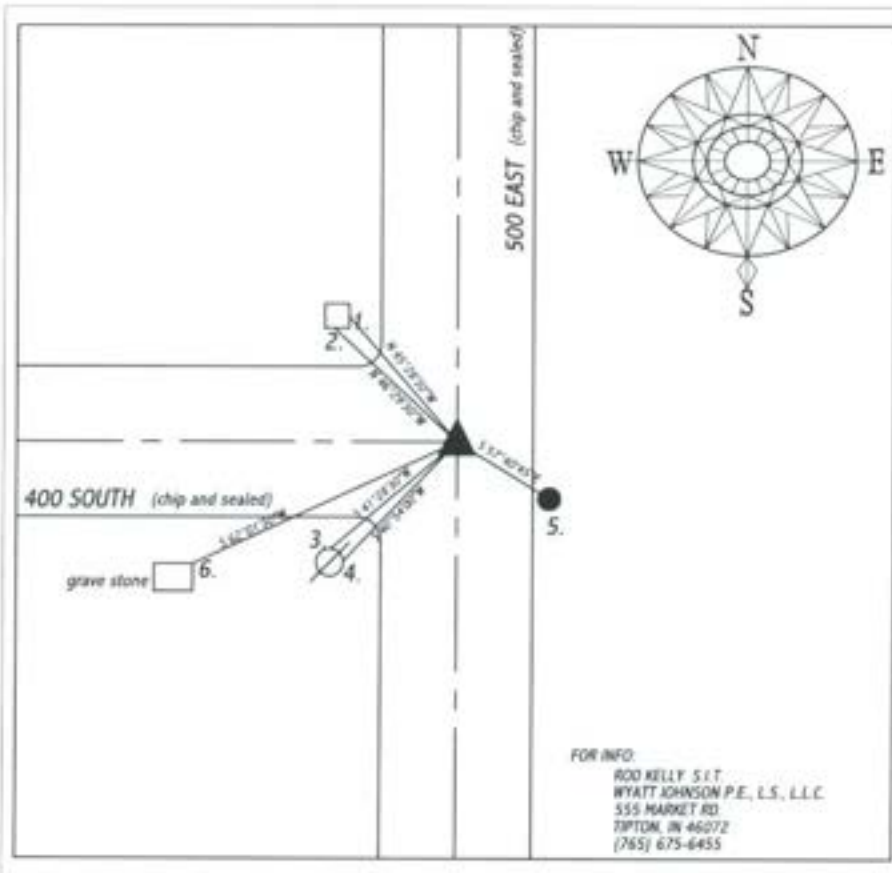

INDIANA COORDINATE VALUES (NAD83)

OBSERVATION DATE: -

CREW: -

NORTH: - EAST: -

ELEVATION: -

LATITUDE: -

LONGITUDE: -

DRAWN BY: R.K.

CREW: ROD KELLY, JARED HENRY


JOB # 02-146 JUNG

TYPE OF MARKER IDENTIFIED: STONE FOUND 0.30' BELOW SURFACE

HISTORY AND DESCRIPTION OF RECOVERED POINT:


Martin Badgley did a survey in 1993 that shows stone was found then. A reference was found by our office in 1996 while doing a job for Mike Foor. One of the distances did not check. We found the stone to be in good standing with a "+" at the center of the high point.

REFERENCE	DISTANCE	DESCRIPTION	FOUND	SET
1.	27.83'	Nail in a bottle cap in east side of post.	☒	☐
2.	27.90'	P.K. nail in south side of post.	☒	☐
3.	28.57'	P.K. nail in north side of power pole.	☒	☐
4.	28.55'	Nail in a bottle cap in northeast side of power pole.	☒	☐
5.	12.04'	Iron rod w/ orange I.D. cap 1' east of edge of road.	☐	☒
6.	43.99'	Northeast corner of Lewis Smith grave marker.	☒	☐
-	-	-	☐	☐
-	-	-	☐	☐

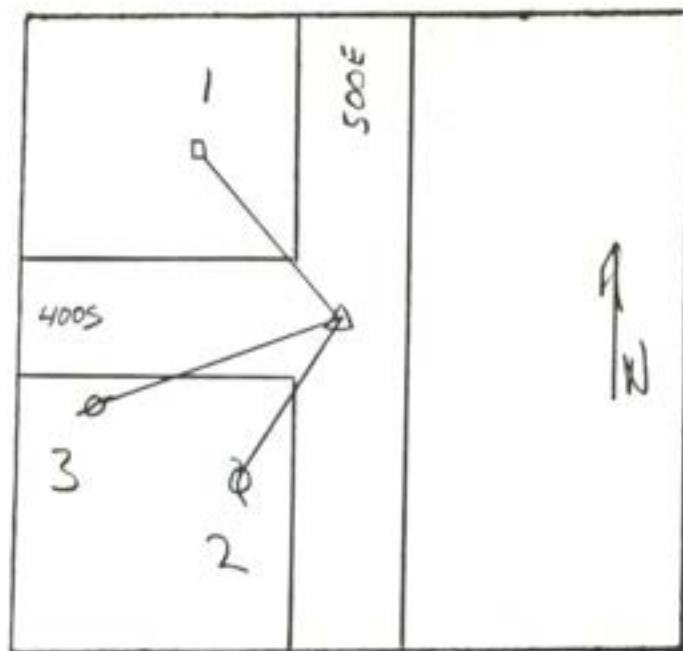

SEC 26 TWP 21 RANGE 5

8-21-87

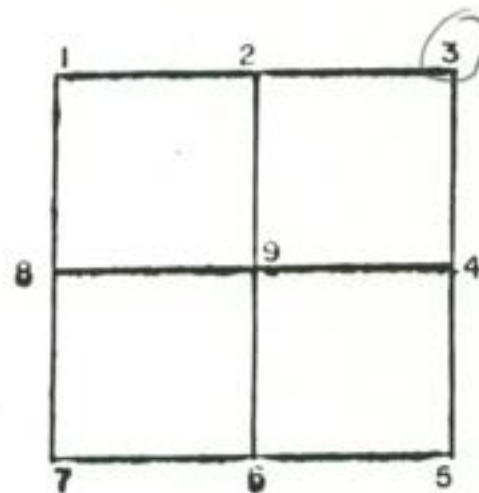


CORNER IDENT. 3 NO DESCRIPTION GIVEN

TIES: 1. 27.85 SN - HEADPOST

2. 28.60 SN - PWP


3. 55.60 SN - PWP

SEC 26 TWP 21 RANGE 5

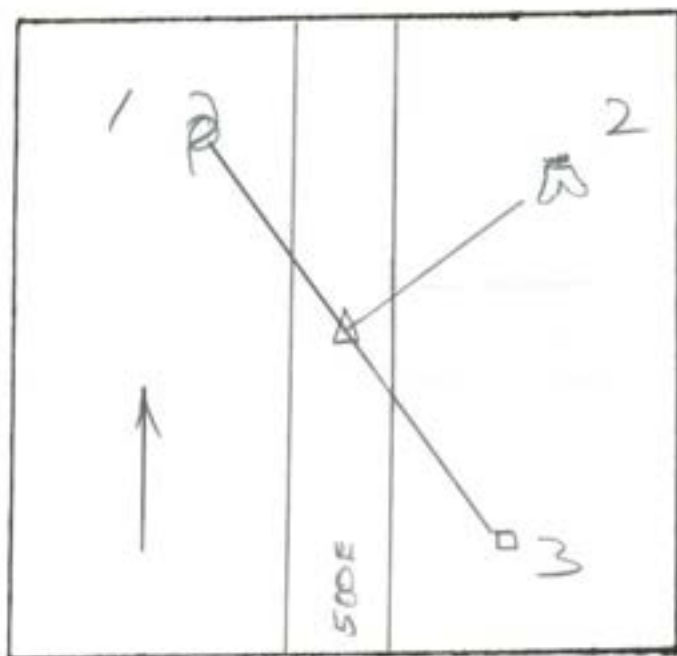

GRAPHIC TIES
(SKETCHED)

SEC 26 TWP 21 RANGE 5

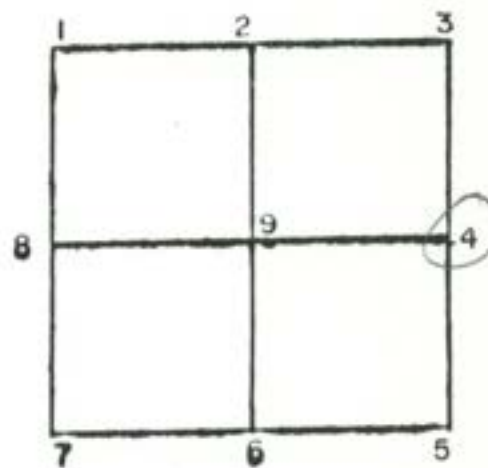


CORNER IDENT. NOT STATED


TIES: 1. 51.75' PWP
2. 44.25' TREE STUMP
3. 25.35' HP

SEC 26 TWP 21 RANGE 5

SEC 26 TWP 21 RANGE 5

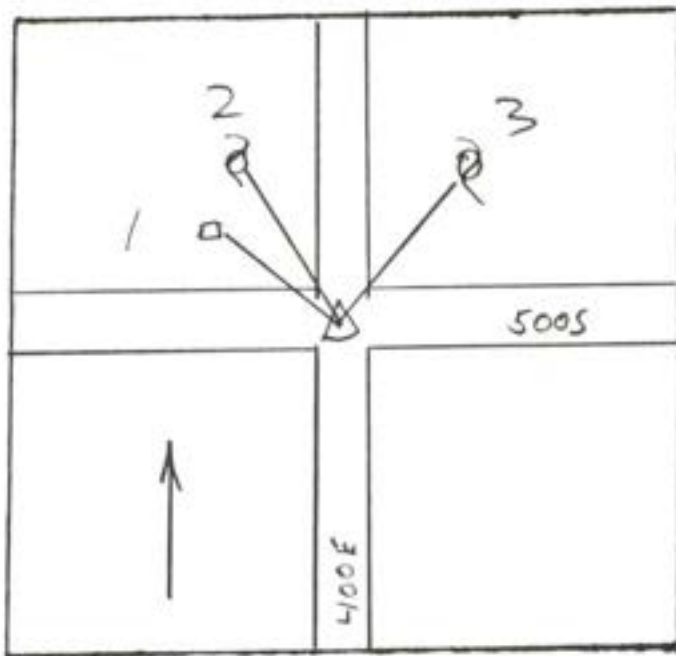



GRAPHIC TIES
(SKETCHED)

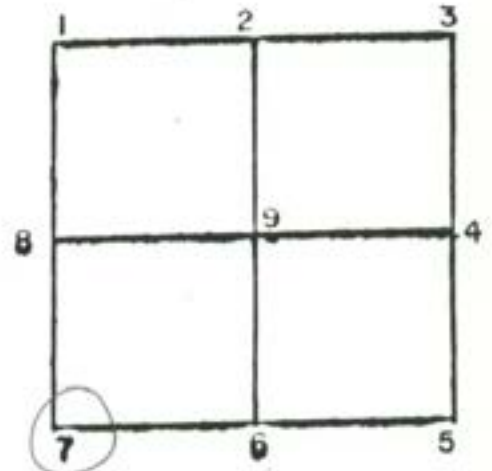

CORNER IDENT. _____

TIES: 1. 26.10' FP
2. 30.10' PWP
3. 24.10' PWP

SEC 26 TWP 21 RANGE 5

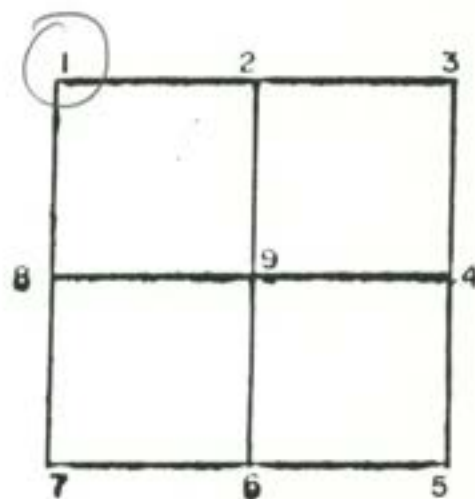

GRAPHIC TIES
(SKETCHED)


CORNER IDENT. 1 NO DESCRIPTION GIVEN

TIME: 1. 42.05 PWP

2. 43.23 CORNER POST

S. 44.15 CORNER POST


SEC 27 TWP 21 RANGE 5

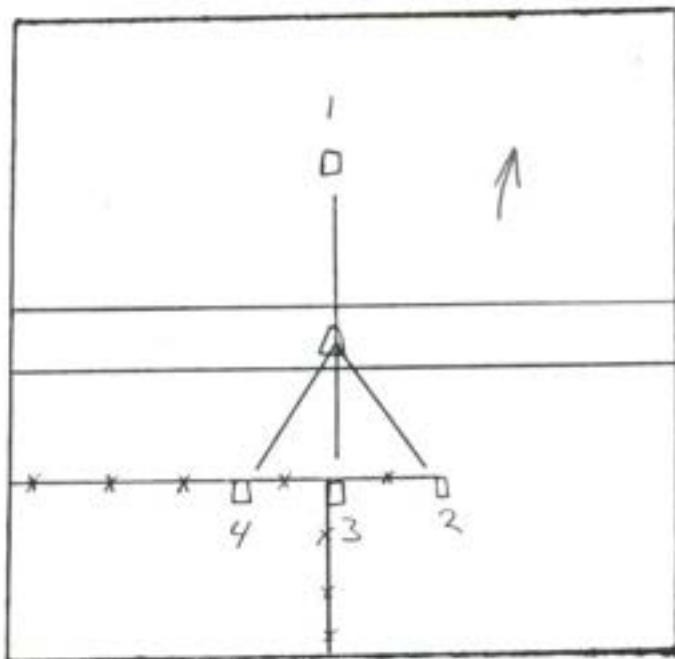

GRAPHIC TIES
(SKETCHED)

SEC 27 TWP 21 RANGE 5

DEC. 21, 1987

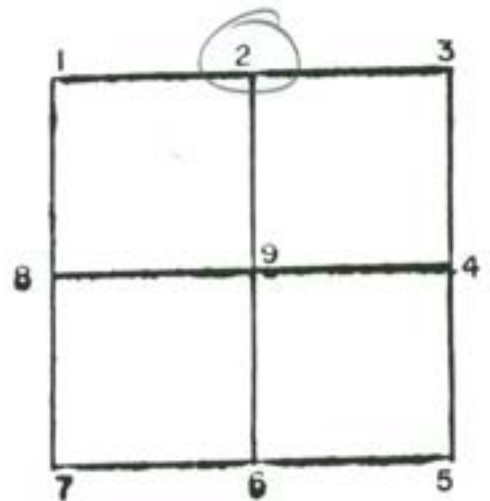


CORNER IDENT. STONE FND

TIES: 1. 17.65' HP
2. 21.05' FENCE POST
3. 19.55' HP
4. 21.45' HP


PK's FND IN ALL HEADPOST

SEC 27 TWP 21 RANGE 5

SEC 27 TWP 21 RANGE 5

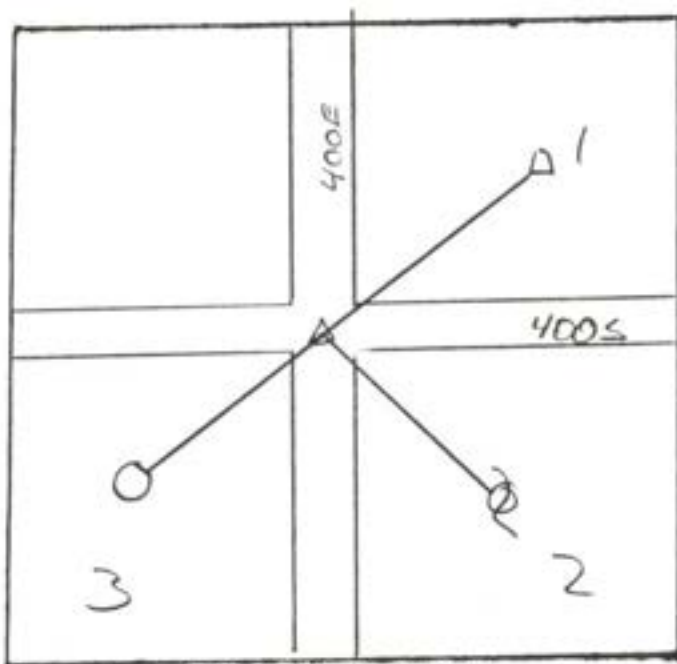

GRAPHIC TIES
(SKETCHED)

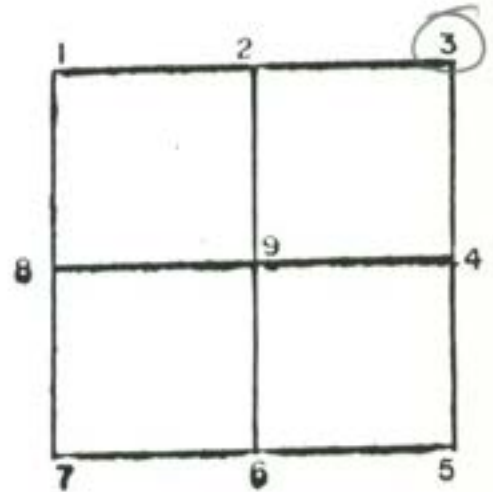


CORNER IDENT. STONE FND

TIES: 1. 28.60' FP

2. 24.75' FP


3. 24.75' STONE POST

SEC 27 TWP 21 RANGE 5

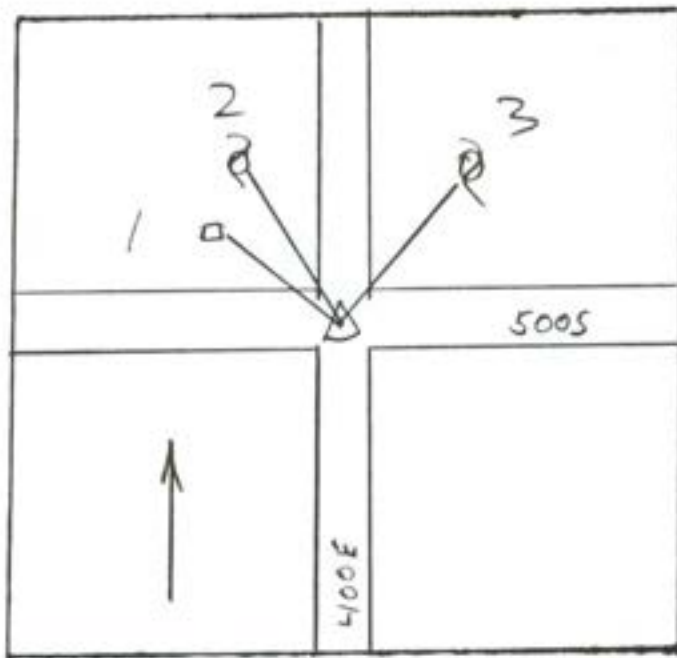

GRAPHIC TIES
(SKETCHED)


SEC. 27 TWP 21 RANGE 5

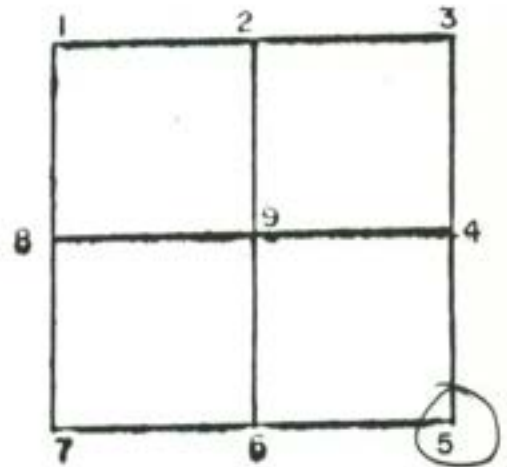


CORNER IDENT. _____

TIES: 1. 26.10' FP
2. 30.10' PWP
3. 24.10' PWP

SEC 27 TWP 21 RANGE 5

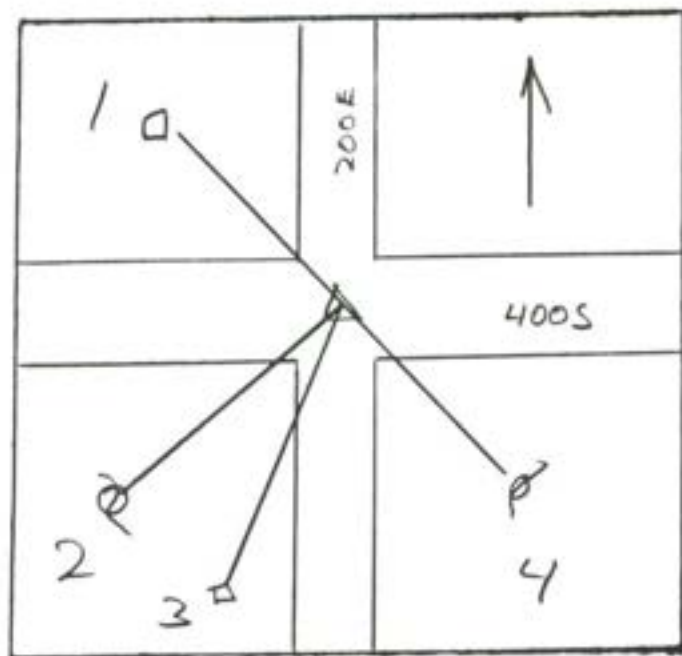

SEC 28 TWP 21 RANGE 5

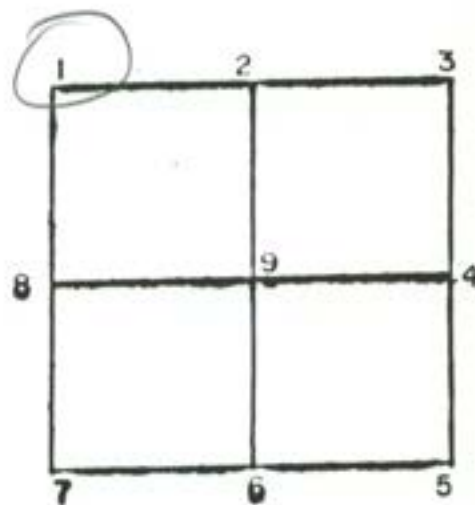


GRAPHIC TIES
(SKETCHED)


CORNER IDENT. NOT STATED

TIES: 1. 30.30' HP
2. 38.20' PWP
3. 29.00' HP
4. 54.80' PWP

SEC 28 TWP 21 RANGE 5

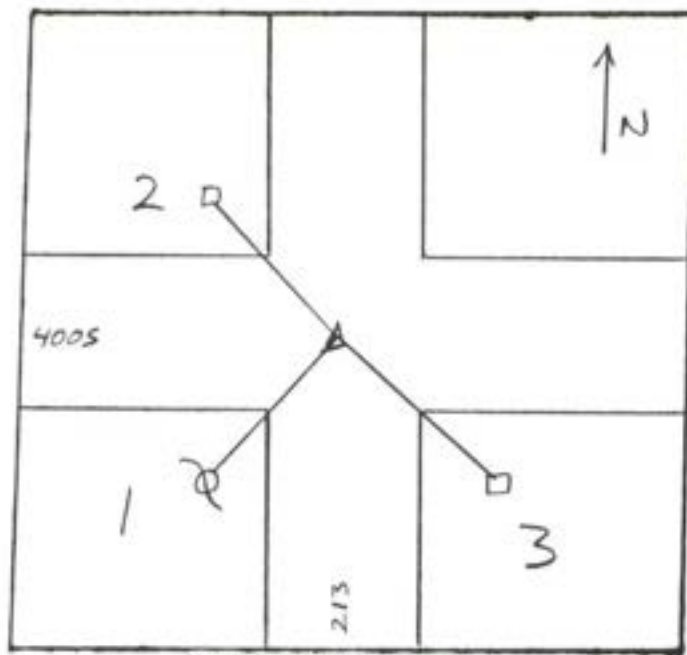

SEC 28 TWP 21 RANGE 5

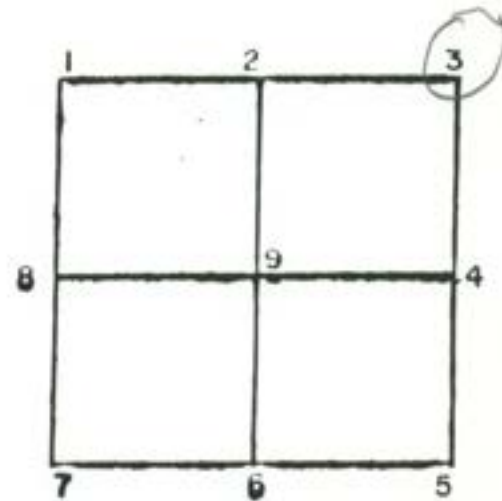


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 3 NO DESCRIPTION GIVEN


TIES:	1.	42.05	PWP
	2.	43.23	CORNER POST
	3.	44.15	CORNER POST

SEC 28 TWP 21 RANGE 5

SEC 29 TWP 21 RANGE 5

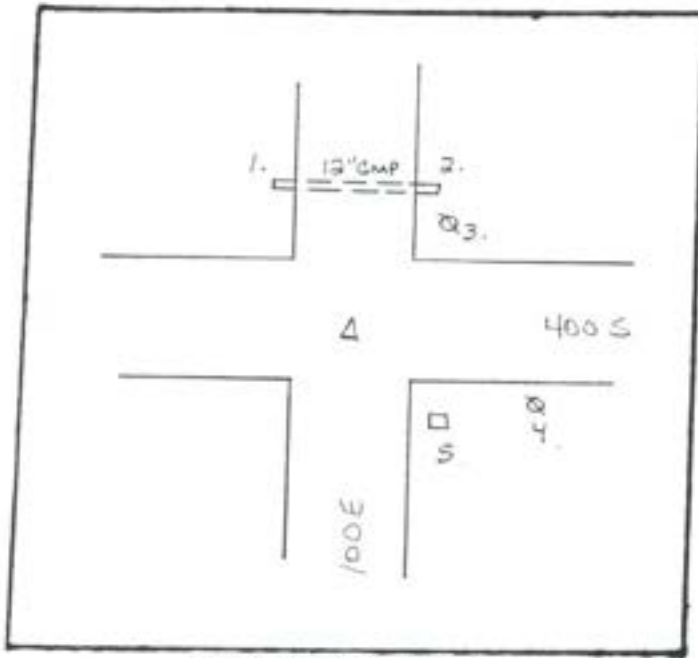


GRAPHIC TIES
(SKETCHED)

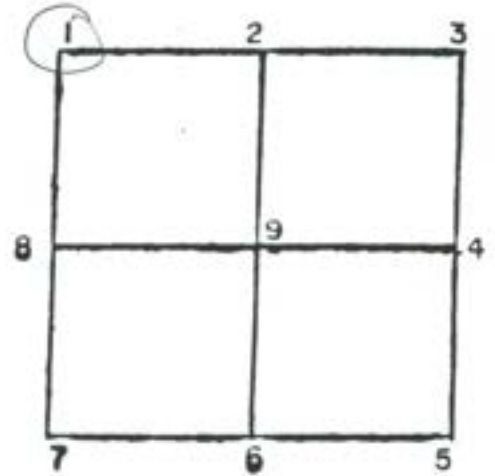

CORNER IDENT. BOLT SPIKE

- TIES: 1. 31.85' SOUTH EDGE OF WEST END OF 12" CMP
2. 31.47' " " " EAST " " " "
3. 26.53' PK NAIL IN POWER POLE
4. 55.23' " " " " "
5. 23.77' SW CORNER OF WOOD HEADPOST

SEC 29 TWP 21 RANGE 5




TIES:


1.	30.30'	HP
2.	38.20'	PWP
3.	29.00'	HP
4.	54.80'	PWP

SEC 29 TWP 21 RANGE 5

SEC 29 TWP 21 RANGE 5

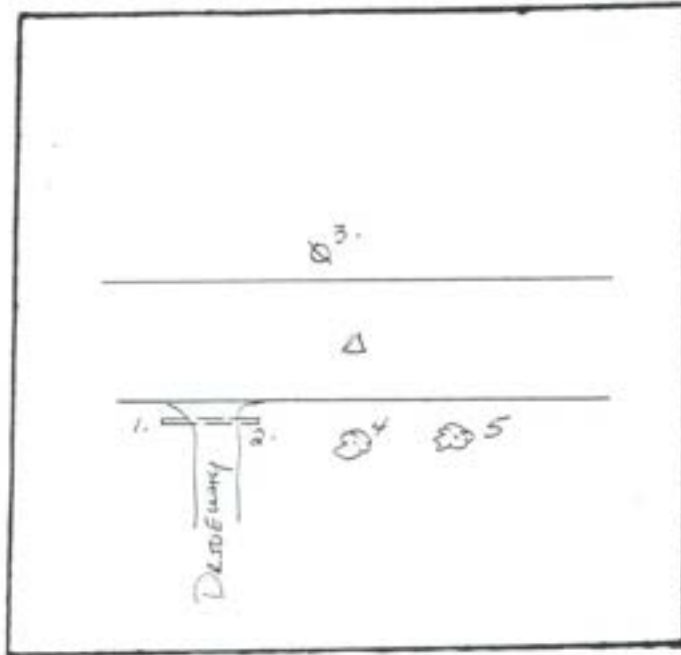

GRAPHIC TIES
(SKETCHED)

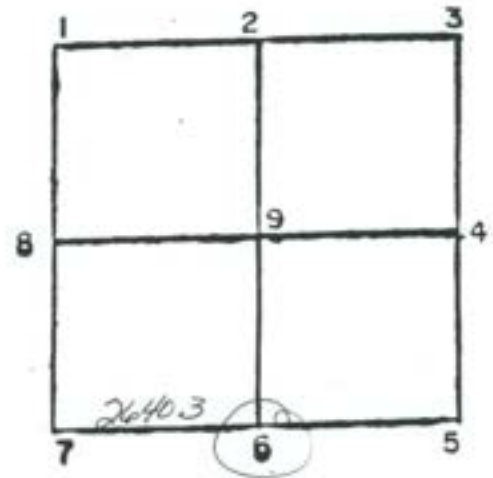


CORNER IDENT. IRON ROD


TIES: 1. 39.20' TOP CENTER OF WEST END OF 12" CMD UNDER DRIVE
2. 17.51' " " " EAST " " " " "
3. 16.12 PK NAIL IN POWERPOLE
4. 31.50' " " TREE
5. 17.60' " " "

SEC 29 TWP 21 RANGE 5

SEC 29 TWP 21 RANGE 5

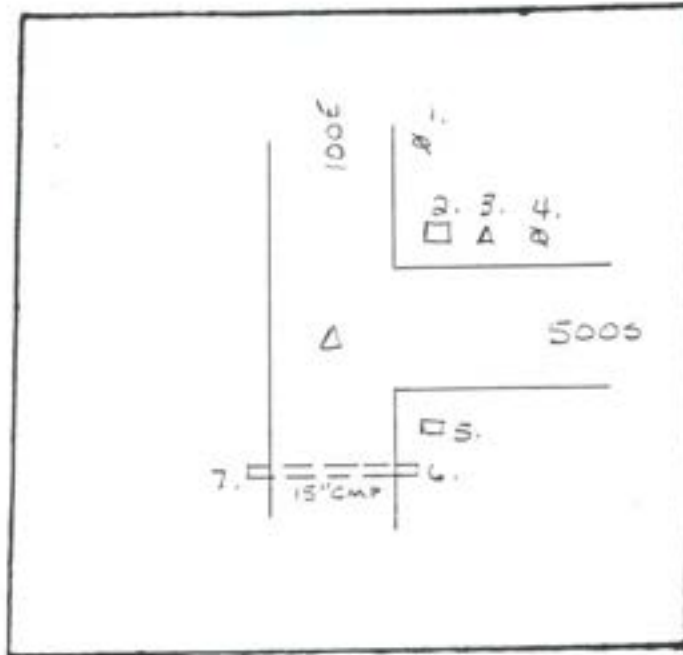

GRAPHIC TIES
(SKETCHED)

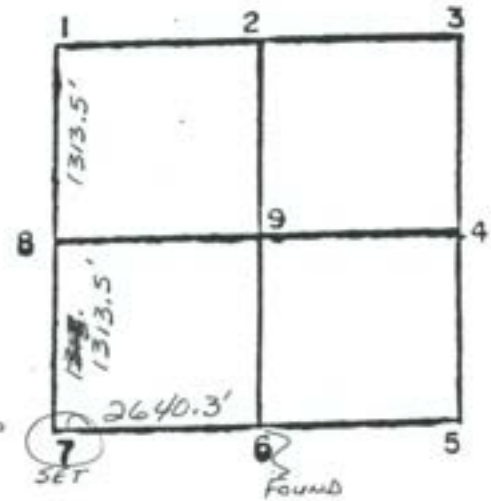

Δ 2640.00
FOUND


7 SET

6 FOUND

CORNER IDENT. 1" IRON ROD


- TIES:
1. 30.90' PK NAIL IN POWERPOLE
 2. 17.85' SW CORNER OF BRICK HEADPOST
 3. 41.40' 4' IN CENTER OF AZIMUTH "HERON"
 4. 52.55' PK NAIL IN POWERPOLE
 5. 31.90' " " " FENCEPOST
 6. 61.50' NORTH EDGE OF EAST END OF 15" CMP
 7. 62.90' " " " WEST " " " "

SEC 29 TWP 21 RANGE 5

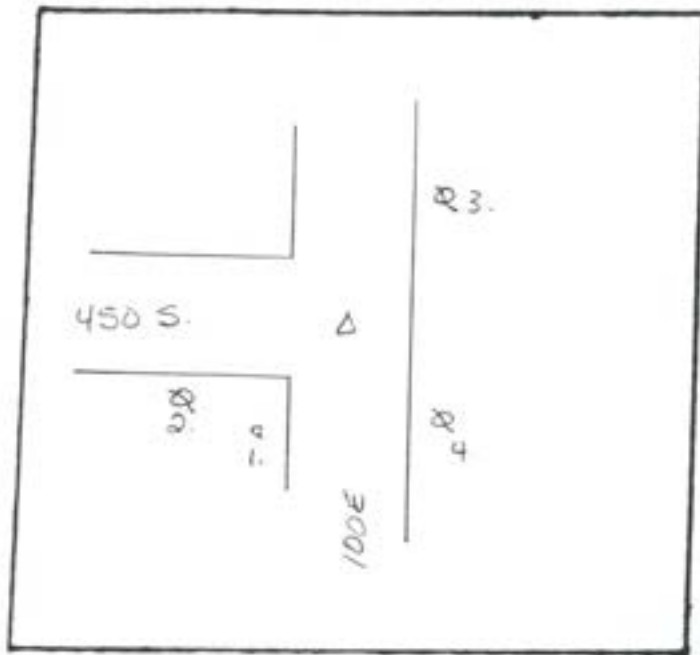

GRAPHIC TIES
(SKETCHED)


SEC 29 TWP 21 RANGE 5

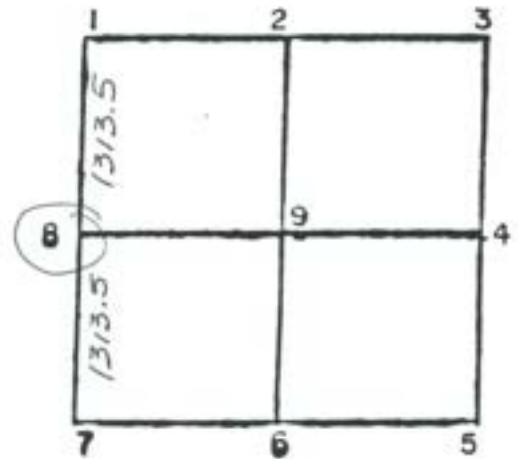

CORNER IDENT. BOLT SPIRE


TIES: 1. 42.15 PK NAIL IN FENCEPOST
2. 53.70 " " " POWERPOLE
3. 187.90' " " " "
4. 24.03 " " " "

SEC 29 TWP 21 RANGE 5

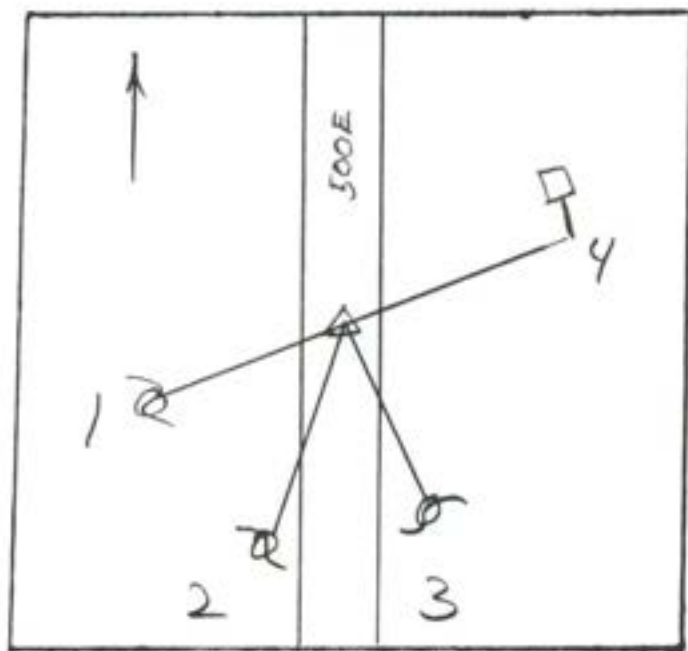

GRAPHIC TIES
(SKETCHED)

SEC 30 TWP 21 RANGE 5

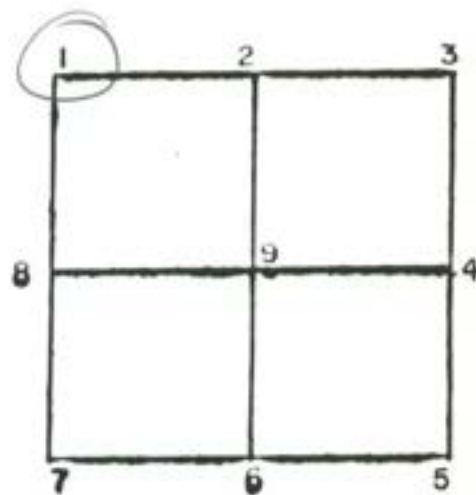


CORNER IDENT. NOT STATED


TIES: 1. 51.60' PWP
 2. 40.50' PWP
 3. 33.30' PWP
 4. 40.10' SIGN POST

SEC 30 TWP 21 RANGE 5

SEC 30 TWP 21 RANGE 5

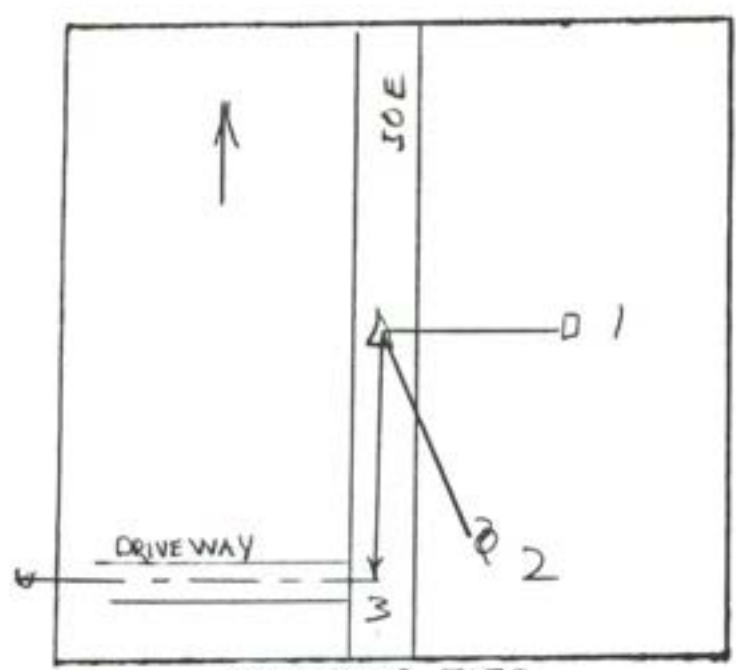


GRAPHIC TIES
(SKETCHED)

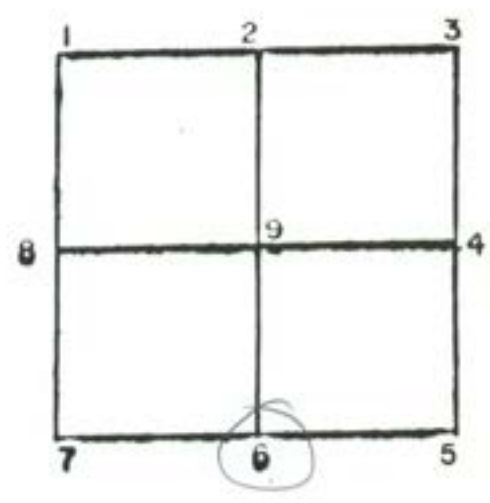

CORNER IDENT. 5/8" IRON PIN SET

TIES: 1. 17.33' HP
2. 98.55' PWP
3. 88.87' TO E OF DRIVEWAY S OF STONE


SEC 30 TWP 21 RANGE 5

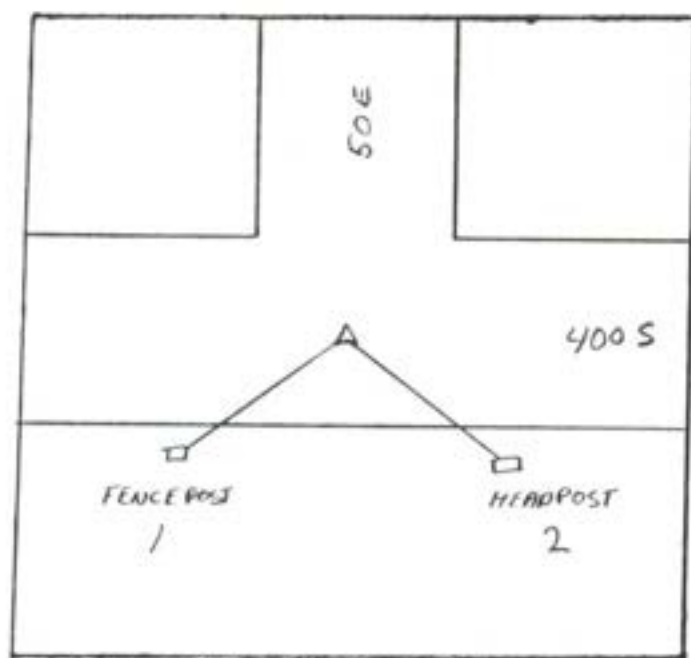

GRAPHIC TIES
(SKETCHED)

SEC 30 TWP 21 RANGE 5

7-10-84

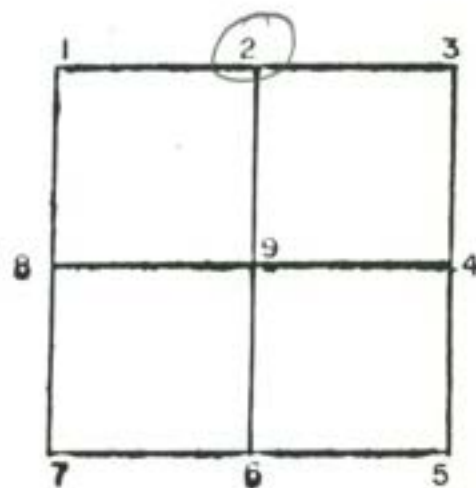

CORNER IDENT. 2


TIES:

1. 30.55 TO FENCE POST


2. 18.40 TO HEAD POST

SEC 30 TWP 21 RANGE 5

SEC 30 TWP 21 RANGE 5

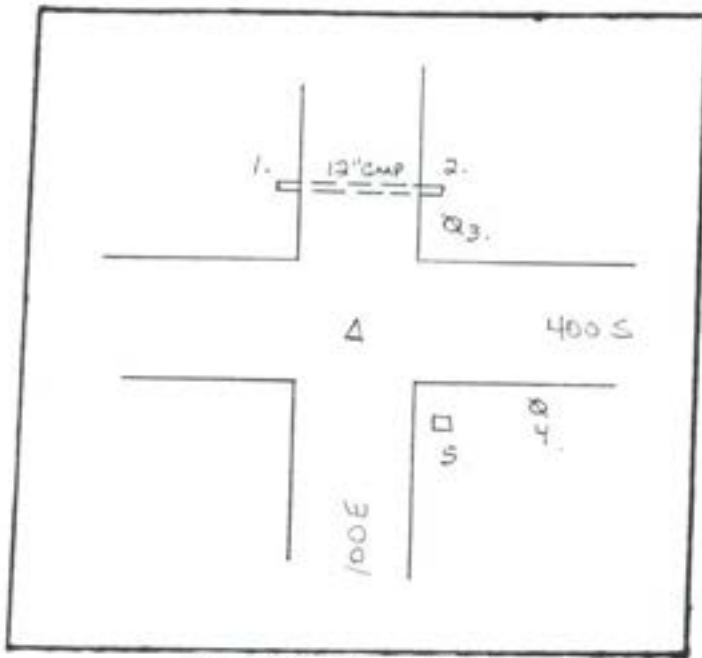

GRAPHIC TIES
(SKETCHED)

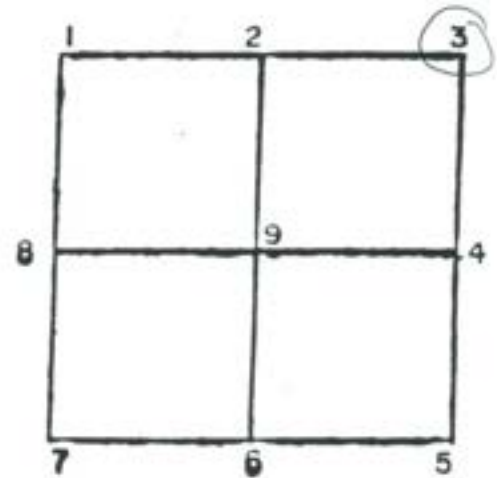


CORNER IDENT. BOLT SPIKE


- TIES:
1. 31.85' SOUTH EDGE OF WEST END OF 12" CMP
 2. 31.47' " " " EAST " " " "
 3. 26.53' PK NAIL IN POWER POLE
 4. 55.25' " " " " "
 5. 23.77' SW CORNER OF WOOD HEADPOST

SEC 30 TWP 21 RANGE 5

SEC. 30 TWP. 21 RANGE 5

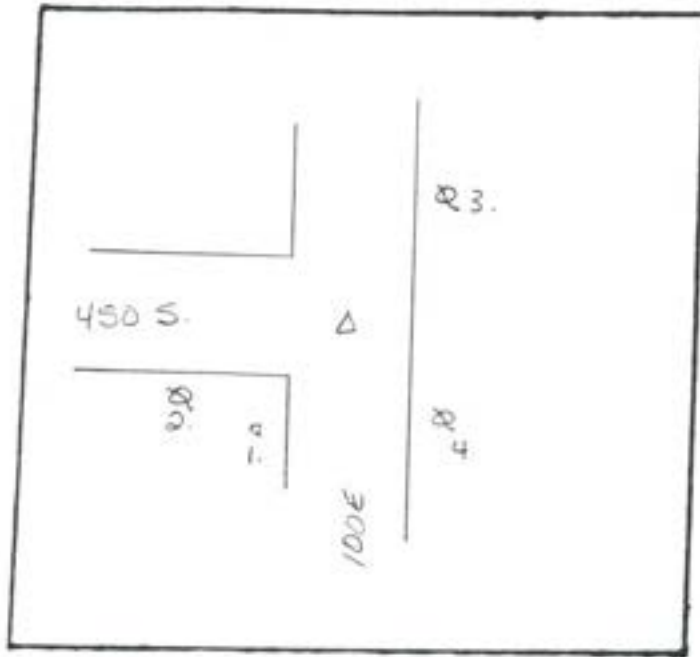

GRAPHIC TIES
(SKETCHED)

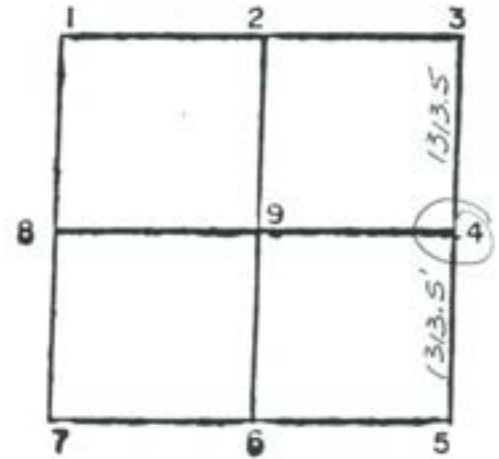


CORNER IDENT. BOLT SPIRE


TIES: 1. 42.15 PK NAIL IN FENCEPOST
2. 53.70 " " " POWERPOLE
3. 187.90' " " " "
4. 24.03 " " " "

SEC. 30 TWP. 21 RANGE 5

SEC. 30 TWP. 21 RANGE 5

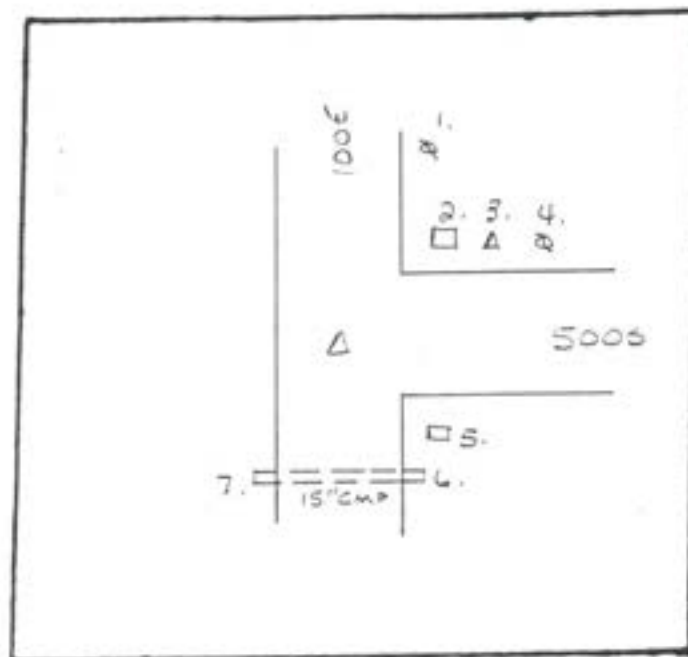

GRAPHIC TIES
(SKETCHED)

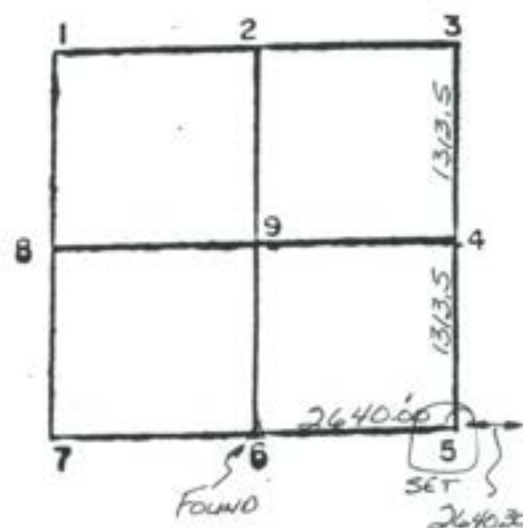

CORNER IDENT. 1" IRON ROD SET

TIES:



1. 30.90' PK NAIL IN POWERPOLE
2. 17.85' SW CORNER OF BRICK HEADPOST
3. 41.40' + IN CENTER OF AZEMUTH "HERON"
4. 52.55' PK NAIL IN POWERPOLE
5. 31.90' " " " FENCEPOST
6. 61.50' NORTH EDGE OF EAST END OF 15" CMP
7. 62.90' " " " WEST " " " "

SEC 30 TWP 21 RANGE 5

REFERENCE SHEET

SECTION 30 TOWNSHIP 21 RANGE 5 EAST

DATE OF RECOVERY AUGUST, 2001

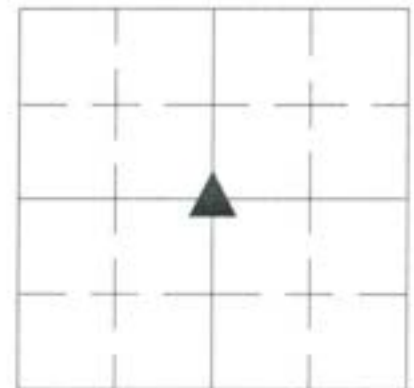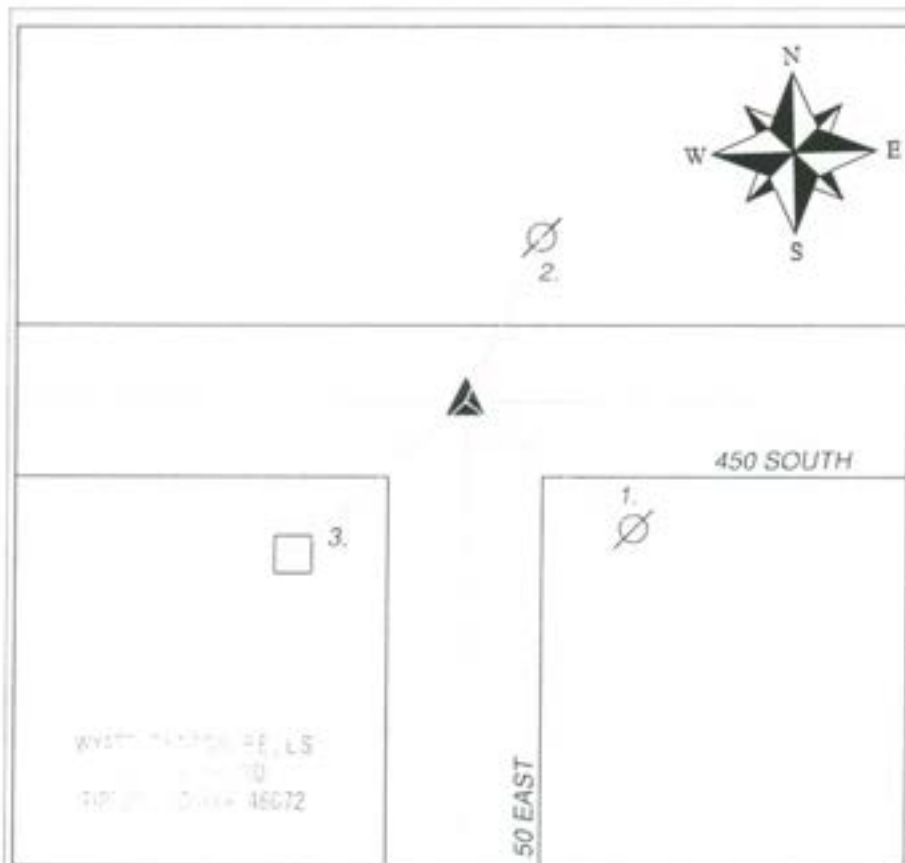

INDIANA COORDINATE SYSTEM
OBSERVATION DATE: _____
CREW: _____
NORTH: _____ EAST: _____
ELEVATION: _____
SURFACE SCALE FACTOR: _____
LATITUDE: _____
LONGITUDE: _____
ELLIPSOID HEIGHT: _____


PARTY CHIEF: ROD KELLY
CREW: ROD KELLY, JARED HENRY

TYPE OF MARKER IDENTIFIED: 1" IRON ROD
HISTORY AND DESCRIPTION OF RECOVERED POINT:


NO MONUMENT WAS FOUND AT THE CENTER OF THIS SECTION. WE REESTABLISHED THIS CORNER BY REBAR ON THE AT THE CORNERS OF THE PROPERTY LYING SOUTHWEST OF THIS POINT. THE PARCEL WE WERE SURVEYING AT THIS TIME STARTED AT THIS POINT. I WAS TOLD BY THE COUNTY SURVEYOR THAT MANY STONES IN THIS PORTION OF THE TIME STARTED AT THIS POINT. I WAS TOLD BY THE COUNTY SURVEYOR THAT MANY STONES IN THIS PORTION OF THE

REFERENCE	DISTANCE	DESCRIPTION	FOUND	SET
1.	39.03'	MAG NAIL W/ I.D. WASHER IN NORTH SIDE OF POWERPOLE	☐	☒
2.	21.46'	PK NAIL IN SOUTHEAST SIDE OF POWERPOLE	☒	☐
3.	34.03'	PK NAIL IN NORTHWEST CORNER OF POST	☒	☐
4.	-	-	☐	☐
5.	-	-	☐	☐
6.	-	-	☐	☐
7.	-	-	☐	☐
8.	-	-	☐	☐

SEC 31 TWP 21 RANGE 5

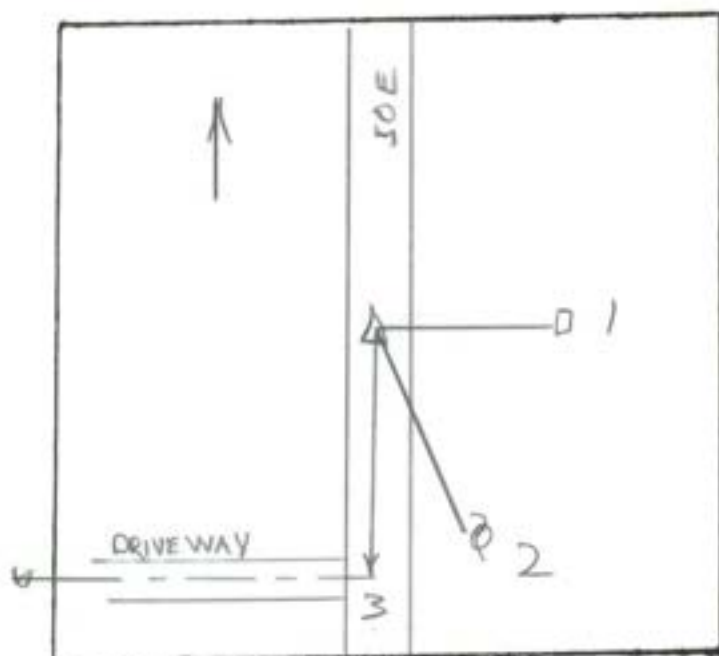

GRAPHIC TIES
(SKETCHED)

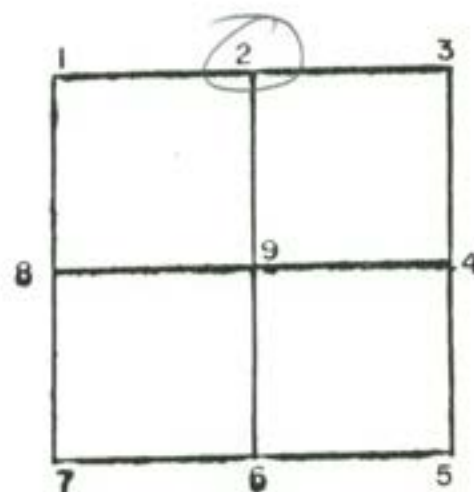


CORNER IDENT. 5/8" IRON PIN SET


TIES: 1. 17.33' HP
2. 98.55' PWP
3. 88.87' TO E OF DRIVEWAY S OF STONE

SEC 31 TWP 21 RANGE 5

SEC 31 TWP 21 RANGE 5

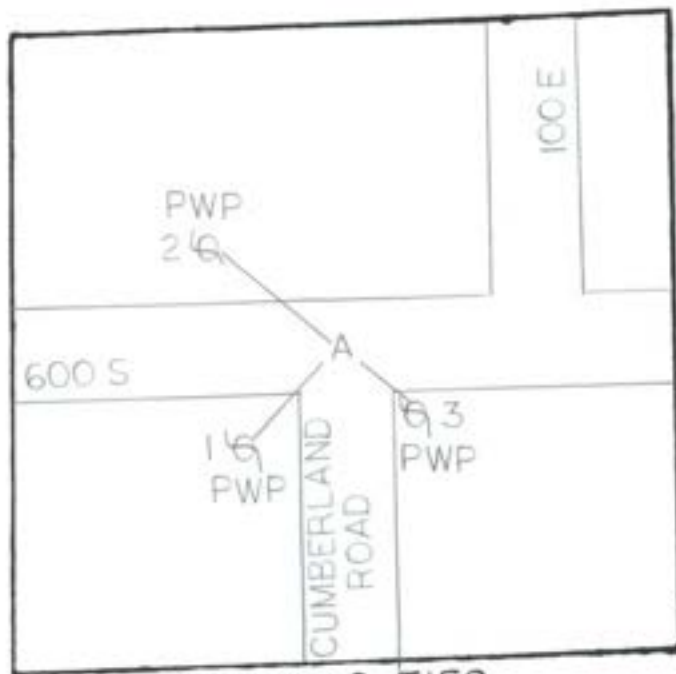

GRAPHIC TIES
(SKETCHED)

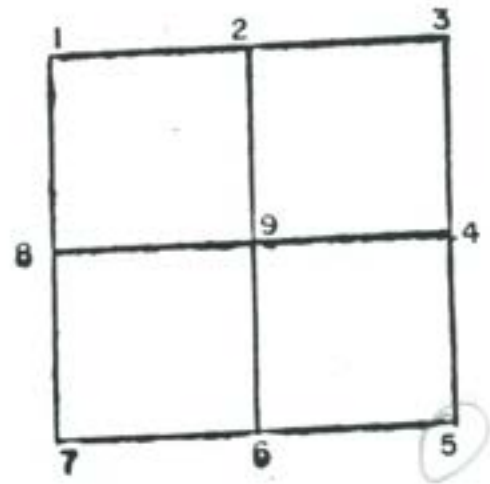

CORNER IDENT. "A" CORNERSTONE BOX

TIES:


- A
1. 47.2'
 2. 62.6'
 3. 22.8'

* ALL ARE PK IN PWP


* MEASURED TO NE COR OF BOX

SEC 31 TWP 21 RANGE 5

SEC 16 TWP 20 RANGE 5

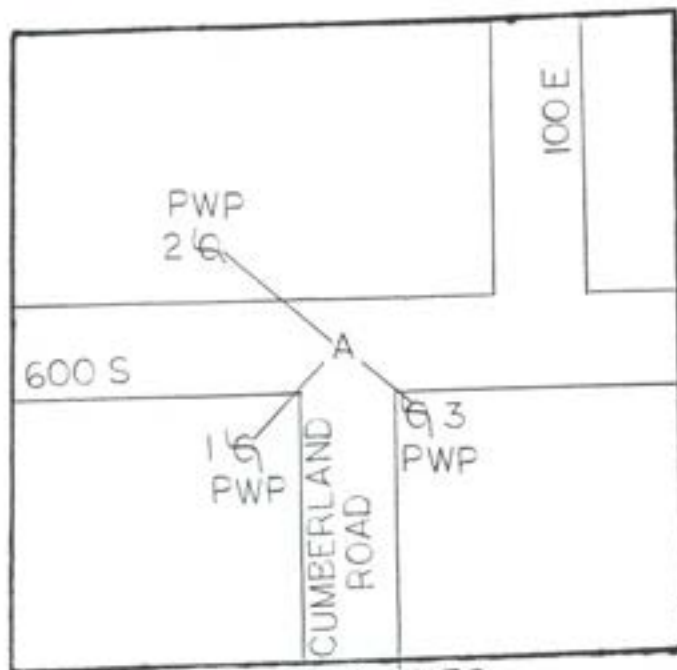

GRAPHIC TIES
(SKETCHED)

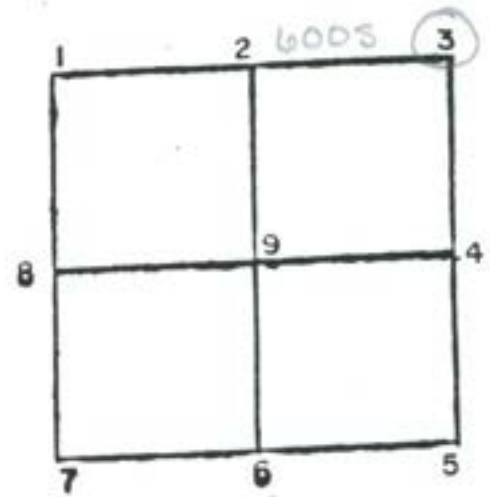

CORNER IDENT. "A" CORNERSTONE BOX

TUES:

A


47.2'

$$\overline{2.62.6'}$$


3. 22.8

SEC 6 TWP 20 RANGE 5.

SEC 31 TWP 21 RANGE 5

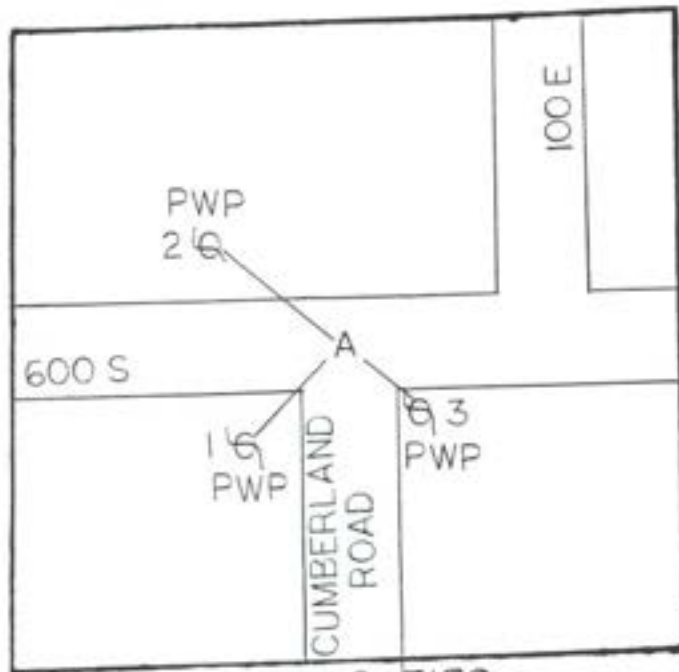

GRAPHIC TIES
(SKETCHED)

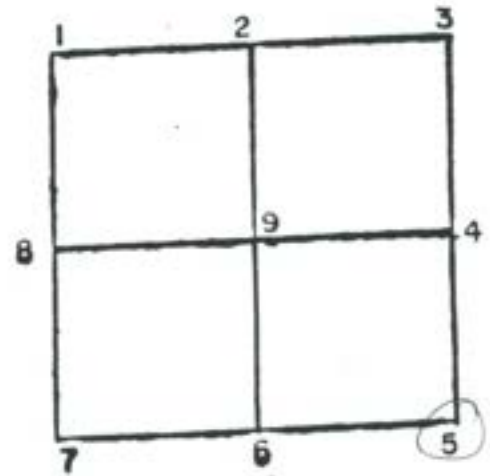

CORNER IDENT. "A" CORNERSTONE BOX

TIES: A

1. 47.2'

2. 62.6'

3. 22.8'


SEC 31 TWP 21 RANGE 5

A hand-drawn map showing the study area. The map is bounded by a vertical line labeled "50°E" and a horizontal line labeled "600 S". A vertical road labeled "WHISTLER ROAD" runs along the left side. Two points, A and B, are marked on the horizontal line. Three points are labeled "PWP 1", "PWP 2", and "PWP 3", and one point is labeled "HP". Lines connect A to PWP 1, A to PWP 2, A to PWP 3, and B to PWP 1, B to PWP 2, and B to PWP 3. A scale bar is shown at the bottom right.


	A	B	
1.	73.9'	65.2'	PWP
2.	79.2'	26.5'	HP
3.	111.40'	28.3'	PWP

SEC 31 TWP 21 RANGE 5

SEC 6 TWP 20 RANGE 5

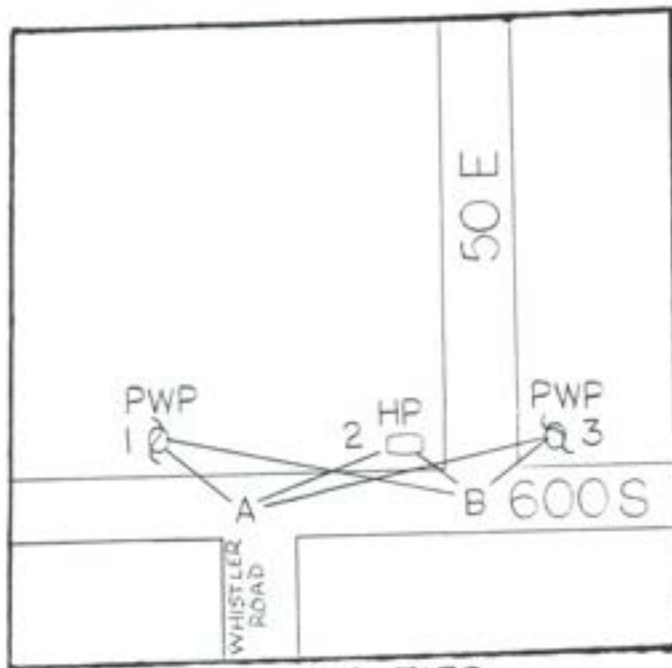

GRAPHIC TIES
(SKETCHED)

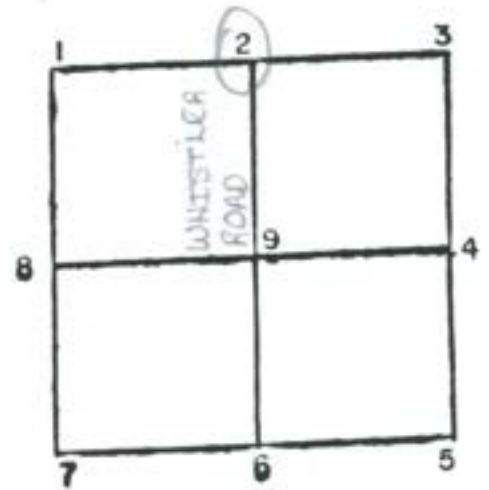

CORNER IDENT. "A" BOLT SPIKE "B" NAIL

TIES:	A	B	
1.	73.9'	65.2'	PWP
2.	79.2'	26.5'	HP
3.	111.40'	28.3'	PWP

SEC 6 TWP 20 RANGE 5

A hand-drawn map showing the study area. The map is bounded by a vertical line labeled "50°E" and a horizontal line labeled "60°S". A vertical line labeled "WHISTLER ROAD" runs along the left side. Two points, A and B, are marked on the horizontal line. Lines connect A to PWP 1, 2, 3 and B to PWP 1, 2, 3. A small square is drawn near HP.




CORNER IDENT. "A" BOLT SPIKE "B" NAIL


	A	B	
1.	73.9'	65.2'	PWP
2.	79.2'	26.5'	HP
3.	111.40'	28.3'	PWP

SEC 31 TWP 21 RANGE 5

SEC 31 TWP 21 RANGE 5

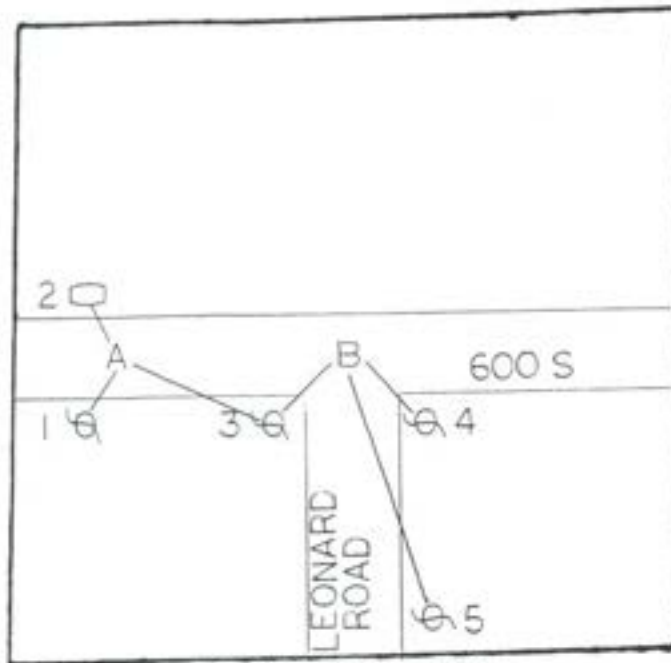

GRAPHIC TIES
(SKETCHED)

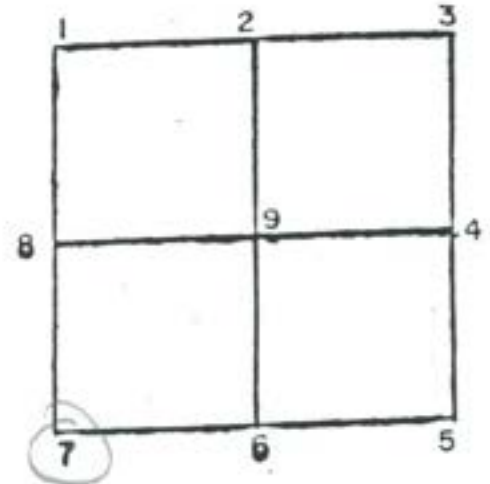


CORNER IDENT. "A" RR SPIKE "B" CORNERSTONE BOX (MEASURED TO NE INSIDE CORNER)


TIES:	A	B
1.	20.9' PWP	
2.	20.2' HP	
3.	165.1'	35.6' PWP
4.		50.1' HP
5.		74.0' PWP

SEC 31 TWP 21 RANGE 5

SEC 1 TWP 20 RANGE 4

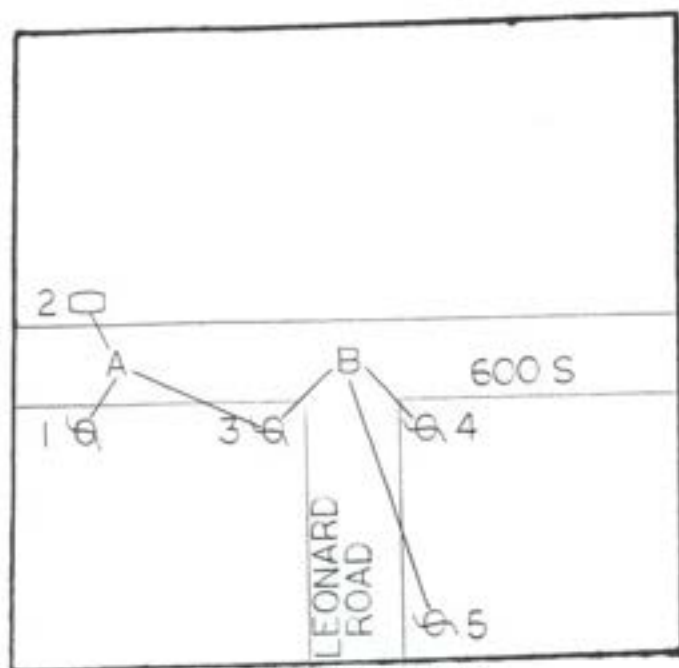

GRAPHIC TIES
(SKETCHED)

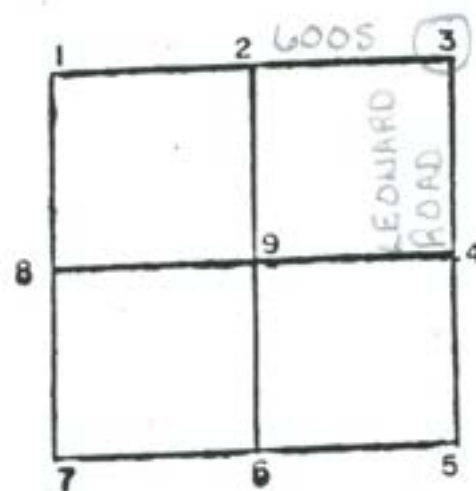


CORNER IDENT. "A" RR SPIKE "B" CORNERSTONE BOX (MEASURED TO NE INSIDE CORNER)


TIES:	A	B
1.	20.9' PWP	
2.	20.2' HP	
3.	165.1'	35.6' PWP
4.		50.1' HP
5.		74.0' PWP

SEC 1 TWP 20 RANGE 4

SEC 31 TWP 21 RANGE 5

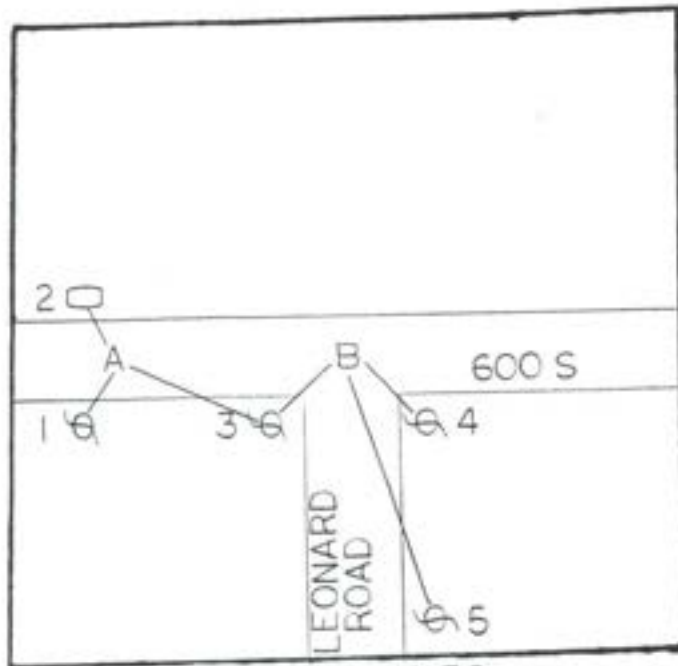

GRAPHIC TIES
(SKETCHED)

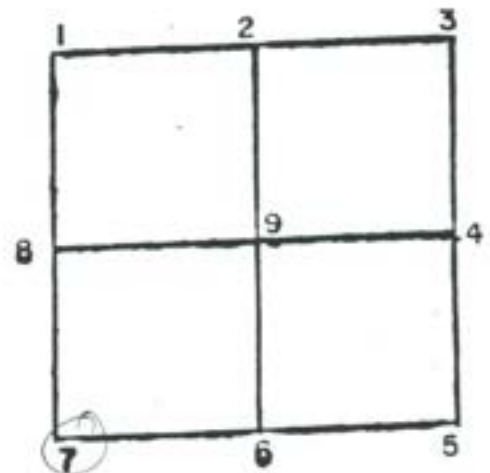


CORNER IDENT. "A" RR SPIKE "B" CORNERSTONE BOX

TIES:


	A	B
1.	20.9' PWP	
2.	20.2' HP	
3.	165.1'	35.6' PWP
4.		50.1' HP
5.		74.0' PWP

SEC 31 TWP 21 RANGE 5

SEC. 31 TWP. 21 RANGE 5

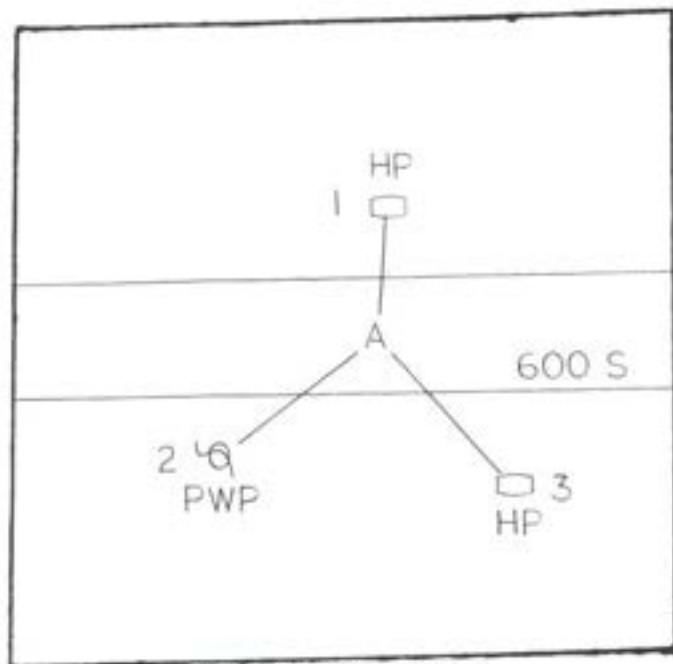

GRAPHIC TIES
(SKETCHED)

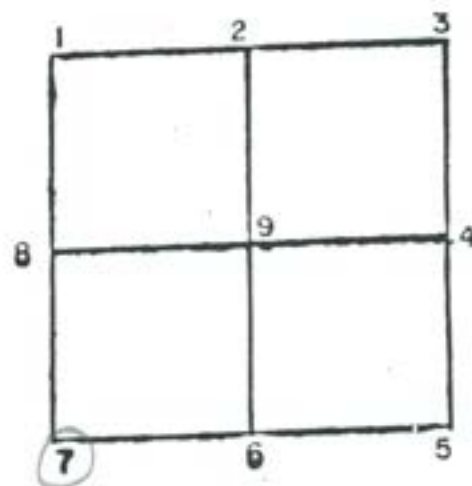


CORNER IDENT. A IRON PIN

TIES:


- A
- 1. 20.2' HP
 - 2. 35.0' PWP
 - 3. 45.7' HP
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -

SEC. 31 TWP. 21 RANGE 5

SEC 31 TWP 21 RANGE 5

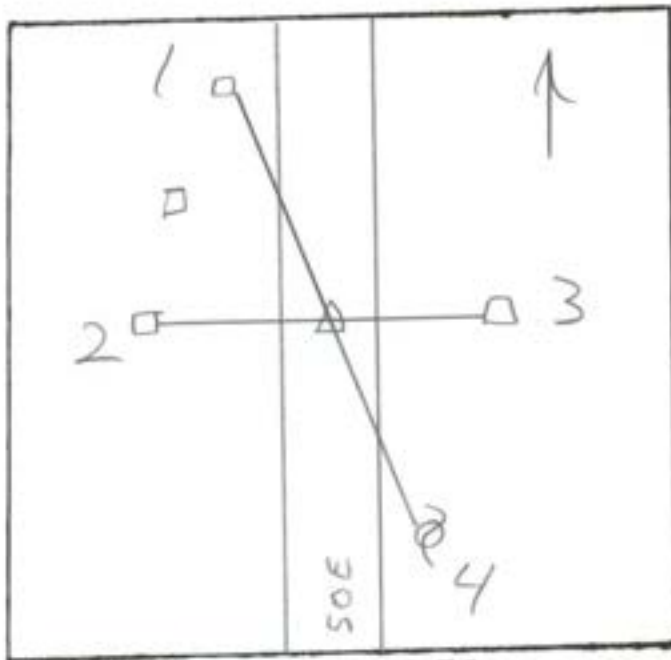

GRAPHIC TIES
(SKETCHED)

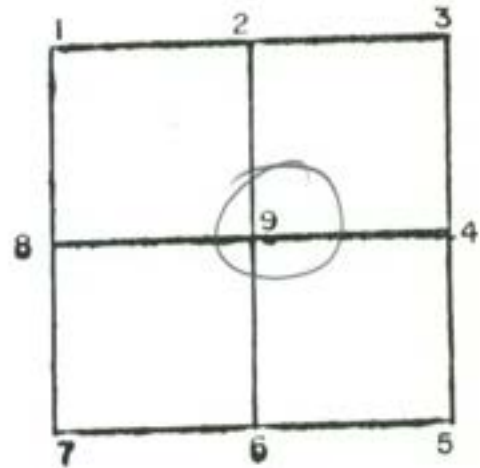


CORNER IDENT. STONE 1.0 DEEP


TIES: 1. 59.05' 2ND FP N OF HP
2. 16.8' HP
3. 17.9' HP
4. 50.65' PWP

SEC 31 TWP 21 RANGE 5

SEC 32 TWP 21 RANGE 5

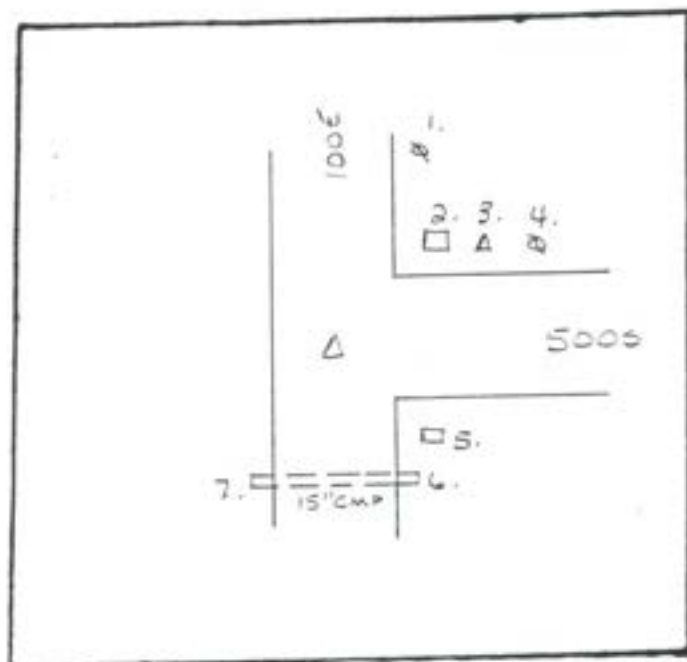

GRAPHIC TIES
(SKETCHED)

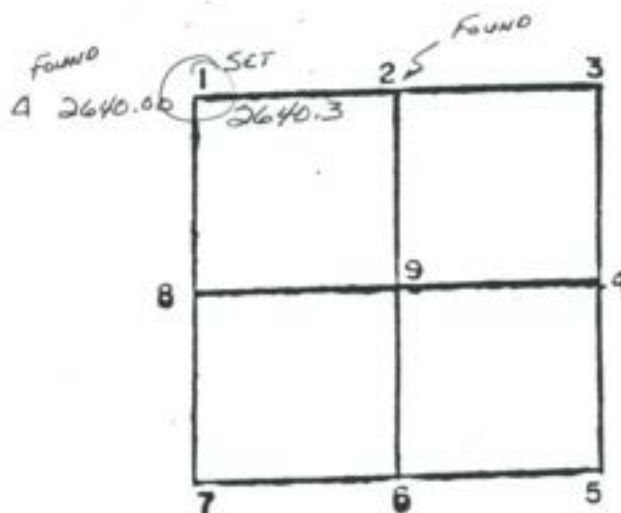


CORNER IDENT. 1" IRON ROD


- TIES:
1. 30.90' PK NAIL IN POWERPOLE
 2. 17.85' SW CORNER OF BRICK HEADPOST
 3. 41.40' 4' IN CENTER OF AZEMUTH "HERON"
 4. 52.55' PK NAIL IN POWERPOLE
 5. 31.90' " " " FENCEPOST
 6. 61.50' NORTH EDGE OF EAST END OF 15" CMP
 7. 62.90' " " " WEST " " " "

SEC 32 TWP 21 RANGE 5

SEC 32 TWP 21 RANGE 5

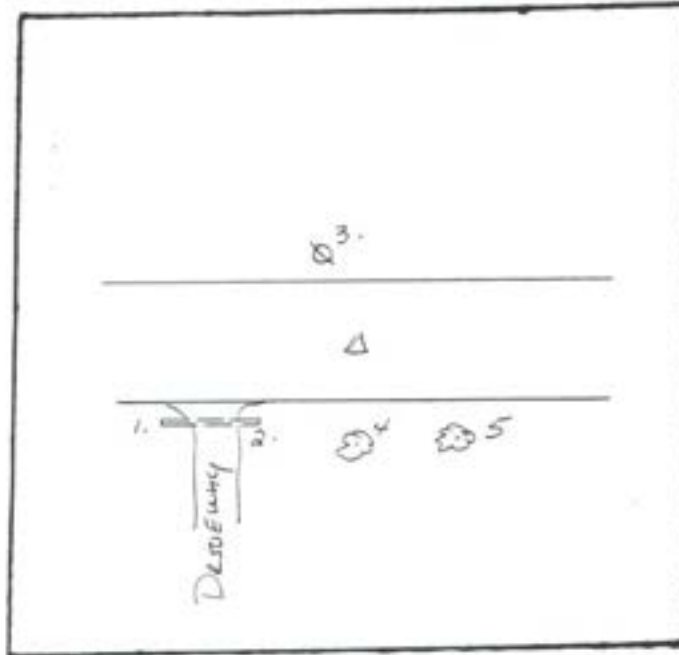

GRAPHIC TIES
(SKETCHED)

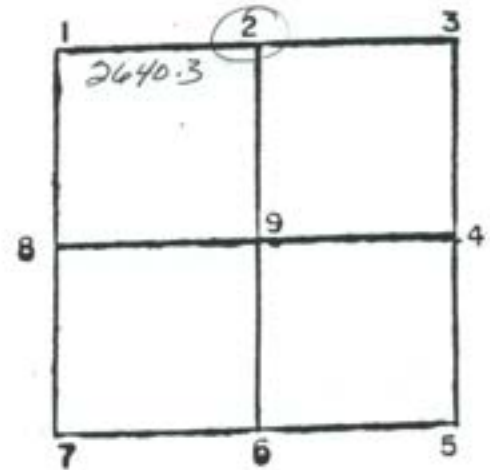


CORNER IDENT. IRON ROD


TIES: 1. 39.20' TOP CENTER OF WEST END OF 12" CMD UNDER DRIVE
 2. 17.51' " " " EAST " " " " "
 3. 16.12 PK NAIL IN POWERPOLE
 4. 31.50' " " TREE
 5. 17.60' " " "

SEC 32 TWP 21 RANGE 5

SEC. 31 TWP 21 RANGE 5

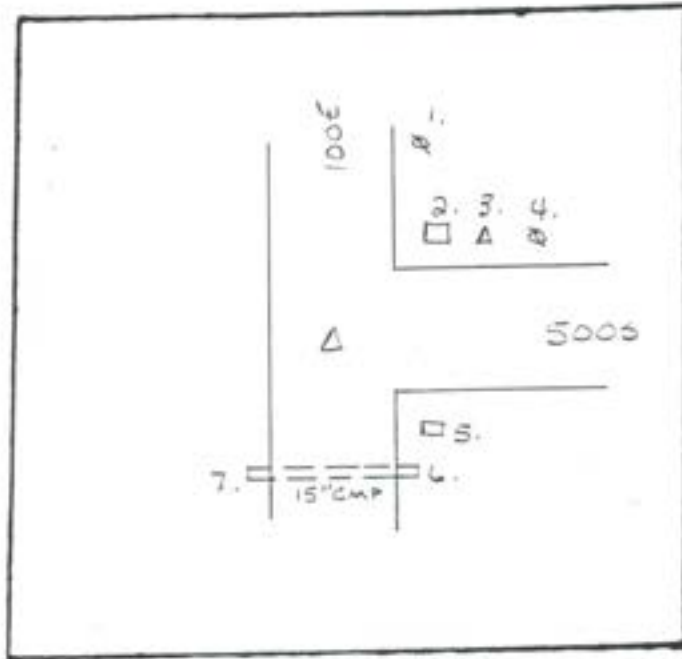

GRAPHIC TIES
(SKETCHED)

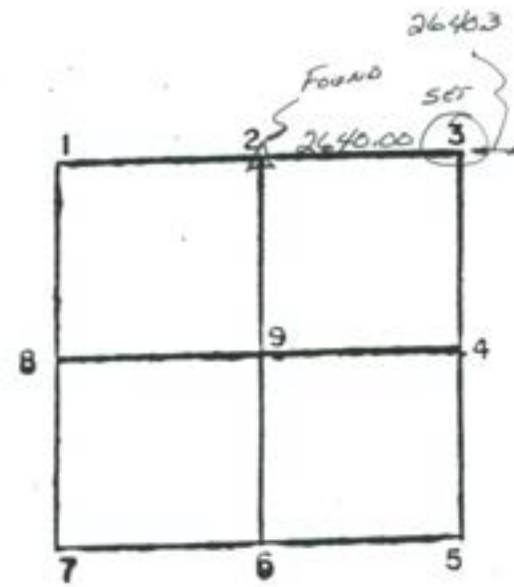


CORNER IDENT. 1" IRON ROD SET


- TIES:
- 1. 30.90' PK NAIL IN POWERPOLE
 - 2. 17.85' SW CORNER OF BRICK HEADPOST
 - 3. 41.40' '+' IN CENTER OF AZIMUTH "HERON"
 - 4. 52.55' PK NAIL IN POWERPOLE
 - 5. 31.90' " " " FENCEPOST
 - 6. 61.50' NORTH EDGE OF EAST END OF 15" CMP
 - 7. 62.90' " " " WEST " " " "

SEC. 31 TWP 21 RANGE 5

SEC 32 TWP 21 RANGE 5

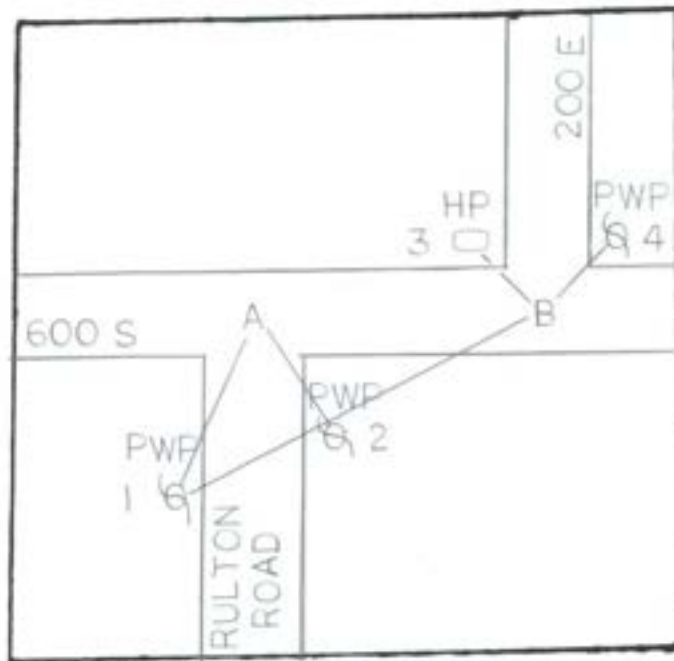

GRAPHIC TIES
(SKETCHED)

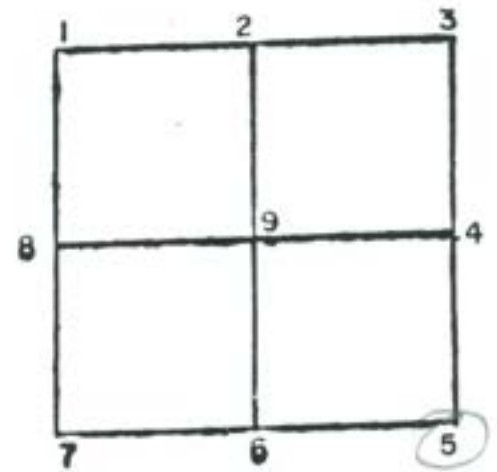


CORNER IDENT. "A" RR SPIKE "B" RR SPIKE

TIES:


	A	B		
1	67.9'	175.1'	PWP	(PK E FACE)
2	48.3'		PWP	(PK W FACE)
3		27.9'	HP	(PK S FACE)
4		33.3'	PWP	(PK NW FACE)

SEC 32 TWP 21 RANGE 5

SEC 5 TWP 20 RANGE 5

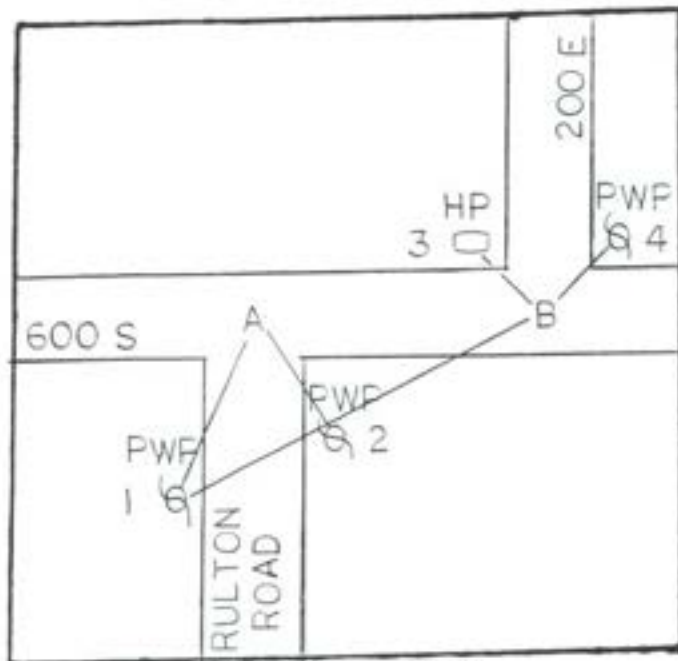

GRAPHIC TIES
(SKETCHED)

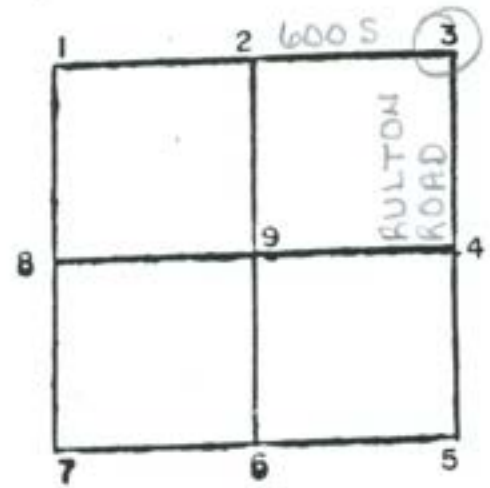


CORNER IDENT. 'A' RR SPIKE 'B' RR SPIKE

TIES:


	A	B	
1	67.9'	175.1'	PWP
2	48.3'		PWP
3		27.9'	HP
4		33.3'	PWP

SEC 5 TWP 20 RANGE 5

SEC. 32 TWP 21 RANGE 5

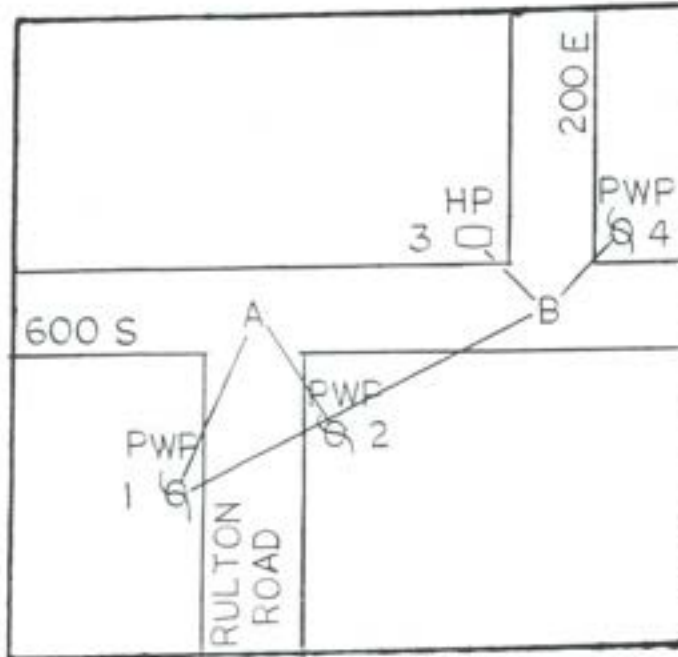

GRAPHIC TIES
(SKETCHED)

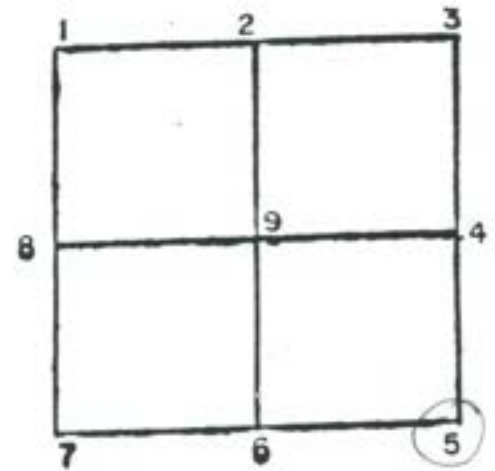


CORNER IDENT. 'A' RR SPIKE 'B' RR SPIKE

TIES:


	A	B	
1	67.9'	175.1'	PWP
2	48.3'		PWP
3		27.9'	HP
4		33.3'	PWP

SEC 32 TWP 21 RANGE 5

SEC 32 TWP 21 RANGE 5

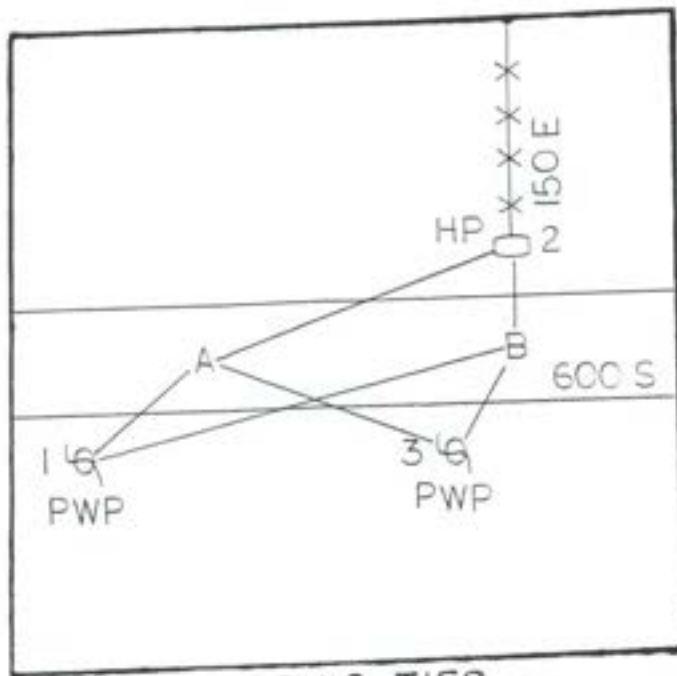

GRAPHIC TIES
(SKETCHED)

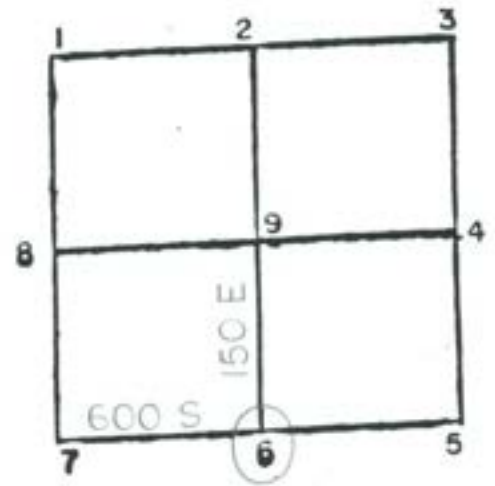


CORNER IDENT. _____


TIES:	A	B	
1.	109.7'	249.6'	PWP
2.	142.6'	19.8'	HP
3.	93.6'	52.6'	PWP

SEC 32 TWP 21 RANGE 5

SEC 32 TWP 21 RANGE 5

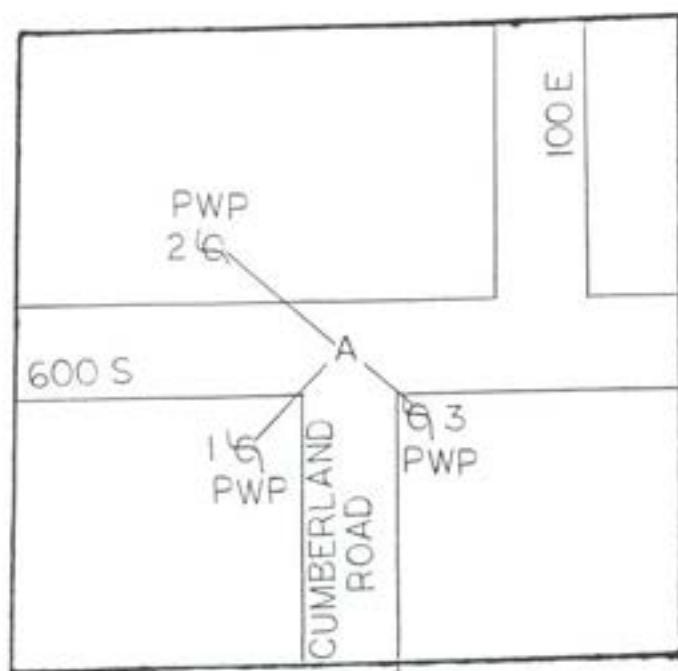

GRAPHIC TIES
(SKETCHED)

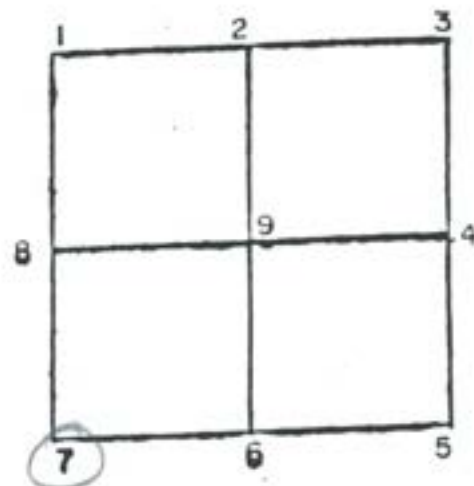

CORNER IDENT. "A" CORNERSTONE BOX

TIES:

A

1. 47.2'


2. 62.6'

3. 22.8'

* ALL ARE PK TO PWP


* MEASURED TO NE CORNER OF BOX

SEC 32 TWP 21 RANGE 5

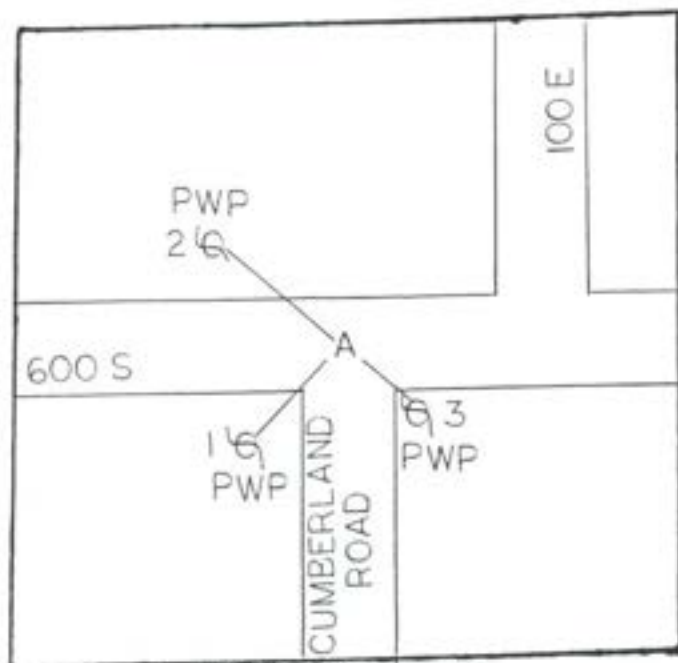

GRAPHIC TIES
(SKETCHED)

SEC 6 TWP 20 RANGE 5

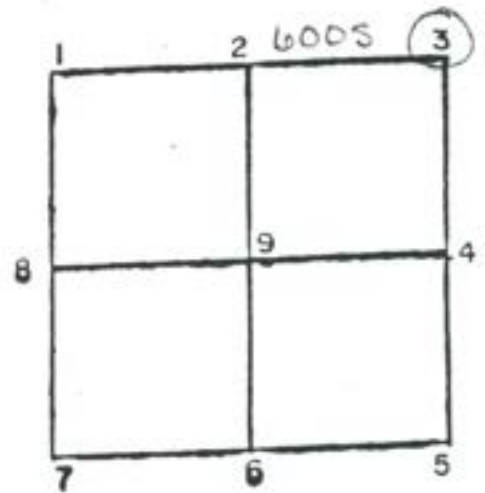


CORNER IDENT. "A" CORNERSTONE BOX


- TIES:
- 1. 47.2'
 - 2. 62.6'
 - 3. 22.8'
 - _____
 - _____
 - _____
 - _____
 - _____
 - _____
 - _____
 - _____

SEC 6 TWP 20 RANGE 5

SEC 32 TWP 21 RANGE 5

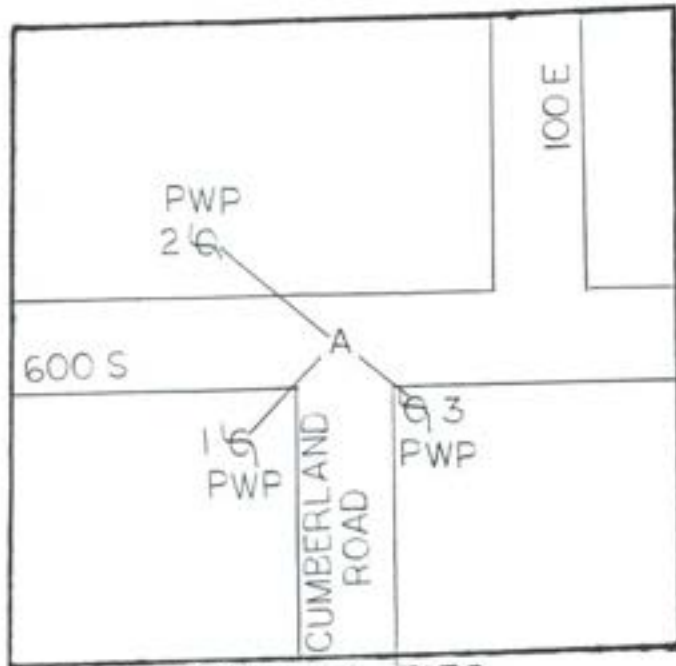

GRAPHIC TIES
(SKETCHED)

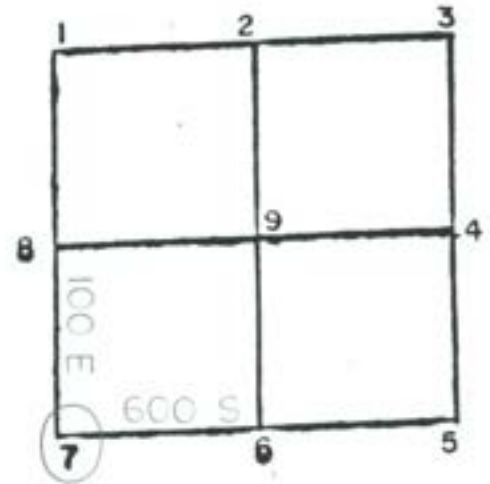


CORNER IDENT. "A" CORNERSTONE BOX

TIES: A


<u>1.</u>	<u>47.2'</u>
<u>2.</u>	<u>62.6'</u>
<u>3.</u>	<u>22.8'</u>

SEC 32 TWP 21 RANGE 5

SEC. 33 TWP. 21 RANGE 5

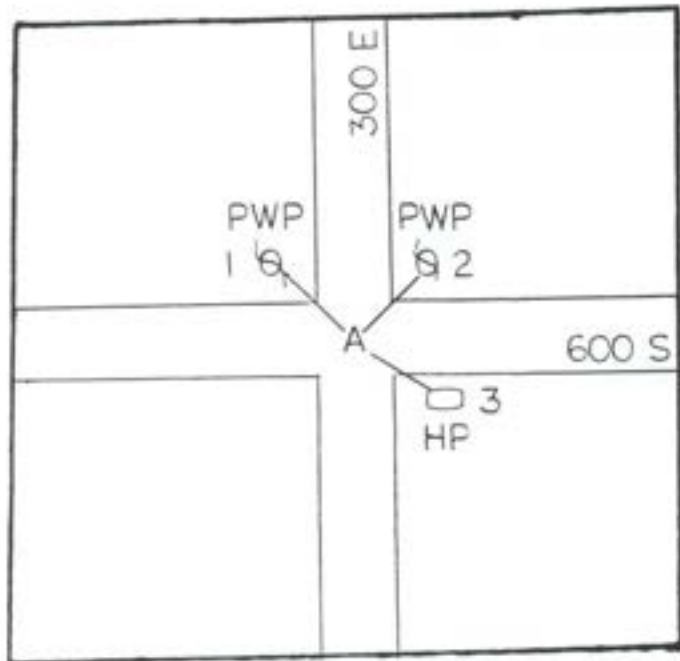

GRAPHIC TIES
(SKETCHED)

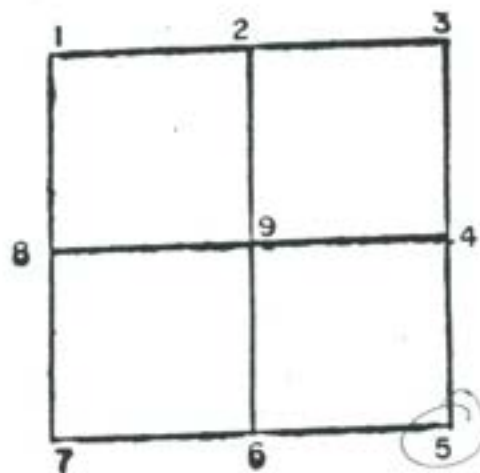

CORNER IDENT. 'A' IRON PIN

TI ES:

A


28.2' PWP

2. 27.0' PWP


3. 39.2 HP

SEC 33 TWP 21 RANGE 5.

SEC 33 TWP 21 RANGE 5

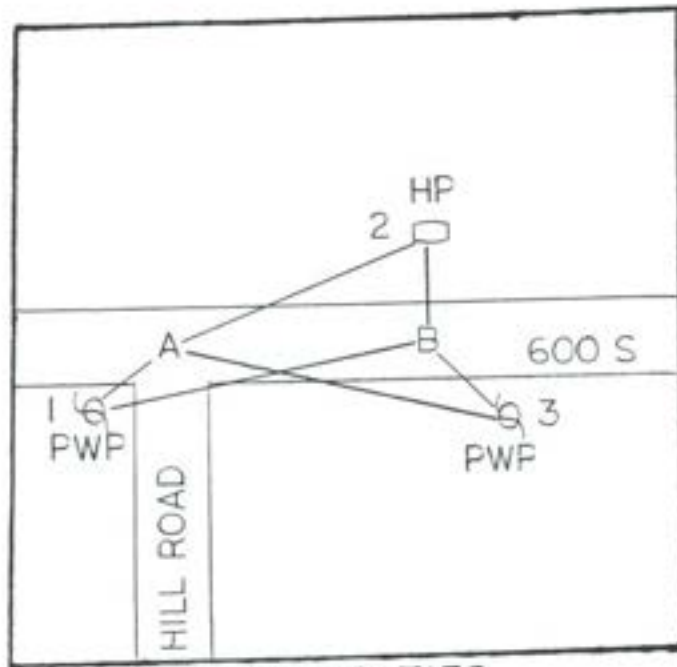

GRAPHIC TIES
(SKETCHED)

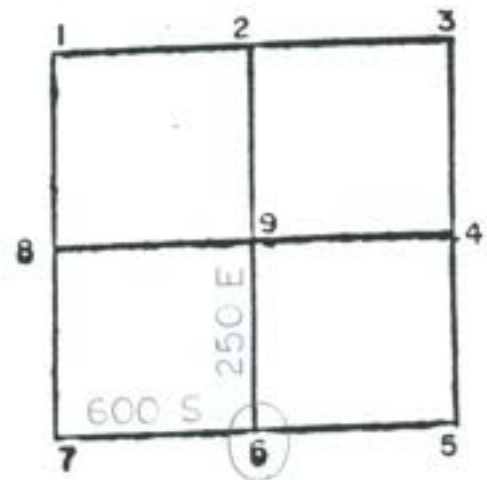


CORNER IDENT. "A" BOLT SPIKE "B" IRON PIN

TIES:


	A	B
1.	24.7'	94.5' PWP
2.	79.0'	18.6' HP
3.	94.9'	25.3' PWP

SEC 33 TWP 21 RANGE 5

SEC 33 TWP 21 RANGE 5

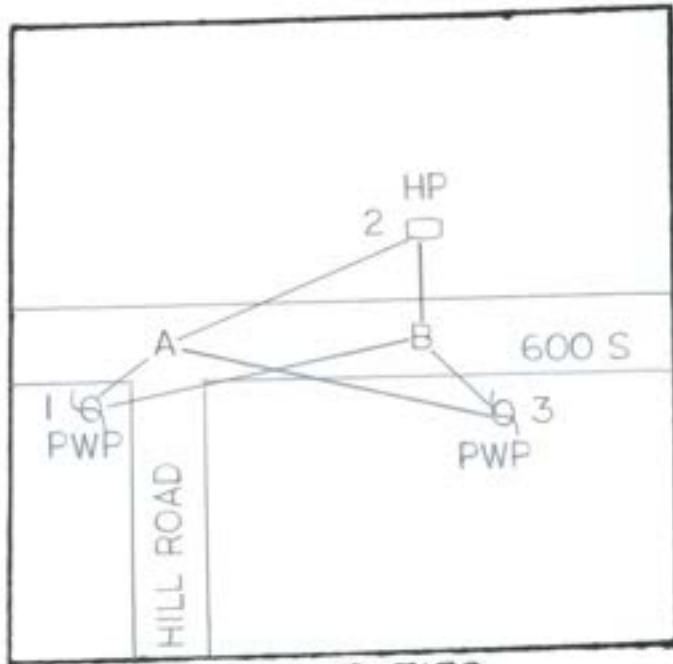

GRAPHIC TIES
(SKETCHED)

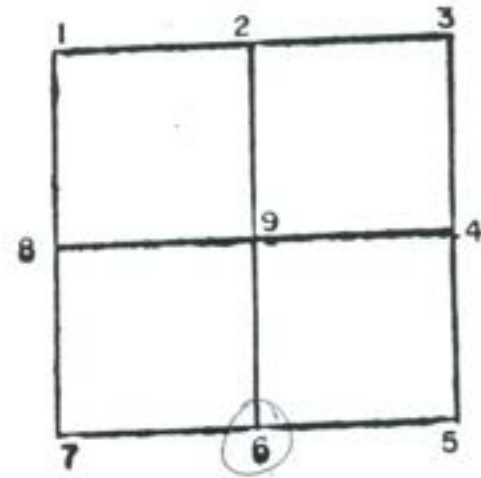



CORNER IDENT. "A" BOLTSPIKE "B" IRON PIN

TIES:

	A	B
1.	24.7'	94.5' PWP (BOLT SPIKE IN W. FACE)
2.	79.0'	18.6' HP
3.	94.9'	25.3' PWP

SEC 33 TWP 21 RANGE 5

SEC 4 TWP 20 RANGE 5

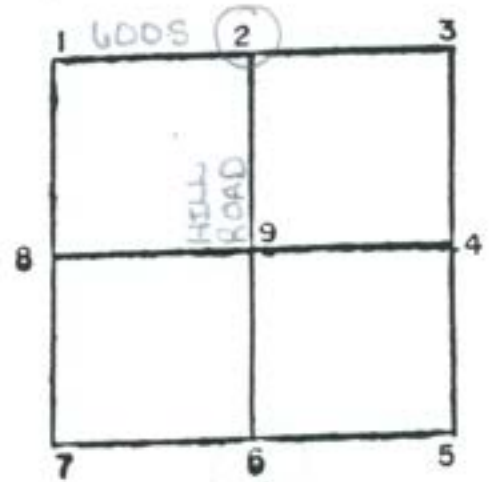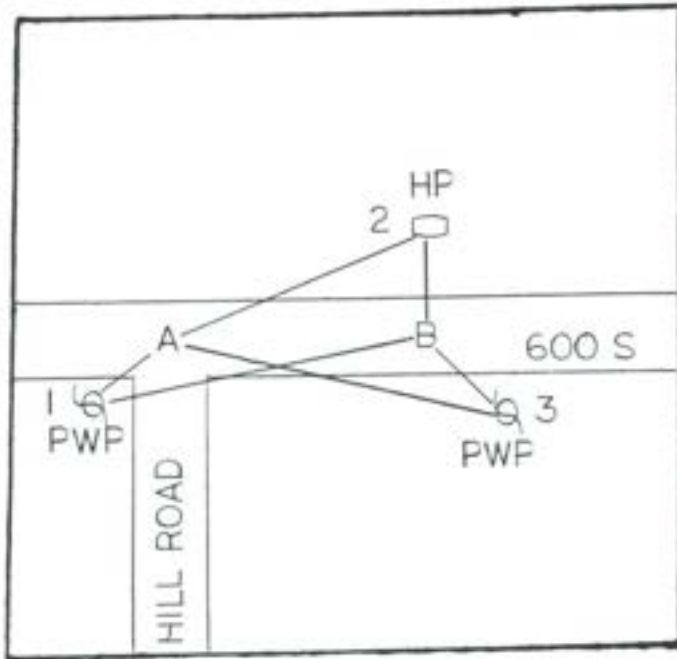


CORNER IDENT. "A" BOLT SPIKE "B" IRON PIN

TIES:


	A	B	
1.	24.7'	94.5'	PWP (BOLT SPIKE IN N FACE)
2.	79.0'	18.6'	HP
3.	94.9'	25.3'	PWP

SEC 4 TWP 20 RANGE 5

SEC. 33 TWP 21 RANGE 5

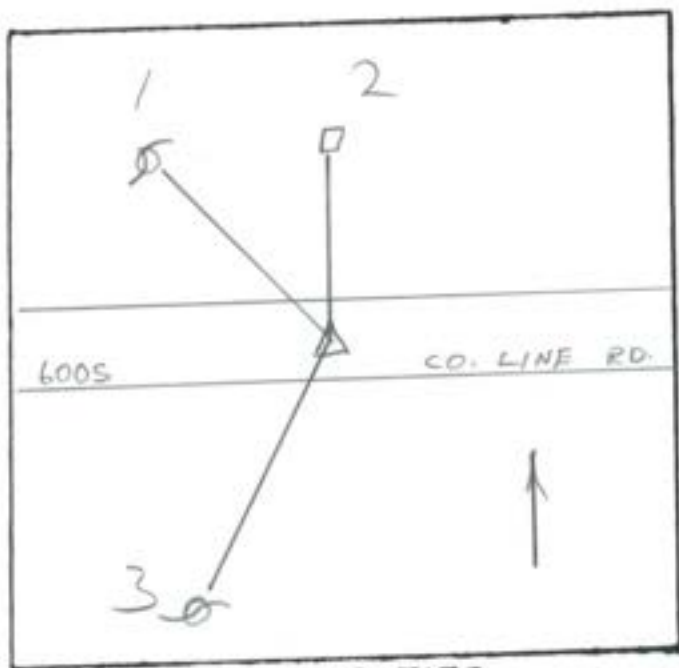

GRAPHIC TIES
(SKETCHED)

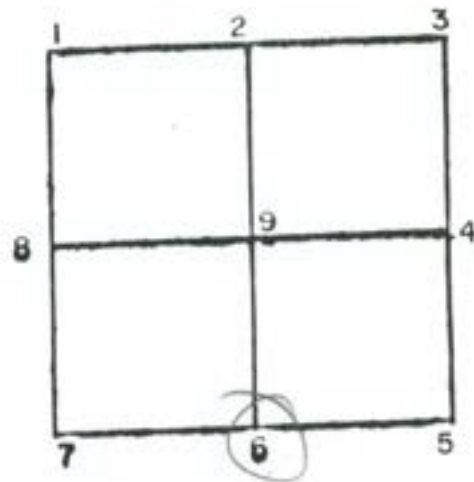


CORNER IDENT. NOT STATED

TIES:


1.	67.50'	PWP
2.	18.50'	FP
3.	25.10'	PWP

SEC 33 TWP 21 RANGE 5

SEC 33 TWP 21 RANGE 5

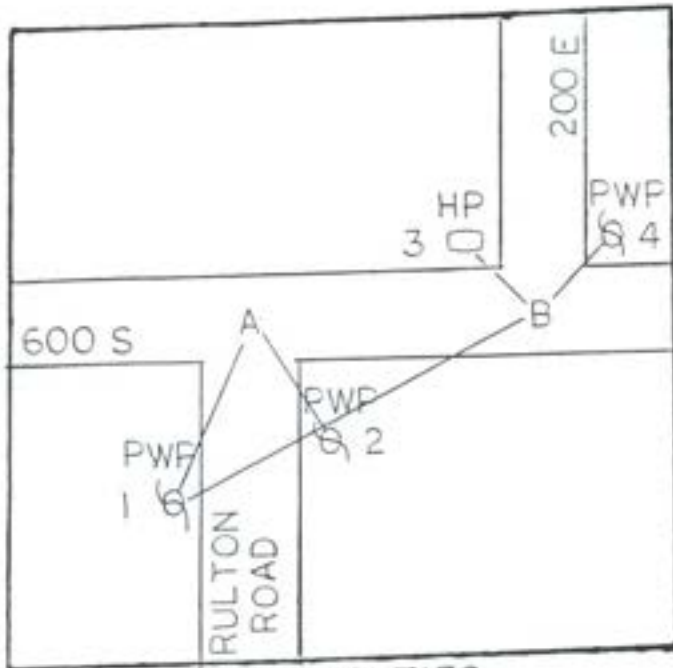

GRAPHIC TIES
(SKETCHED)

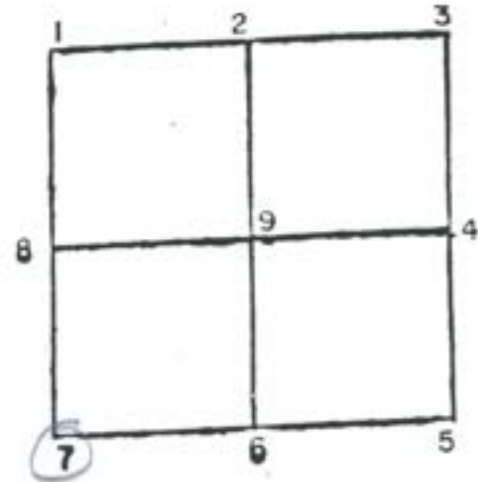


CORNER IDENT. "A" RR SPIKE "B" RR SPIKE

TIES:

	A	B		
1	67.9'	175.1'	PWP	(PK E FACE)
2	48.3'		PWP	(PK W FACE)
3		27.9'	HP	(PK S FACE)
4		33.3'	PWP	(PK NW FACE)

SEC 33 TWP 21 RANGE 5

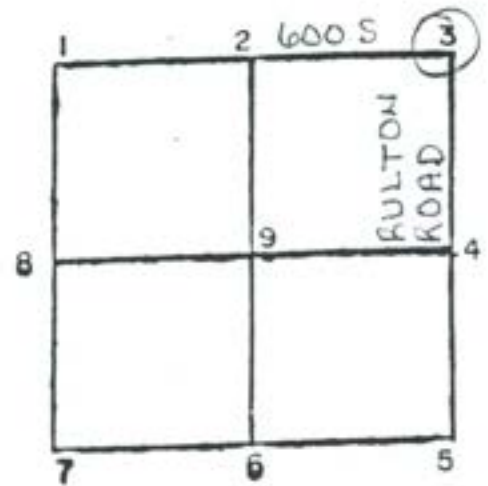

GRAPHIC TIES
(SKETCHED)


CORNER IDENT. 'A' RR SPIKE 'B' RR SPIKE

TIES:


	A	B	
1	67.9'	175.1'	PWP
2	48.3'		PWP
3		27.9'	HP
4		33.3'	PWP

SEC 5 TWP 20 RANGE 5.

SEC 33 TWP 21 RANGE 5

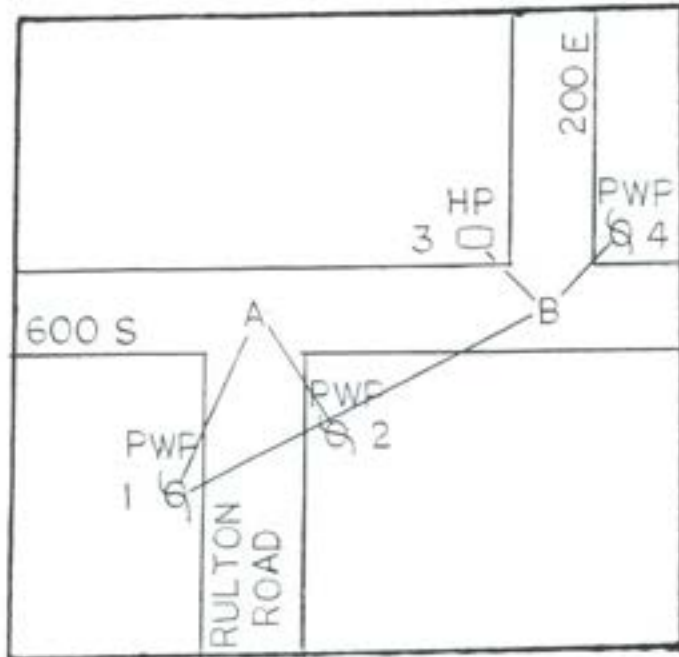

GRAPHIC TIES
(SKETCHED)

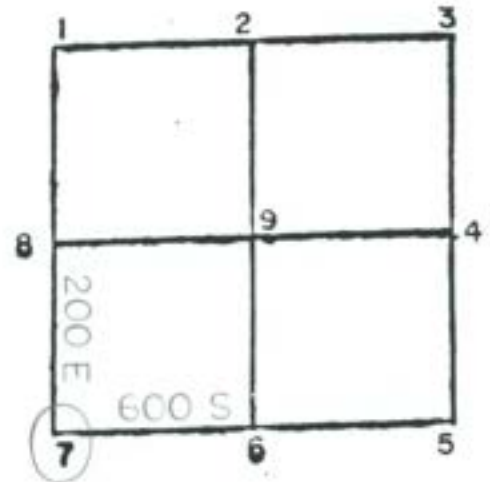


CORNER IDENT. 'A' RR SPIKE 'B' RR SPIKE

TIES:


	A	B	
1	67.9'	175.1'	PWP
2	48.3'		PWP
3		27.9'	HP
4		33.3'	PWP

SEC 33 TWP 21 RANGE 5

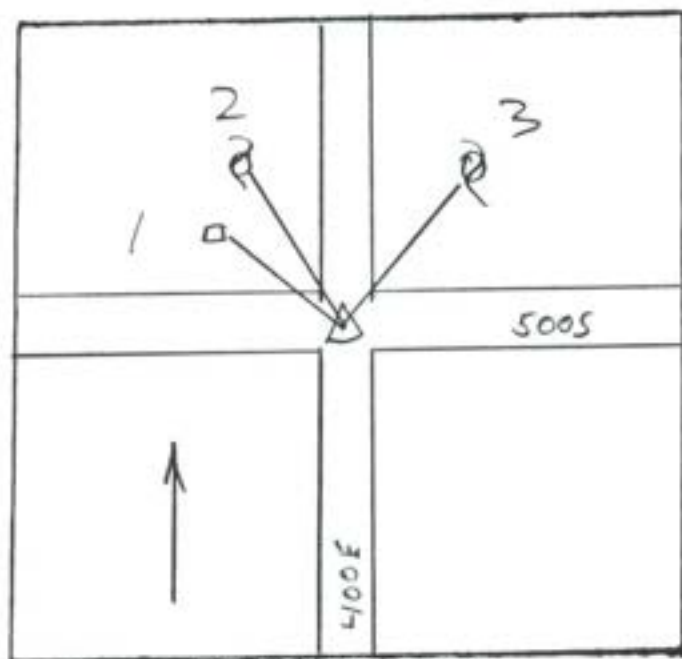

GRAPHIC TIES
(SKETCHED)

SEC 34 TWP 21 RANGE 5


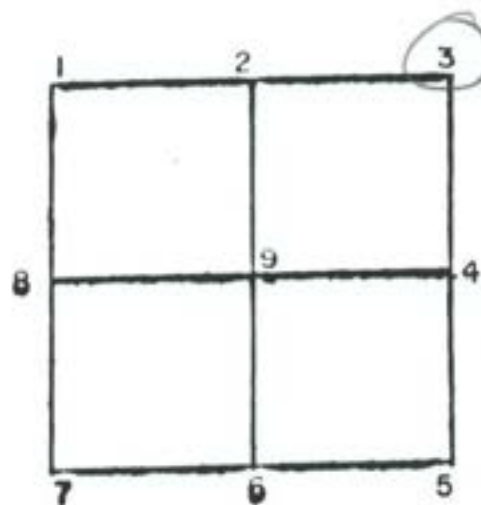


CORNER IDENT. _____

TIES: 1. 26.10' FP
2. 30.10' PWP
3. 24.10' PWP

SEC 34 TWP 21 RANGE 5

SEC 34 TWP 21 RANGE 5

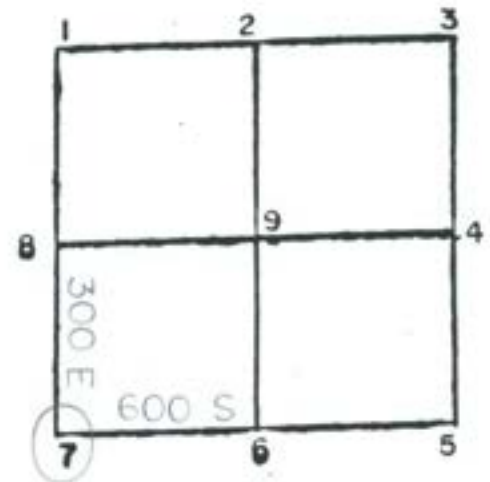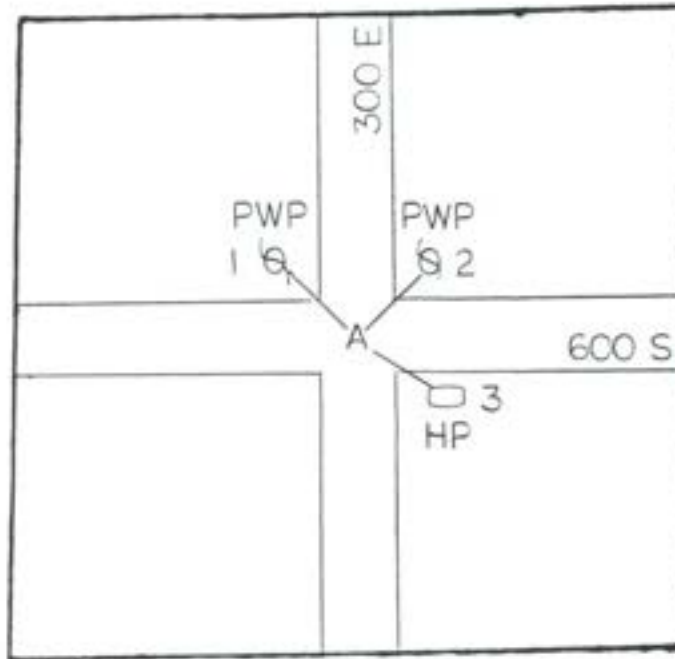


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 'A' IRON PIN

TIES:


- A
1. 28.2' PWP
 2. 27.0' PWP
 3. 39.2 HP
- _____

SEC 34 TWP 21 RANGE 5

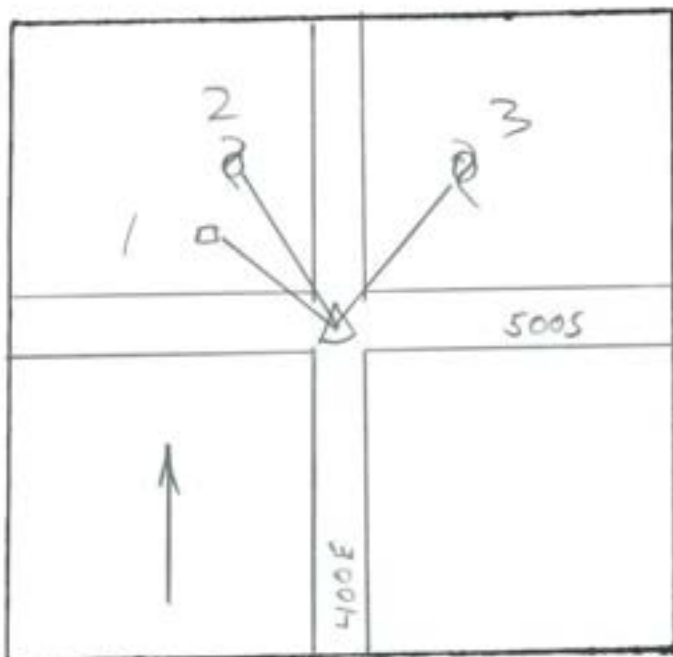

GRAPHIC TIES
(SKETCHED)


SEC 35 TWP 21 RANGE 5

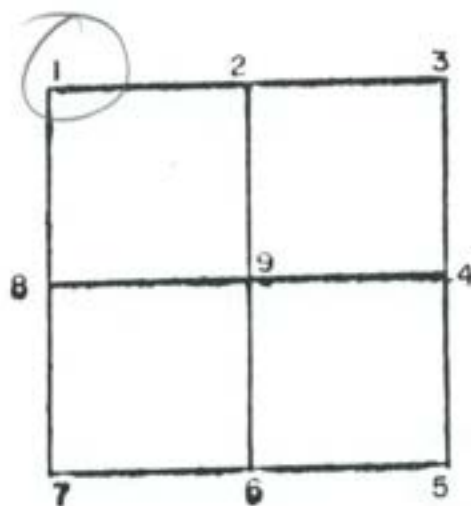

CORNER IDENT. _____


TIES: 1. 26.10' FP
2. 30.10' PWP
3. 24.10' PWP

SEC 35 TWP 21 RANGE 5

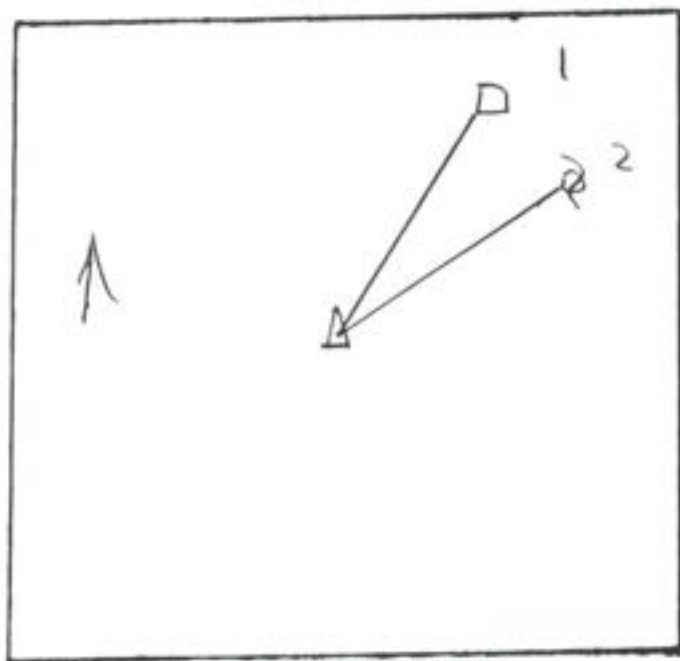

GRAPHIC TIES
(SKETCHED)

SEC 35 TWP 21 RANGE 5

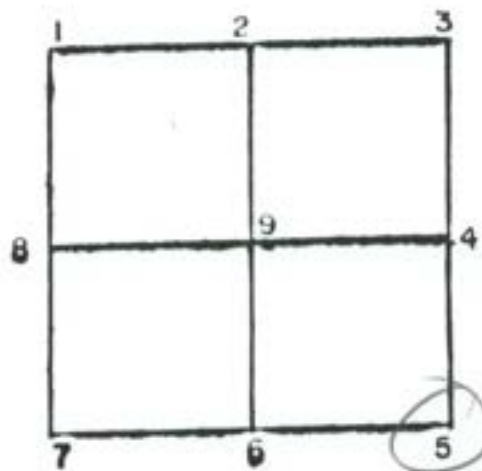


CORNER IDENT. NOT STATED


TIES: 1. 29.33' HP
2. 48.29' PWP

SEC 35 TWP 21 RANGE 5

SEC. 36 TWP. 21 RANGE 5

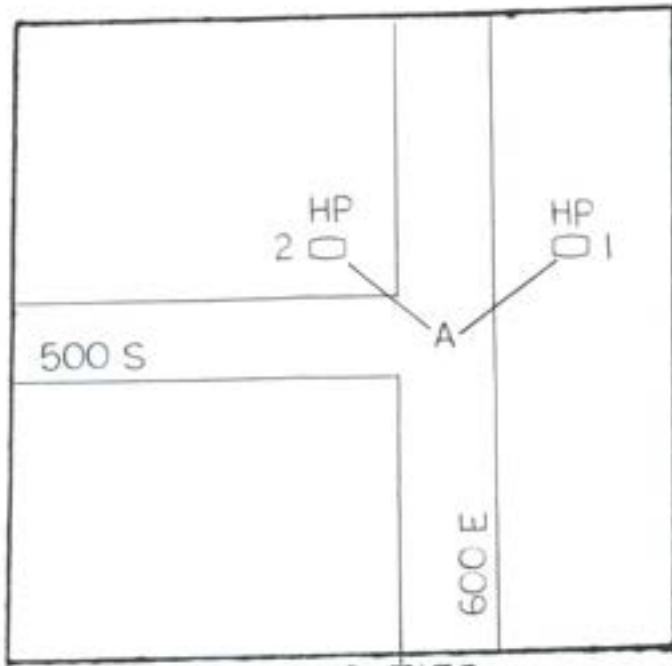

GRAPHIC TIES
(SKETCHED)

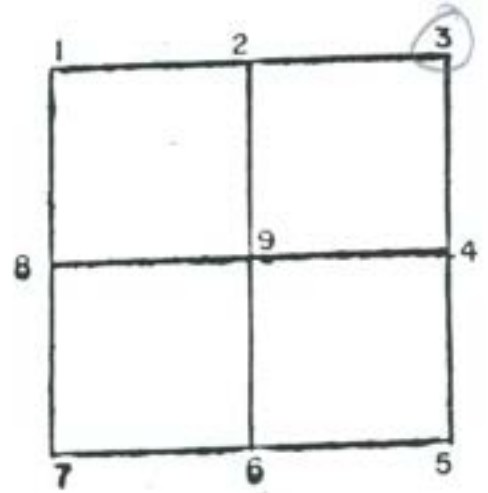


CORNER IDENT. 'A' STONE

TIES:


	A
1.	55.4' HP
2.	21.4' HP

SEC 36 TWP 21 RANGE 5.

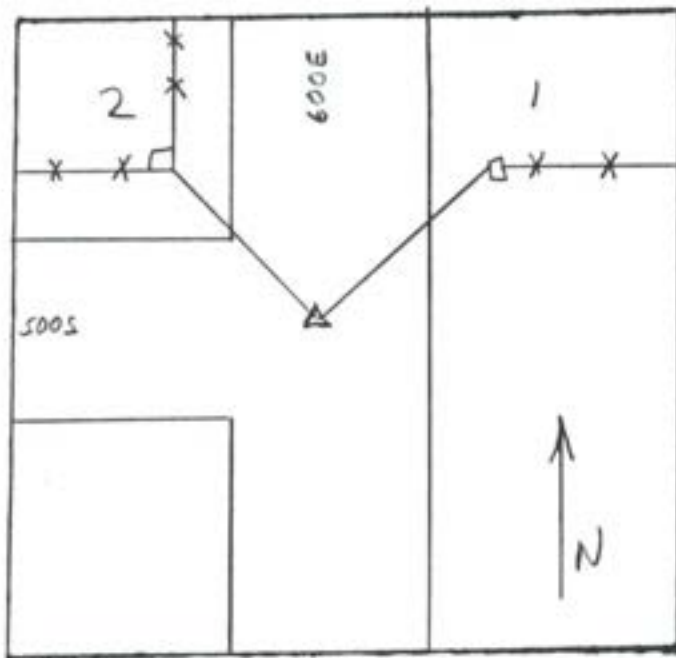

SEC 36 TWP 21 RANGE 5

MAY 1983

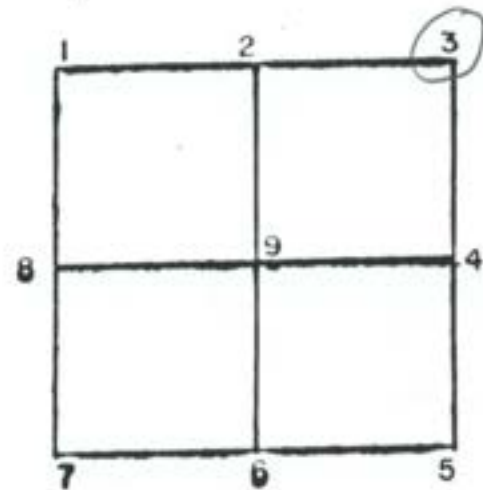


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 3 STONE FND 3" BELOW SURFACE

TIES: 1. 55.4' PK - HEADPOST
2. 21.4' PK - CORNER
3. 2707.13' TO STONE @ W 1/4 CORNER 30-21-6

SEC 36 TWP 21 RANGE 5

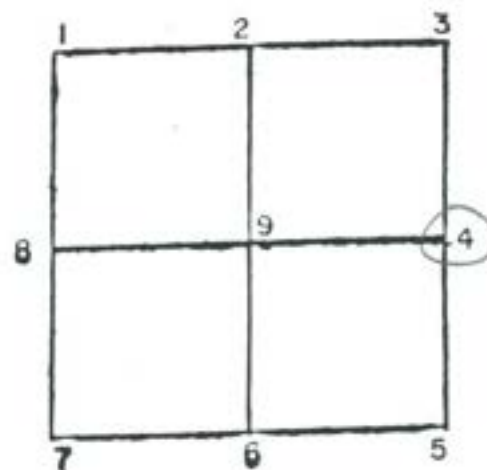


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. "A" RR SPIKE "B" PK NAIL "C" RR SPIKE "D" IRON PIN


THE:

SEC 36 TWP 21 RANGE 5

SEC 36 TWP 21 RANGE 5

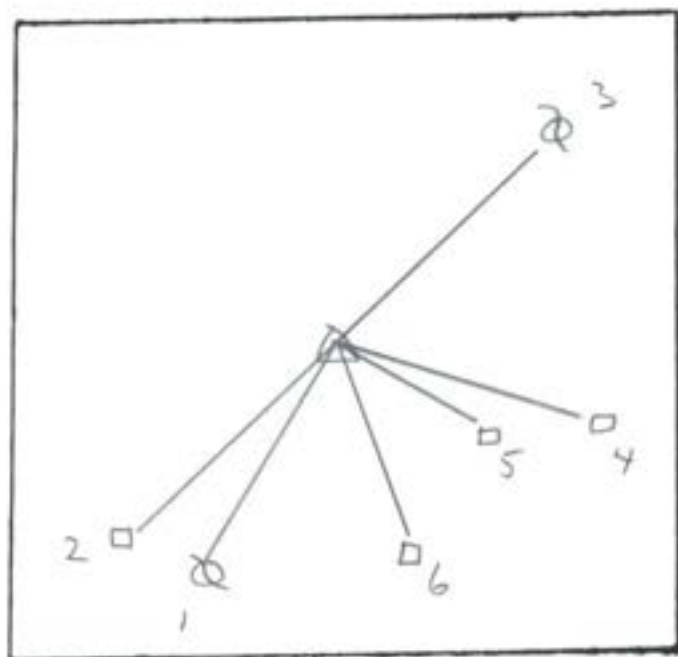

GRAPHIC TIES
(SKETCHED)

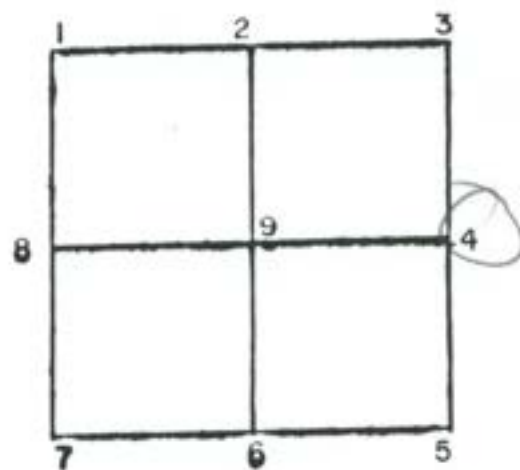


CORNER IDENT. NOT STATED


TIES:	1.	24.99'	PWP
	2.	25.62'	HP
	3.	27.08'	PWP
	4.	33.75'	HP
	5.	26.92'	HP
	6.	33.92'	HP

SEC 36 TWP 21 RANGE 5

SEC 36 TWP 21 RANGE 5

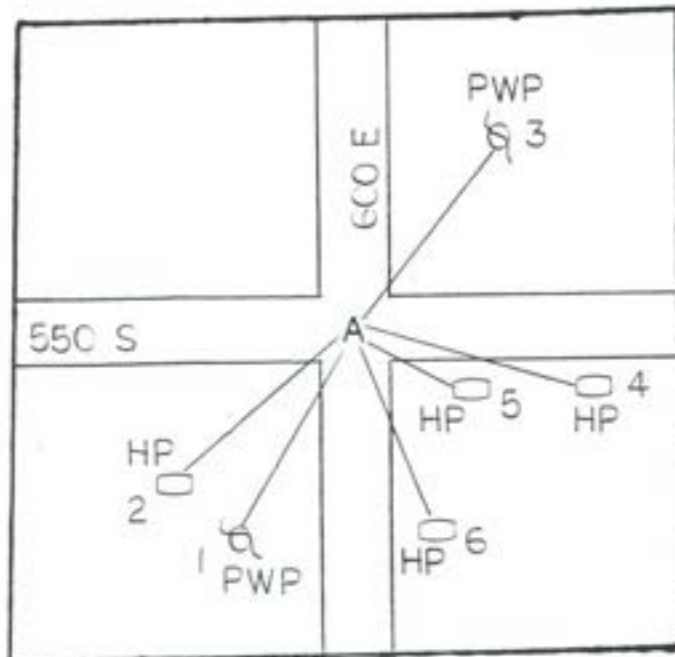

GRAPHIC TIES
(SKETCHED)

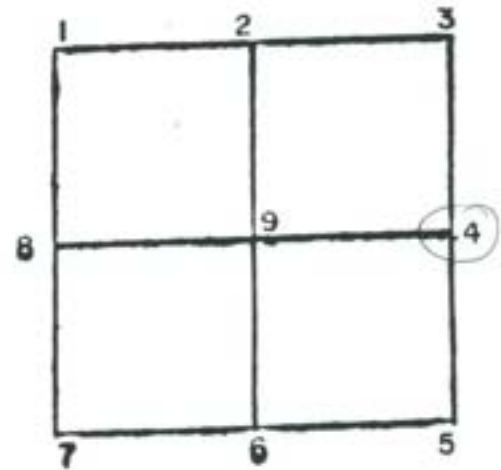


CORNER IDENT. 'A' IRON PIN

TIES:


- A
1. 24.99' PWP
 2. 25.62' HP
 3. 27.08' PWP
 4. 33.75' HP
 5. 26.92' HP
 6. 33.92' HP

SEC 36 TWP 21 RANGE 5

SEC 36 TWP 21 RANGE 5

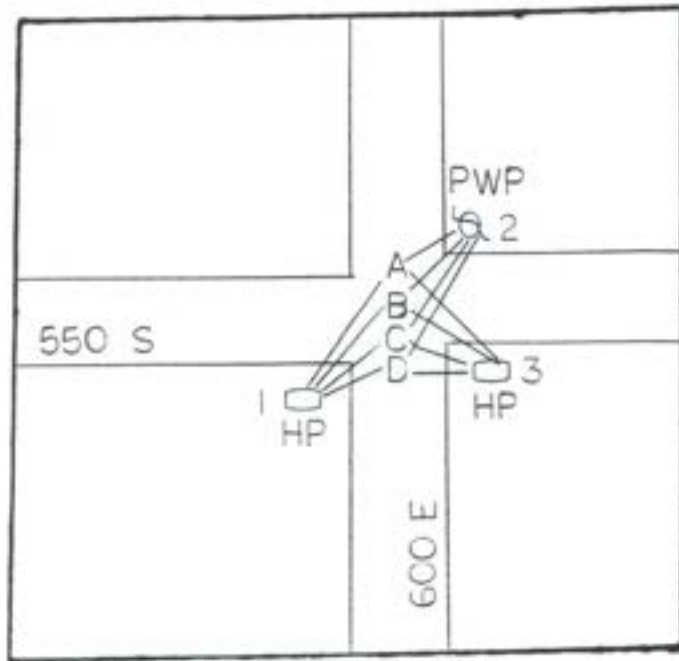

GRAPHIC TIES
(SKETCHED)

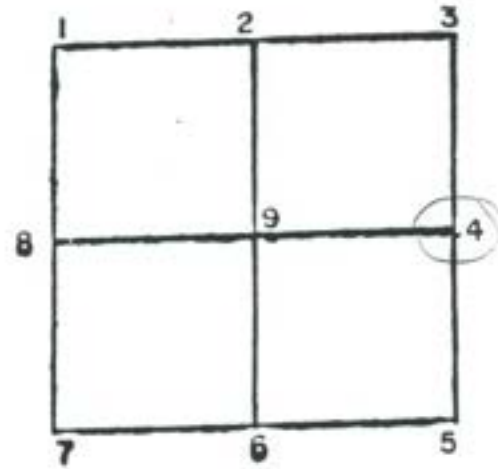


CORNER IDENT. "A" RR SPIKE "B" NAIL "C" RR SPIKE "D" IRON PIN

TIES:


	A	B	C	D	
1.	54.1'	46.9'	28.6'	26.3'	HP
2.	29.9'	32.3'	47.9'	50.7'	PWP
3.	42.3'	34.3'	21.2'	19.6'	HP

SEC 36 TWP 21 RANGE 5

SEC 36 TWP 21 RANGE 5

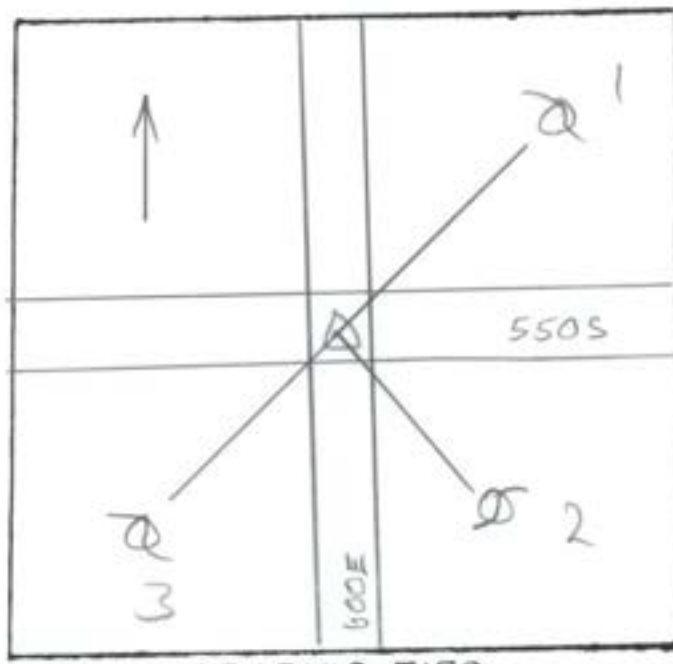

GRAPHIC TIES
(SKETCHED)

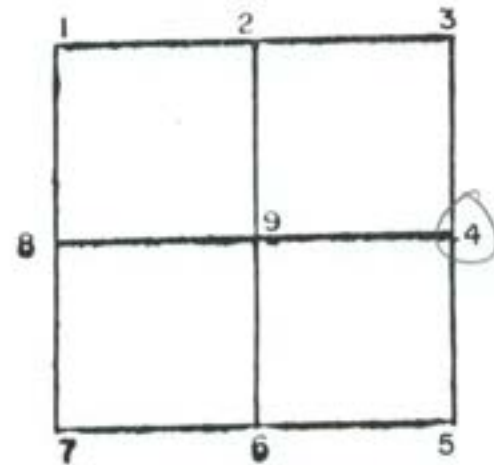

CORNER IDENT. 3/4" P.I.N FND

TIES: 1. 50.6' PWP
2. 19.5' PWP
3. 25.4' PWP

SEC 36 TWP 21 RANGE 5


Diagram illustrating a three-way intersection with a central point A. The intersection is formed by a horizontal road labeled "600 S" and a vertical road labeled "600 E". A diagonal road branches off to the left from point A, leading to a house labeled "1 HP". Another diagonal road branches off to the right from point A, leading to a house labeled "3 HP". A third diagonal road branches off to the right from point A, leading to a house labeled "2 PWP".

ties:


	A	
1.	27.4'	HP
2.	22.4'	PWP
3.	25.1'	HP

SEC 36 TWP 21 RANGE 5

SEC 36 TWP 21 RANGE 5

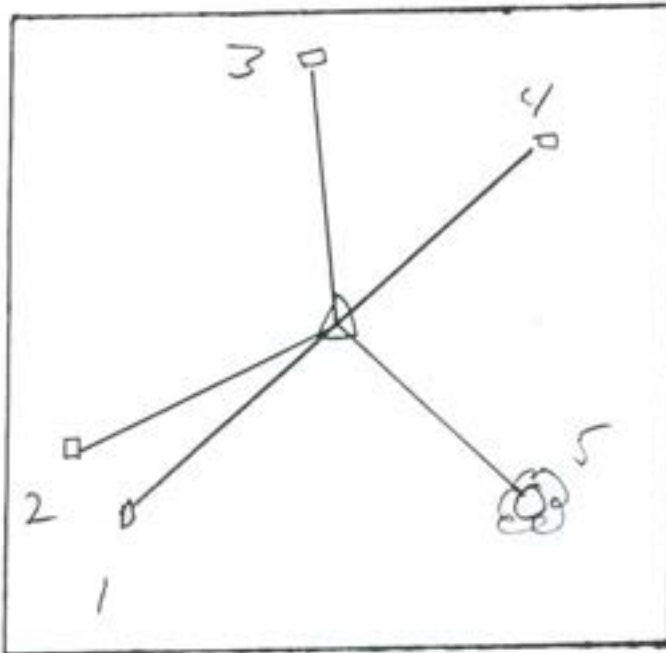

GRAPHIC TIES
(SKETCHED)

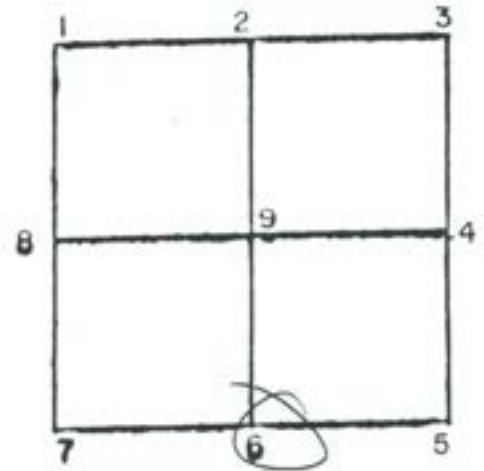


CORNER IDENT. NOT STATED


TIES: 1. 21.78' FP
2. 27.02' FP
3. 20.52' FP
4. 22.36' FP
5. 23.65' MAPLE TREE

SEC 36 TWP 21 RANGE 5

SEC 36 TWP 21 RANGE 5

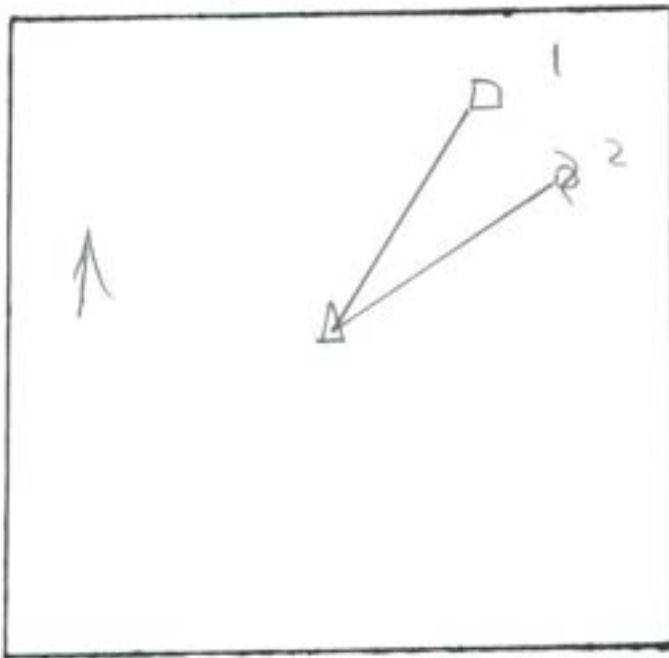

GRAPHIC TIES
(SKETCHED)

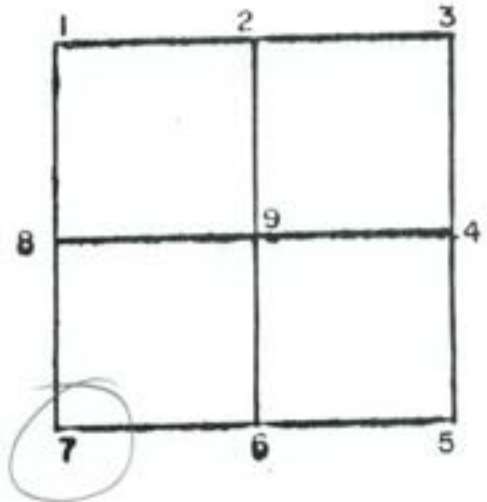

CORNER IDENT. NOT STATED

TIES: 1. 29.33' HP
2. 48.29' PWP

SEC 36 TWP 21 RANGE 5