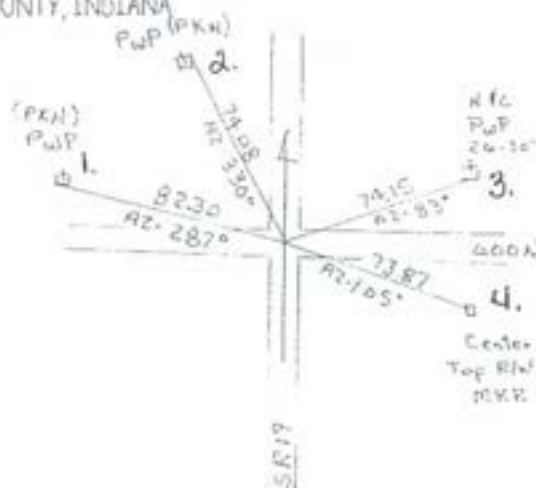


DATE: 9/1/04SECTION 1 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANALOCAL GRID COORD
PT.# 0502
N: _____
E: _____TYPE OF MON: IRON ROD IN CONC
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES.NO.: 0101424

REFERENCED BY: _____


OTHERS: _____

CORNER IDENTIFIED: Iron Rod in Concrete

TIES:

1. 82.30' AZ 287° PK Nail PWP
2. 74.08' AZ 330° PK Nail PWP
3. 74.15' AZ 83° N+C PWP
4. 73.87' AZ 105° Center top R/W Marker


SECTION 1 TWP. 22 RANGE 4

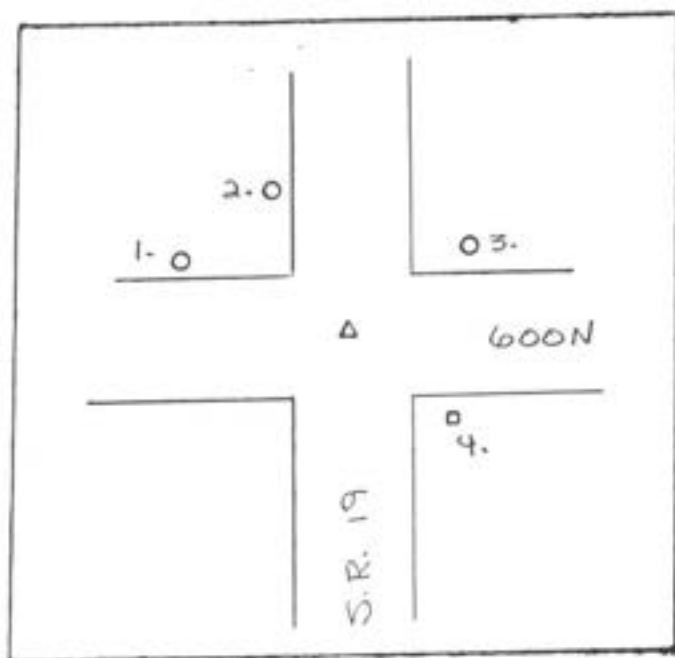

GRAPHIC TIES
(SKETCHED)

SEC 1 TWP 22 RANGE 4


4-15-99

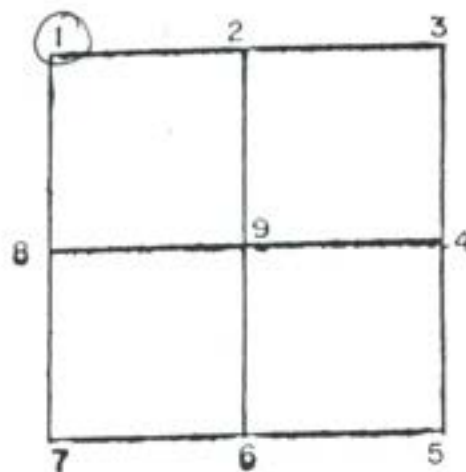


CORNER IDENT. STONE W/DELL HOLE 1.6' DEEP 1.3' IRON ROD SET

TIES: 1. 82.30 PK NAIL IN POWERPOLE
2. 74.25 " " " "
3. 78.37 " " " "
4. 73.95 E TOP OF R/W MARKER

SEC 1 TWP 22 RANGE 4

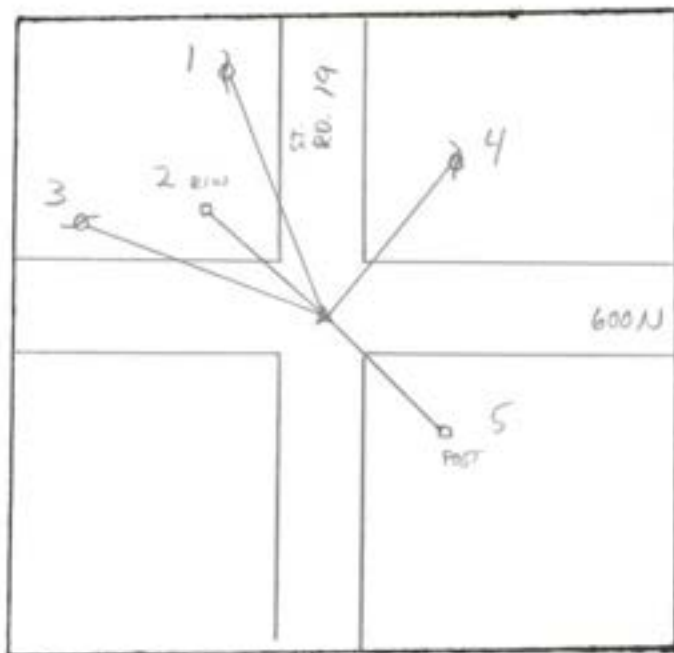

SEC 1 TWP 22 RANGE 4

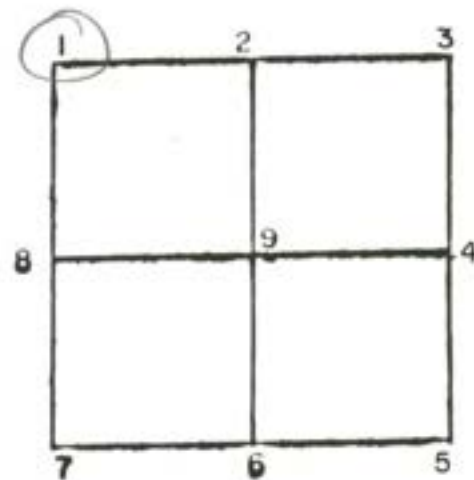

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. STONE W/DRILL HOLE 1.6" D. 1.3" IR. OVER DRILL HOLE

TIES: 1. 73.97' PK IN PWP 203-913
2. 70.1' TOP d OF R/W MARKER
3. 82.22' PK IN PWP 203-912
4. 78.44' PK IN PWP 26-307
5. 74.91' PK IN HEAD POST

SEC 1 TWP 22 RANGE 4

DATE: 9/7/02SECTION 1 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANA

	COORDINATES
	☐ NAD '83 IN E. ZONE
	☐ NAD '83 IN W. ZONE
	☐ LOCAL GRID
	Units: _____
	Pl#: <u>0016</u>
	N: _____
	E: _____


TYPE OF MON: IRON PIN L.DEPTH: 2" ±

UNCERTAINTY: _____

BY: PARTY 1DATE: 9-7-02DES. NO.: 0101424

STATE FORM 40180 (R2 / 2-04)

1 mi. E of SR19

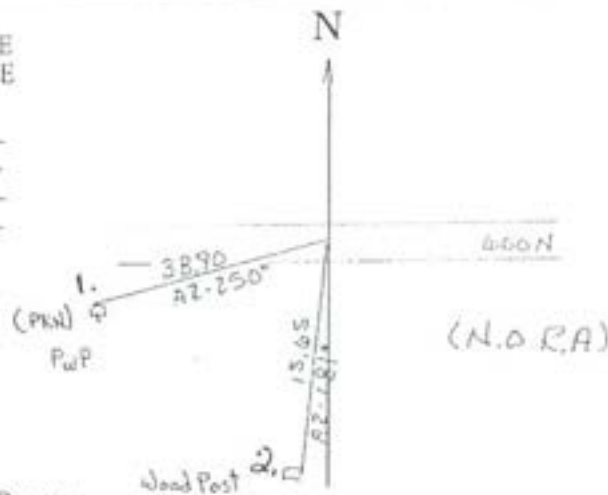

REFERENCED BY: _____

OTHERS: _____

CORNER IDENTIFIED: Iron Pin found 2" ± deep

TIES:


1. 38.90' AZ 250° PK Nail PWP2. 15.65' AZ 181° Wood postSECTION 1 TWP. 22 RANGE 4

DATE: 9/1/04SECTION 1 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 125
N: _____
E: _____

TYPE OF MON.: IRON ROD
DEPTH: 3" ±
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

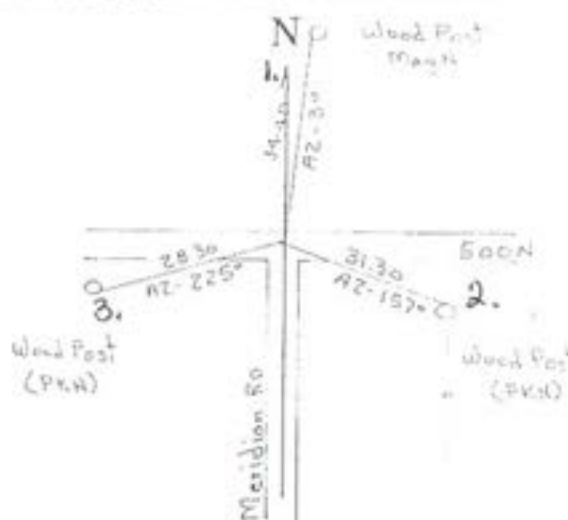

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: Iron rod found 3" ± deep

TIES:

1. 34.40' A2-30° Mag. nail Wood post
2. 31.30' A2-157° P.K. Nail Wood post
3. 28.30' A2-225° P.K. Nail Wood post

SECTION 1 TWP. 22 RANGE 4

DATE: 9/1/04

SECTION 1 TWP. 22 RANGE 4


LIBERTY TWP. TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0014
N: _____
E: _____

TYPE OF MON: REBAR F
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES.NO: 0101424

STATE FORM 40180 (R2/2-04)

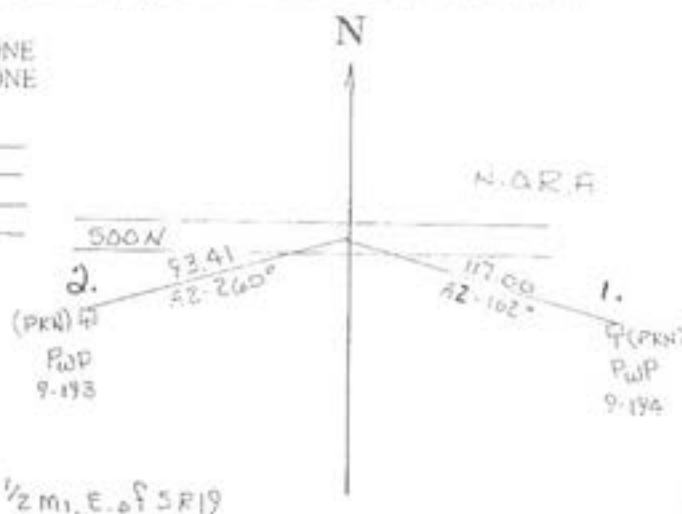

REFERENCED BY:


OTHERS: _____

CORNER IDENTIFIED: Rebar found

TIES:

1. 117.00' AZ 102° PK Nail PWP # 9-194
2. 93.41' AZ 260° PK Nail PWP # 9-193


SECTION 1 TWP. 22 RANGE 4

DATE: 9/1/04SECTION 1 TWP. 22 RANGE 4LIBERTY TWP., TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☒ LOCAL GRID
Units: _____
Pl#: 0013
N: _____
E: _____

TYPE OF MON: IRON ROD IN CONC
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

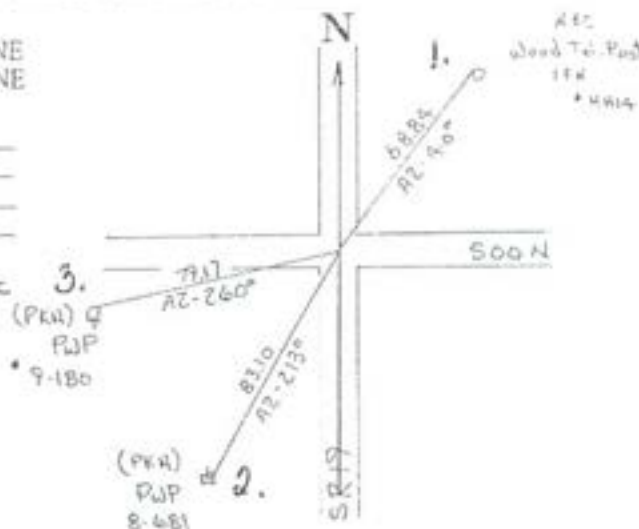

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: Iron Rod in concrete


TIES:

1. 68.84' AZ 40° N+C Wood tele pole IFN # HH14
2. 83.10' AZ 213° PK Nail PWP #8-681
3. 79.17' AZ 260° PK Nail PWP #9-180


SECTION 1 TWP. 22 RANGE 4

SEC 1 TWP 22 RANGE 4

4-15-99

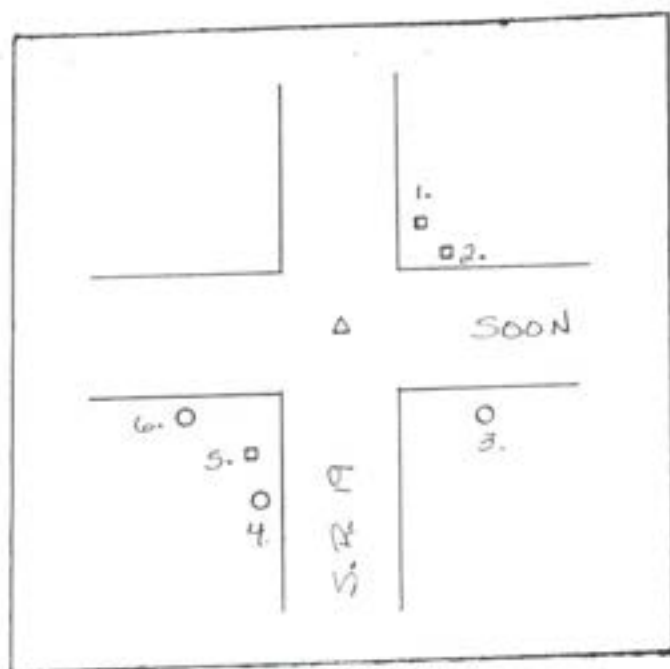


GRAPHIC TIES
(SKETCHED)

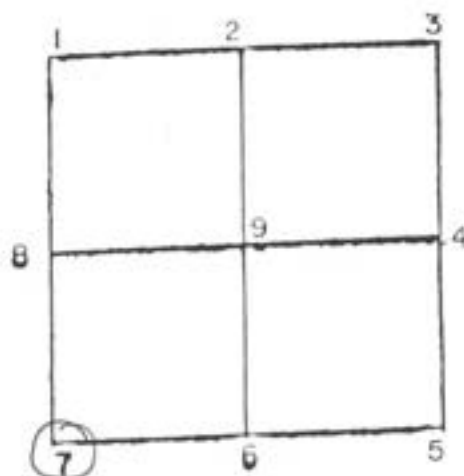

CORNER IDENT. STONE w/ POINT 1.8' DEEP 1.3' IRON ROD SET


- TIES:
- 1. 67.17' E TOP OF R/W MARKER
 - 2. 79.55' " " " " "
 - 3. 125.66' P.K. NAIL IN POWER POLE
 - 4. 83.05' " " " " "
 - 5. 65.17' E TOP OF R/W MARKER
 - 6. 79.28' P.K. NAIL IN POWER POLE

SEC 1 TWP 22 RANGE 4

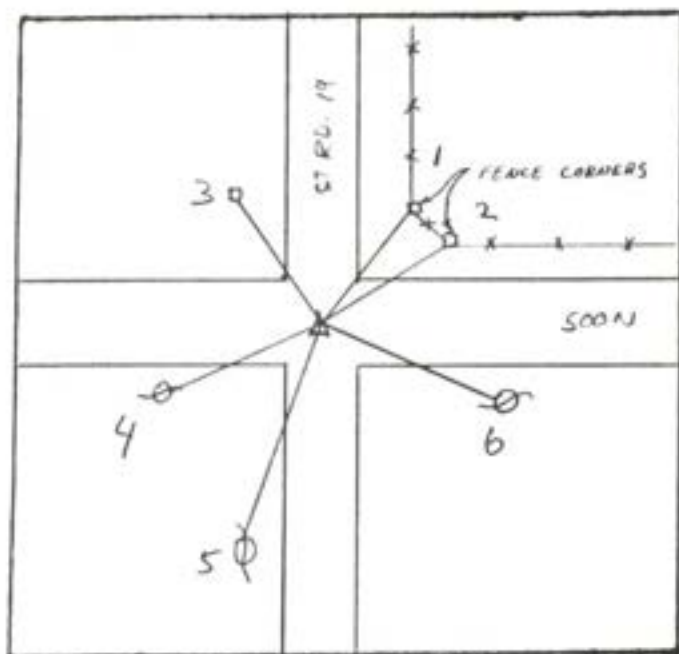

SEC 1 TWP 22 RANGE 4

5-11-82

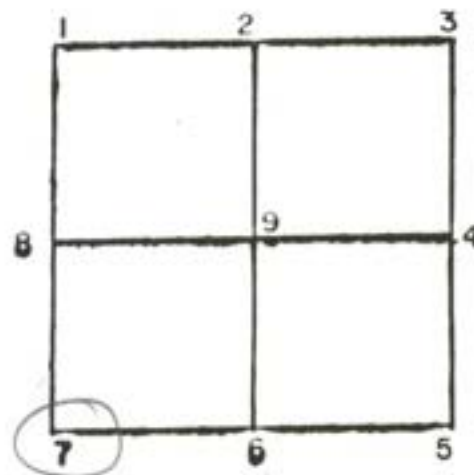

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 7 STONE W/POINT 1.8' D. 1.3' IRON ROD OVER POINT

TIES:	1.	67.83'	PK IN POST	
	2.	80.35'	PK IN POST	
	3.	64.9'	TOP/C R/W MARKER	
	4.	76.73'	PK IN PWP	9-180
	5.	82.87'	PK IN PWP	8-861
	6.	125.66	PK IN PWP	9-181


SEC 1 TWP 22 RANGE 4

DATE: 9/1/04SECTION 1 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANACOORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☒ LOCAL GRID
Units: _____
Pt#: 0012
N: _____
E: _____TYPE OF MON: IRON ROD IN CONCDEPTH: 0"

UNCERTAINTY: _____

BY: PARTY 1DATE: 9-01-04DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

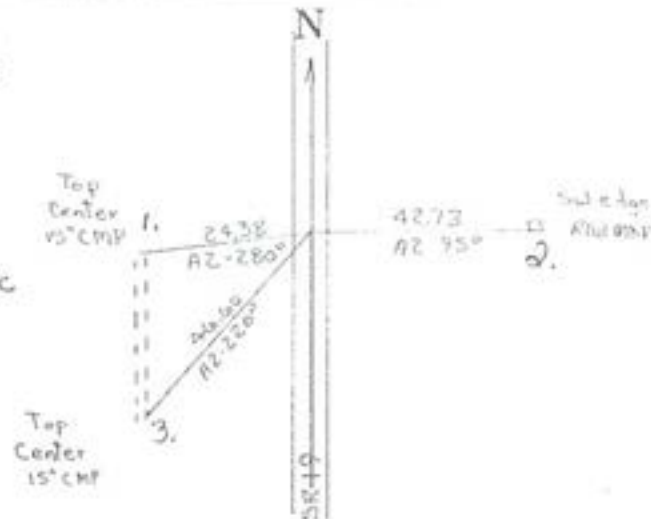


REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: Iron Rod in concrete 0" deep

TIES:


1. 24.38' AZ 280° TOP CENTER 15" CMP2. 42.73' AZ 95° SW Edge R/W MKR3. 46.60' AZ 220° TOP CENTER 15" CMPSECTION 1 TWP. 22 RANGE 4

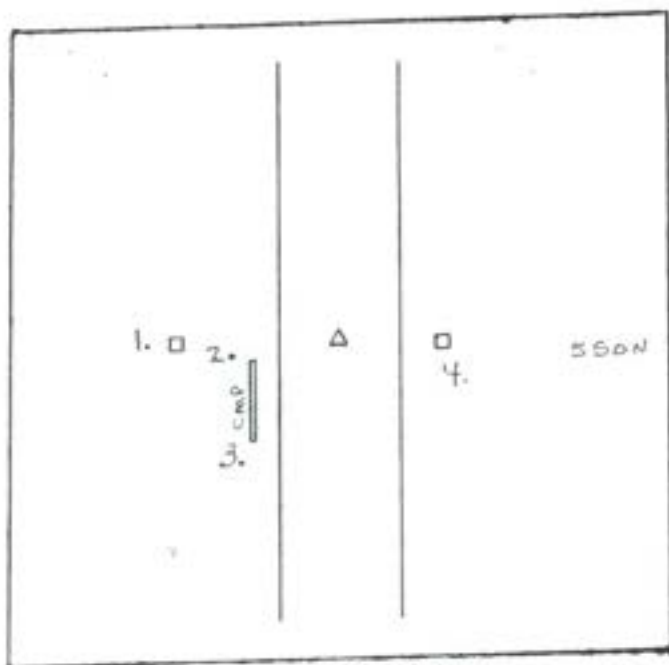

GRAPHIC TIES
(SKETCHED)

SEC 1 TWP 22 RANGE 4


4-15-99

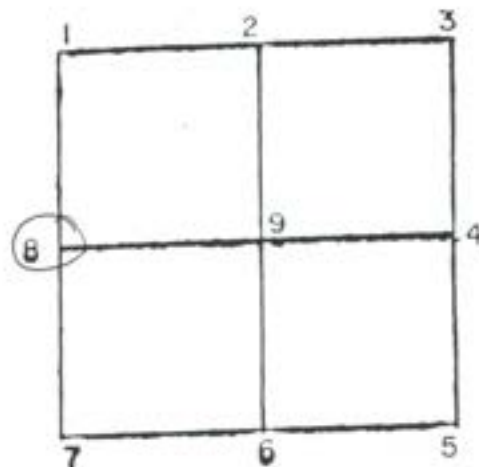

CORNER IDENT. STONE 1.0' DEEP 0.9' IRON ROD SET OVER HIGH POINT

- TIES:
- | | | |
|----|--------|---------------------------|
| 1. | 22.18 | RIKET IN NORTH TOP OF CMP |
| 2. | 37.81 | P.K. NAEL IN HEADPOST |
| 3. | 34.01 | TOP E OF SOUTH END OF CMP |
| 4. | 44.00' | P.K. NAEL IN HEADPOST |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |


SEC 2 TWP 22 RANGE 4

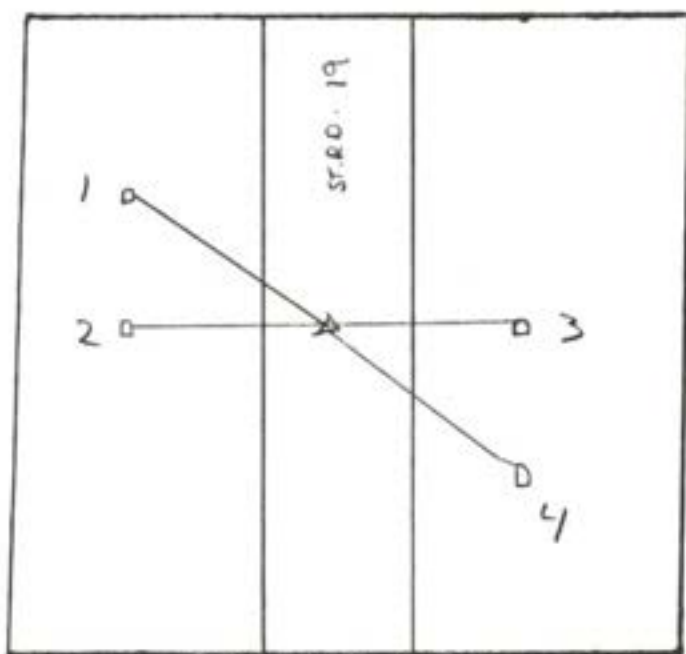

GRAPHIC TIES
(SKETCHED)

SEC. 1 TWP 22 RANGE 4

5-11-82

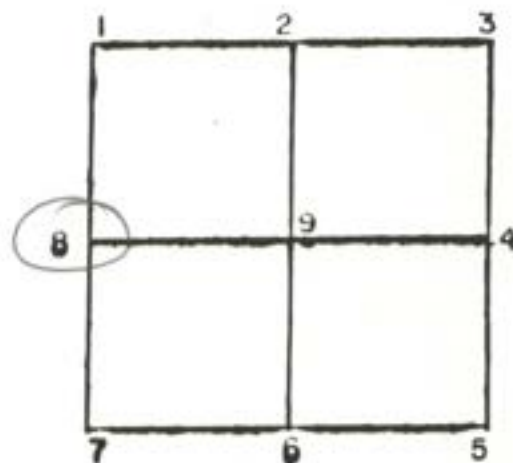

CORNER IDENT. ⁸ STONE FND 1.0'D. 0.9' IRON ROD OVER ⁴ OF STONE

- TIES:
1. 51.16' PK IN FENCE POST
 2. 37.81' PK IN CORNER POST
 3. 44.00' PK IN CORNER POST
 4. 63.08' PK IN FENCE POST

SEC. 1 TWP 22 RANGE 4

DATE: 9/2/04SECTION 2 TWP. 22 RANGE 4


LIBERTY TWP. TIPTON COUNTY INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W ZONE
☐ LOCAL GRID
Units: _____
Pl#: 0023
N: _____
E: _____

Sec 2

TYPE OF MON: R.R. SpKF
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-02-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

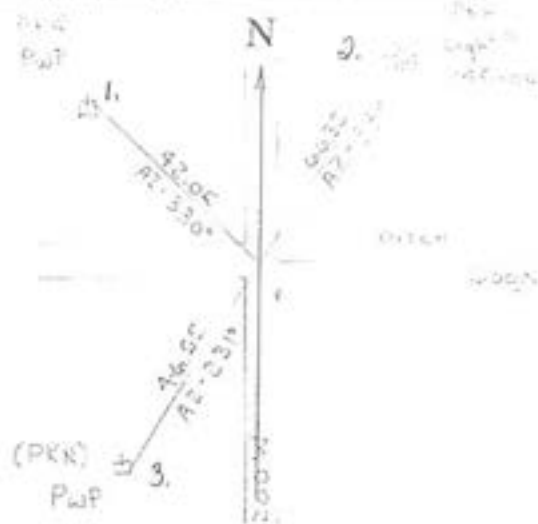

REFERENCED BY:


OTHERS:

CORNER IDENTIFIED: R.R. Spike found 0" deep


TIES:

1. 42.06' AZ 330° PK Nail PWP
2. 166.32' AZ 33° PK Nail light pole #245-060
3. 46.55' AZ 231° PK Nail PWP

SECTION 2 TWP. 22 RANGE 4

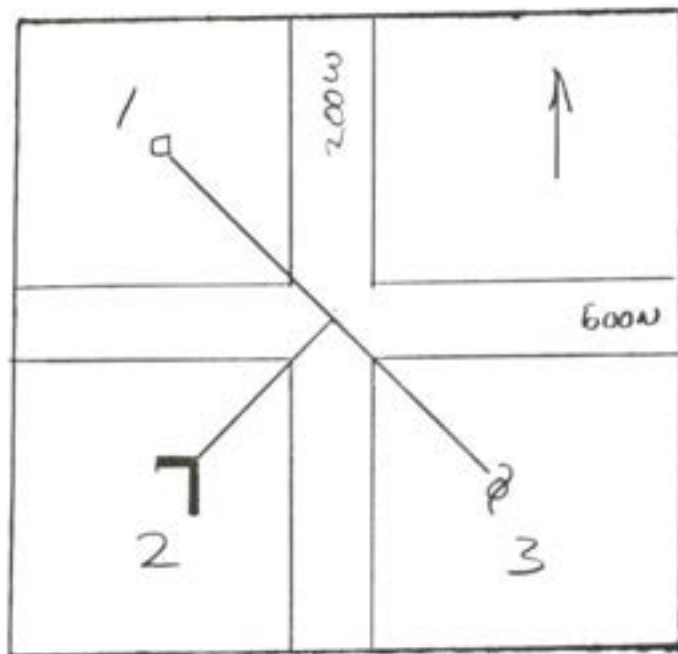

SEC 2 TWP 22 RANGE 4

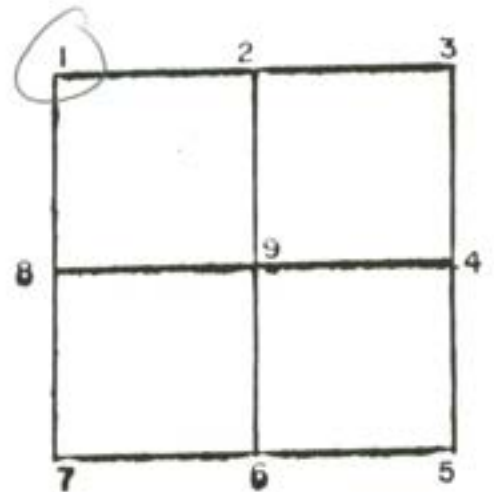

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED

TIES: 1. 31.51' HP
2. 22.21' HEADWALL
3. 47.80' PWP

SEC 2 TWP 22 RANGE 4

DATE: 9/7/04

SECTION 2 TWP. 22 RANGE 4

LIBERTY TWP. TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☒ LOCAL GRID

Units: _____
Pl. # 0510 PWP N+C 1.
N: _____
E: _____

TYPE OF MON: Rebar L
DEPTH: 2"
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-7-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

1/2 mi. W. of SR19



REFERENCED BY:


OTHERS: _____

CORNER IDENTIFIED: Rebar found 2" ± deep

TIES:

1. 205.23' AZ 278° N+C PWP
2. 18.43' AZ 355° PK Nail PWP #203900


SECTION 2 TWP. 22 RANGE 4

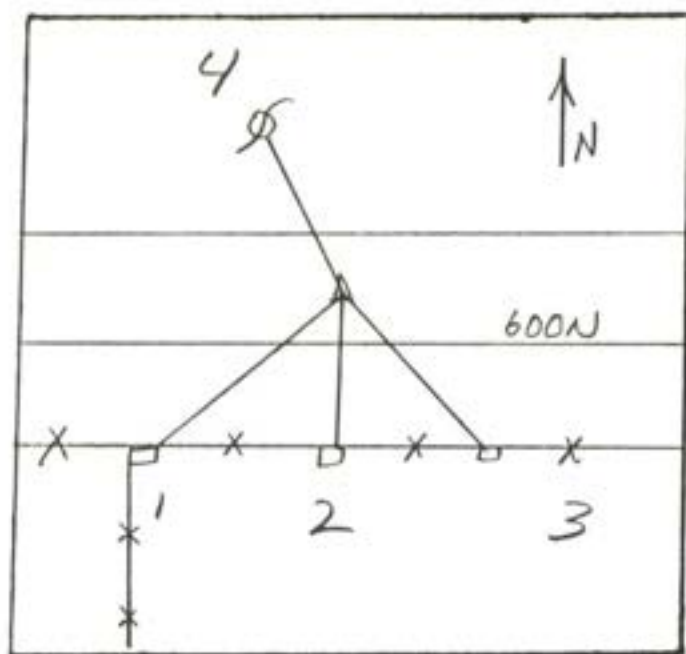

GRAPHIC TIES
(SKETCHED)

SEC. 2 TWP. 22 RANGE 4

4-14-80

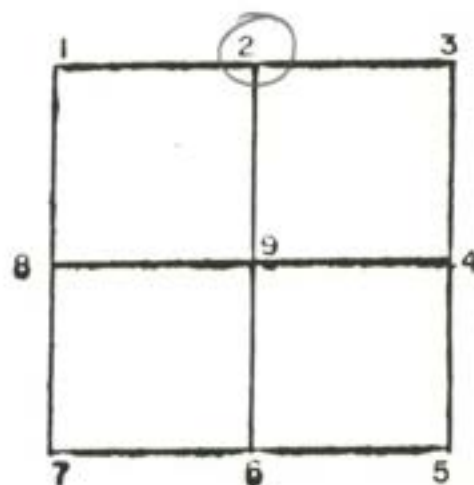


CORNER IDENT. 2 STONE W/POINT FND 0.3" DEEP IRON SET

TIES: 1. 40.09' PK - FENCEPOST (FP)
2. 23.43' PK - FP
3. 20.79' PK - FP
4. 19.47' PK - PWP

FB 150 PG. 18

SEC. 2 TWP. 22 RANGE 4

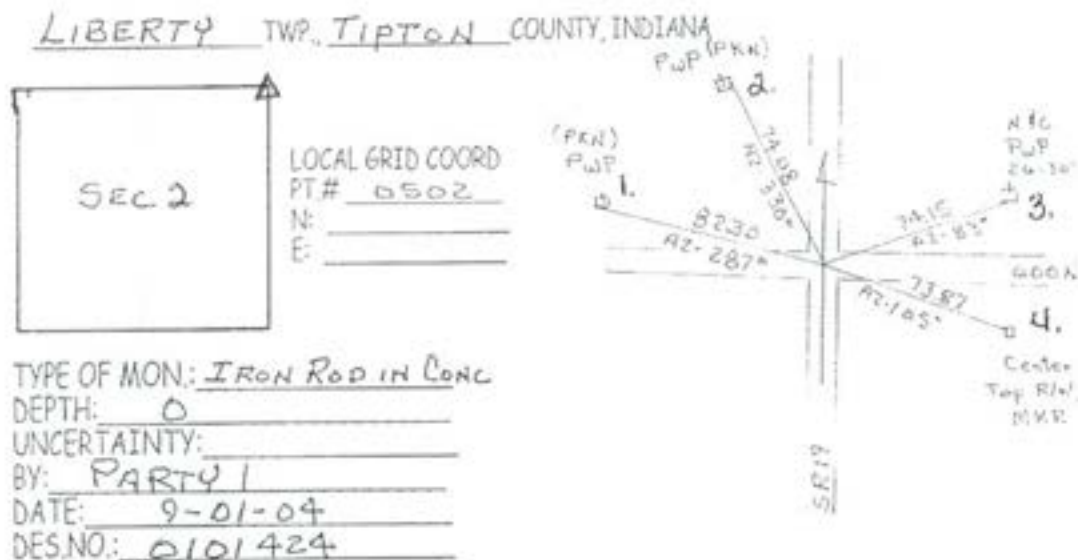DATE: 9/1/04SECTION 2 TWP. 22 RANGE 4

REFERENCED BY:


OTHERS: _____

CORNER IDENTIFIED: Iron Rod in Concrete

TIES:

1. 82.30' AZ 287° PK Nail PWP
2. 74.08' AZ 330° PK Nail PWP
3. 74.15' AZ 83° N+C PWP
4. 73.87' AZ 105° Center top R/W Marker.


SECTION 2 TWP. 22 RANGE 4

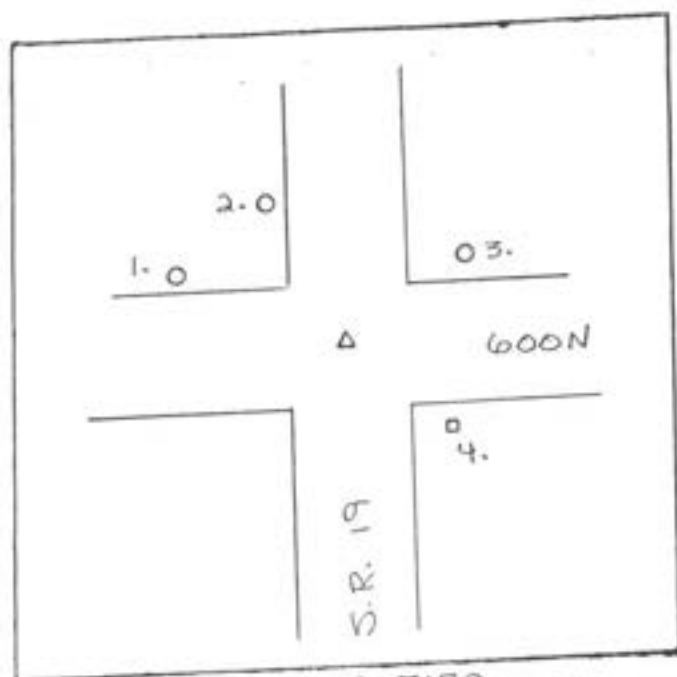

GRAPHIC TIES
(SKETCHED)

SEC. 2 TWP. 22 RANGE 4

4-15-99

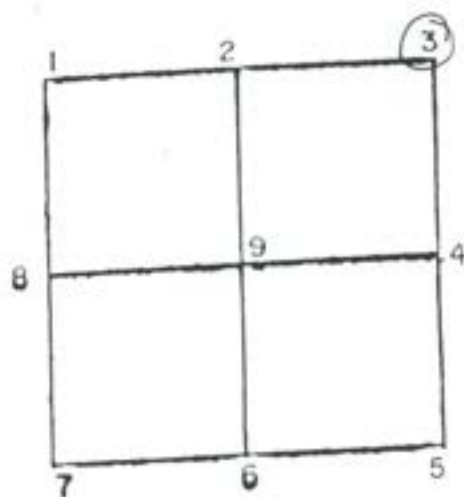

CORNER IDENT. STONE w/DRILL HOLE 1.6' DEEP 1.3' IRON ROD SET


TIES: 1. 82.30 PK NAIL IN POWERPOLE

2. 74.25

3. 78.37


4. 73.95 E TOP OF R/W MARKER

SEC. 2 TWP. 22 RANGE 4

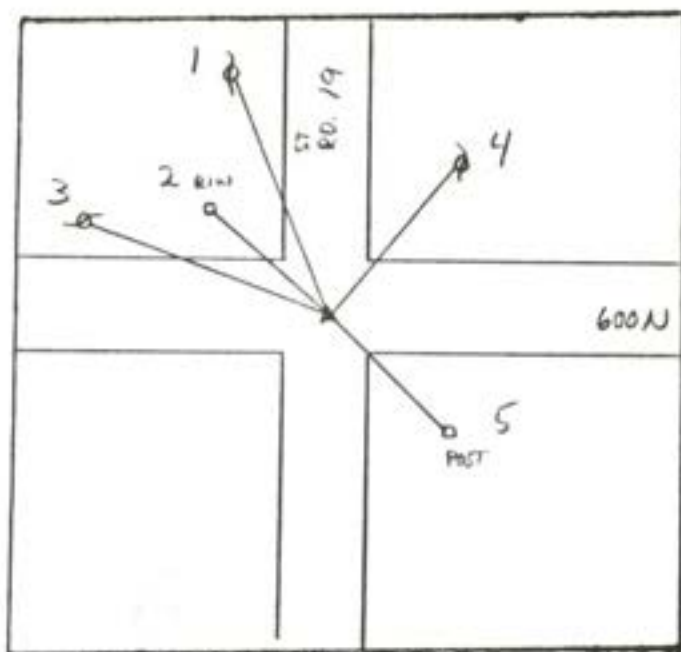

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 22 RANGE 4

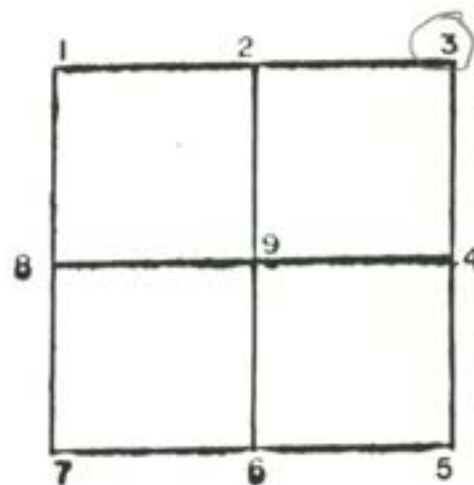

CORNER IDENT. ³ STONE W/DRILL HOLE 1.6" D. 1.3' IR. OVER DRILL HOLE

TIES: 1. 73.97' PK IN PWP 203-913
 2. 70.1' TOP d OF R/W MARKER
 3. 82.22' PK IN PWP 203-912
 4. 78.44' PK IN PWP 26-307
 5. 74.91' PK IN HEAD POST


SEC 2 TWP 22 RANGE 4

DATE: 9/1/04SECTION 2 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANA

Sec. 2	COORDINATES
	☐ NAD '83 IN E. ZONE
	☐ NAD '83 IN W. ZONE
	☒ LOCAL GRID
	Units: _____
	Pl.#: <u>0012</u>
	N: _____
	E: _____

TYPE OF MON: IRON ROD IN CONC
DEPTH: 0"
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

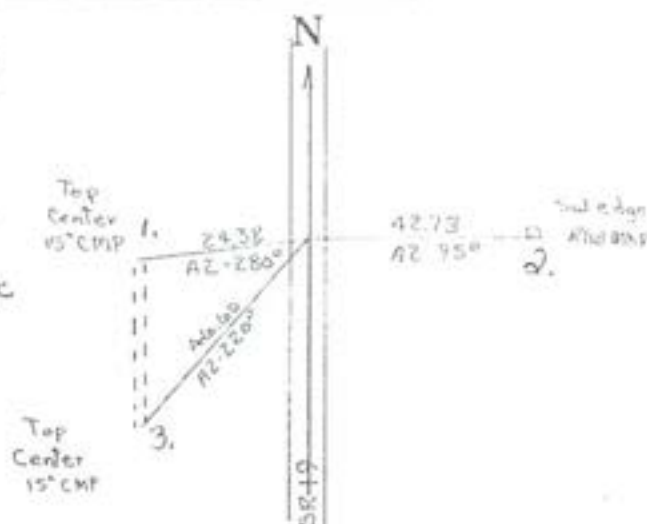

REFERENCED BY:


OTHERS: _____

CORNER IDENTIFIED: Iron Rod in Concrete 0" deep

TIES:

1. 24.38' AZ 280° TOP CENTER 15" CMP
2. 42.73' AZ 95° SW Edge R/W MKL
3. 46.60' AZ 220° TOP CENTER 15" CMP


SECTION 2 TWP. 22 RANGE 4

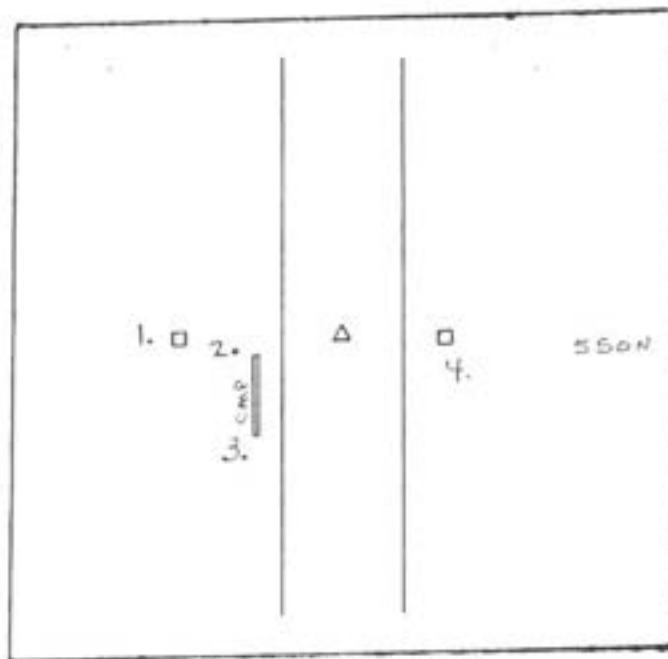

GRAPHIC TIES
(SKETCHED)

SEC. 2 TWP. 22 RANGE 4


4-15-99

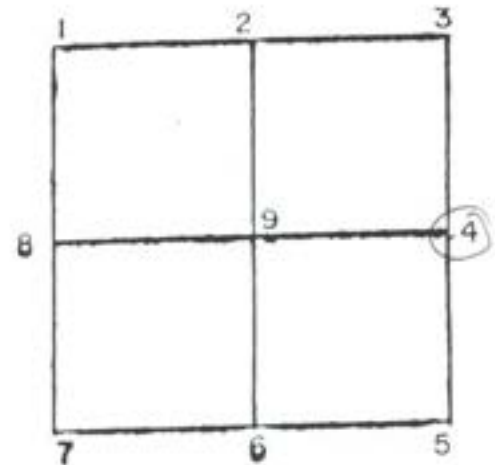

CORNER IDENT. STONE 1.0' DEEP 0.9' IRON ROD SET OVER HIGH POINT

TIES: 1. 22.18 RIVET IN NORTH TOP OF CMP
2. 37.81 P.K. NAIL IN HEAD POST
3. 34.01 TOP E OF SOUTH END OF CMP
4. 44.00' P.K. NAIL IN HEAD POST


SEC. 2 TWP. 22 RANGE 4

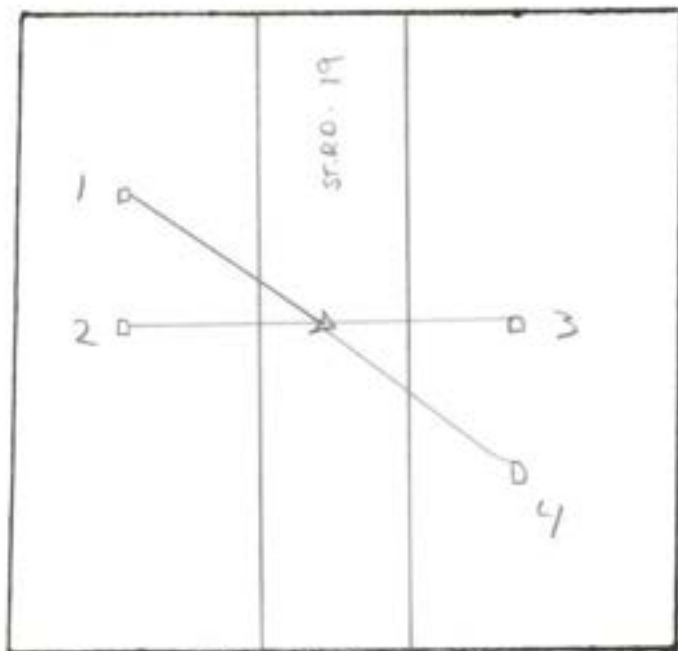

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 22 RANGE 4

5-11-82

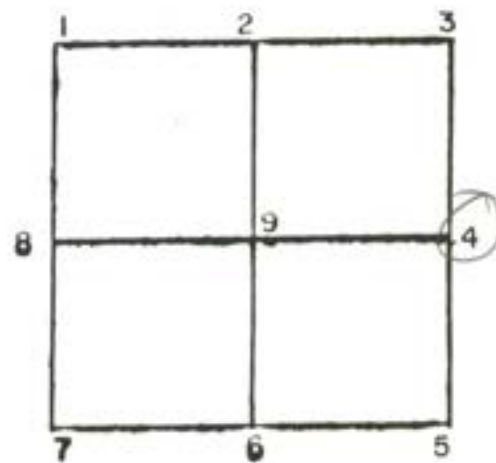

CORNER IDENT. 4 STONE FND 1.0'D. 0.9' IRON ROD OVER 4 OF STONE

- TIES:
- 1. 51.16' PK IN FENCE POST
 - 2. 37.81' PK IN CORNER POST
 - 3. 44.00' PK IN CORNER POST
 - 4. 63.08' PK IN FENCE POST
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -


SEC 2 TWP 22 RANGE 4

DATE: 9/1/04SECTION 2 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANA

	COORDINATES
	☐ NAD '83 IN E. ZONE
	☐ NAD '83 IN W. ZONE
	☒ LOCAL GRID
	Units: _____
	PL# <u>0013</u>
	N: _____
	E: _____

TYPE OF MON: IRON ROD IN CONC
 DEPTH: 0
 UNCERTAINTY: _____
 BY: PARTY 1
 DATE: 9-01-04
 DES. NO.: 0101424

STATE FORM 40180 (R2 / 2-04)

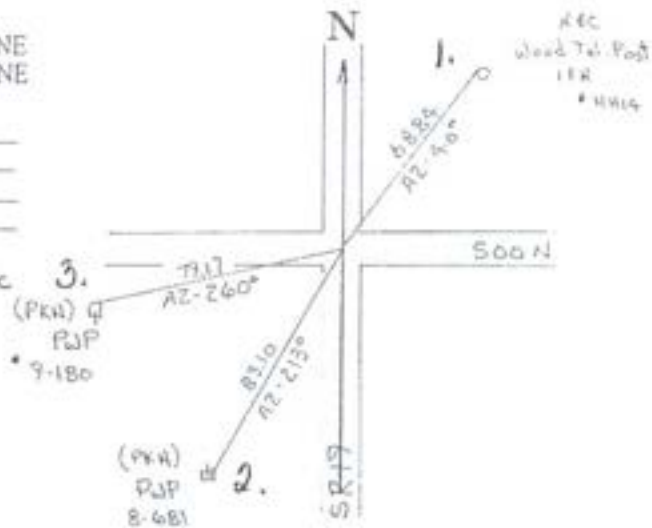

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: Iron Rod in concrete


TIES:

1. 68.84' AZ 40° N+C Wood tele pole IFN #HH14
 2. 83.10' AZ 213° PK Nail PWP #8-681
 3. 79.17' AZ 260° PK Nail PWP #9-180


SECTION 2 TWP. 22 RANGE 4

SEC. 2 TWP. 22 RANGE 4

4-15-99

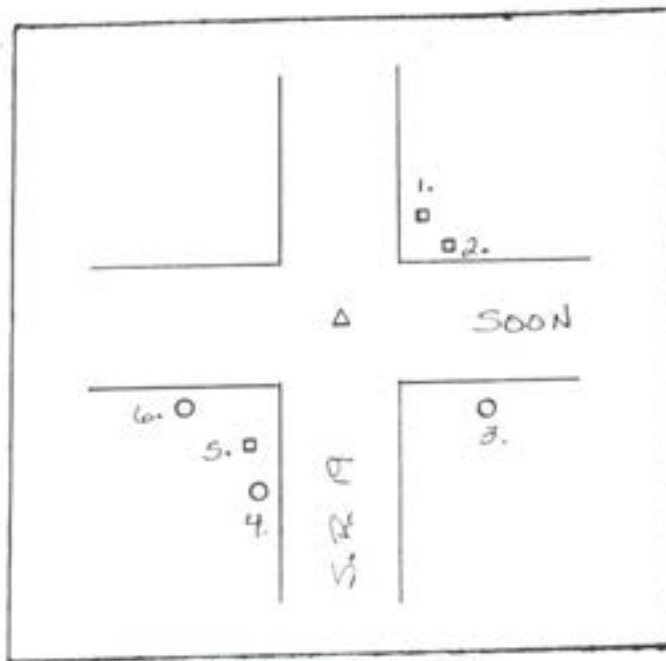


GRAPHIC TIES
(SKETCHED)

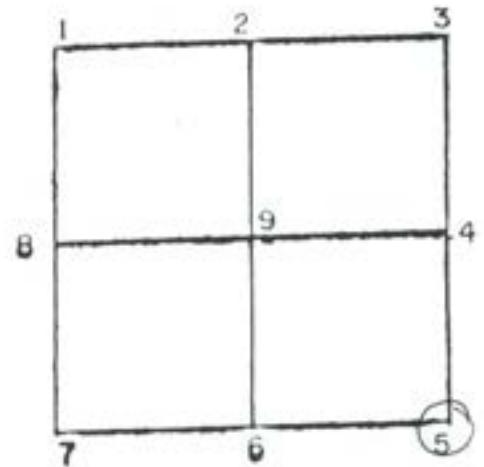

CORNER IDENT. STONE W/ POINT 1.8' DEEP 1.3' IRON ROD SET

TIES: 1. 67.17' E TOP OF R/W MARKER
2. 79.55' " " " " "
3. 125.66' P.K. NAIL IN POWER POLE
4. 83.05' " " " "
5. 65.17' E TOP OF R/W MARKER
6. 79.28' P.K. NAIL IN POWER POLE


SEC. 2 TWP. 22 RANGE 4

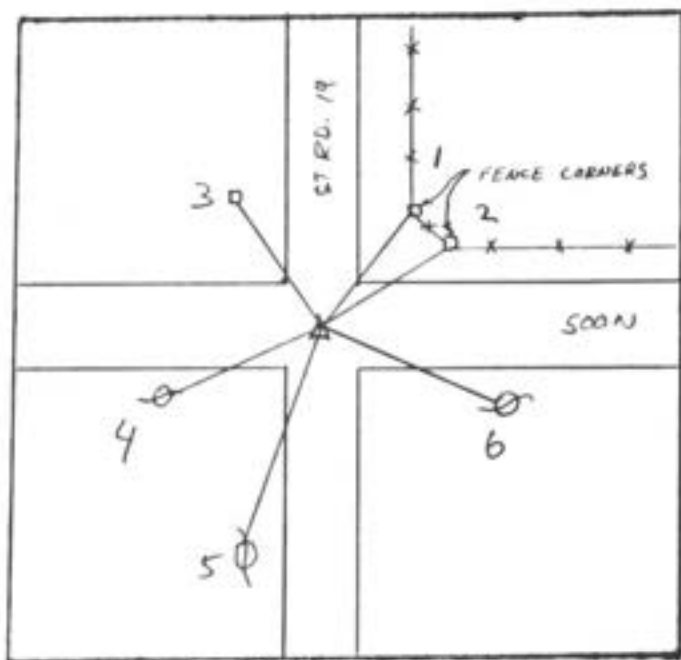

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 22 RANGE 4

5-11-82

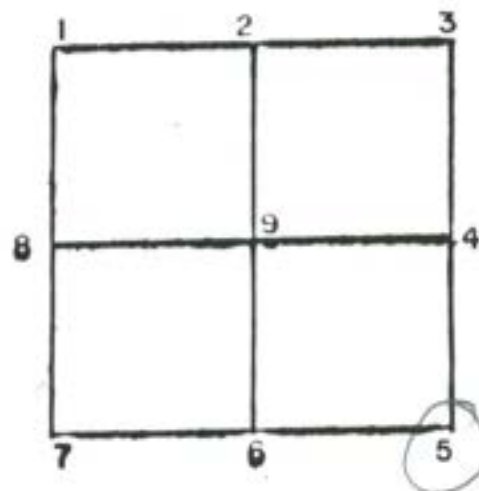

CORNER IDENT. 5 STONE W/POINT 1.8' O. 1.3' IRON ROD OVER POINT

TIES:	1.	67.83'	PK IN POST	
	2.	80.35'	PK IN POST	
	3.	64.9'	TOP/C R/W MARKER	
	4.	76.73'	PK IN PWP	9-180
	5.	82.87'	PK IN PWP	8-861
	6.	125.66	PK IN PWP	9-181


SEC 2 TWP 22 RANGE 4

DATE: 9/1/04SECTION 2 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
 Units: _____
 Pl. # 2010
 N: _____
 E: _____

TYPE OF MON.: PK.N.L.
 DEPTH: 1"
 UNCERTAINTY: _____
 BY: PARTY 1
 DATE: 9-01-04
 DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

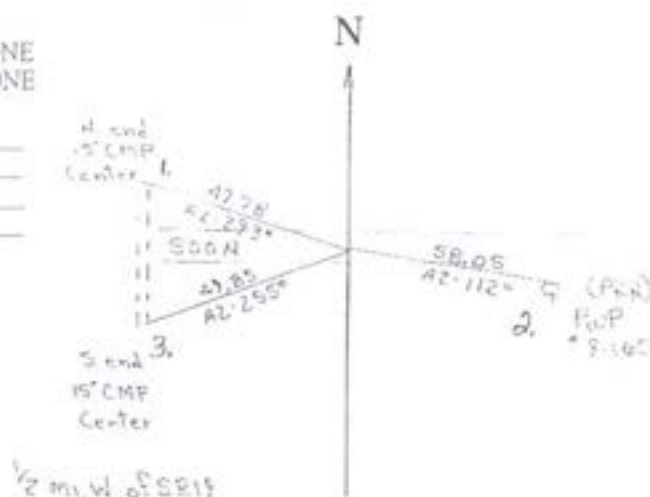

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: PK Nail found 1" ± deep

TIES:


1. 47.78' AZ 293° N END CTR 15" CMP
 2. 58.05' AZ 112° PK NAIL PWP
 3. 49.85' AZ 255° S END CTR 15" CMP

SECTION 2 TWP. 22 RANGE 4

SEC. 2 TWP 22 RANGE 4

MAY 14, 1991

HAS NOT BEEN
FIELD CHECKED
BY THIS OFFICE

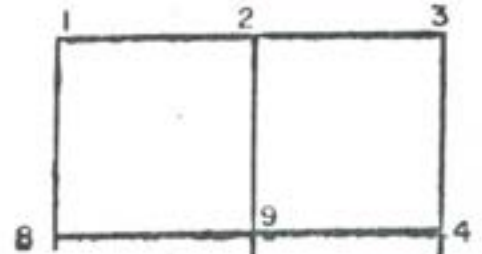

WILLIAM W. BASSETT & ASSOCIATES, INC.
ENGINEERS • PLANNERS • SURVEYORS
212 EAST LINCOLN ROAD SUITE 3 NOKOMO, INDIANA 46902
(317) 453-9200

ORIGINAL SURVEY



LEGAL DESCRIPTION

Part of the Southeast Quarter of Section 2, Township 22 North, Range 4 East, Liberty Township, Tipton County, Indiana, more particularly described as follows:

Beginning at a point on the South line of said Southeast Quarter, said point being 447.72 feet East of the Southwest corner of the Southeast Quarter of said Section and marked by a P.K. Nail; thence North 00°00' East 229.0 feet to a 5/8" capped rebar; thence North 90°00' East, parallel to the South line of said Quarter Section, 293.42 feet to a 5/8" capped rebar; thence South 00°00' West 229.0 feet to the South line of said Quarter Section, marked by a P.K. Nail; thence South 90°00' West, on and along said South line, 293.42 feet to the point of beginning, containing 1.543 acres, more or less. Subject to legal highway right of way and easements of record.

SEC. 2 TWP 22 RANGE 4

DATE: 9/1/04

SECTION 2 TWP. 22 RANGE 4


LIBERTY TWP., TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pl#: 0025
N: _____
E: _____

TYPE OF MON: STONE IN MON.
DEPTH: _____
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

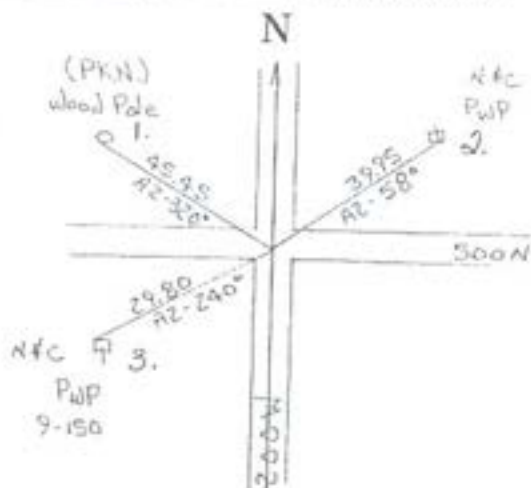

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: Stone in monument


TIES:

1. 45.45' AZ 320° PK Nail Wood Pole

2. 39.95' AZ 58° N+C PWP

3. 29.80' AZ 240° N+C PWP


SECTION 2 TWP. 22 RANGE 4

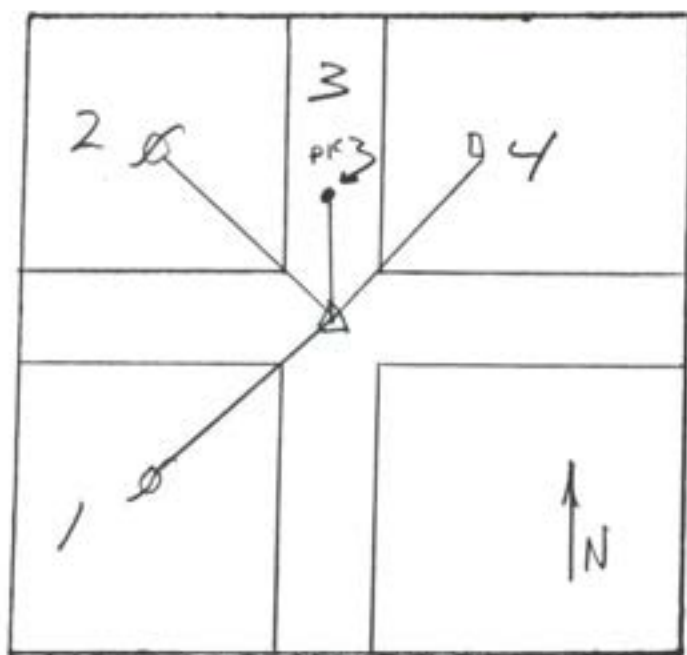

GRAPHIC TIES
(SKETCHED)

SEC. 2 TWP 22 RANGE 4

4-22-80

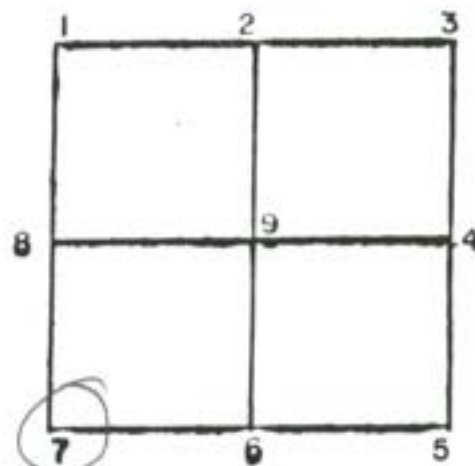

CORNER IDENT. 7 STONE FND 1.7' D. MARKED W/ARROW

- TIES:
1. 29.93' PK - PWP
 2. 45.45' PK - PWP
 3. 15.75' PK - IN $\frac{1}{4}$ OF Co. RO. 200W
 4. 47.05' - TOP SE CORNER OF TELEPHONE PED.

SEC 2 TWP 22 RANGE 4

DATE: 9/1/04


SECTION 2 TWP. 22 RANGE 4

LIBERTY TWP. TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt. # 0024
N: _____
E: _____

TYPE OF MON.: STONE IN MON.
DEPTH: _____
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2 / 2-04)

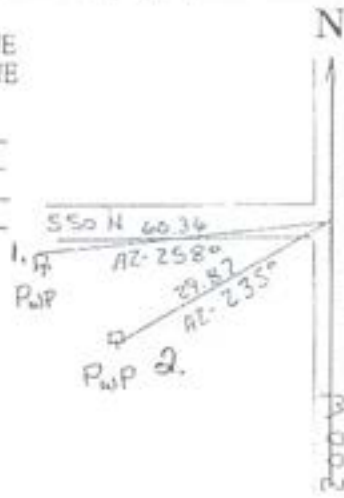

(M.O.R.A.)

REFERENCED BY:

OTHERS: _____


CORNER IDENTIFIED: Stone in Monument

TIES:

1. 60.36' AZ 258° PWP

2. 29.87' AZ 235° PWP


SECTION 2 TWP. 22 RANGE 4

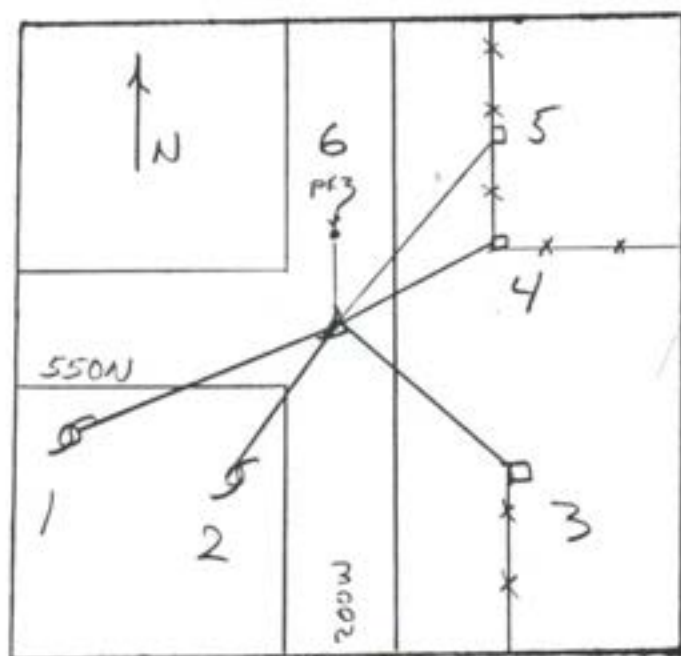

GRAPHIC TIES
(SKETCHED)

SEC 2 TWP 22 RANGE 4


4-15-1980

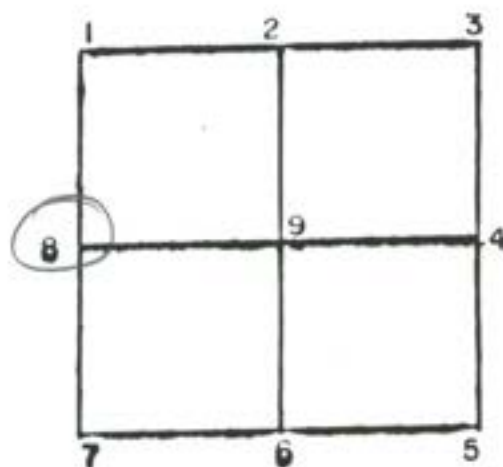

CORNER IDENT. 8 STONE W/POINT 1.3' DEEP

- TIES:
1. 60.30' PK - PWP 214-571
 2. 29.60' PK - PWP
 3. 32.18' PK - GATE POST
 4. 26.92' PK - CORNER POST
 5. 28.35' PK - BRACE POST
 6. 15.03' PK - E OF CO. RD. 200W


SEC 2 TWP 22 RANGE 4

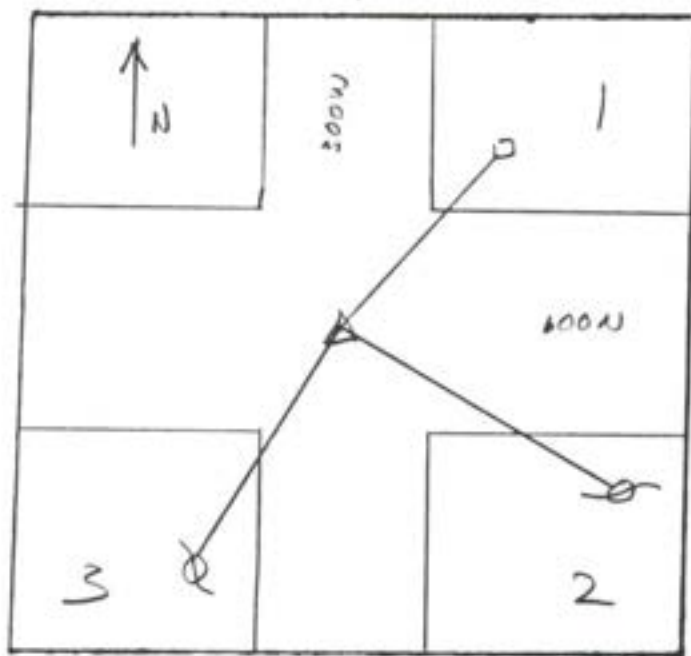

GRAPHIC TIES
(SKETCHED)

SEC 3 TWP 22 RANGE 4

6-20-86

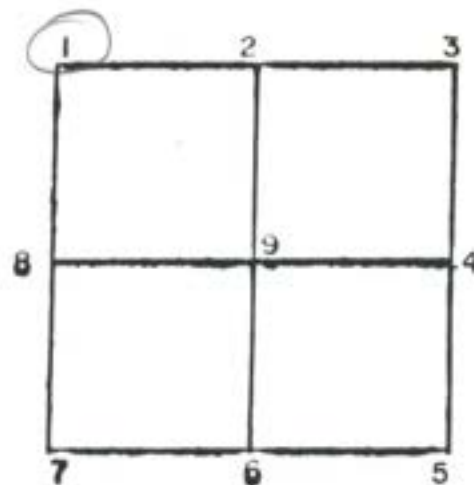

CORNER IDENT. 1 3/4" IRON ROD

TIES: 1. 23.68' PK - W FACE CORNER POST
2. 74.0' PK - SW FACE PWP
3. 38.141' PK - SE FACE PWP

SEC 3 TWP 22 RANGE 4

DATE: 9/2/04SECTION 3 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY INDIANA


COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W ZONE
☐ LOCAL GRID
Units: _____
Pl.#: 0023
N: _____
E: _____

TYPE OF MON: R.R. SpKFDEPTH: 0

UNCERTAINTY: _____

BY: PARTY 1DATE: 9-02-04DES.NO: 0101424

STATE FORM 40180 (R2/2-04)

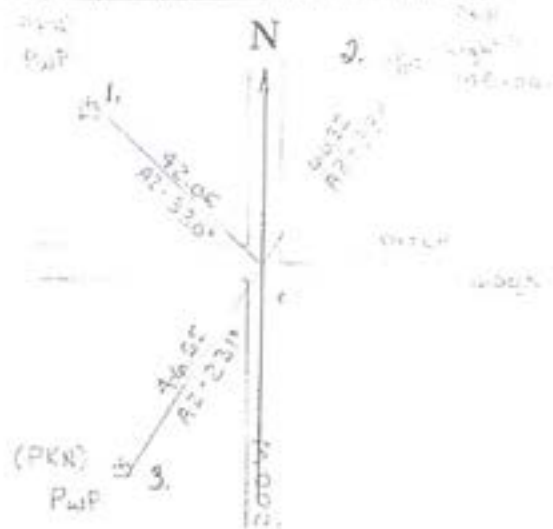


REFERENCED BY: _____

OTHERS: _____


CORNER IDENTIFIED: R.R. Spikes found 0" deep

TIES:

1. 42.06' A2 330° PK Nail PWP2. 66.32' A2 33° PK Nail Light pole #245-0603. 46.55' A2 231° PK Nail PWPSECTION 3 TWP. 22 RANGE 4

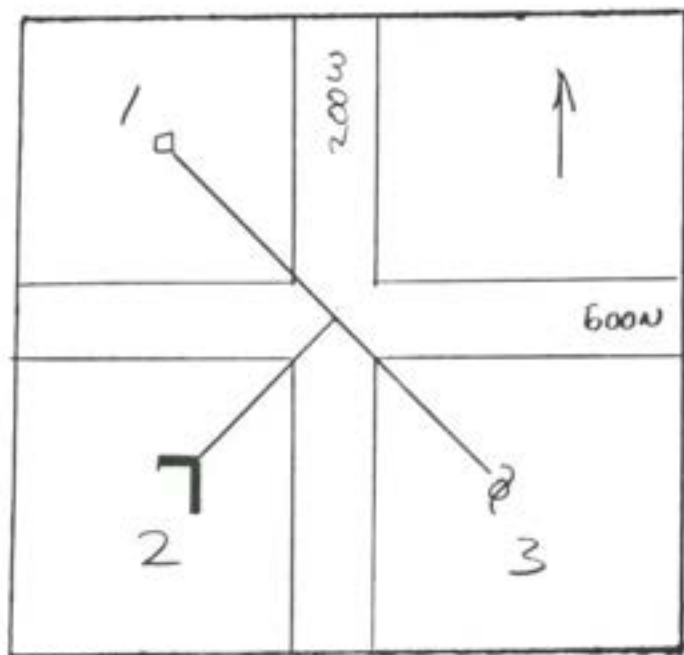

SEC 3 TWP 22 RANGE 4

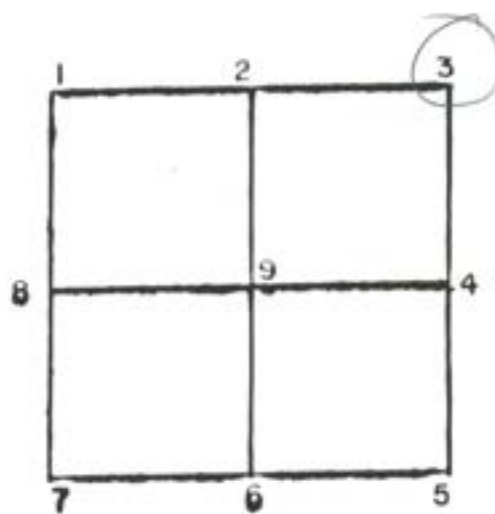

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED

TIES: 1. 31.51' HP

2. 22.21' HEADWALL


3. 47.80' PWP

SEC 3 TWP 22 RANGE 4

DATE: 9/1/04

SECTION 3 TWP. 22 RANGE 4


LIBERTY TWP. TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.# 0024
N: _____
E: _____

TYPE OF MON.: STONE IN MON.
DEPTH: _____
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101924

STATE FORM 40180 (R2/2-04)

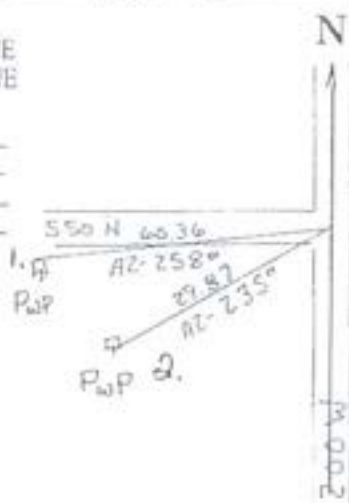

(H.O.R.A.)

REFERENCED BY:

OTHERS: _____


CORNER IDENTIFIED: Stone in Monument

TIES:

1. 60.36' AZ 258° PWP

2. 29.87' AZ 235° PWP


SECTION 3 TWP. 22 RANGE 4

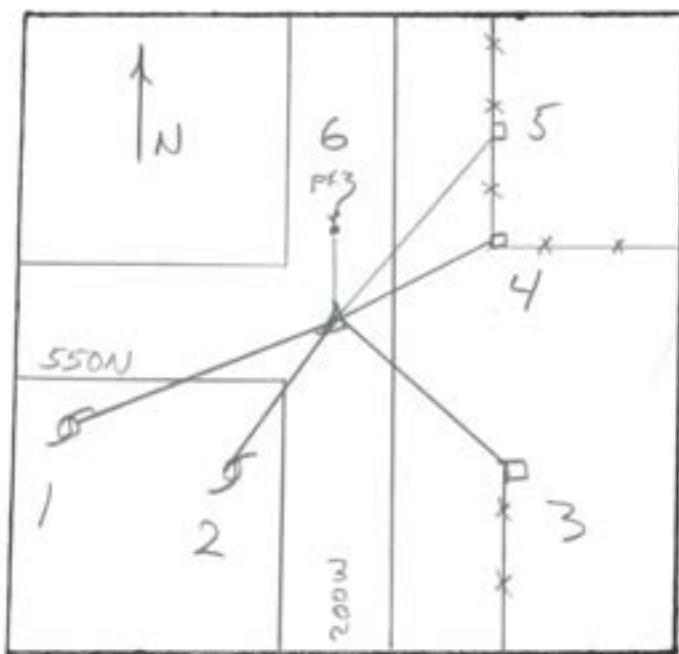

GRAPHIC TIES
(SKETCHED)

SEC. 3 TWP 22 RANGE 4

4-15-1980

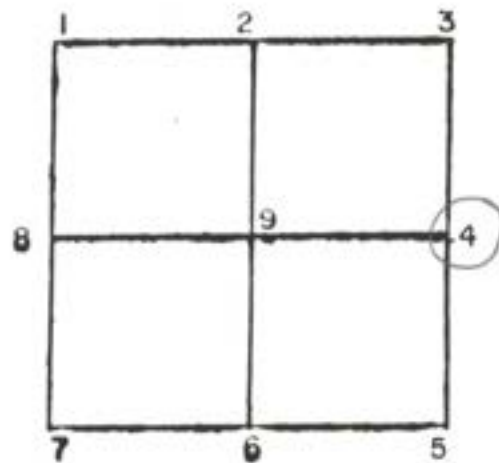

CORNER IDENT. STONE W/POINT 1.3' DEEP

TIES: 1. 60.30' PK - PWP 214-571
2. 29.60' PK - PWP
3. 32.18' PK - GATE POST
4. 26.92' PK - CORNER POST
5. 28.35' PK - BRACE POST
6. 15.03' PK - E OF C.O.R.D. 200W

SEC 3 TWP 22 RANGE 4

DATE: 9/1/04

SECTION 3 TWP. 22 RANGE 4

LIBERTY TWP., TIPTON COUNTY, INDIANA



COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt.#: 0025
N: _____
E: _____

TYPE OF MON.: STONE IN MON.

DEPTH: _____


UNCERTAINTY: _____

BY: PARTY 1

DATE: 9-01-04

DES.NO.: 0101424

STATE FORM 40180 (R2/2-04)

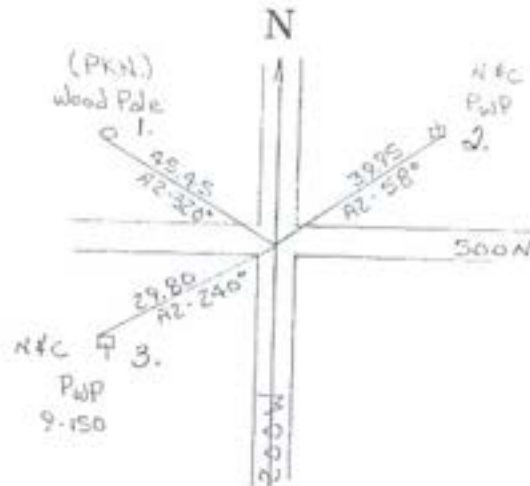

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: Stone in monument


TIES:

1. 45.45' AZ. 320° PK Nail Wood Pole

2. 39.95' AZ. 58° N+C PWP

3. 29.80' AZ. 240° N+C PWP


SECTION 3 TWP. 22 RANGE 4

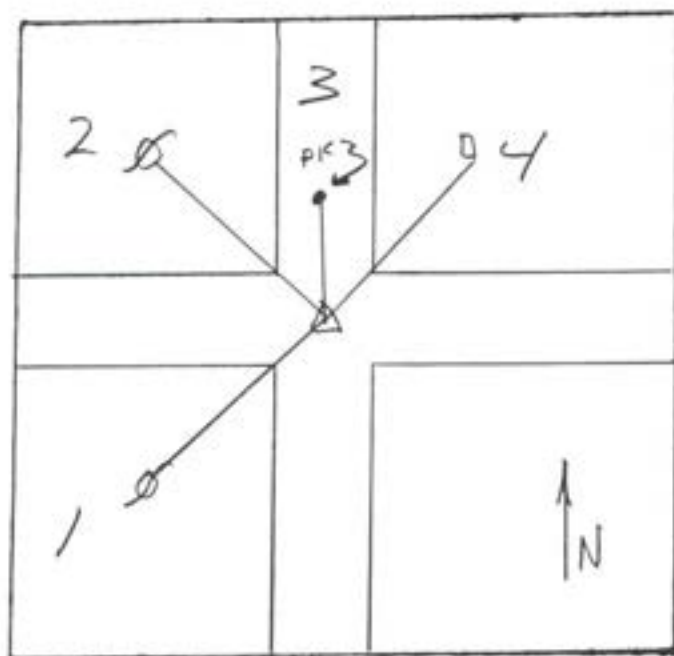

GRAPHIC TIES
(SKETCHED)

SEC 3 TWP 22 RANGE 4


4-22-80

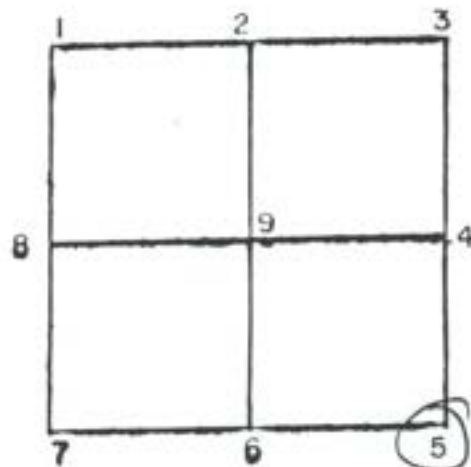


CORNER IDENT. 5 STONE FND 1.7' D. MARKED W/ARROW

TIES: 1. 29.93' PK - PWP
2. 45.45' PK - PWP
3. 15.75' PK - IN 9 OF Co. RD. 200W
4. 47.05' - TOP SE CORNER OF TELEPHONE PED.

SEC 3 TWP 22 RANGE 4

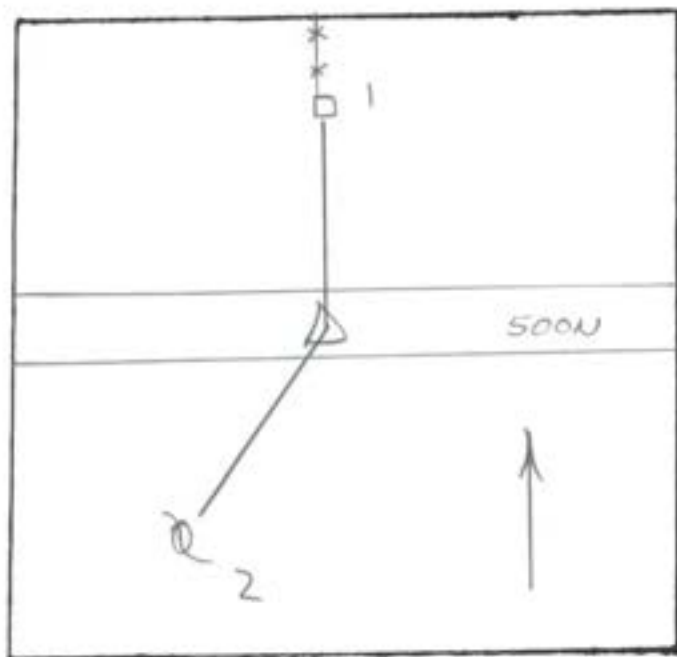


SEC. 3 TWP 22 RANGE 4

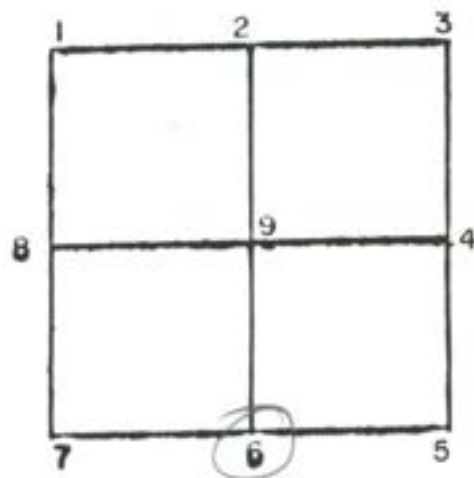

CORNER IDENT. NOT STATED


TIES: 1. 16.68' HP
2. 78.14' PWP

SEC 3 TWP 22 RANGE 4

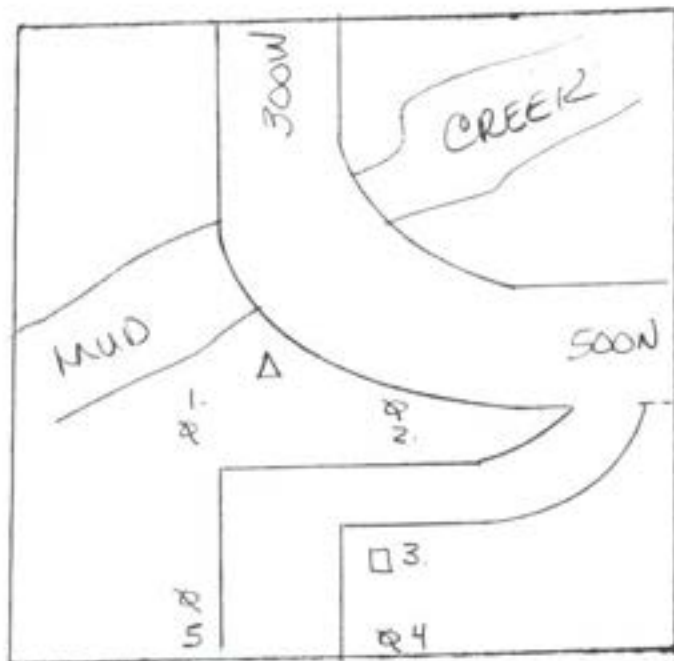

GRAPHIC TIES
(SKETCHED)


SEC. 3 TWP. 22 RANGE 4

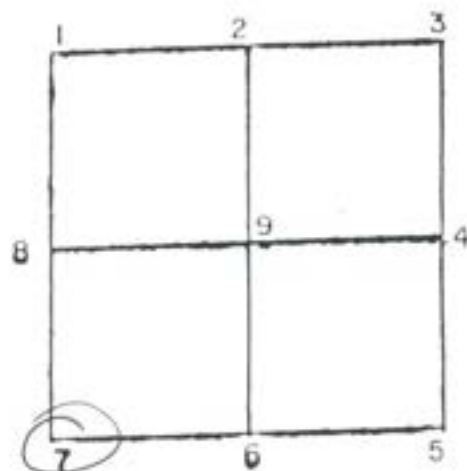

CORNER IDENT. _____

TIES: 1. 21.20 POWER POLE
2. 62.17 POWER POLE
3. 254.35 HEAD POST
4. 284.40 POWER POLE
5. 274.25 POWER POLE


SEC. 3 TWP. 22 RANGE 4

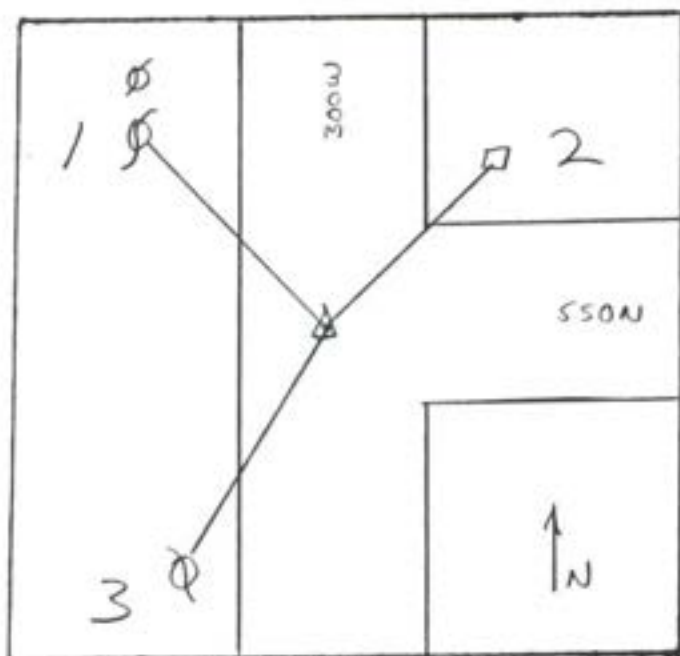

GRAPHIC TIES
(SKETCHED)

SEC. 3 TWP 22 RANGE 4


6-20-86

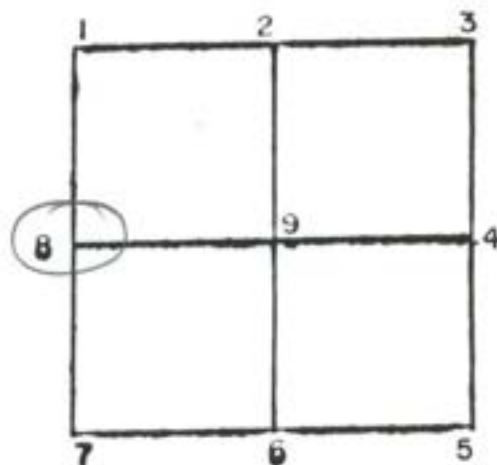

CORNER IDENT. 8 FND. $\frac{1}{2}$ " IRON ROD


- TIES:
1. 32.20' PK SE/F PWP
 2. 29.05' PK SW/F CORNER POST.
 3. 38.75' PK E/F PWP

SEC 3 TWP 22 RANGE 4

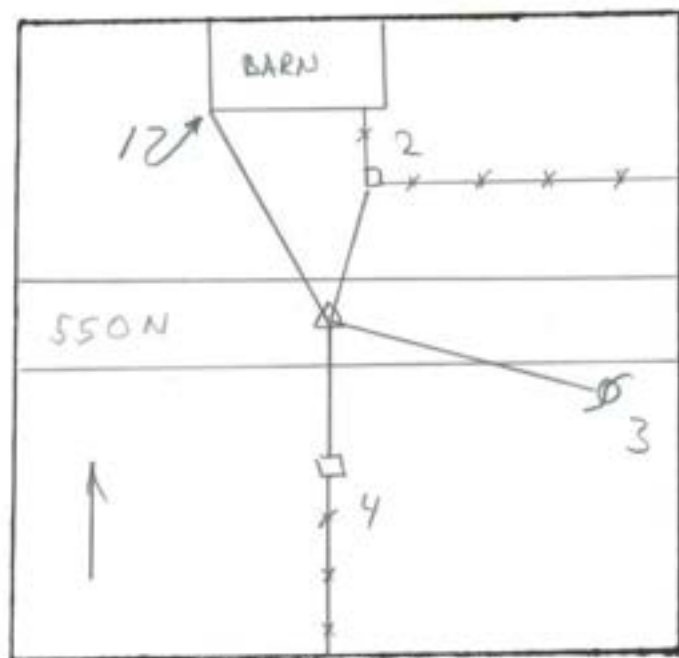

GRAPHIC TIES
(SKETCHED)


SEC 3 TWP 22 RANGE 4

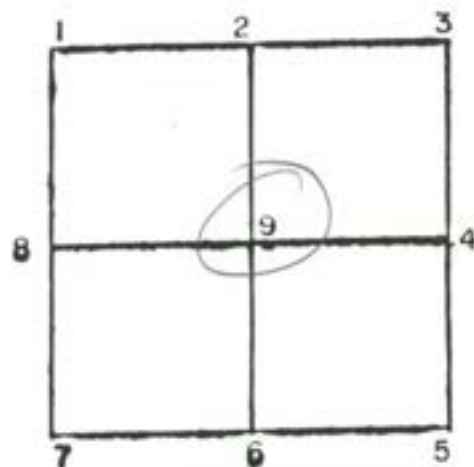


CORNER IDENT. BOAT SPIKE FND

TIES: 1. 47.55' SW CORNER OF BARN
2. 15.3' HP
3. 101.9' PWP
4. 14.9' HP

SEC 3 TWP 22 RANGE 4

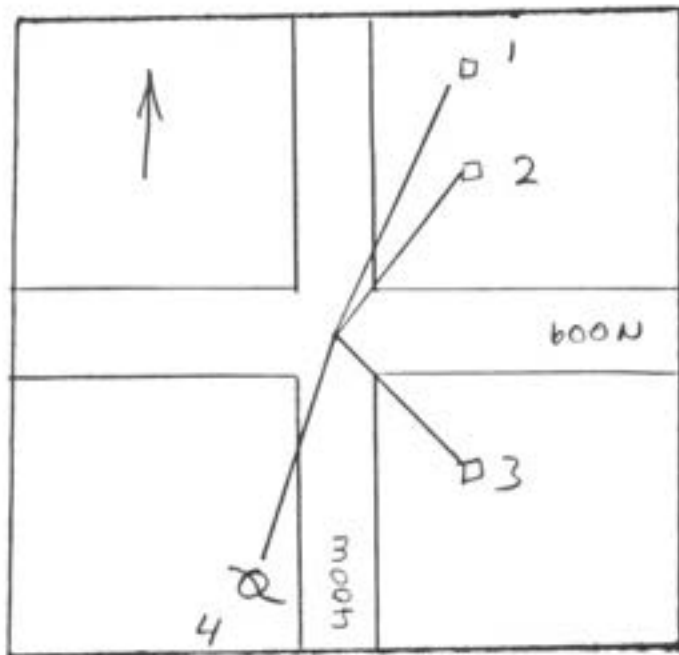

SEC. 4 TWP. 22 RANGE 4

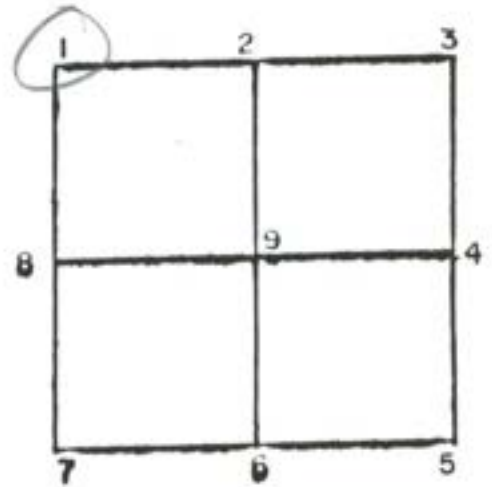


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED

TIES: 1. 34.70' FP
2. 43.50' HP
3. 31.20' HP
4. 28.30' PUP


SEC. 4 TWP. 22 RANGE 4

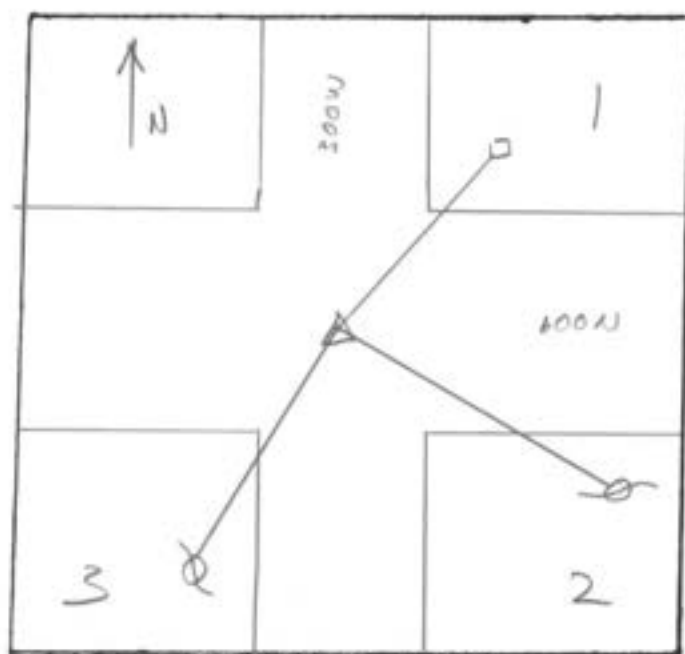

GRAPHIC TIES
(SKETCHED)

SEC 4 TWP 22 RANGE 4

6-20-86

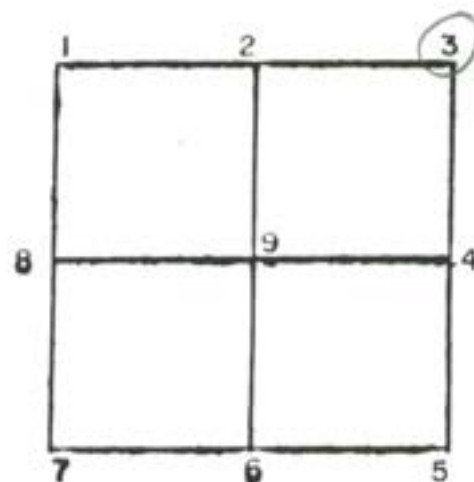


CORNER IDENT. 3 3/4" IRON ROD

TIES: 1. 23.68' PK - W FACE CORNER POST

2. 74.0' PK - SW FACE PWP

3. 38.44' PK - SE FACE PWP


SEC 4 TWP 22 RANGE 4

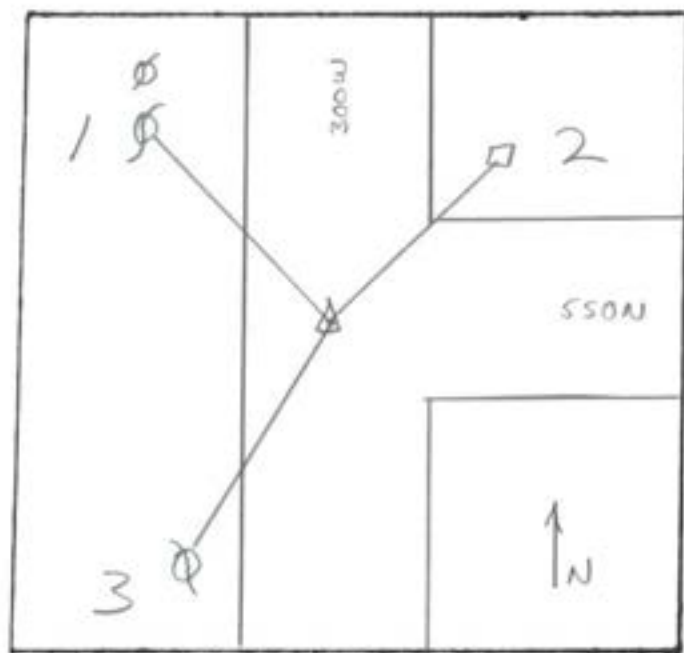

GRAPHIC TIES
(SKETCHED)

SEC 4 TWP 22 RANGE 4

6-20-86

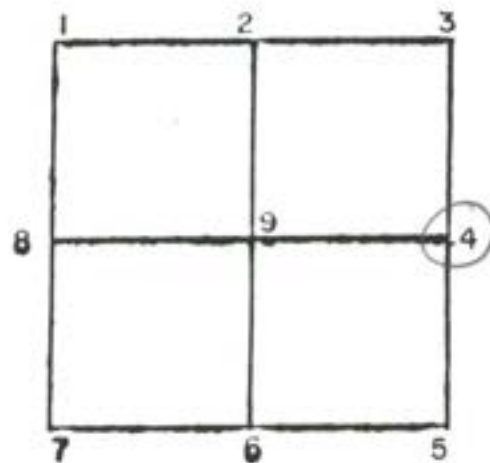


CORNER IDENT. 4 FND. $\frac{1}{2}$ " IRON ROD


- TIES:
1. 32.20' PK SE/F PWP
 2. 29.05' PK SW/F CORNER POST.
 3. 38.75' PK E/F PWP
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -

SEC 4 TWP 22 RANGE 4

SEC. 4 TWP. 22 RANGE 4

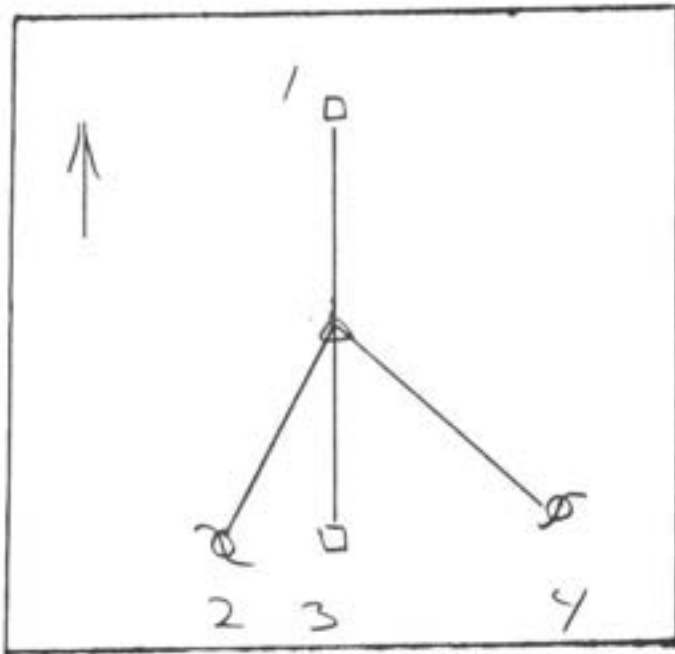

GRAPHIC TIES
(SKETCHED)

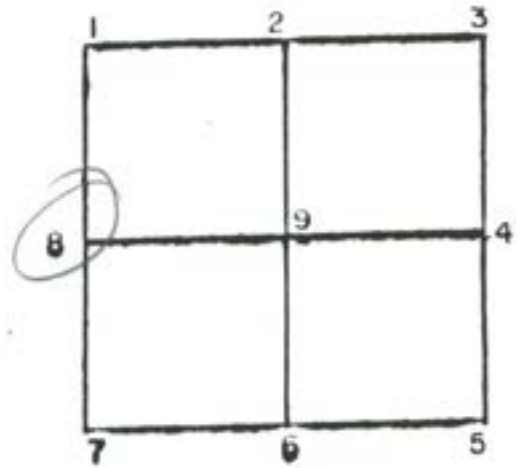


CORNER IDENT. NOT STATED


Time	Location
1. 17.00	HP
2. 80.60	PWP
3. 17.05	HP
4. 18.80	PWP

SEC 4 TWP 22 RANGE 4

SEC 5 TWP 22 RANGE 4

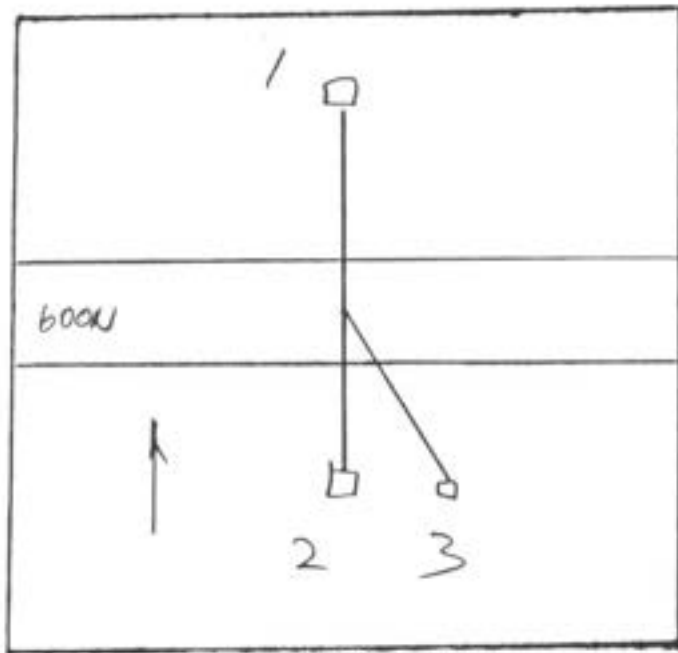


GRAPHIC TIES
(SKETCHED)

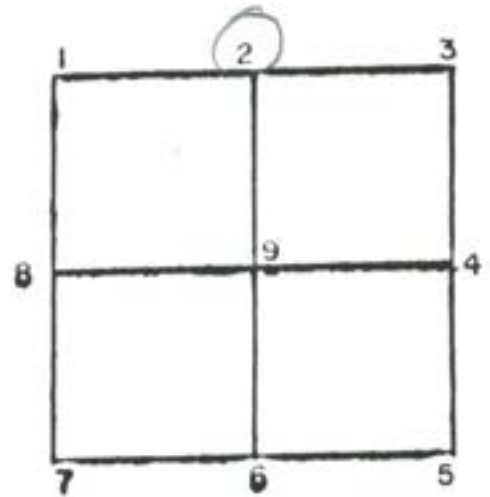

CORNER IDENT. NOT STATED


TIES: 1. 16.00' HP
2. 17.30' HP
3. 17.90' FP

SEC 5 TWP 22 RANGE 4

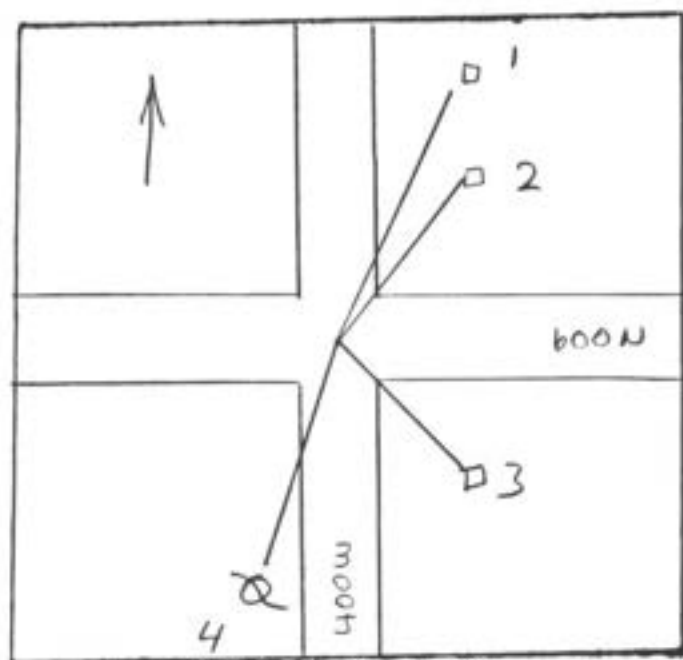

GRAPHIC TIES
(SKETCHED)

SEC. 5 TWP. 22 RANGE 4

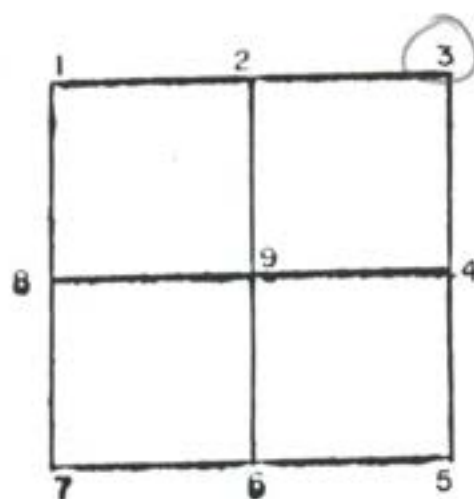


CORNER IDENT. NOT STATED


TIES:	1.	34.70'	FP
	2.	43.50'	HP
	3.	31.20'	HP
	4.	28.30'	PWP

SEC. 5 TWP. 22 RANGE 4

SEC. 5 TWP. 22 RANGE 4

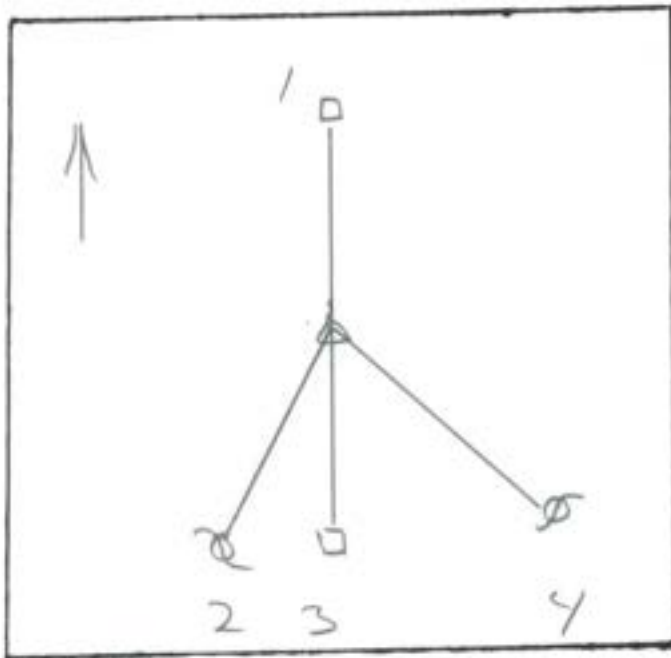


GRAPHIC TIES
(SKETCHED)

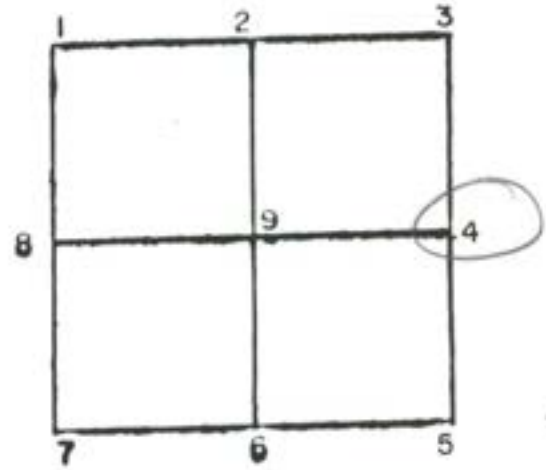

CORNER IDENT. NOT STATED


TIES: 1. 17.00 HP
 2. 80.60 PWP
 3. 17.05 HP
 4. 18.80 PWP

SEC 5 TWP 22 RANGE 4

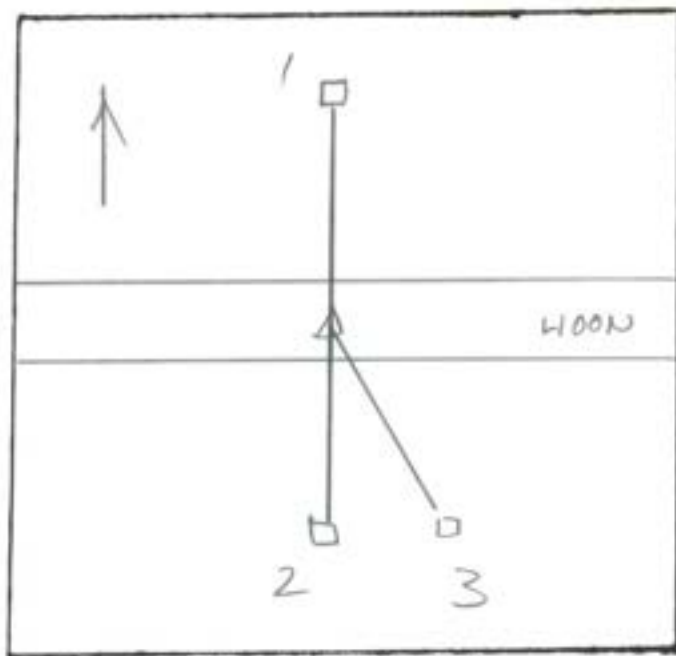

GRAPHIC TIES
(SKETCHED)


SEC. 7 TWP 22 RANGE 4

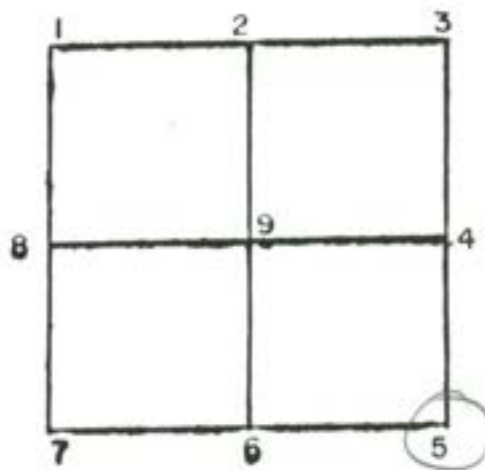


CORNER IDENT. NOT STATED

TIES: 1. 15.60' HP
2. 16.40' HP
3. 18.80' FP

SEC. 7 TWP 22 RANGE 4

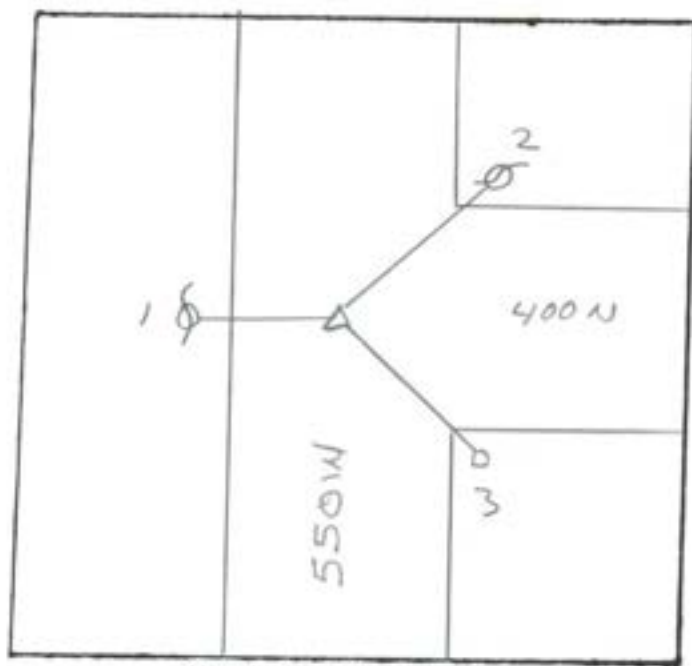

SEC. 7 TWP 22 RANGE 4

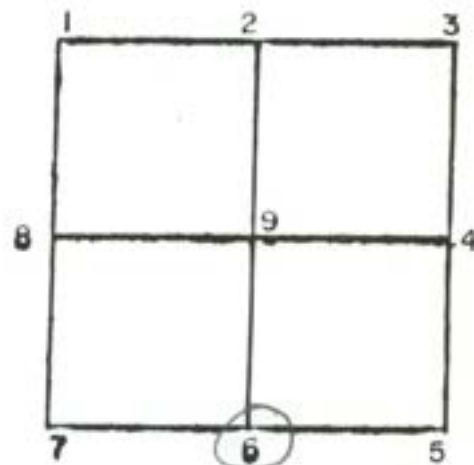


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 6


TIES: 1. 19.55' PWP
2. 47.25' PWP
3. 36.23' TELEPHONE PED.

SEC 7 TWP 22 RANGE 4

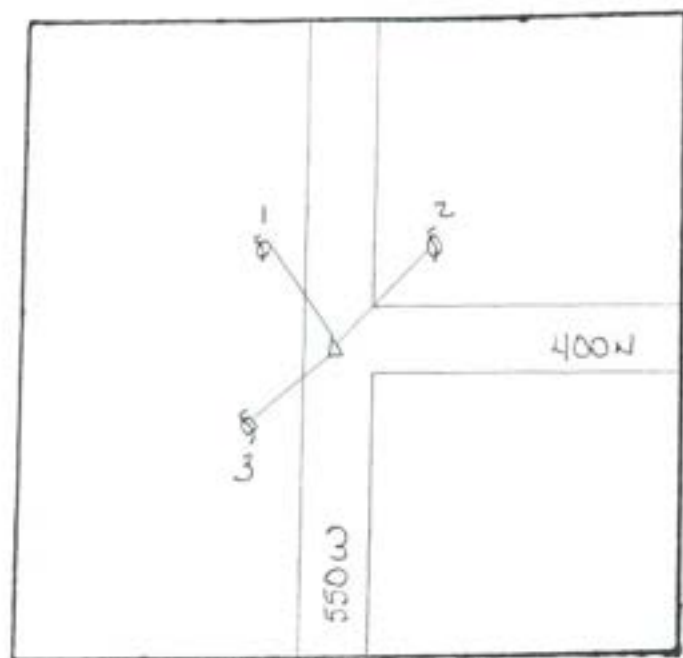

GRAPHIC TIES
(SKETCHED)

SEC 7 TWP 22 RANGE 4

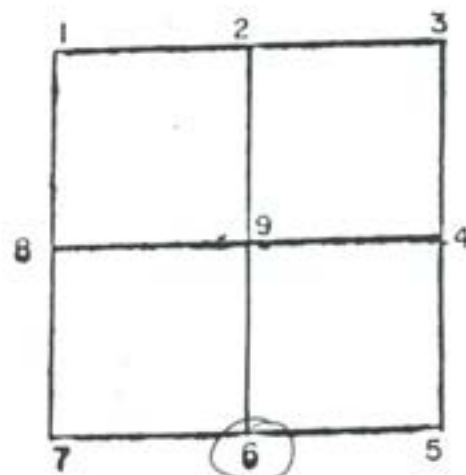

CORNER IDENT. NAIL W/ RIBBON 4" deep


TIES: 1 37.53' PK NAIL NE FACE PWP

2 48.40' PK NAIL + CAP IN PWP

3 21.88' PK NAIL IN CAP IN PWP


SEC 7 TWP 22 RANGE 4

6/11/01

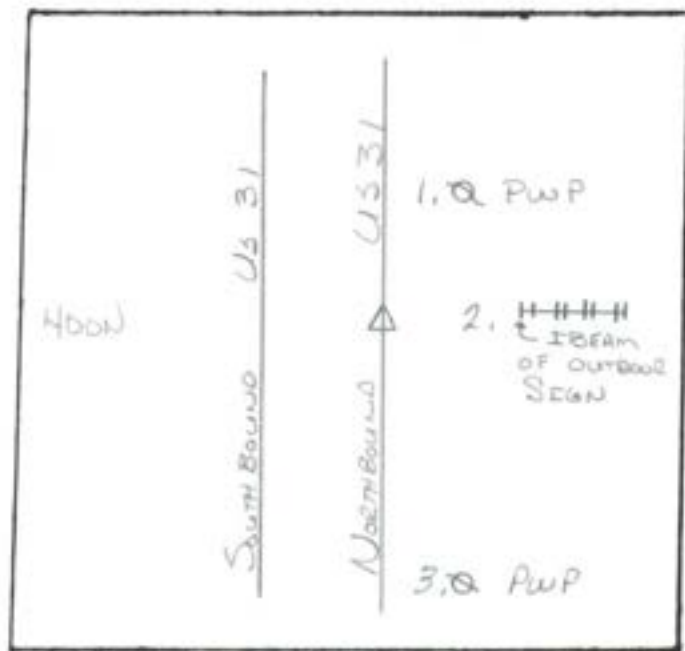

GRAPHIC TIES
(SKETCHED)


SEC 7 TWP 22 RANGE 4

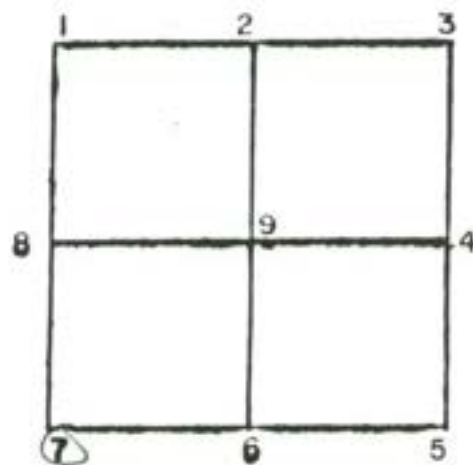

CORNER IDENT. P.K. NAIL


TIES: 1. 49.55' P.K. NAIL IN SOUTHEAST FACE PWP
2. 64.12' SOUTHWEST CORNER VERTICAL I-BEAM
3. 199.68' P.K. NAIL IN SOUTHWEST FACE PWP

SEC 7 TWP 22 RANGE 4

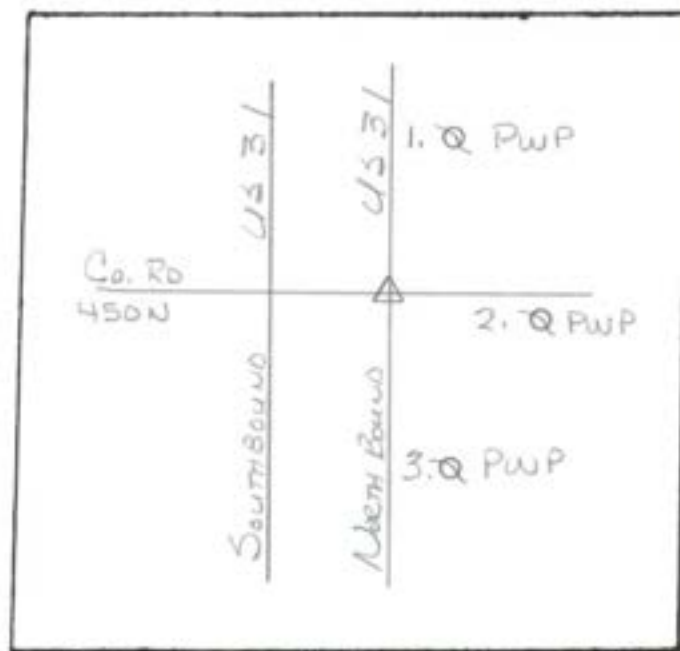

GRAPHIC TIES
(SKETCHED)

SEC. 7 TWP. 22 RANGE 4

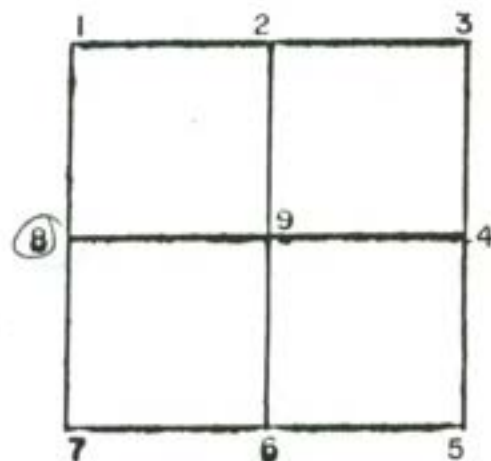


CORNER IDENT. PK NAILS A & B

TIES: 1A. 92.63' PK NAIL IN NORTHWEST FACE PWP
 1B. 89.95' " " " " " "
 2A. 113.80' PK NAIL IN NORTHWEST FACE PWP
 2B. 113.92' " " " " " "
 3A. 95.39' PK NAIL IN SOUTHWEST FACE PWP
 3B. 91.70' " " " " " "


NAIL ARE 4.95' APART E-W

SURVEYS DONE IN THIS SECTION
 INDICATE THAT THE EAST PIN IS
 SEC. COR.

SEC. 7 TWP. 22 RANGE 4

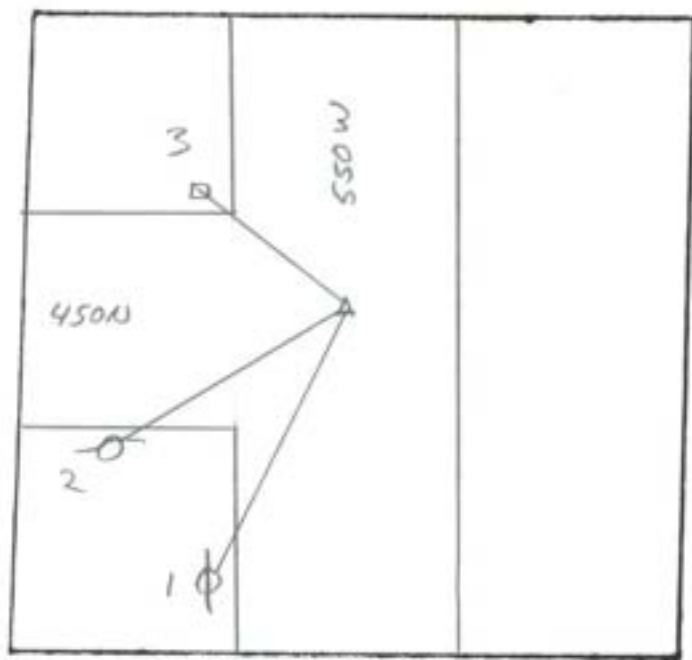

SEC 7 TWP 22 RANGE 4

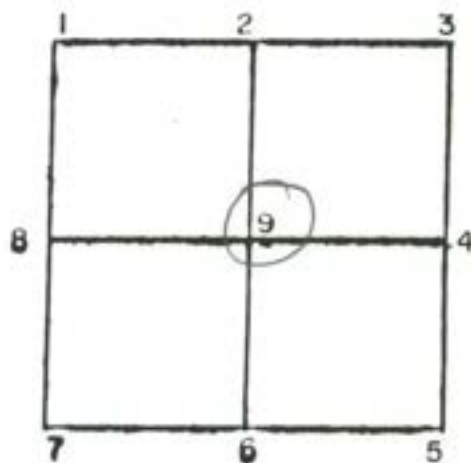

CORNER IDENT. 9 RR SPIKE

TIES: 1. 32.75' PWP
2. 70.20' PWP
3. 29.40' HEADPOST

SEC 7 TWP 22 RANGE 4


	400W	
1 Q	Δ	400N
Co. Ro	Co. Ro.	□ 2 Q 3

TIME: 1. 25.95 P.K. NARL E.


2. 28.14 P.K. Nair EN

3. 42.83 P.K. NAIL IN POWERPOLE

SEC 8 TWP 22 RANGE 4

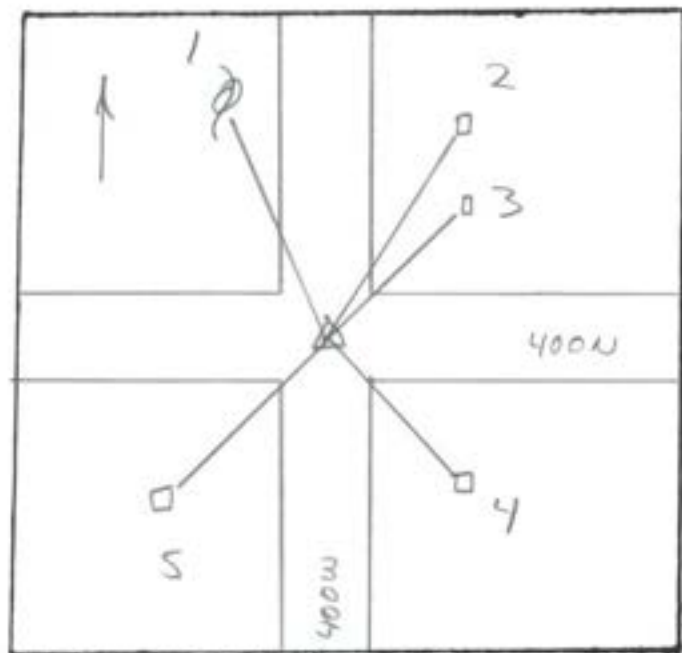

SEC 8 TWP 22 RANGE 4

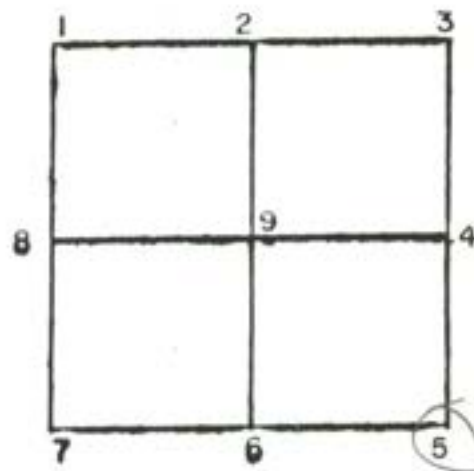


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NOT STATED


TIES: 1. 26.10' PWP
2. 36.45' FP
3. 38.60' HP
4. 27.65' HP
5. 27.00' HP

SEC 8 TWP 22 RANGE 4

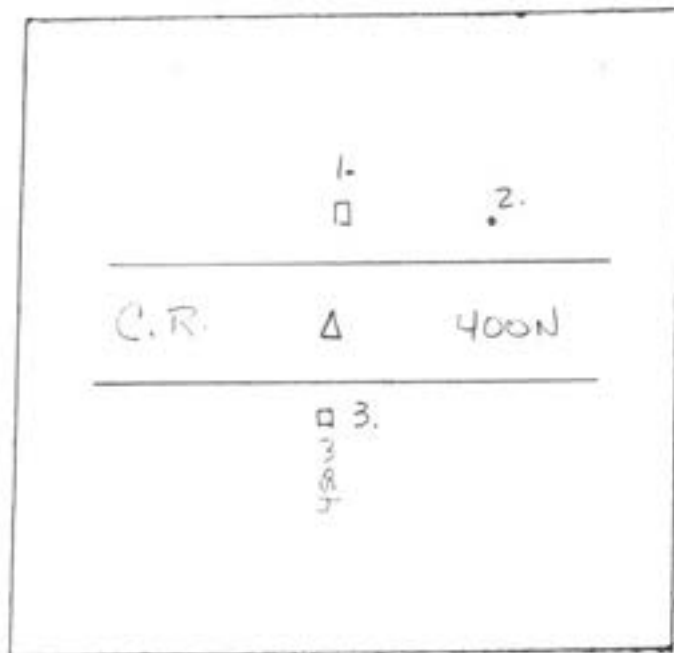

GRAPHIC TIES
(SKETCHED)


SEC. 8 TWP. 22 RANGE 4
6/2000

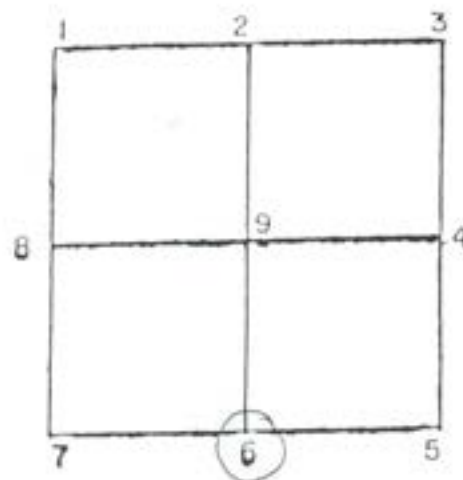

CORNER IDENT. STONE w/x" FOUND 6" DEEP


TIES: 1. 17.02' - P.K. NAIL IN WEST FACE HEADPOST
2. 25.30' - IRON ROD SET 20' EAST OF HEADPOST
3. 16.88' - P.K. NAIL IN NORTH FACE HEADPOST

SEC. 8 TWP. 22 RANGE 4

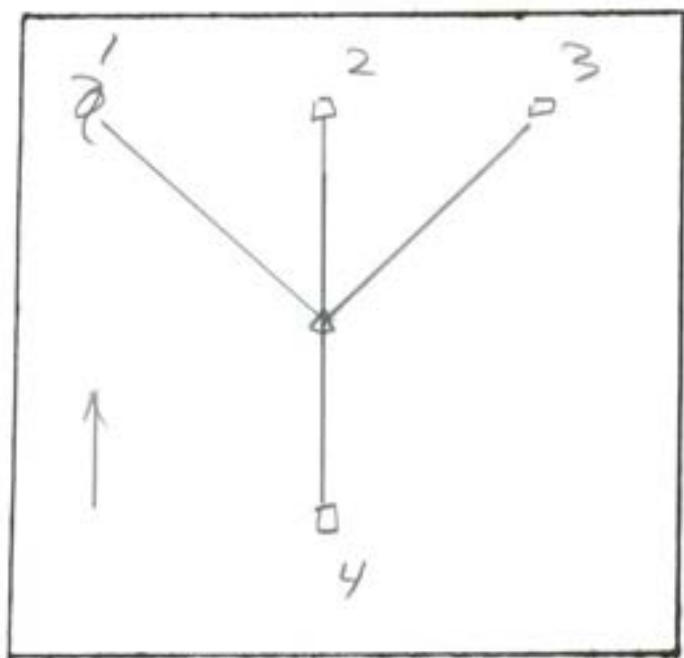

GRAPHIC TIES
(SKETCHED)

SEC. 8 TWP 22 RANGE 4

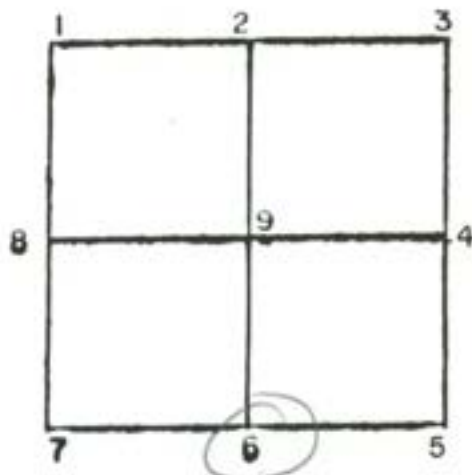


CORNER IDENT. NOT STATED


TIES: 1. 51.50° PWP
2. 16.60° HP
3. 28.20° FP
4. 17.00° HP

SEC 8 TWP 22 RANGE 4

SEC. 8 TWP 22 RANGE 4

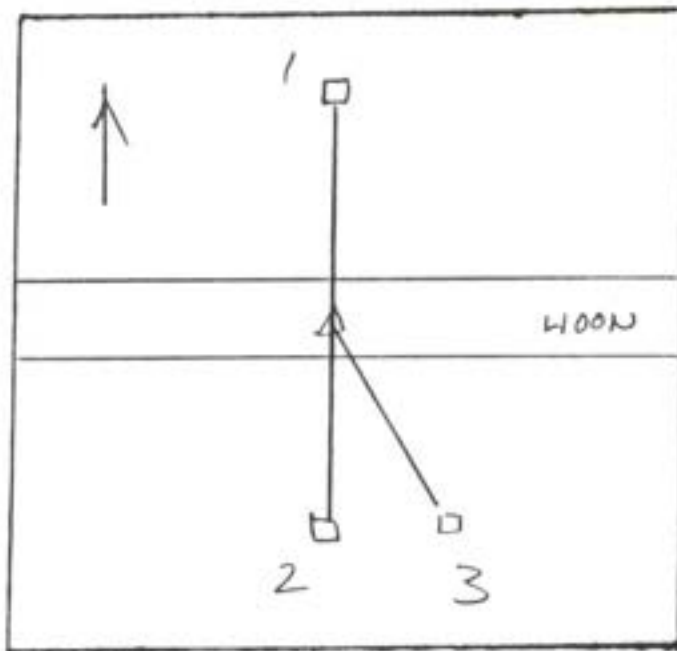

GRAPHIC TIES
(SKETCHED)

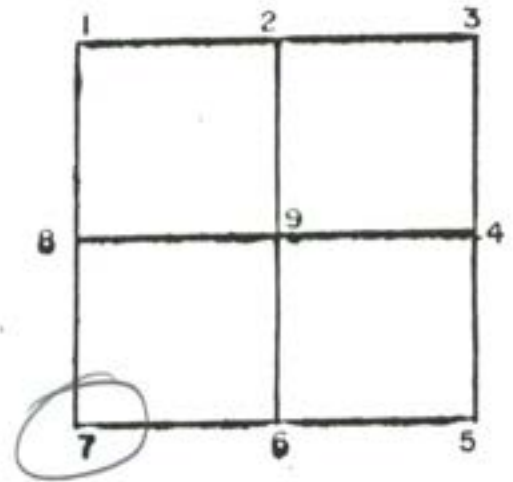


CORNER IDENT. NOT STATED

TIME: 1. 15.60' HP

2. 16.40' HP

3. 18.80° FP


SEC 8 TWP 22 RANGE 4

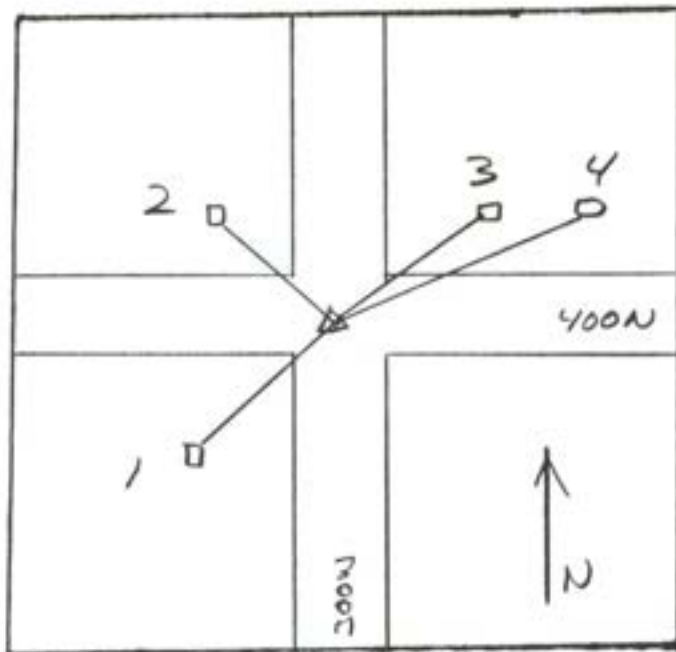

GRAPHIC TIES
(SKETCHED)

SEC 9 TWP 22 RANGE 4

9-27-84

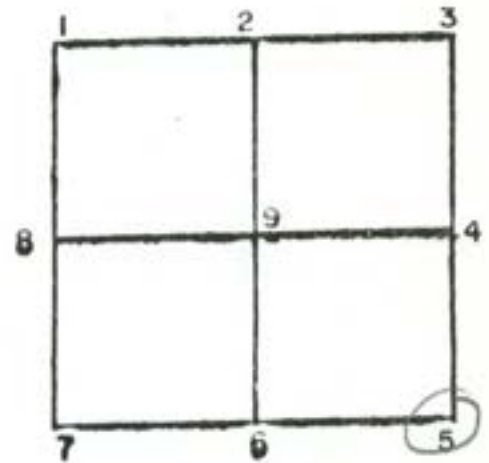


CORNER IDENT. 5 IRON PIN FND

TIES: 1. 26.71' HEAD POST
2. 25.98' HEAD POST
3. 26.04' HEAD POST
4. 41.73' FENCE POST

SEC 9 TWP 22 RANGE 4



9-27-84

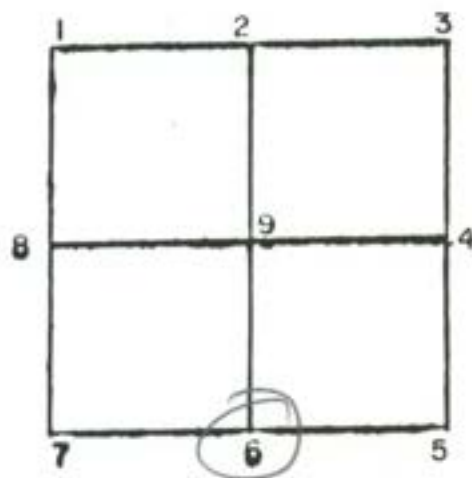


TIES:

1. 19.58' FENCE POST


2. 18.21' HEAD POST

SEC 9 TWP 22 RANGE 4

SEC. 9 TWP 22 RANGE 4

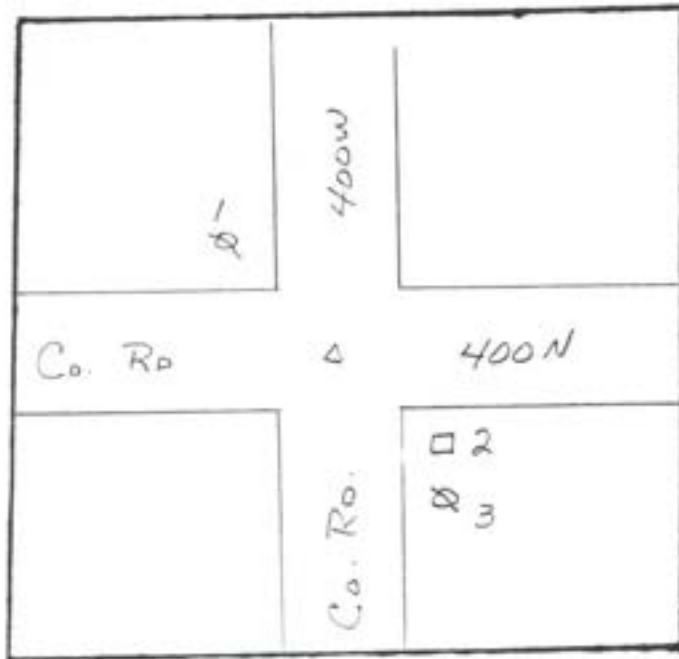

GRAPHIC TIES
(SKETCHED)

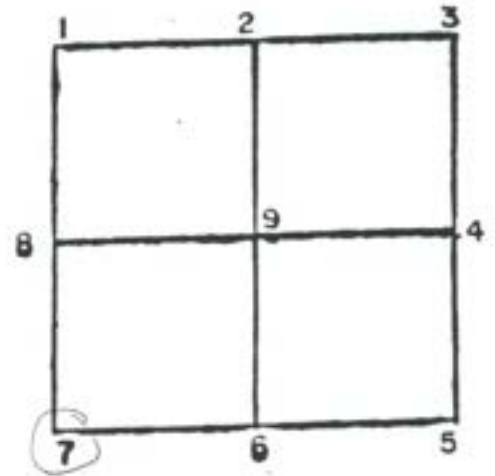

CORNER IDENT. IRON ROD


TIES: 1. 25.95 P.K. NAEL 5

2. 28.14 P.K. NAEL EN


3. 42.83 P.K. NAEL EN POWERPOLE

SEC 9 TWP 22 RANGE 4

SEC 9 TWP 22 RANGE 4

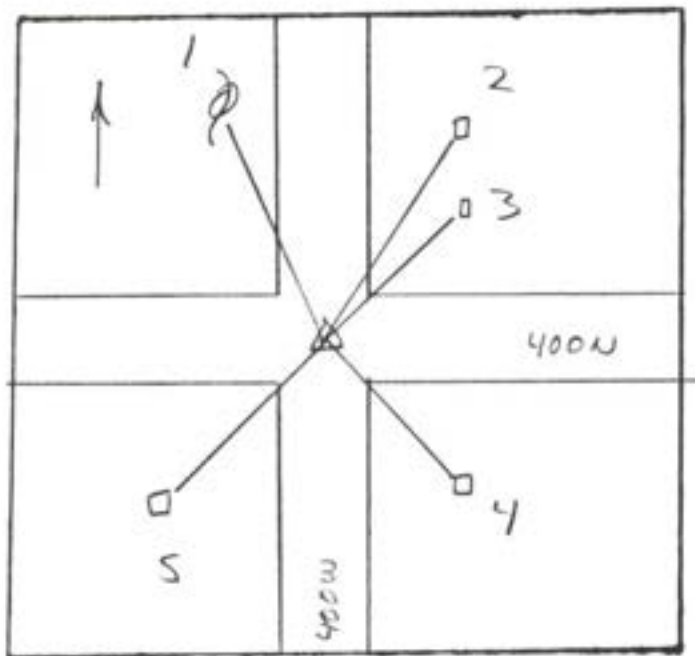

GRAPHIC TIES
(SKETCHED)

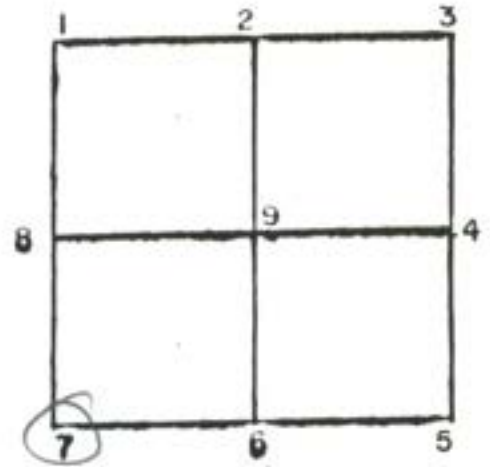


CORNER IDENT. NOT STATED


TIES: 1. 26.10' PWP
2. 36.45' FP
3. 38.40' HP
4. 27.65' HP
5. 27.00' HP

SEC 9 TWP 22 RANGE 4

SEC 10 TWP 22 RANGE 4

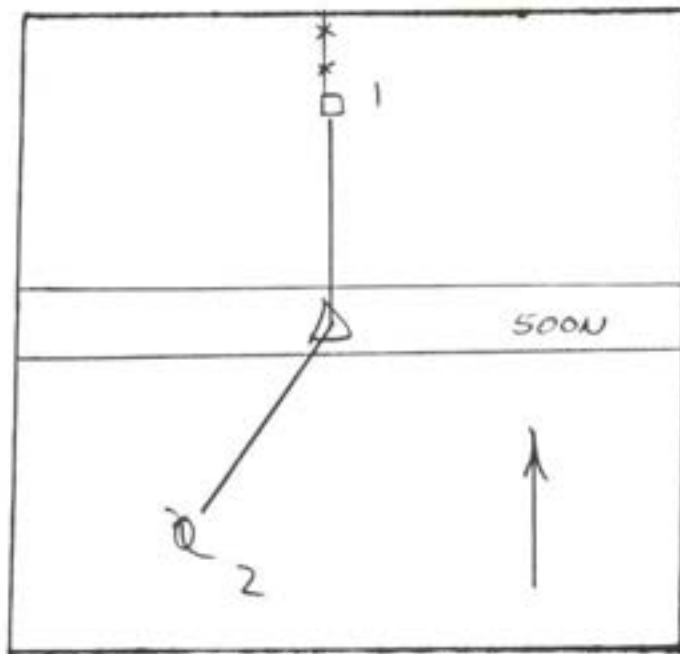

GRAPHIC TIES
(SKETCHED)

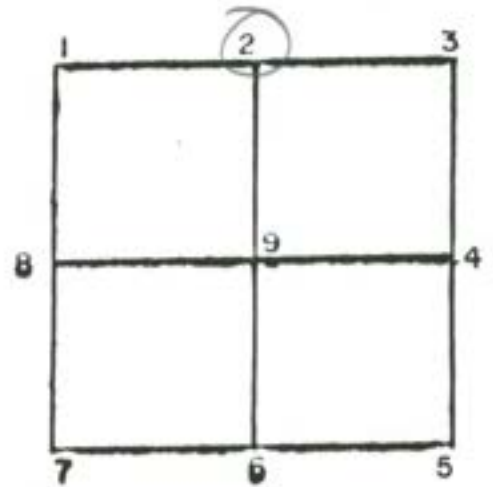

CORNER IDENT. NOT STATED

TIES: 1. 16.68' HP
2. 78.14' PUMP

SEC 10 TWP 22 RANGE 4

DATE: 9/1/04SECTION 10 TWP. 22 RANGE 4LIBERTY TWP., TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Plat: 0025
N: _____
E: _____


TYPE OF MON: STONE IN MON.

DEPTH: _____

UNCERTAINTY: _____

BY: PARTY 1DATE: 9-01-04DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

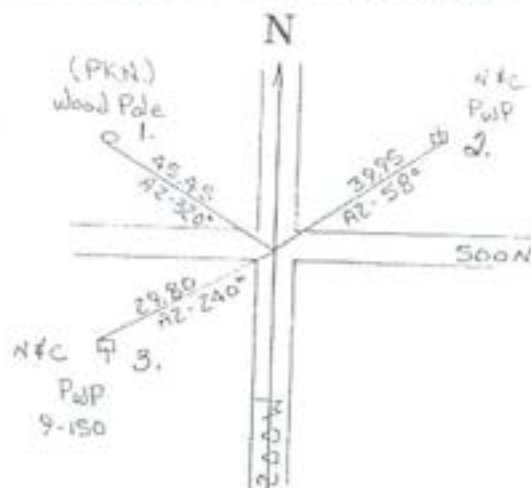


REFERENCED BY: _____

OTHERS: _____

CORNER IDENTIFIED: Stone in monument


TIES:

1. 45.45' AZ 320° PK Nail Wood Pole2. 39.95' AZ 58° N+C PWP3. 29.80' AZ 240° N+C PWPSECTION 10 TWP. 22 RANGE 4

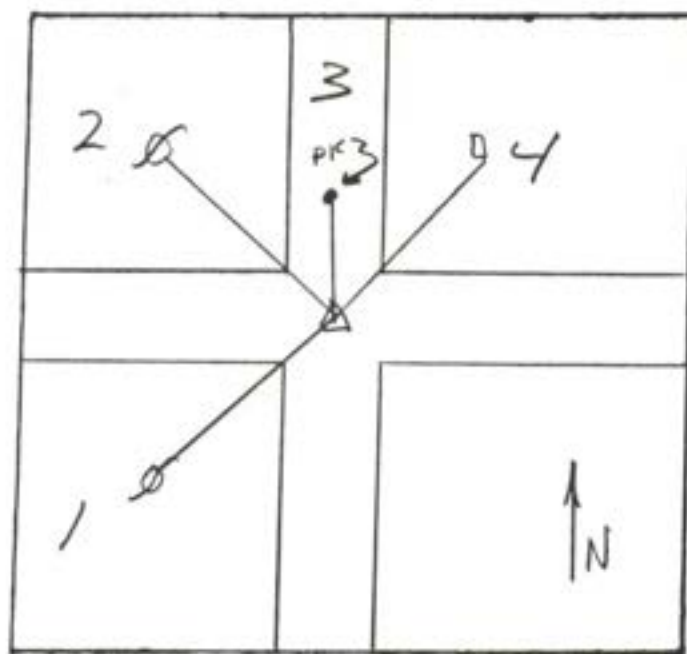

SEC. 10 TWP 22 RANGE 4

4-22-80

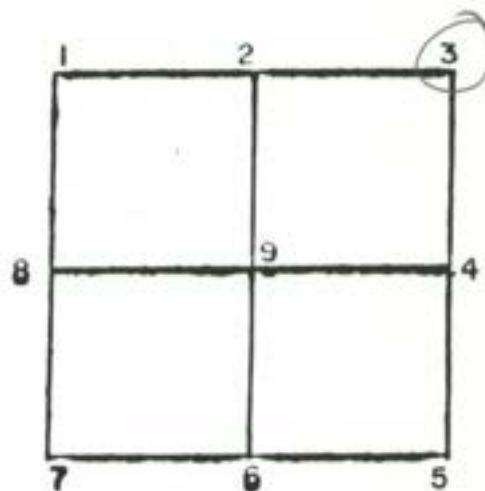


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 3 STONE FND 1.7' D. MARKED W/ARROW

TIES: 1. 29.93' PK - PWP
2. 45.45' PK - PWP
3. 15.75' PK - IN 2 OF Co. RD. 200W
4. 47.05' - TOP SE CORNER OF TELEPHONE PED.


SEC 10 TWP 22 RANGE 4

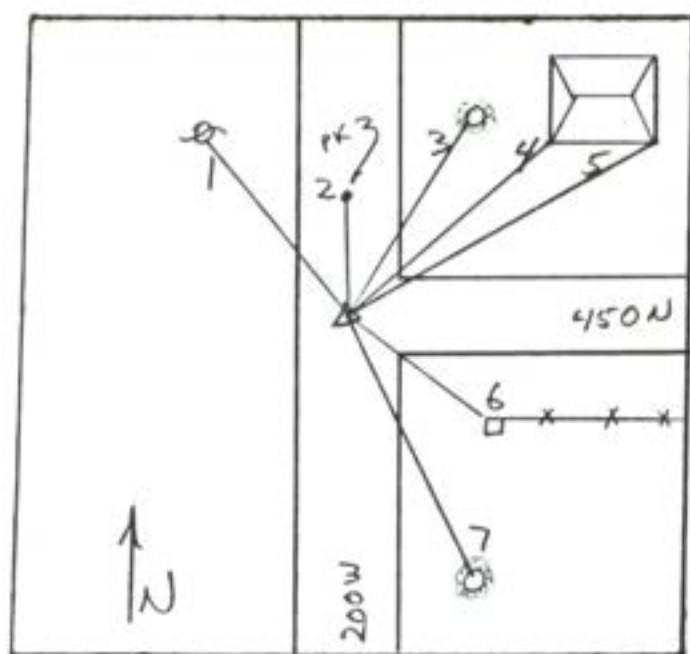

GRAPHIC TIES
(SKETCHED)

SEC 10 TWP 22 RANGE 4

4-10-1980

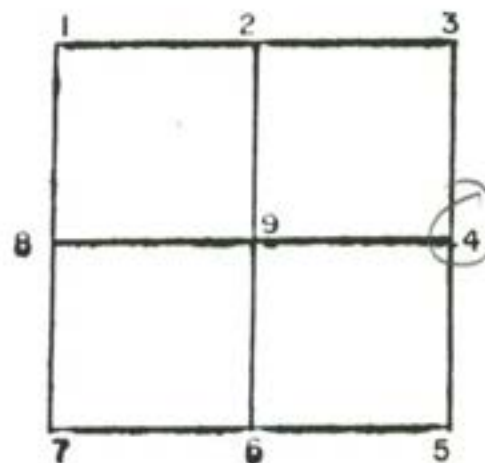


CORNER IDENT. 4 STONE w/x 1.8' DEEP

- TIES:
1. 23.63' PK - PWP
 2. 16.5' PK - E OF Co. Rd. 200 W.
 3. 36.75' PK - 32" TREE
 4. 53.50' TO SW CORNER OF OLD SCHOOL HOUSE
 5. 84.09' TO SE CORNER OF OLD SCHOOL HOUSE
 6. 34.41' PK - HEADPOST
 7. 42.63' PK - 18" TREE

F.B. 150 P. 10


SEC 10 TWP 22 RANGE 4

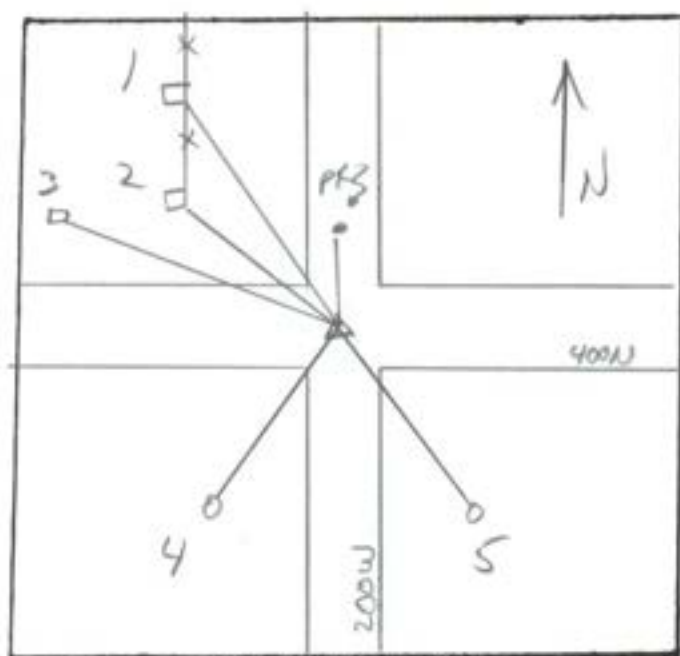

GRAPHIC TIES
(SKETCHED)

SEC 10 TWP 22 RANGE 4

4-8-1980

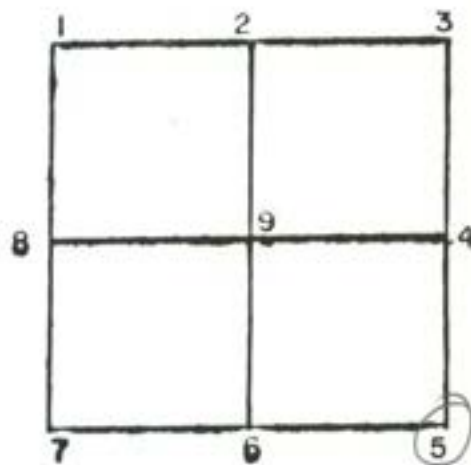

CORNER IDENT. STONE W/Y FND 2' DEEP

TIES:

1. 56.03' PK - BRACE POST

2. 49.35' PK - CORNER POST


3. 53.36' PK - FENCE POST

4. 53.14' PK - FENCE POST

5. 48.59' PK - FENCE POST

6. 14.98' PK - 4 RP. 200W


SEC 10 TWP 22 RANGE 4

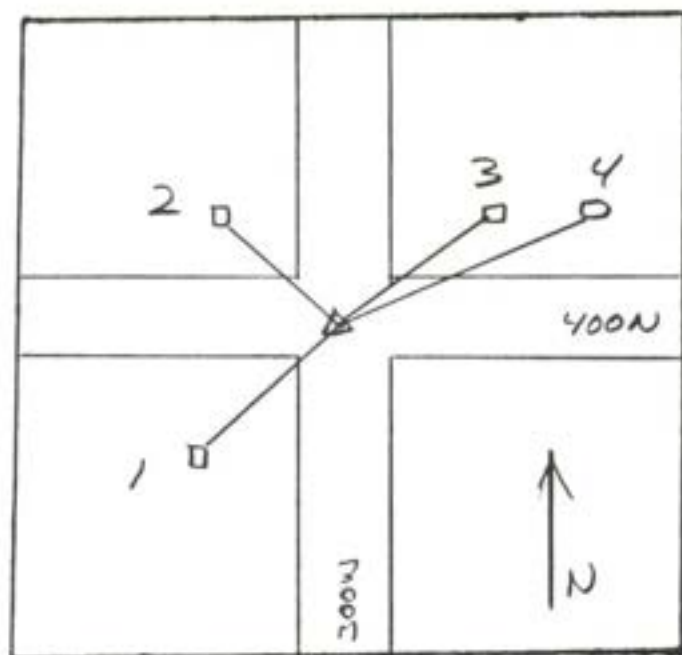

GRAPHIC TIES
(SKETCHED)

SEC. 10 TWP. 22 RANGE 4


9-27-84

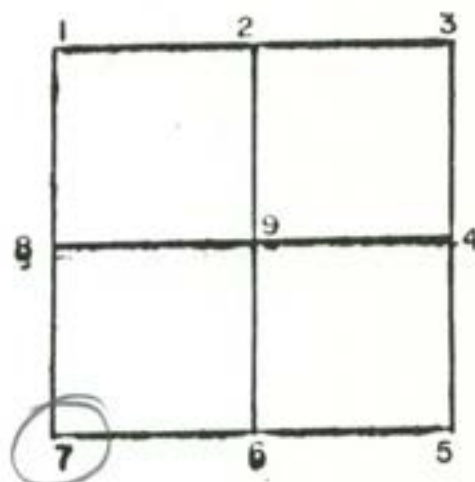

CORNER IDENT. 7 IRON PIN FND

TIES: 1. 26.71' HEAD POST
2. 25.98' HEAD POST
3. 26.04' HEAD POST
4. 41.23' FENCE POST


SEC. 10 TWP. 22 RANGE 4

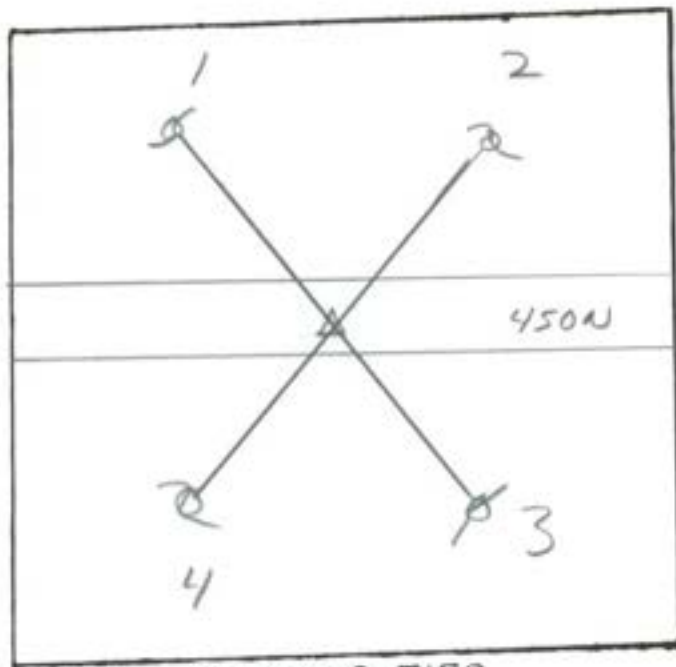

GRAPHIC TIES
(SKETCHED)

SEC. 11 TWP. 22 RANGE 4

MARCH 1987

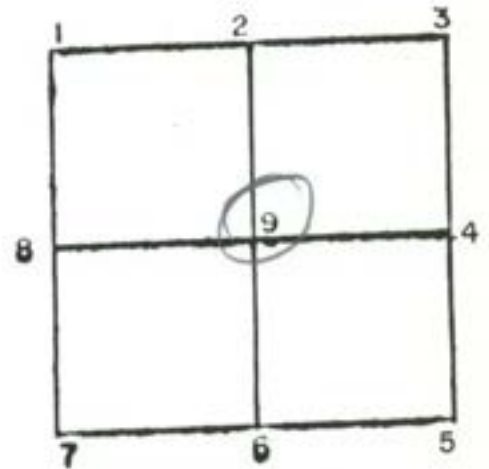

CORNER IDENT. 9 STONE FND IRON ROD SET

TIES: 1. 18.6' PK - PWP
2. 17.8' PK - PWP
3. 17.3' PK - PWP
4. 20.15' PK - PWP


SEC. 11 TWP. 22 RANGE 4

DATE: 9/1/04SECTION 11 TWP. 22 RANGE 4LIBERTY TWP., TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
PL#: 0025
N: _____
E: _____

TYPE OF MON.: STONE IN MON.
DEPTH: _____
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

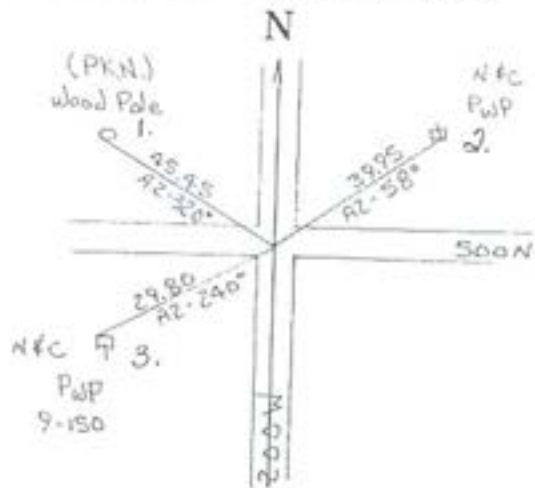


REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: Stone in monument

TIES:


1. 45.45' AZ 320° PK Nail Wood Pole2. 39.95' AZ 58° N+C PWP3. 29.80' AZ 240° N+C PWPSECTION 11 TWP. 22 RANGE 4

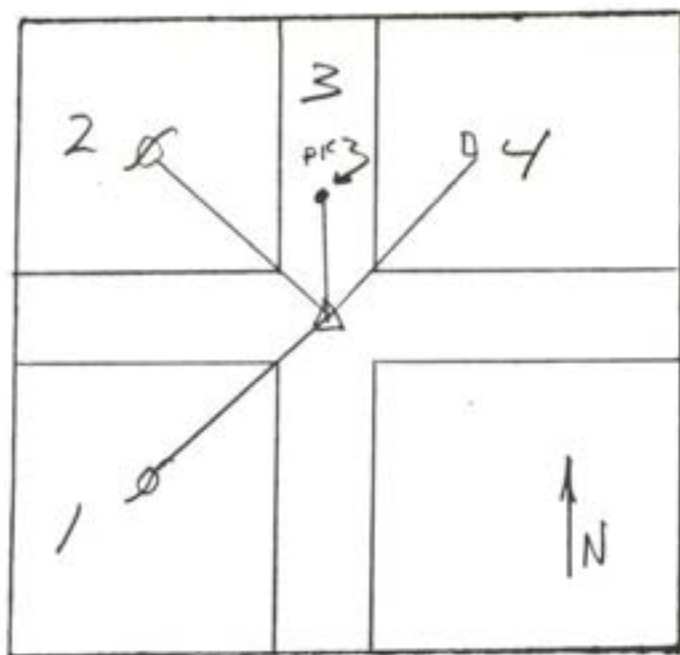

GRAPHIC TIES
(SKETCHED)

SEC. 11 TWP 22 RANGE 4

4-22-80

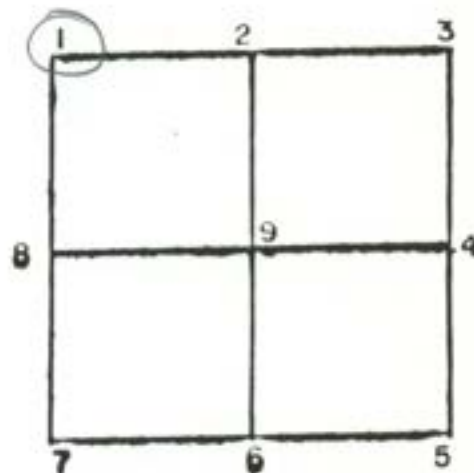

CORNER IDENT. 1 STONE FND 1.7' D. MARKED W/ARROW

TIES: 1. 29.93' PK - PWP
2. 45.45' PK - PWP
3. 15.75' PK - IN 1/4 OF Co. RD. 200W
4. 47.05' - TOP SE CORNER OF TELEPHONE PED.

SEC. 11 TWP 22 RANGE 4

DATE: 9/1/04SECTION 11 TWP. 22 RANGE 4

LIBERTY TWP. TIPTON COUNTY, INDIANA

COORDINATES
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
 Units: _____
 P.C.F. 100.0
 N: _____
 E: _____

TYPE OF MON: PK.N.L.
 DEPTH: 1"±
 UNCERTAINTY: _____
 BY: PARTY 1
 DATE: 9-01-04
 DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

1/2 mi. W. of SR 15

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: PK Nail found 1"± deep


TIES:

1. 47.78' AZ 293° N END CTR. 15" cmp

2. 58.05' AZ 112° PK NAIL PWP

3. 49.85' AZ 255° S END CTR. 15" cmp

SECTION 11 TWP. 22 RANGE 4

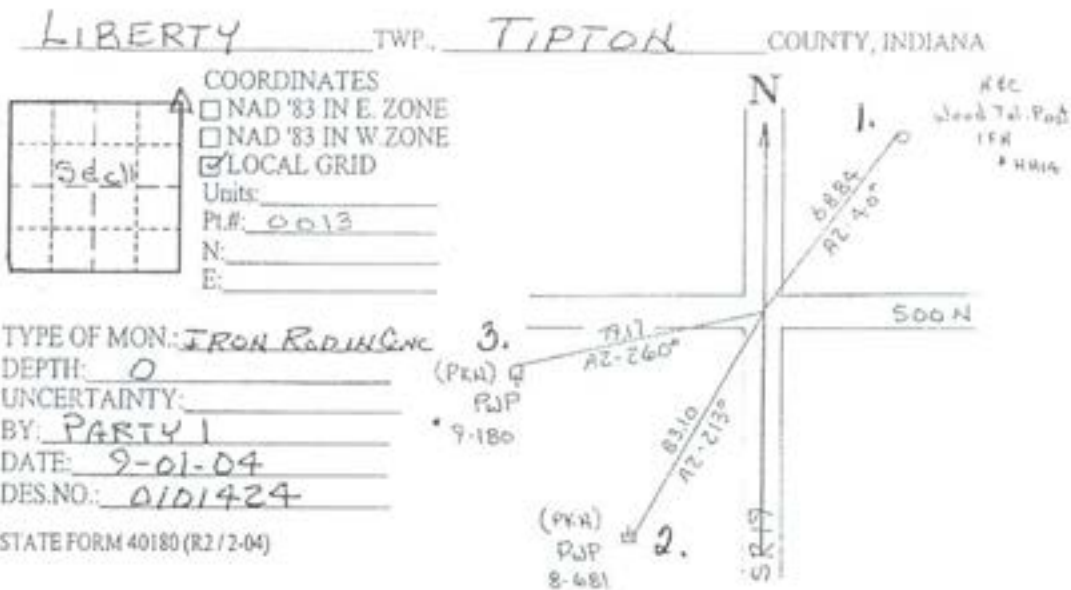DATE: 9/1/04SECTION 11 TWP. 22 RANGE 4

REFERENCED BY:


OTHERS:

CORNER IDENTIFIED: Iron Rod in concrete

TIES:

1. 68.84' AZ 40° N+C Wood tele. pole IFN #NH14
2. 83.10' AZ 213° PK Nail PWP #8-681
3. 79.17' AZ 260° PK Nail PWP #9-180


SECTION 12 TWP. 22 RANGE 4

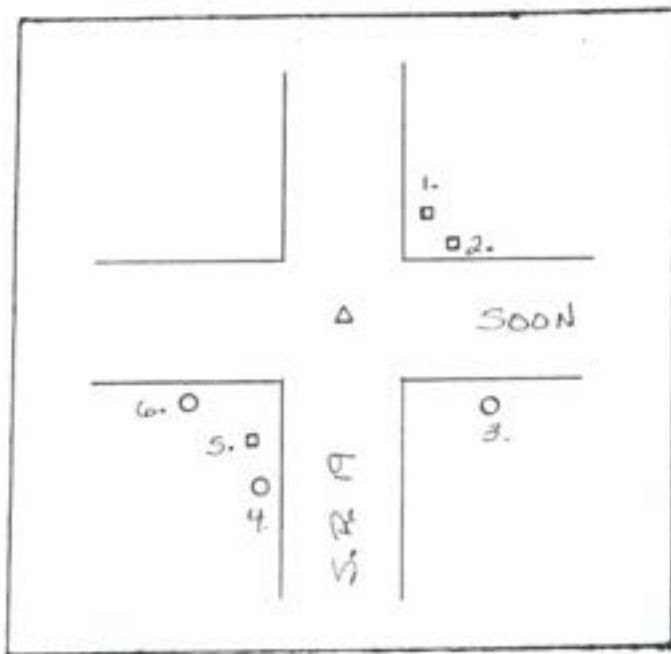

GRAPHIC TIES
(SKETCHED)

SEC. 11 TWP. 22 RANGE 4


4-15-99

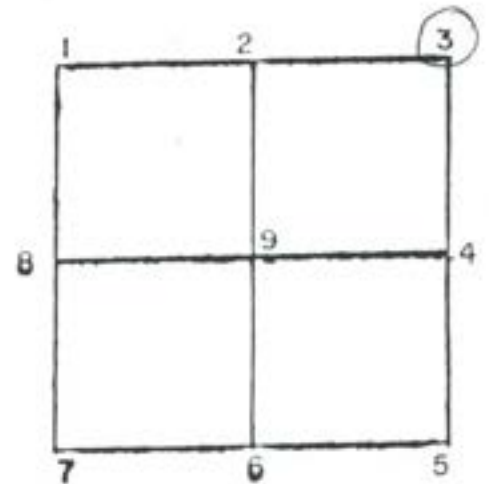

CORNER IDENT. STONE W/ POINT 1.8' DEEP 1.3' IRON ROD SET

- TIES: 1. 67.17' E TOP OF R/W MARKER
2. 79.55' " " " " "
3. 125.66' P.K. NAIL IN POWER POLE
4. 83.05' " " " "
5. 65.17' E TOP OF R/W MARKER
6. 79.28' P.K. NAIL IN POWER POLE


SEC. 11 TWP. 22 RANGE 4

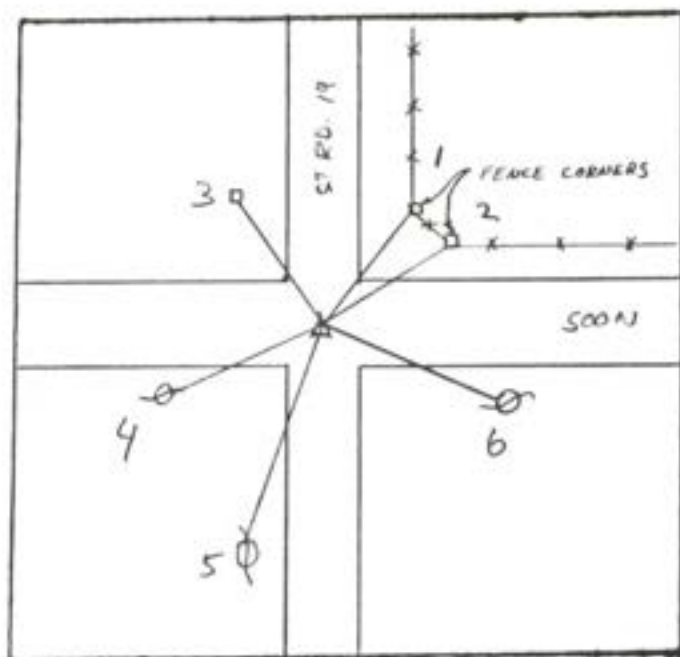

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 22 RANGE 4


5-11-82

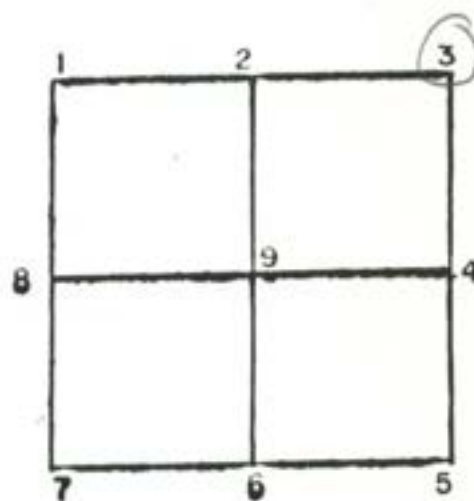

CORNER IDENT. 3 STONE W/POINT 1.8' D. 1.3' IRON ROD OVER POINT

TIES: 1. 67.83' PK IN POST
2. 80.35' PK IN POST
3. 64.9' TOP/C R/W MARKER
4. 76.73' PK IN PWP 9-180
5. 82.87' PK IN PWP 8-861
6. 125.66 PK IN PWP 9-181


SEC 11 TWP 22 RANGE 4

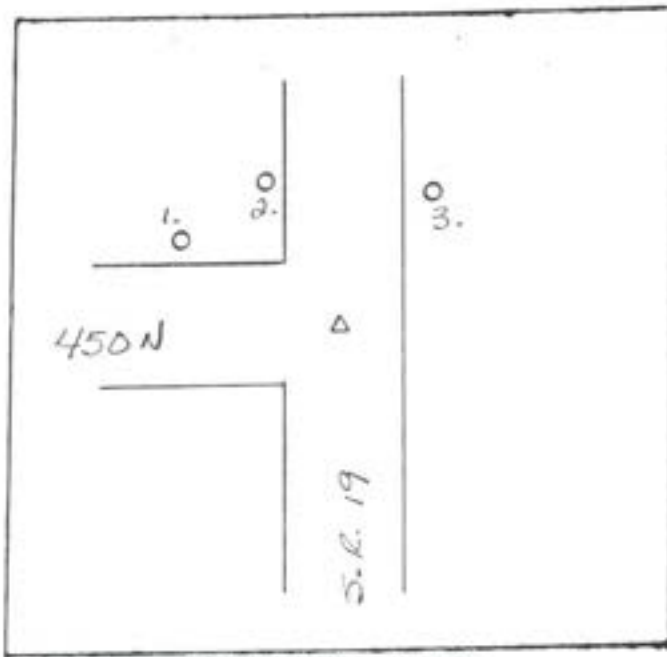

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 22 RANGE 4


4-15-99

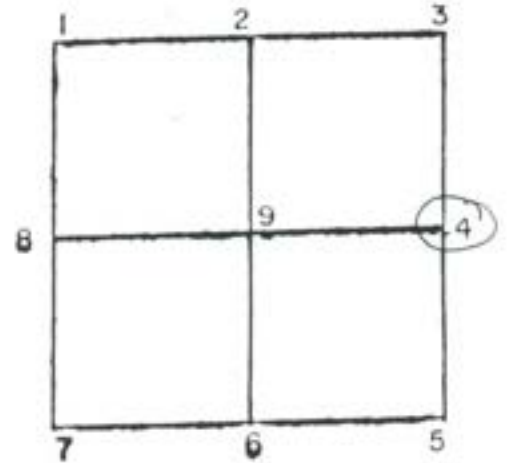

CORNER IDENT. IRON ROD AT SURFACE

TIES: 1. 100.91 P. K. NEEL IN POWERPOLE
2. 75.53 " " " "
3. 72.10 " " " "


SEC 11 TWP 22 RANGE 4

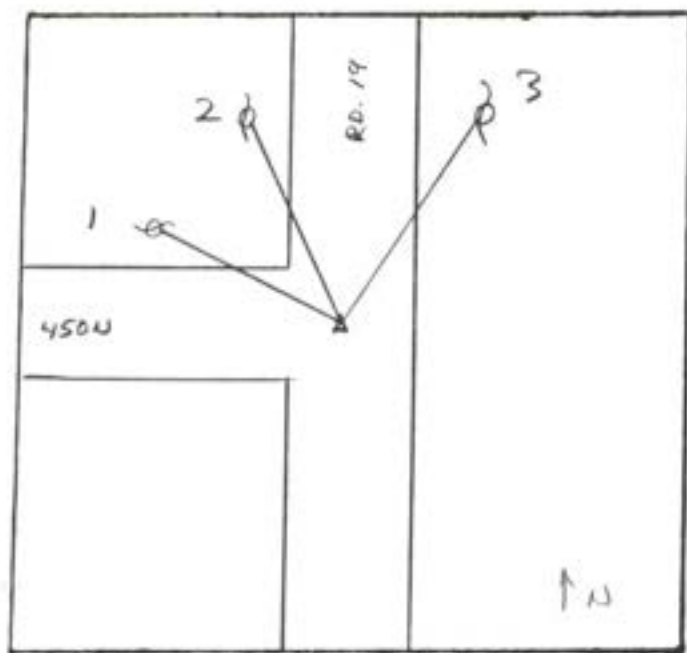

GRAPHIC TIES
(SKETCHED)

SEC. 11 TWP 22 RANGE 4

5-11-82

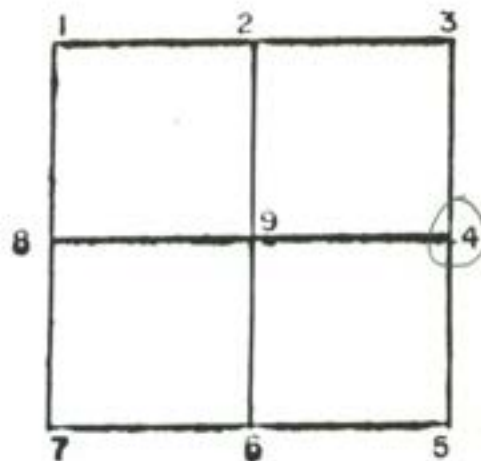


CORNER IDENT. ⁴ BOLT SPIKE @ SURFACE W/ X ON CONCRETE PATCH

TIES: 1- 100.95' PK IN PWP #2 718

2- 75.52' PK IN PWP 2- 717

3- 72.03' PK IN PWP 204-676


SEC 11 TWP 22 RANGE 4

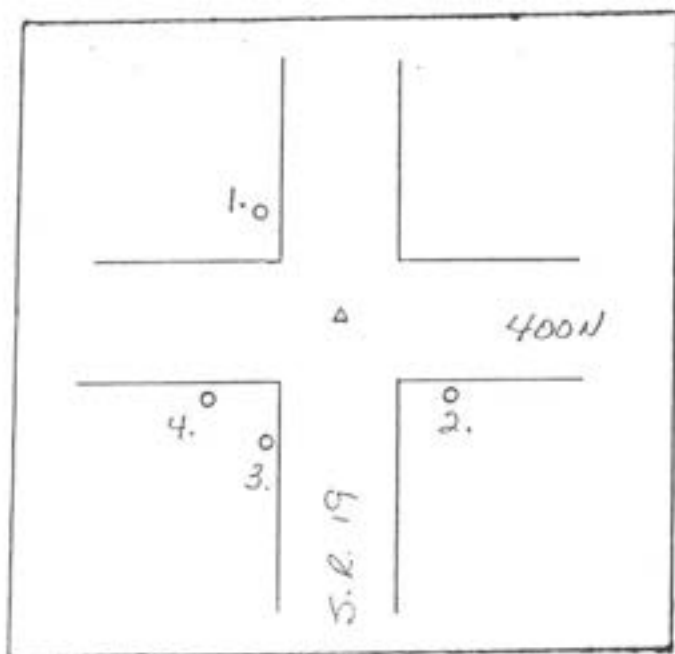

GRAPHIC TIES
(SKETCHED)

SEC. 11 TWP. 22 RANGE 4

4-15-99

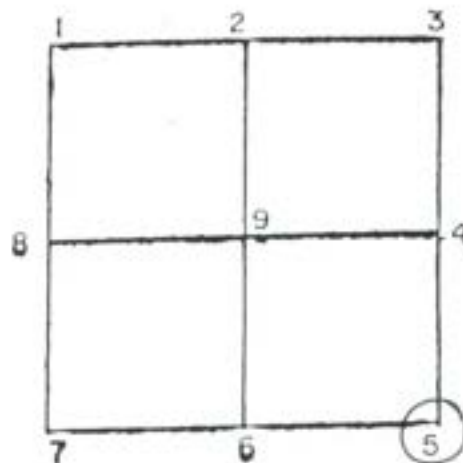

CORNER IDENT. STONE w/x 1.6' DEEP 1.3' IRON ROD SET


TIES: 1. 60.12 P.K. NAIL IN CUT-OFF TELEPHONE POLE

2. 78.03 " " " POWERPOLE

3. 66.38 " " " "

4. 73.86 " " " "


SEC. 11 TWP. 22 RANGE 4

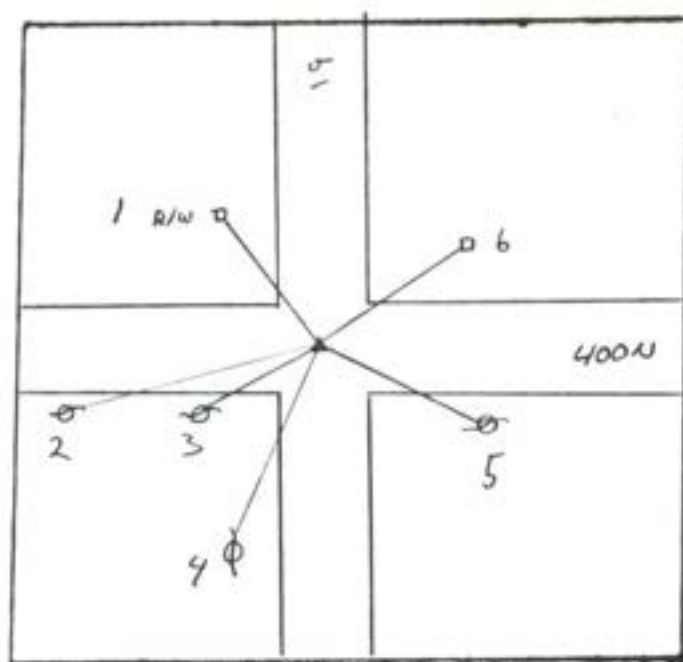

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 22 RANGE 4


5-11-82

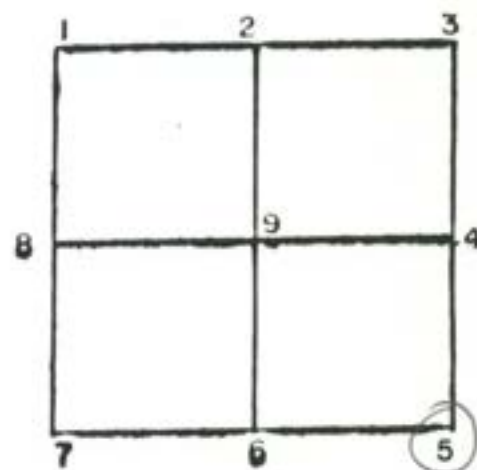

CORNER IDENT. 5 STONE W/ 1.6" 1.3" IR. OVER X

- TIES:
1. 65.3' TOP CENTER R/W MARKER
 2. 86.18' PK IN PWP
 3. 73.86' PK IN PWP
 4. 66.38' PK IN PWP
 5. 78.05' PK IN PWP
 6. 77.9' TOP CENTER R/W MARKER


SEC 11 TWP 22 RANGE 4

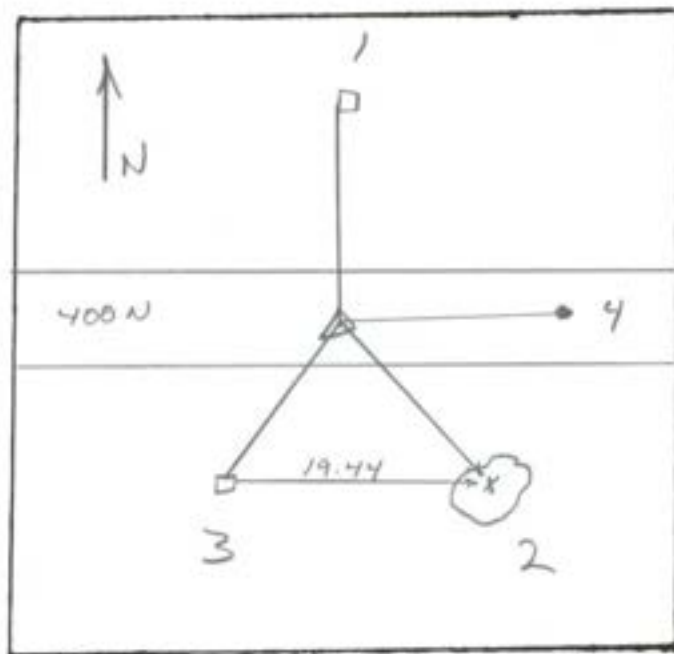

GRAPHIC TIES
(SKETCHED)

SEC. 11 TWP. 22 RANGE 4


MARCH 1987

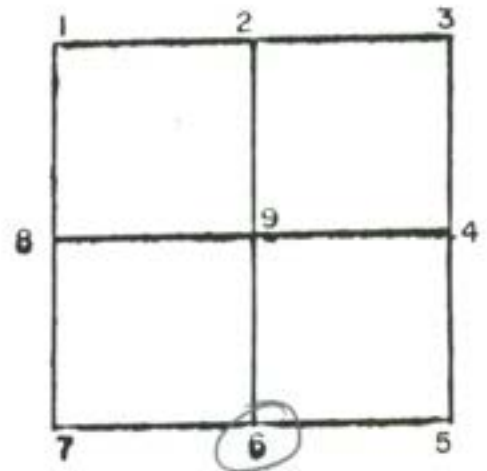

CORNER IDENT. 6 FND STONE W/X 6" DEEP

TIES: 1. 16.0' SN IN POST
2. 20.92' X IN STONE
3. 18.39' PK - HP
4. 387.30' PK - EAST OF STONE IN $\frac{1}{4}$ OF 400N


SEC. 11 TWP. 22 RANGE 4

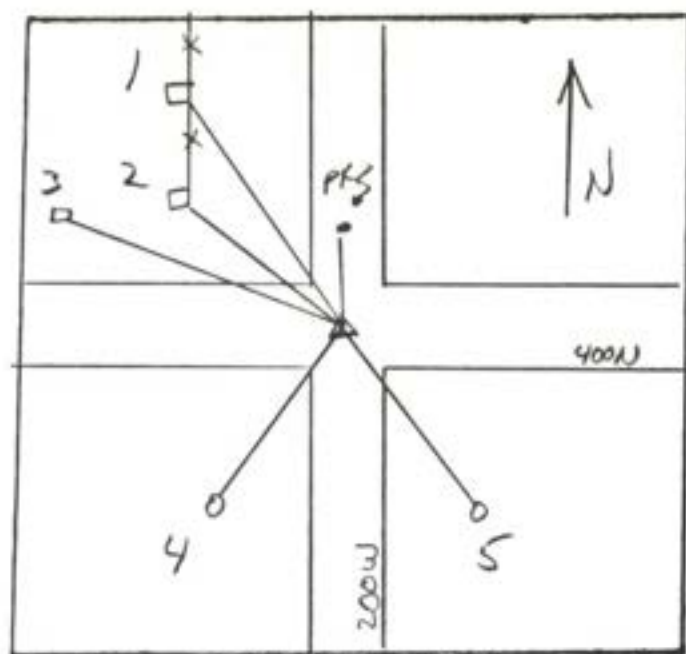

GRAPHIC TIES
(SKETCHED)

SEC 11 TWP 22 RANGE 41

4-8-1980

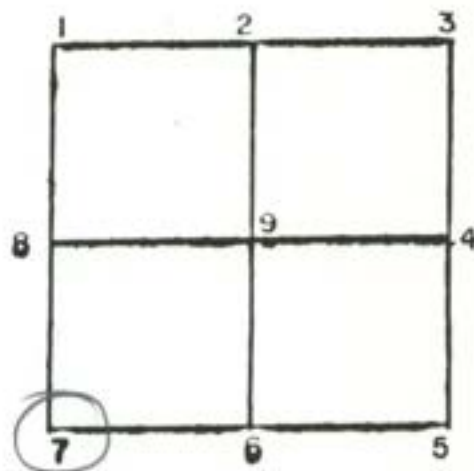

CORNER IDENT. 7 STONE W/Y FND 2' DEEP

TIES:

1. 56.03' PK - BRACE POST

2. 49.35' PK - CORNER POST

3. 53.36' PK - FENCE POST

4. 53.14' PK - FENCE POST


5. 48.59' PK - FENCE POST

6. 14.98' PK - ⁴ RP. 200W


SEC 11 TWP 22 RANGE 4

SEC 11 TWP 22 RANGE 4

4-10-1980

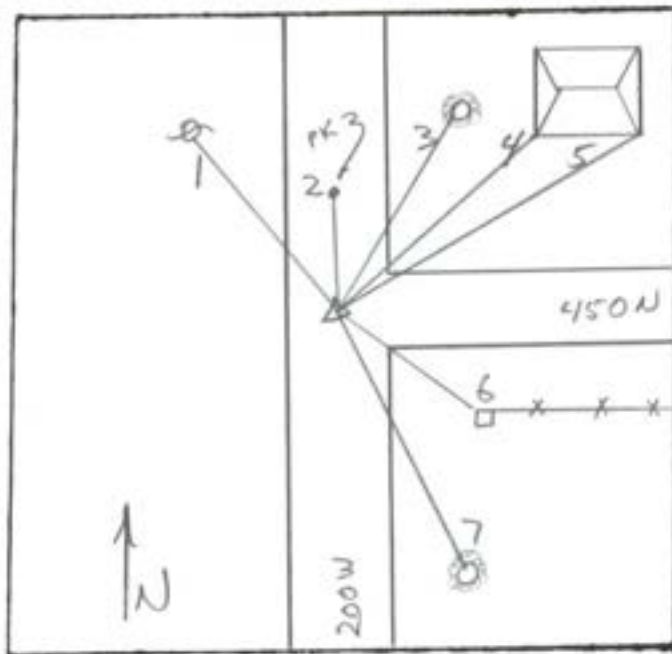

GRAPHIC TIES
(SKETCHED)

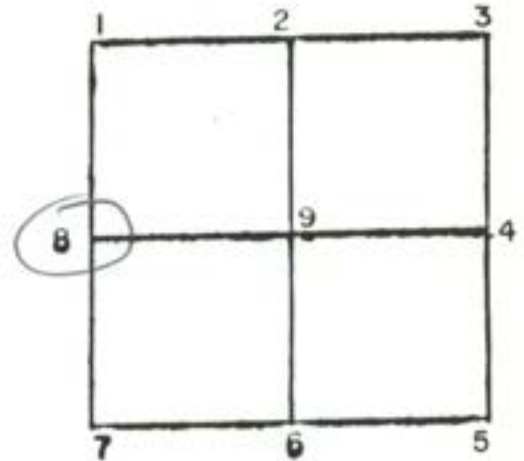


CORNER IDENT. 8 STONE w/X 1.8' DEEP

- TIES:
1. 23.63' PK - PWP
 2. 16.5' PK - E OF Co. Rd. 200 W.
 3. 36.75' PK - 32" TREE
 4. 53.50' TO SW CORNER OF OLD SCHOOL HOUSE
 5. 84.04' TO SE CORNER OF OLD SCHOOL HOUSE
 6. 34.41' PK - HEADPOST
 7. 42.63' PK - 18" TREE

F.B. 150 P. 10

SEC 11 TWP 22 RANGE 4

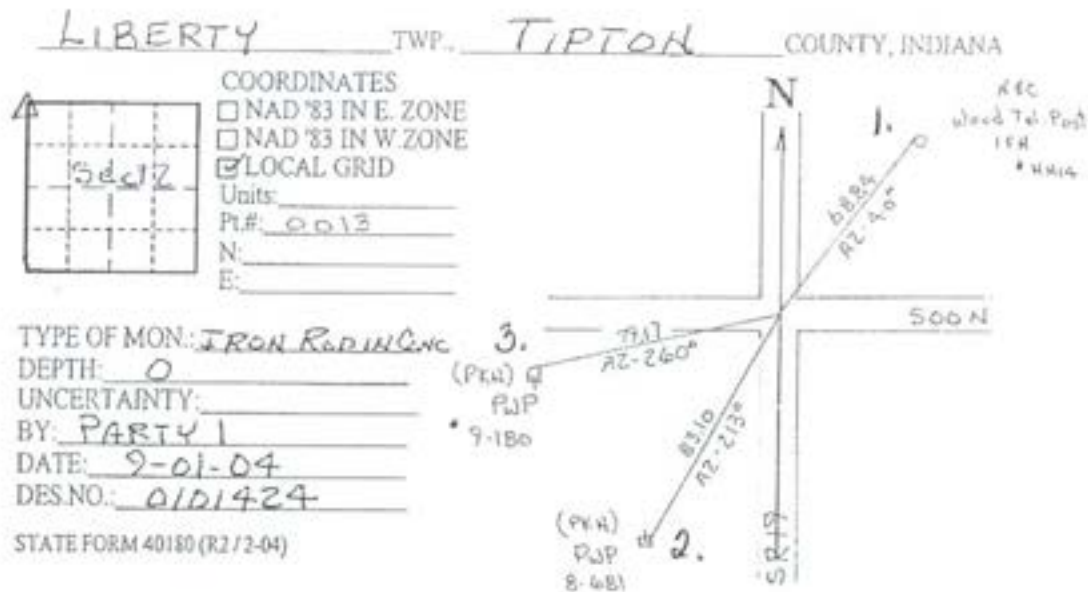DATE: 9/1/04SECTION 12 TWP. 22 RANGE 4

REFERENCED BY:

OTHERS:

CORNER IDENTIFIED: Iron Rod in concrete


TIES:

1. 68.84' AZ 40° N+C Wood tele. pole IFN # NH14
 2. 83.10' AZ 213° PK Nail PWP # 8-681
 3. 79.17' AZ 260° PK Nail PWP # 9-180


SECTION 12 TWP. 22 RANGE 4

SEC. 12 TWP. 22 RANGE 4

4-15-99

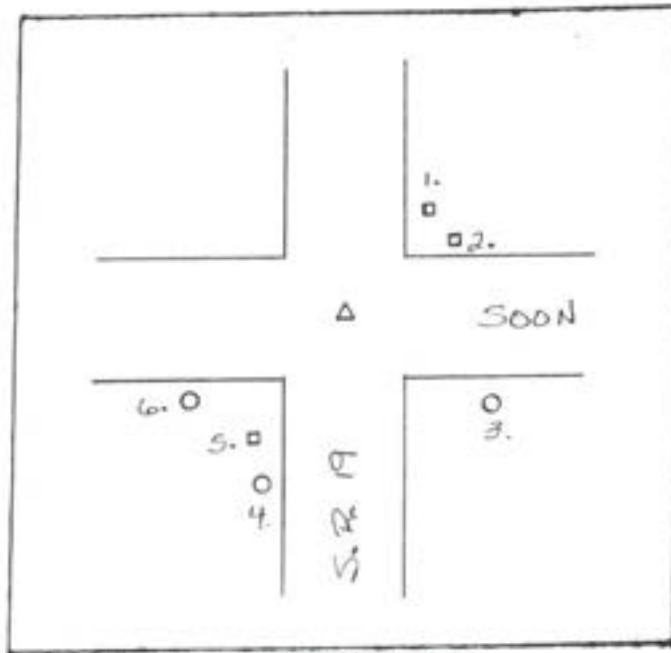


GRAPHIC TIES
(SKETCHED)

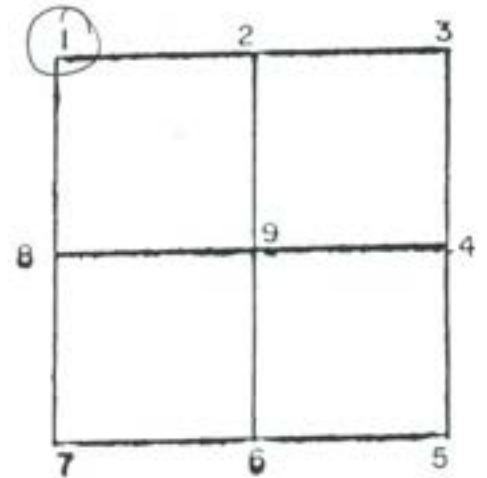

CORNER IDENT. STONE w/ POINT 1.8' DEEP 1.3' IRON ROD SET

- TIES:
- 1. 67.17' E TOP OF R/W MARKER
 - 2. 79.55' " " " " "
 - 3. 125.66' P.K. NAIL IN POWER POLE
 - 4. 83.05' " " " "
 - 5. 65.17' E TOP OF R/W MARKER
 - 6. 79.28' P.K. NAIL IN POWER POLE
 -
 -
 -
 -
 -
 -


SEC. 12 TWP. 22 RANGE 4

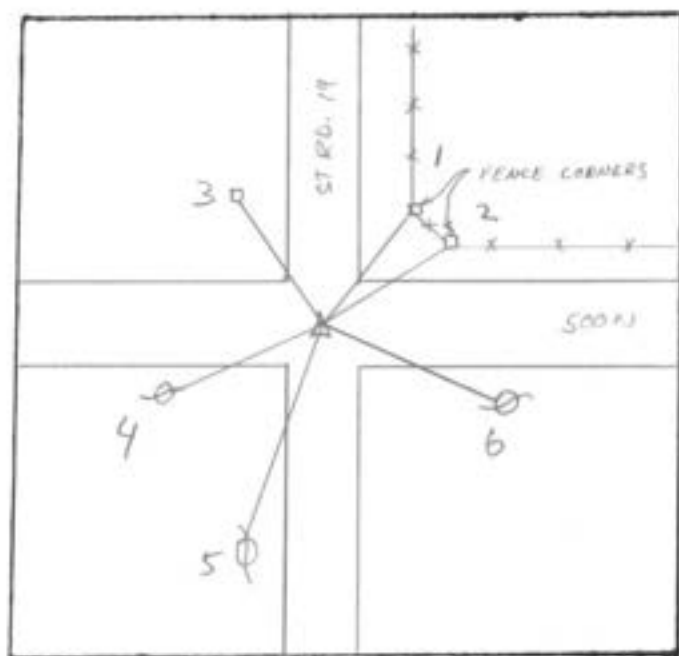

GRAPHIC TIES
(SKETCHED)

SEC 12 TWP 22 RANGE 4

5-11-82

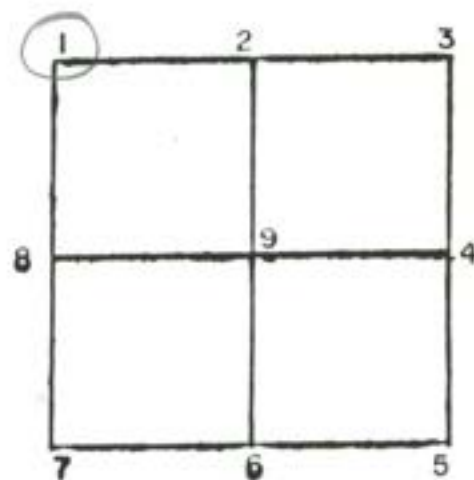

CORNER IDENT. 1 STONE W/POINT 1.8" D. 1.3' IRON ROD OVER POINT


TIES:	1.	67.83'	PK IN POST	
	2.	80.35'	PK IN POST	
	3.	64.9'	TOP/C R/W MARKER	
	4.	76.73'	PK IN PWP	9-180
	5.	82.87'	PK IN PWP	8-861
	6.	125.66	PK IN PWP	9-181

SEC 12 TWP 22 RANGE 4

DATE: 9/1/04

SECTION 12 TWP. 22 RANGE 4


LIBERTY TWP. TIPTON COUNTY, INDIANA



COORDINATES:
☐ NAD '83 IN E. ZONE
☐ NAD '83 IN W. ZONE
☐ LOCAL GRID
Units: _____
Pt# 0014
N: _____
E: _____

TYPE OF MON: REBAR
DEPTH: 0
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

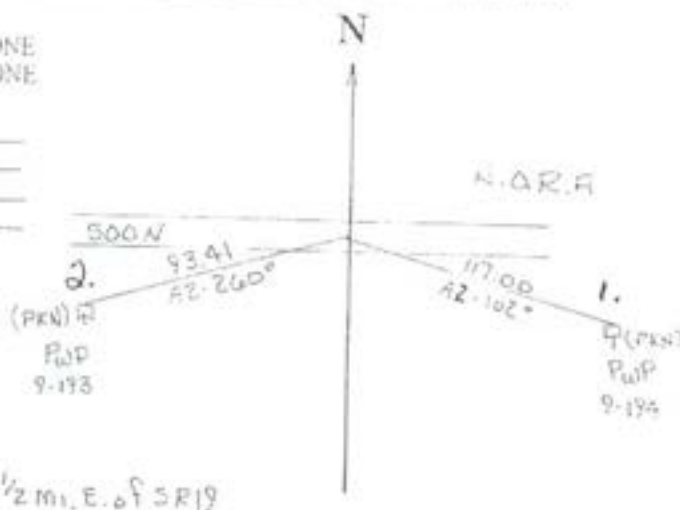

REFERENCED BY:

OTHERS: _____

CORNER IDENTIFIED: Rebar found

TIES:

1. 117.00' AZ 102° PK Nail PWP #9-194

2. 93.41' AZ 260° PK Nail PWP #9-194


SECTION 12 TWP. 22 RANGE 4

DATE: 9/1/04SECTION 12 TWP. 22 RANGE 4LIBERTY TWP. TIPTON COUNTY, INDIANA

Section 12	COORDINATES
	☐ NAD '83 IN E. ZONE
	☐ NAD '83 IN W. ZONE
	☐ LOCAL GRID
	Units: _____
Plat# _____	
N: _____	
E: _____	

TYPE OF MON: IRON ROD
DEPTH: 3" ±
UNCERTAINTY: _____
BY: PARTY 1
DATE: 9-01-04
DES. NO.: 0101424

STATE FORM 40180 (R2/2-04)

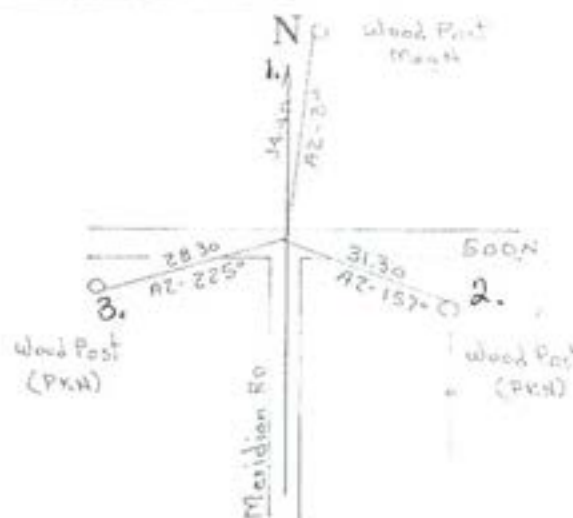

REFERENCED BY:

OTHERS: _____


CORNER IDENTIFIED: Iron rod found 3" ± deep

TIES:


1. 34.40' AZ 30° Magnetic Nail Wood post
2. 31.30' AZ 157° P.K. Nail Wood post
3. 28.30' AZ 225° P.K. Nail Wood post

SECTION 12 TWP. 22 RANGE 4

SEC 12 TWP 22 RANGE 4

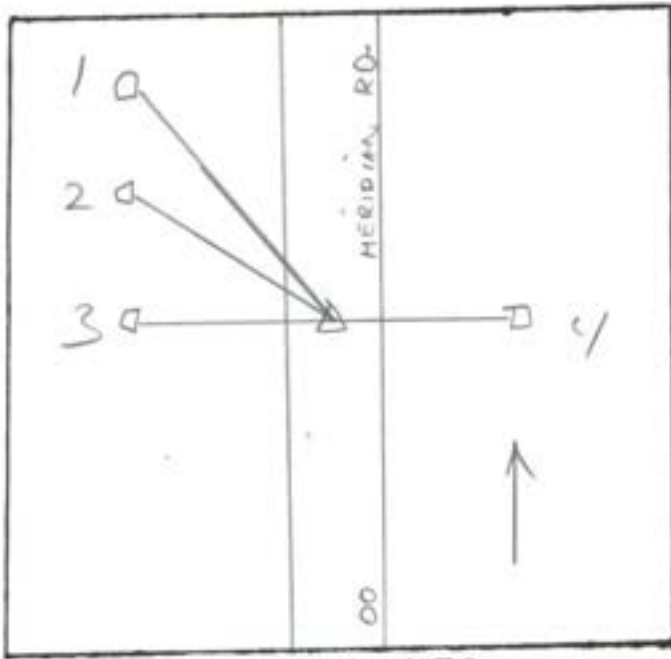

GRAPHIC TIES
(SKETCHED)

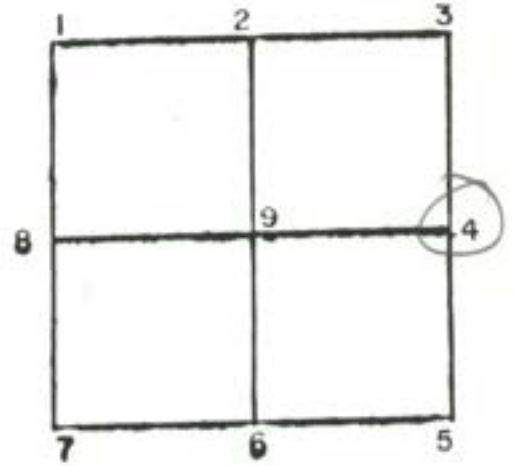


CORNER IDENT. NOT STATED


TIME	TEMPERATURE	TYPE
1	28.60°	FP
2	34.00°	METAL FP
3	17.10°	HP
4	17.05°	HP

SEC 12 TWP 22 RANGE 4

SEC 12 TWP 22 RANGE 4

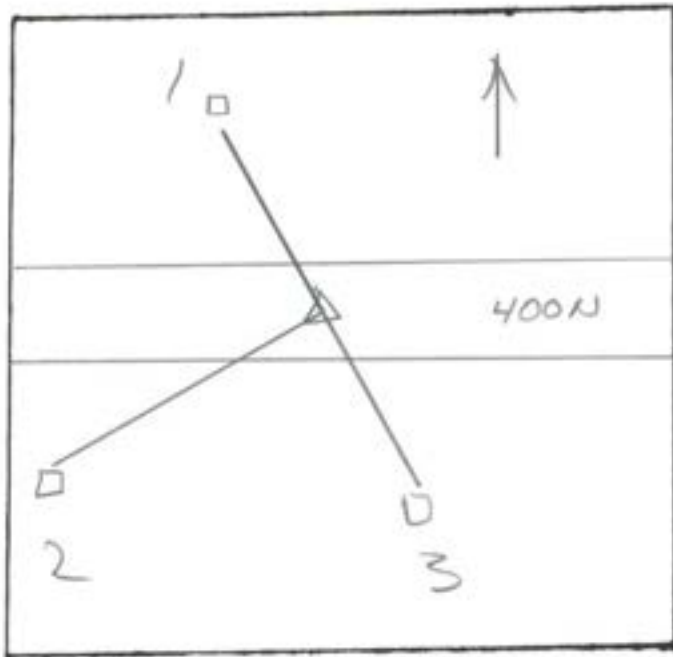

GRAPHIC TIES
(SKETCHED)

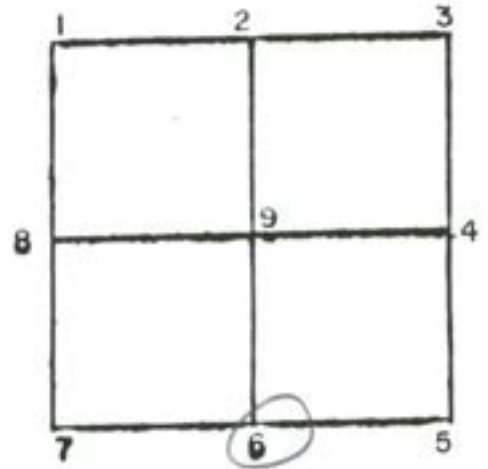


CORNER IDENT. NOT STATED

TIES: 1. 20.40' METAL FP

2. 18.45' FP

3. 20.70' FP


SEC 12 TWP 22 RANGE 4

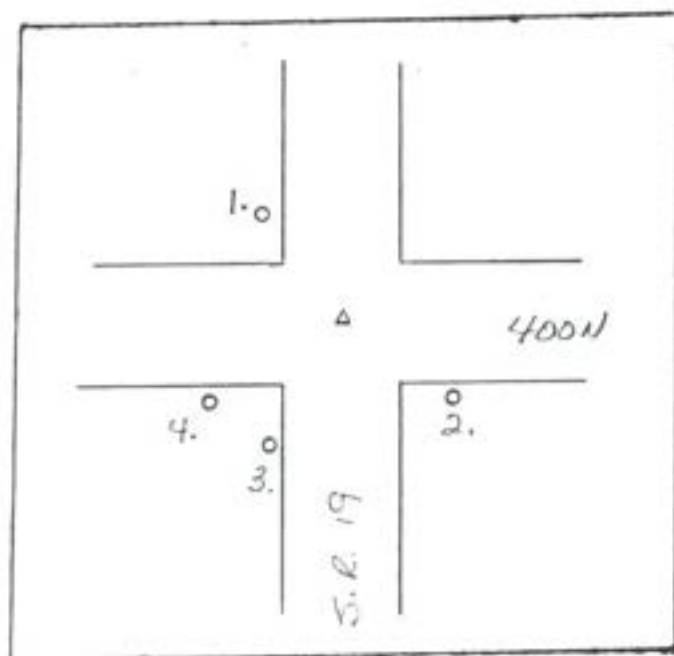

GRAPHIC TIES
(SKETCHED)

SEC 12 TWP 22 RANGE 4


4-15-99

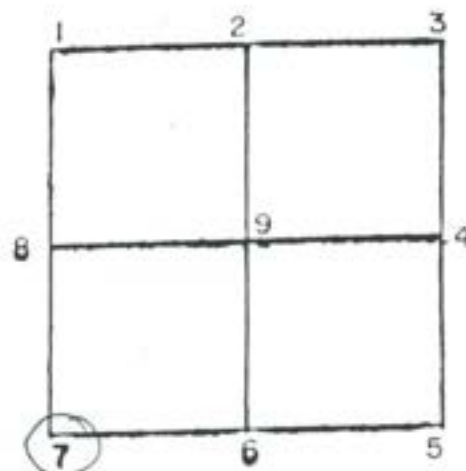

CORNER IDENT. STONE W/X 1.6' DEEP 1.3' IRON ROD SET

TIES: 1. 60.12 P.K. NAIL IN CUT-OFF TELEPHONE POLE
2. 78.03 " " " POWERPOLE
3. 66.38 " " " "
4. 73.86 " " " "


SEC 12 TWP 22 RANGE 4

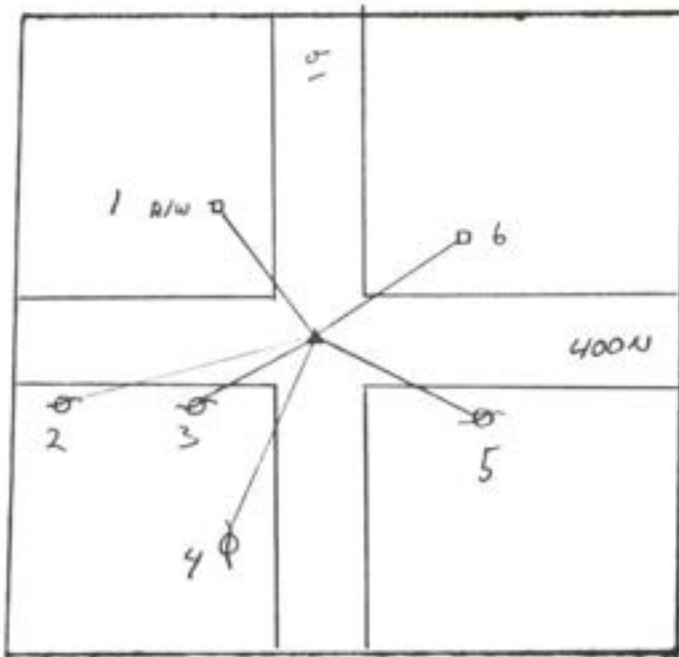

GRAPHIC TIES
(SKETCHED)

SEC 12 TWP 22 RANGE 4


5-11-82

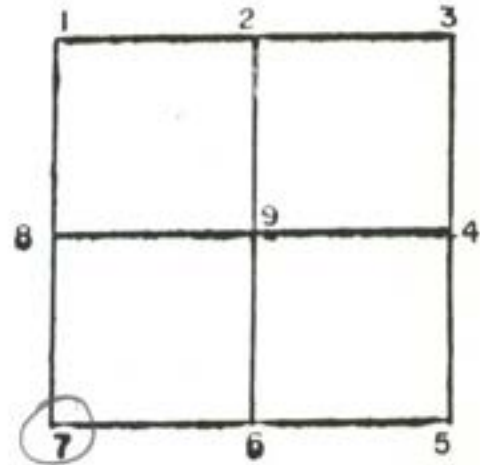

CORNER IDENT. STONE W/ 1.6" D. 1.3" IR. OVER X

- TIES:
1. 65.3' TOP CENTER R/W MARKER
 2. 86.18' PK IN PWP
 3. 73.81' PK IN PWP
 4. 66.38' PK IN PWP
 5. 78.05' PK IN PWP
 6. 77.9' TOP CENTER R/W MARKER


SEC 12 TWP 22 RANGE 4

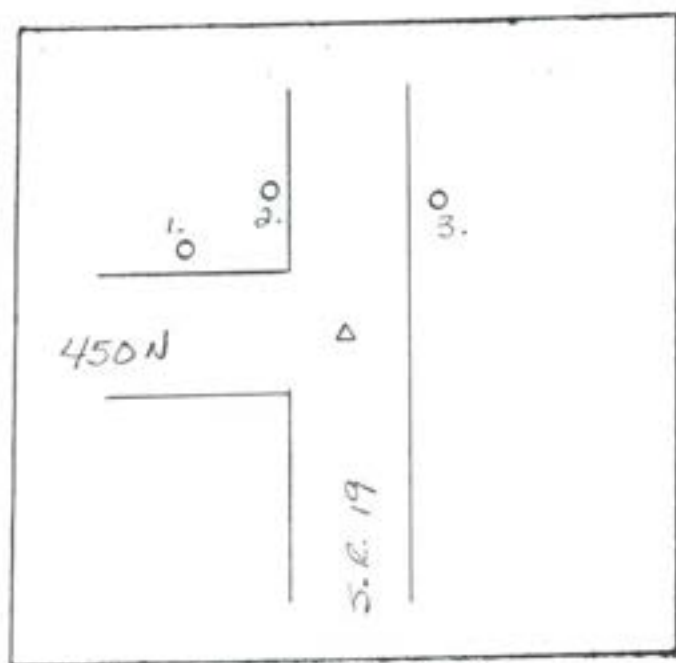

GRAPHIC TIES
(SKETCHED)

SEC. 12 TWP. 22 RANGE 4

4-15-99

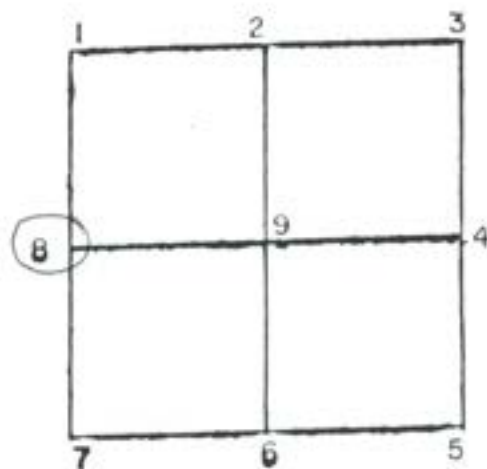


CORNER IDENT. IRON ROD AT SURFACE

TIES: 1. 100.91 P.K. NEEL DI POWERPOLE

2. 75.53 " " " "

3. 72.10 " " " "


SEC. 12 TWP. 22 RANGE 4

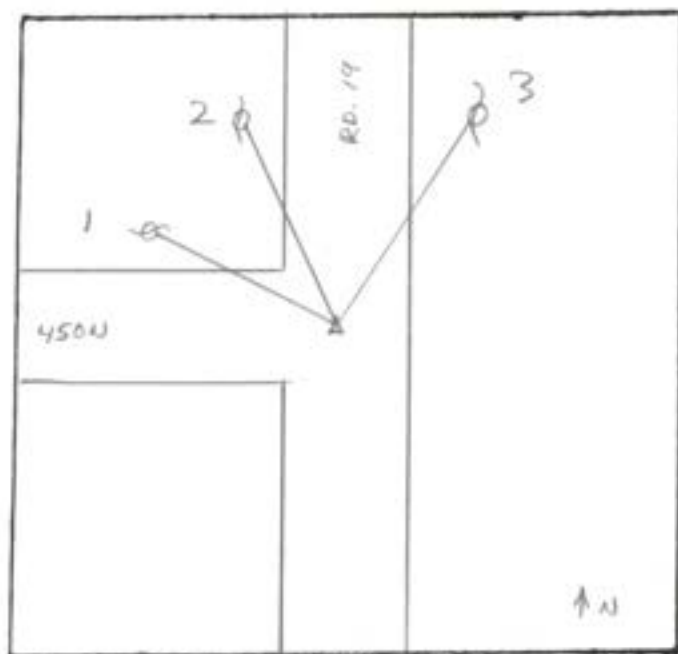

GRAPHIC TIES
(SKETCHED)

SEC. 12 TWP. 22 RANGE 4


5-11-82

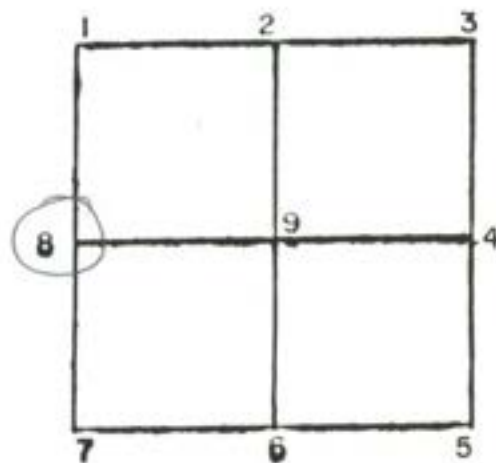

CORNER IDENT. BOLT SPIKE @ SURFACE W/ X ON CONCRETE PATCH

TIES: 1- 100.95' PK IN PWP 2
2- 75.52' PK IN PWP 2-717
3- 72.03' PK IN PWP 204-676


SEC 12 TWP 22 RANGE 4

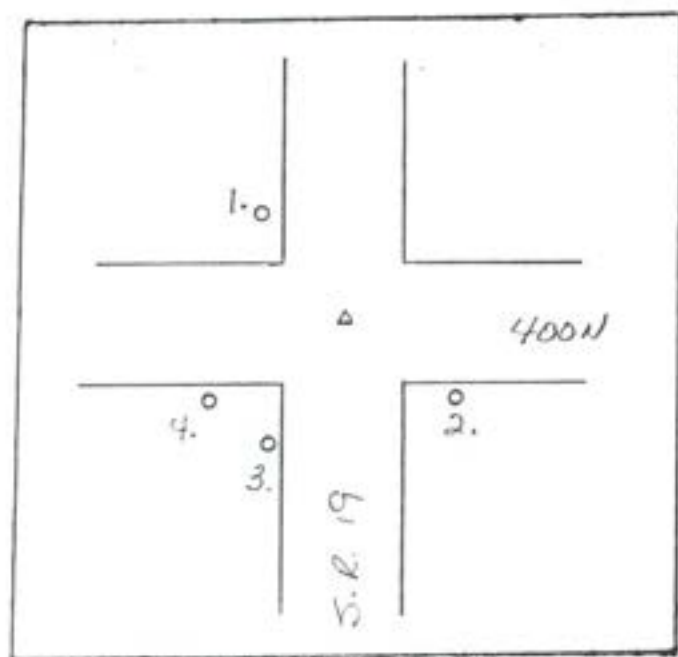

GRAPHIC TIES
(SKETCHED)

SEC 13 TWP 22 RANGE 4

4-15-99

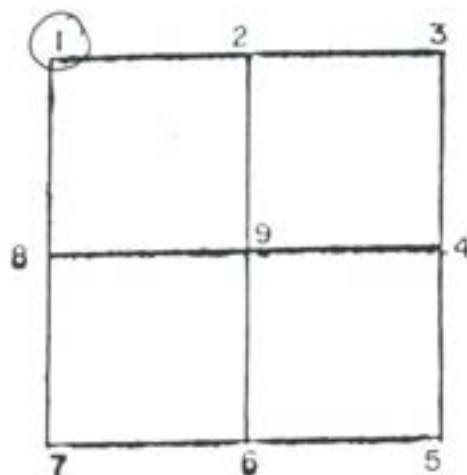

CORNER IDENT. STONE w/x 1.6' DEEP 1.3' IRON ROD SET


TIES: 1. 60.12 P.K. NAIL IN CUT-OFF TELEPHONE POLE

2. 78.03 " " " POWER POLE

3. 66.38 " " " "

4. 73.86 " " " "


SEC 13 TWP 22 RANGE 4

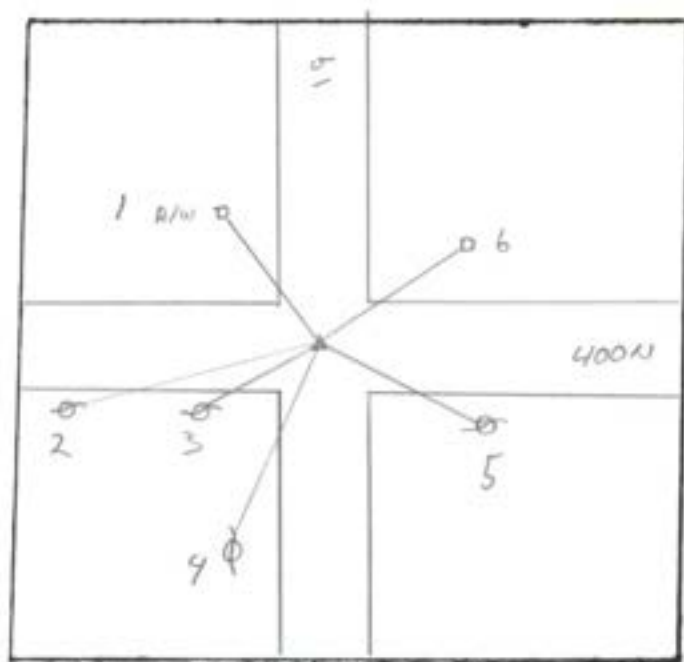

GRAPHIC TIES
(SKETCHED)

SEC 13 TWP 22 RANGE 4

5-11-82

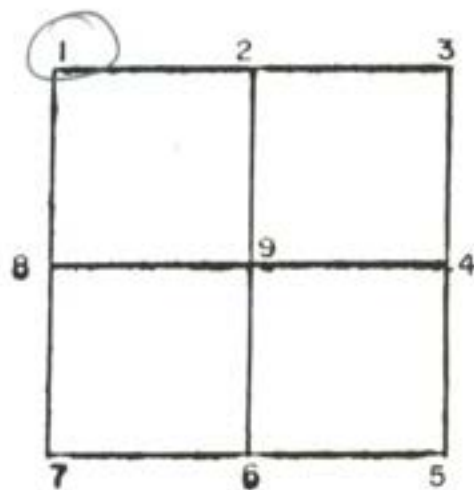


CORNER IDENT. STONE W/ 1.6" D. 1.3" IR. OVER X


- TIES:
1. 65.3' TOP CENTER R/W MARKER
 2. 86.18' PK IN PWP
 3. 73.86' PK IN PWP
 4. 66.38' PK IN PWP
 5. 78.05' PK IN PWP
 6. 77.9' TOP CENTER R/W MARKER

SEC 13 TWP 22 RANGE 4

SEC 13 TWP 22 RANGE 4

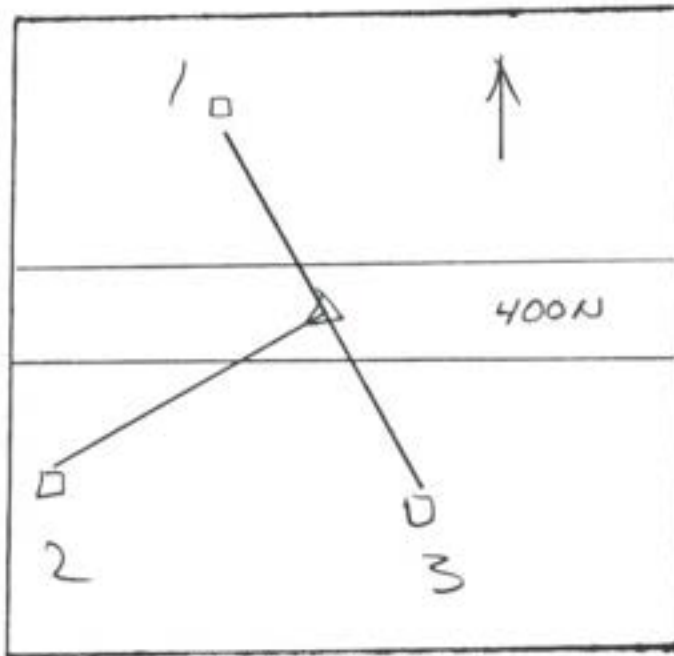

GRAPHIC TIES
(SKETCHED)

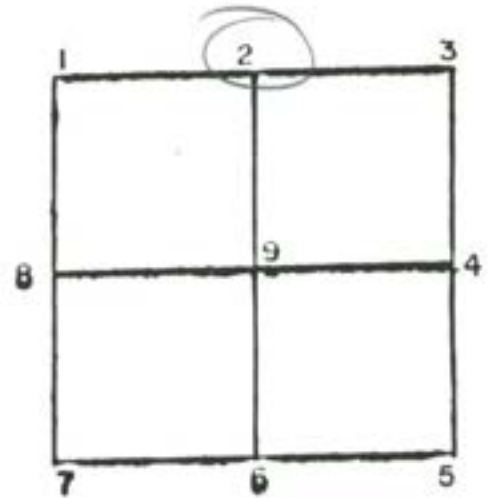

CORNER IDENT. NOT STATED

TIES: 1. 20.40' METAL FP

2. 18.45' FP


3. 20.70' FP

SEC 13 TWP 22 RANGE 4

SEC. 13 TWP. 22 RANGE 4
6/2000




GRAPHIC TIES
(SKETCHED)

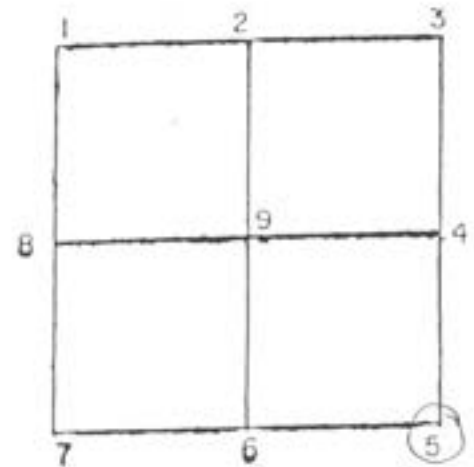

CORNER IDENT. STONE w/x FOUND / IRON ROD FOUND

TIES:	STONE	IRON ROD
1.	48.86 — P.K. NACL IN PWD —	49.94
2.	62.75 — " " " " —	61.78
3.	48.00 — " " " " —	49.42


SEC. 13 TWP. 22 RANGE 4

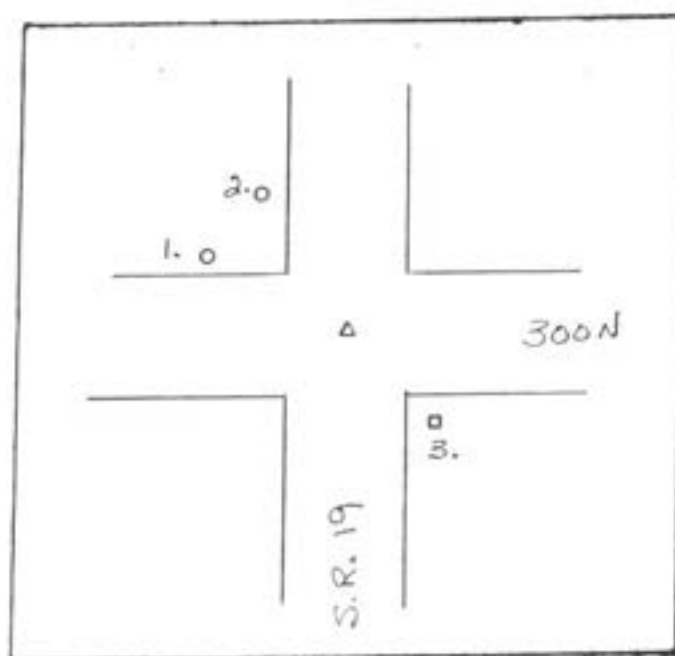

GRAPHIC TIES
(SKETCHED)

SEC. 13 TWP 22 RANGE 4


4-15-99

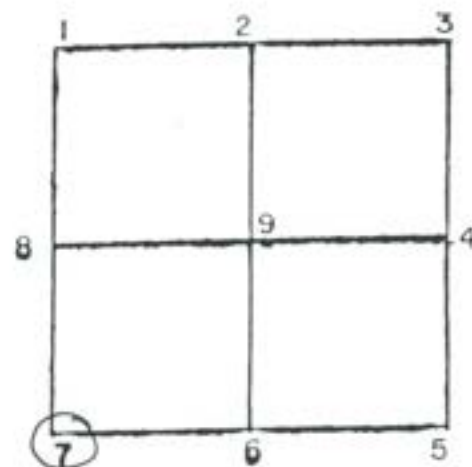

CORNER IDENT. STONE W/X 1.5' DEEP 1.3' IRON ROD SET

TIES: 1. 98.48 P.K. NAIL IN POWER POLE
2. 79.35' " " " "
3. 76.83 " " " HEAD POST


SEC 13 TWP 22 RANGE 4

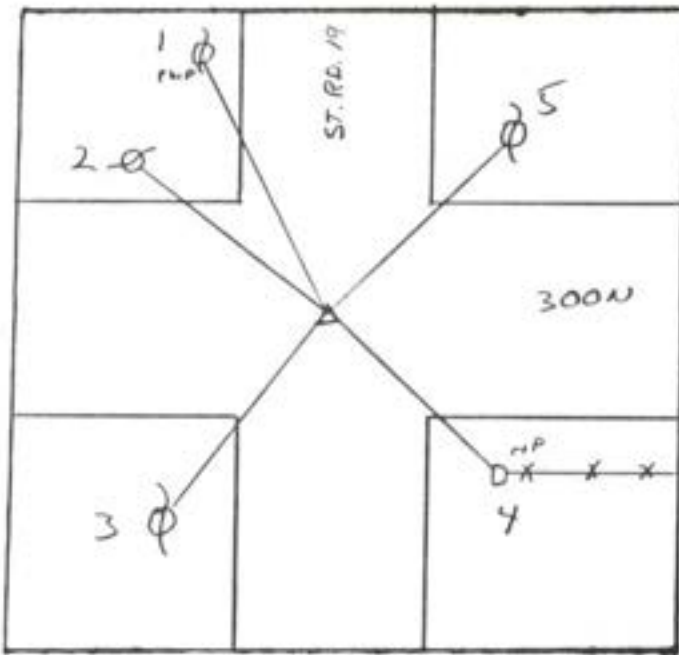

GRAPHIC TIES
(SKETCHED)

SEC 13 TWP 22 RANGE 4


5-11-82

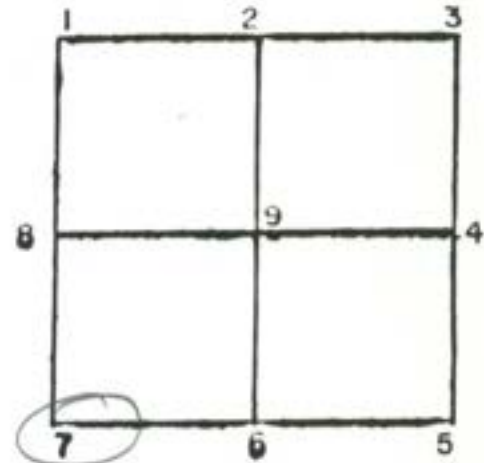

CORNER IDENT. 7 STONE W/X 1.5' O. 1.3' IR. SET OVER X

TIES:	1.	79.10'	PK IN PWP
	2.	98.42'	PK IN PWP
	3.	67.62'	PK IN PWP
	4.	76.64'	PK IN END POST
	5.	91.85'	PK IN PWP


SEC 13 TWP 22 RANGE 4

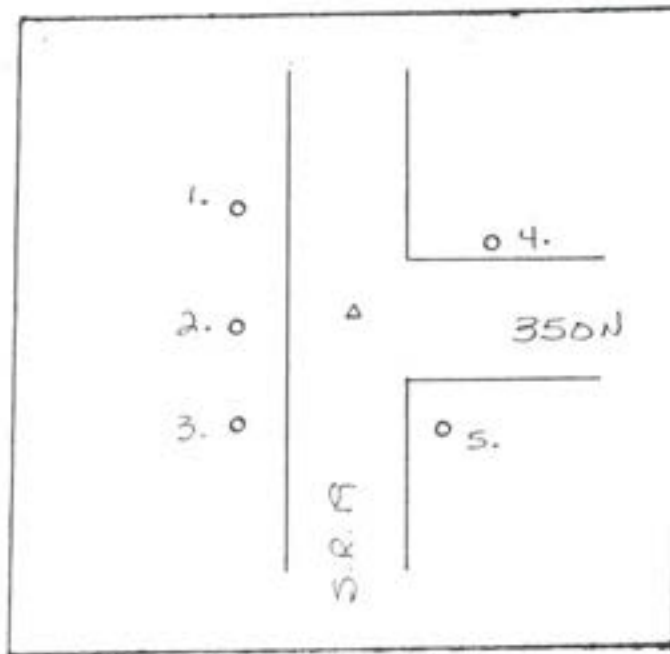

GRAPHIC TIES
(SKETCHED)

SEC 13 TWP 22 RANGE 4


4-15-99

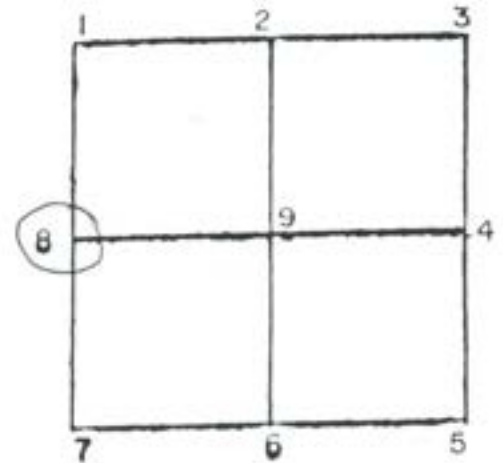

CORNER IDENT. STONE W/ POINT 1.0' DEEP 29' IRON ROD SET

TIES: 1. 58.52' P.K. NAIL IN CUT-OFF TELEPHONE POLE
2. 40.33' " " " POWER POLE
3. 41.26' " " " "
4. 96.36' " " " "
5. 85.67' " " " "


SEC 13 TWP 22 RANGE 4

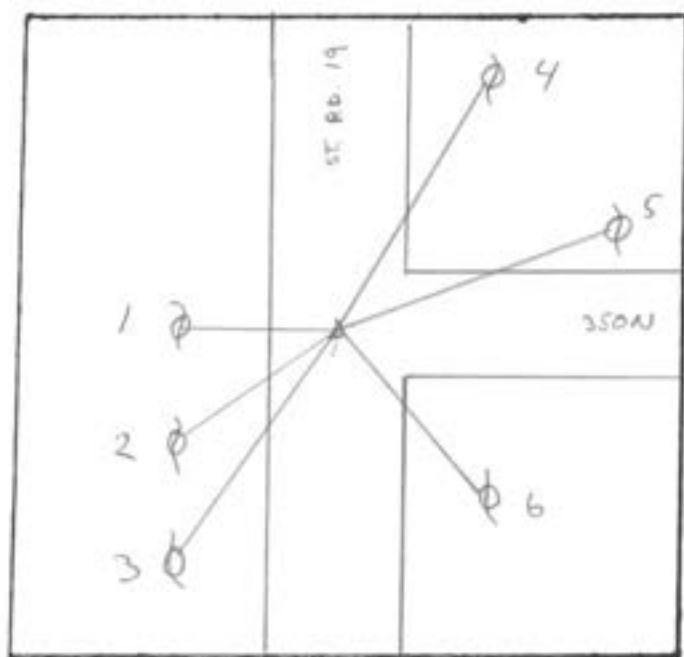

GRAPHIC TIES
(SKETCHED)

SEC. 13 TWP. 22 RANGE 4

5-11-82

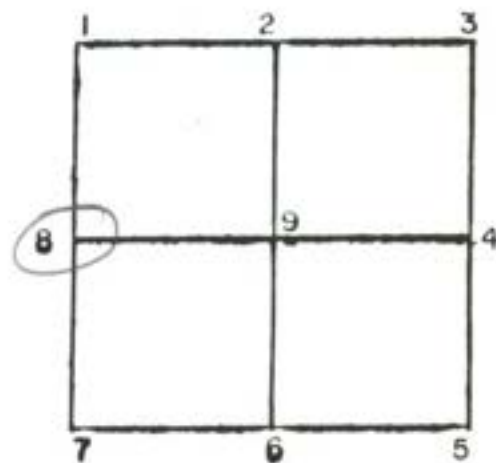


CORNER IDENT. & STONE W/POINT 10' DEEP / .9' IRON ROD OVER POINT

TIES:


1. 40.33' PK in PWP
2. 41.26' PK in PWP
3. 51.82' PK in PWP
4. 65.02' PK in PWP
5. 93.18' PK in PWP
6. 85.67' PK in PWP

SEC. 13 TWP. 22 RANGE 4

SEC 13 TWP 22 RANGE 4

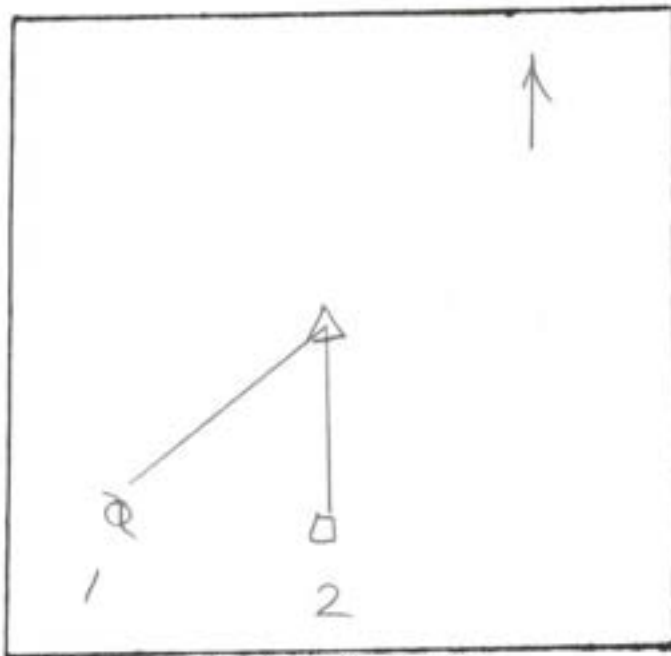


GRAPHIC TIES
(SKETCHED)

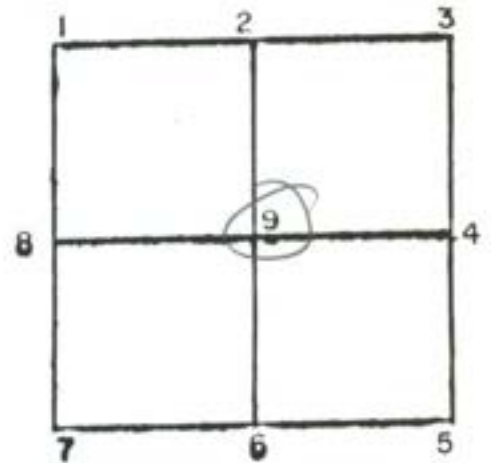

CORNER IDENT. NOT STATED

TIES: 1. 49.70' PWP
2. 18.60' HP


SEC 13 TWP 22 RANGE 4

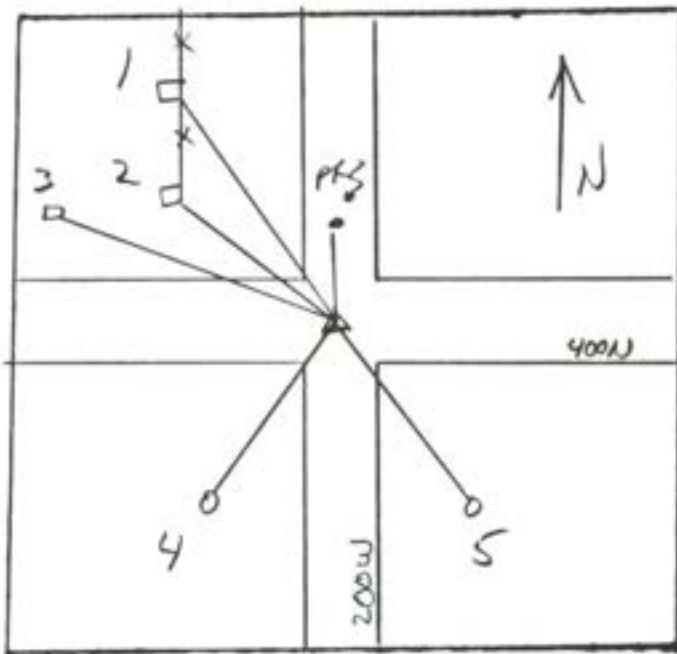

GRAPHIC TIES
(SKETCHED)

SEC 14 TWP 22 RANGE 41


4-8-1980

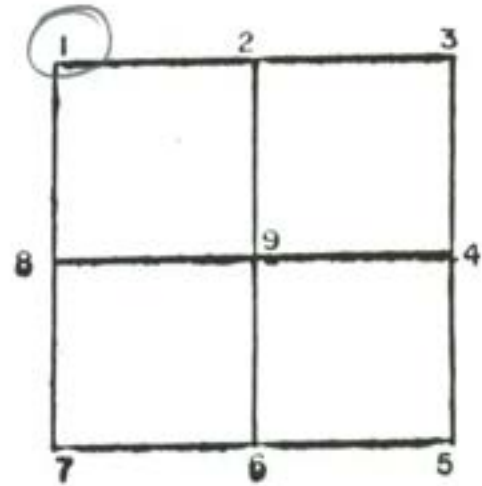

CORNER IDENT. STONE W/X FND 2' DEEP

TIES: 1. 56.03' PK - BRACE POST
2. 49.35' PK - CORNER POST
3. 53.36' PK - FENCE POST
4. 53.14' PK - FENCE POST
5. 48.59' PK - FENCE POST
6. 14.98' PK - 4 RP. 200W


SEC 14 TWP 22 RANGE 4

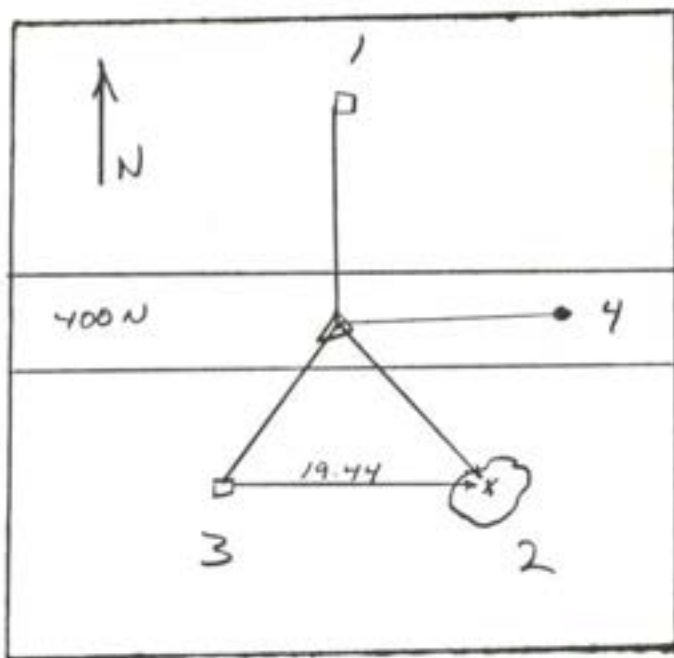

GRAPHIC TIES
(SKETCHED)

SEC. 14 TWP. 22 RANGE 4


MARCH 1987

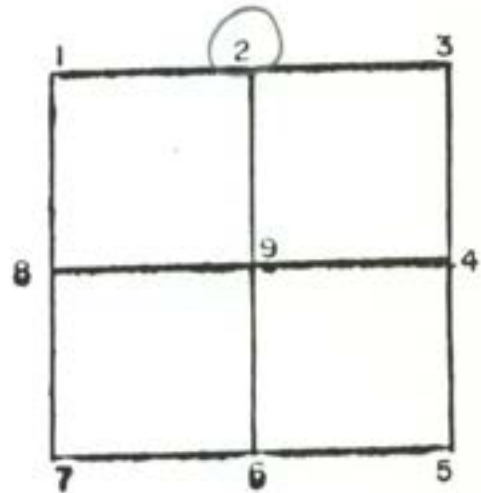

CORNER IDENT. 2 END STONE W/X 6" DEEP

TIES: 1. 16.0' SN IN POST
2. 20.92' X IN STONE
3. 18.39' PK - HP
4. 387.30' PK - EAST OF STONE IN 4 OF 400 N


SEC. 14 TWP. 22 RANGE 4

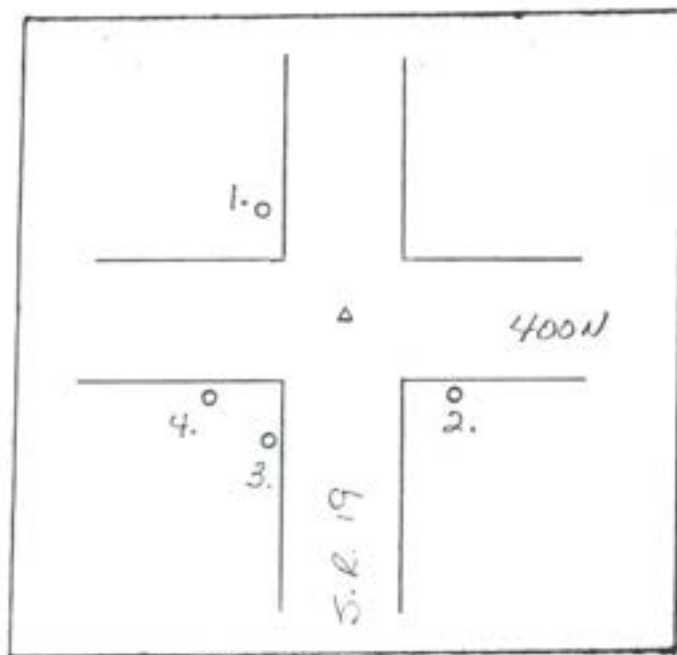

GRAPHIC TIES
(SKETCHED)

SEC. 14 TWP 22 RANGE 4


4-15-99

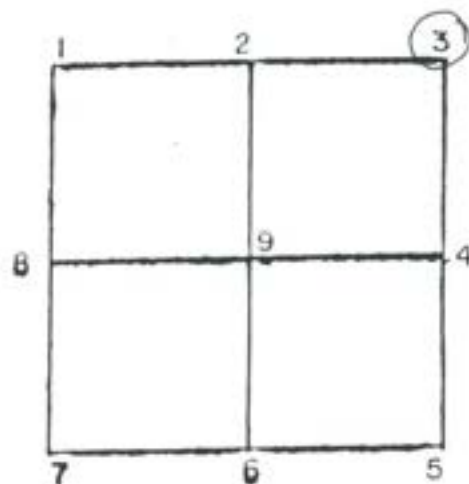

CORNER IDENT. STONE w/x 1.6' DEEP 1.3' IRON ROD SET

TIES: 1. 60.12 P.K. NAIL IN CUT-OFF TELEPHONE POLE
2. 78.03 " " " POWER POLE
3. 66.38 " " " "
4. 73.86 " " " "


SEC. 14 TWP 22 RANGE 4

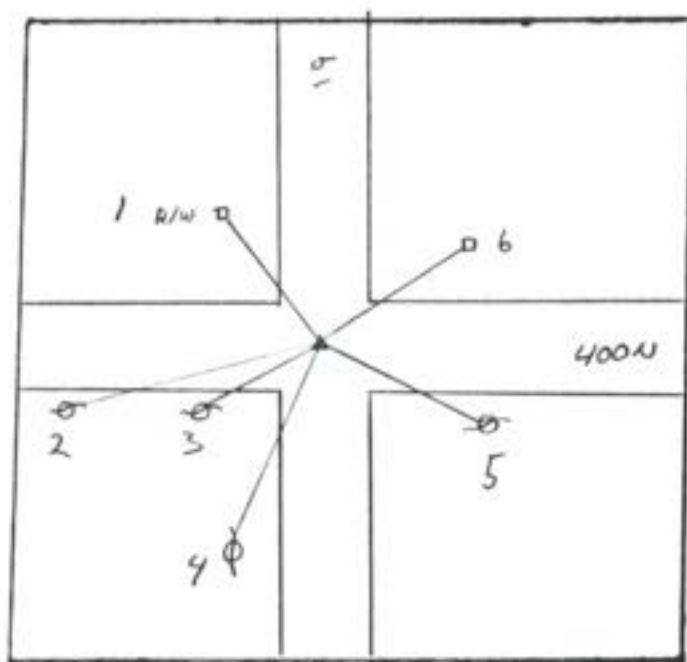

GRAPHIC TIES
(SKETCHED)

SEC 14 TWP 22 RANGE 4


5-11-82

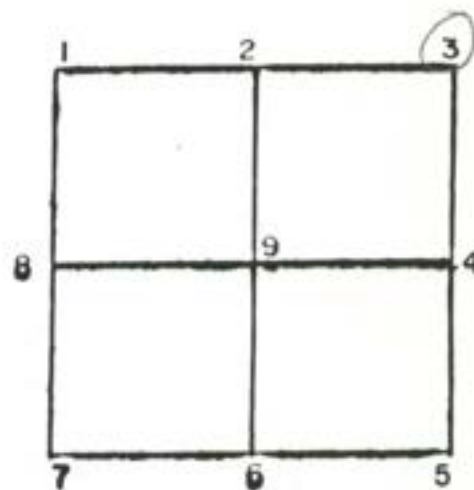

CORNER IDENT. ³ STONE W/L 1.6". 1.3' IR. OVER X

- TIES:
1. 65.3' TOP CENTER R/W MARKER
 2. 86.18' PK IN PWP
 3. 73.86' PK IN PWP
 4. 66.38' PK IN PWP
 5. 78.05' PK IN PWP
 6. 77.9' TOP CENTER R/W MARKER


SEC 14 TWP 22 RANGE 4

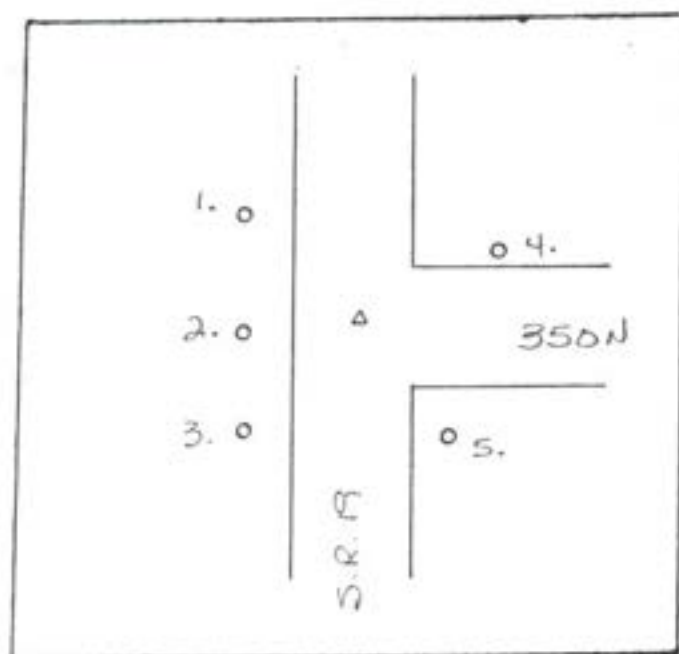

GRAPHIC TIES
(SKETCHED)

SEC 14 TWP 22 RANGE 4


4-15-99

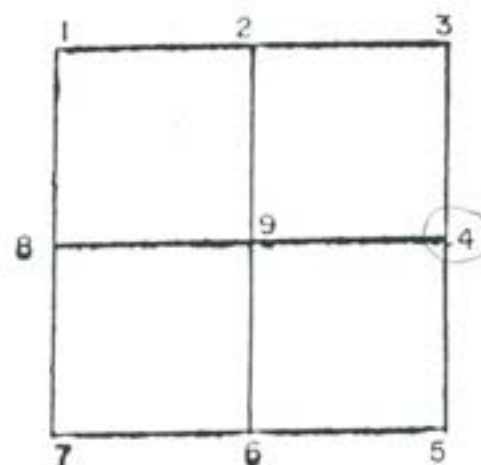

CORNER IDENT. STONE W/ POINT 1.0' DEEP 29' IRON ROD SET

TIES: 1. 58.52' P.K. NAIL IN CUT-OFF TELEPHONE POLE
2. 40.33' " " " POWER POLE
3. 41.26' " " " "
4. 96.36' " " " "
5. 85.67' " " " "


SEC 14 TWP 22 RANGE 4

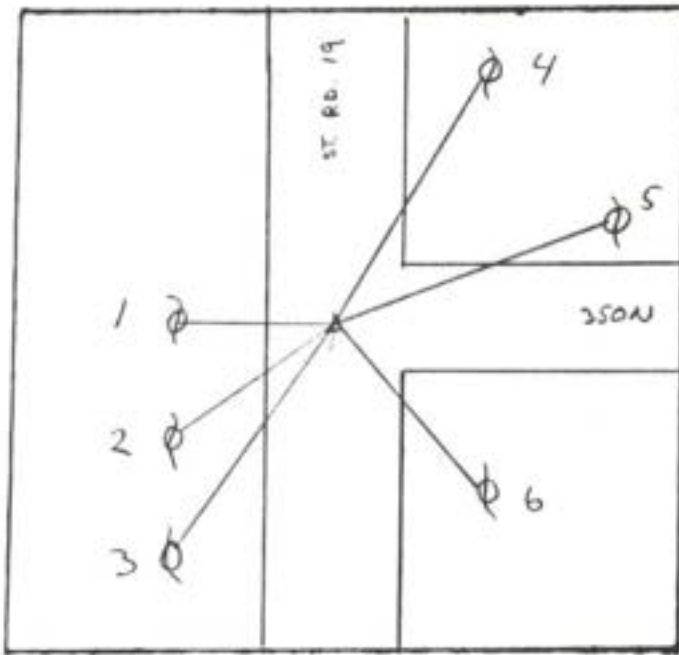

GRAPHIC TIES
(SKETCHED)

SEC. 14 TWP. 22 RANGE 4


5-11-82

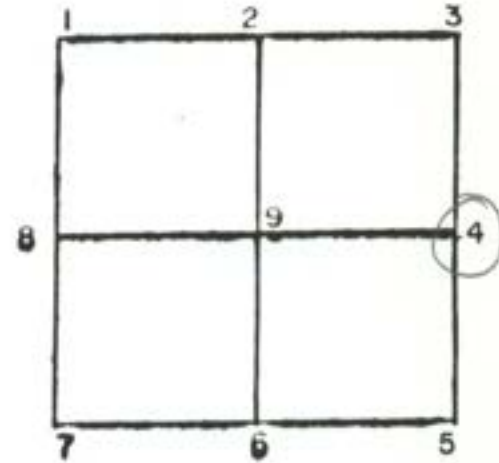

CORNER IDENT. 4 STONE W/ADJINT 10' DEEP / .9' IRON ROD OVER POINT

- TIES:
- 1. 40.33' PK in PWP
 - 2. 41.26' PK in PWP
 - 3. 51.82' PK in PWP
 - 4. 65.02' PK in PWP
 - 5. 93.18' PK in PWP
 - 6. 85.67' PK in PWP
 -
 -
 -
 -
 -
 -
 -
 -
 -


SEC. 14 TWP. 22 RANGE 4

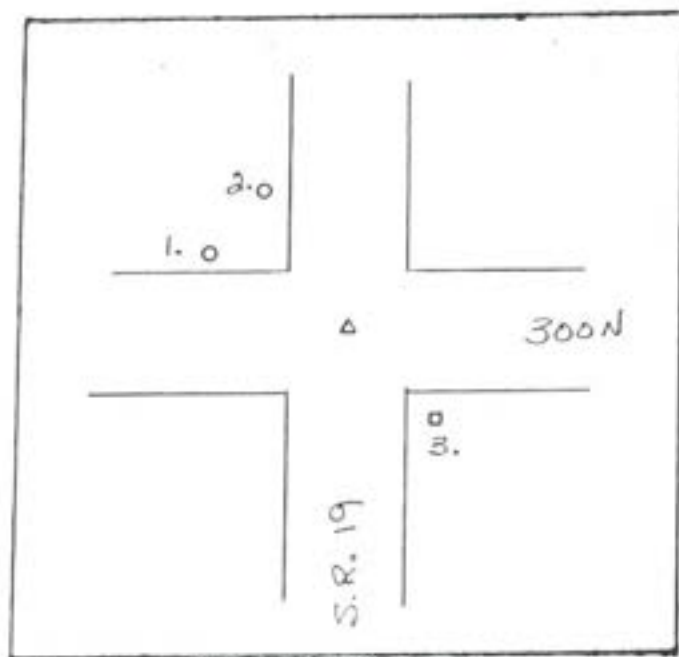

GRAPHIC TIES
(SKETCHED)

SEC. 14 TWP. 22 RANGE 4

4-15-99

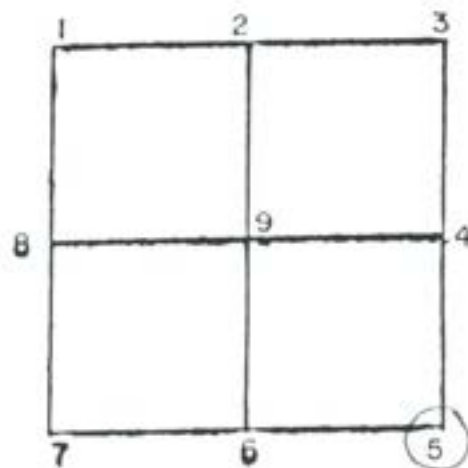


CORNER IDENT. STONE w/x 1.5' DEEP 1.3' IRON ROD SET

TIES: 1. 98.48 P.K. NAIL IN POWER POLE
2. 79.35' " " " "
3. 76.83 " " " HEAD POST

SEC. 14 TWP. 22 RANGE 4



5-11-82

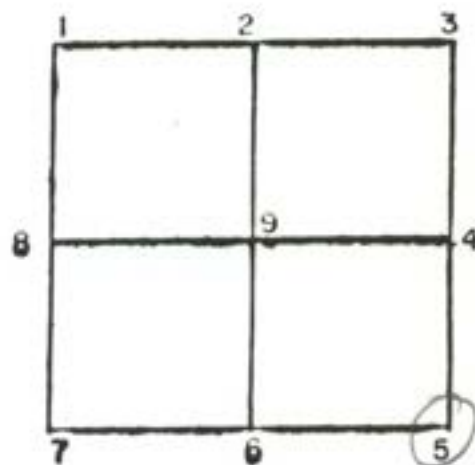


TIES:


- | | | |
|----|--------|----------------|
| 1. | 79.10' | PK IN PWP |
| 2. | 98.42' | PK IN PWP |
| 3. | 67.62' | PK IN PWP |
| 4. | 76.64' | PK IN END POST |
| 5. | 91.85' | PK IN PWP |

SEC 14 TWP 22 RANGE 4

SEC. 14 TWP. 22 RANGE 4
6/2000

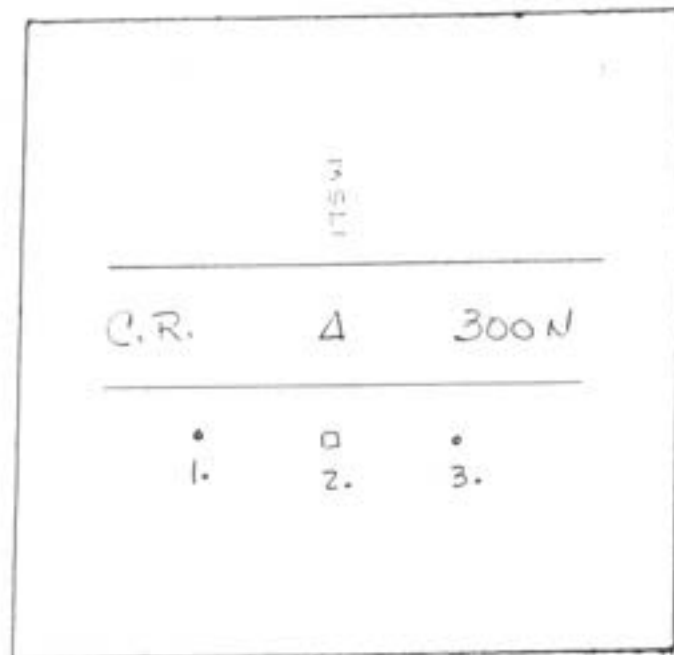

GRAPHIC TIES
(SKETCHED)

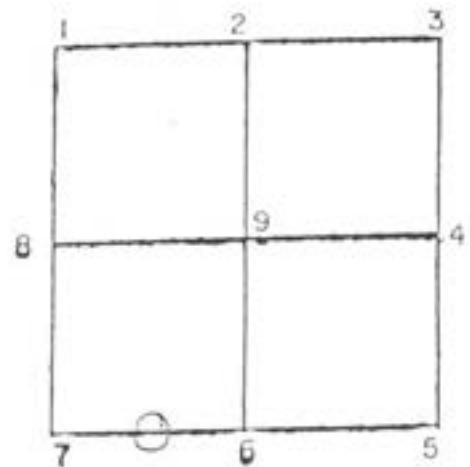


CORNER IDENT. STONE FOUND FLUSH


- TIES: 1. 27.12 - IRON ROD SET 20' WEST OF HEAD POST
2. 17.65 - BOTTOM BOLT IN NORTH FACE OF ROUND HEAD POST
3. 26.42 - IRON ROD SET 20' EAST OF HEAD POST

SEC 14 TWP 22 RANGE 4

SEC. 14 TWP. 22 RANGE 4

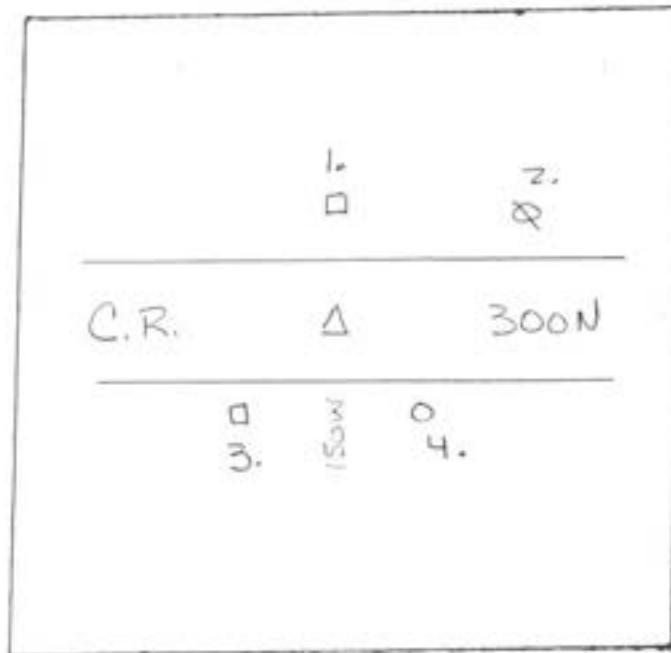


GRAPHIC TIES
(SKETCHED)

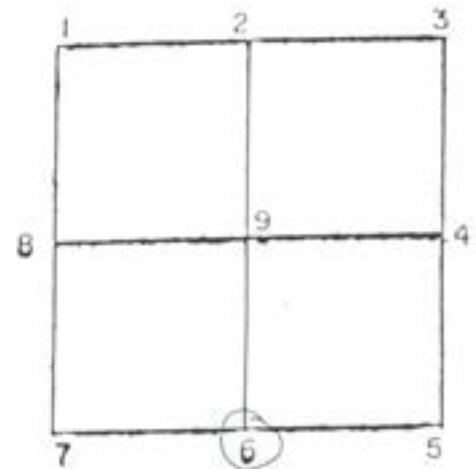

CORNER IDENT. STONE FOUND

- TIES:
- 1. 17.58 — P.K. NAIL IN WEST FACE OF HEAD POST
 - 2. 19.76 — " " " SOUTHEAST FACE OF ROUND HEAD POST
 - 3. 25.75 — " " " WEST FACE " " "
 - 4. 29.20 — " " " NORTHWEST CORNER OF
RAILROAD TIE USED AS HEAD POST


SEC. 14 TWP. 22 RANGE 4

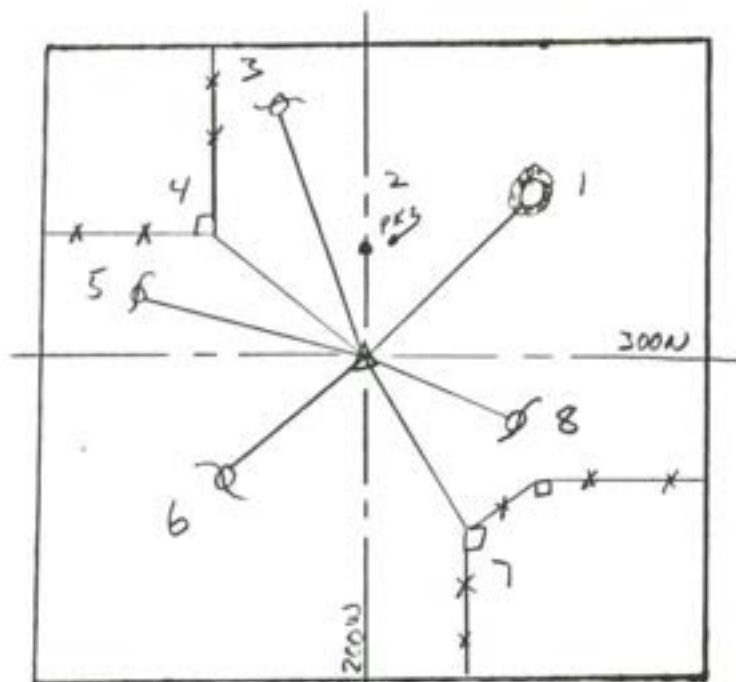

GRAPHIC TIES
(SKETCHED)

SEC 14 TWP 22 RANGE 4

4-15-1980

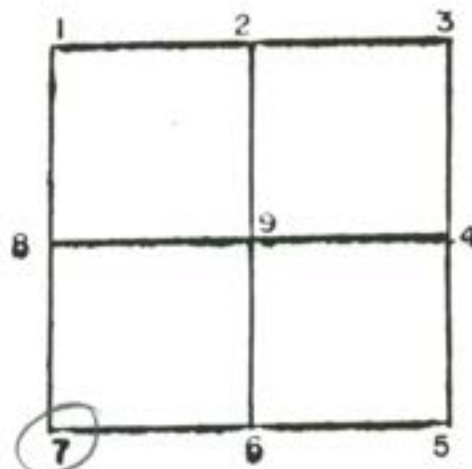


CORNER IDENT. 7 STONE W/POINT

- TIES:
1. 67.60' PK - 24" MAPLE TREE
 2. 15.36' PK - E OF RD. 200W N OF STONE
 3. 33.22' PK - PWP
 4. 31.33' PK - CORNER POST
 5. 59.21' PK - PWP
 6. 27.06' PK - PWP
 7. 53.87' PK - CORNER POST
 8. 43.72' PK - PWP

F.B. 150 P. 16


SEC 14 TWP 22 RANGE 4

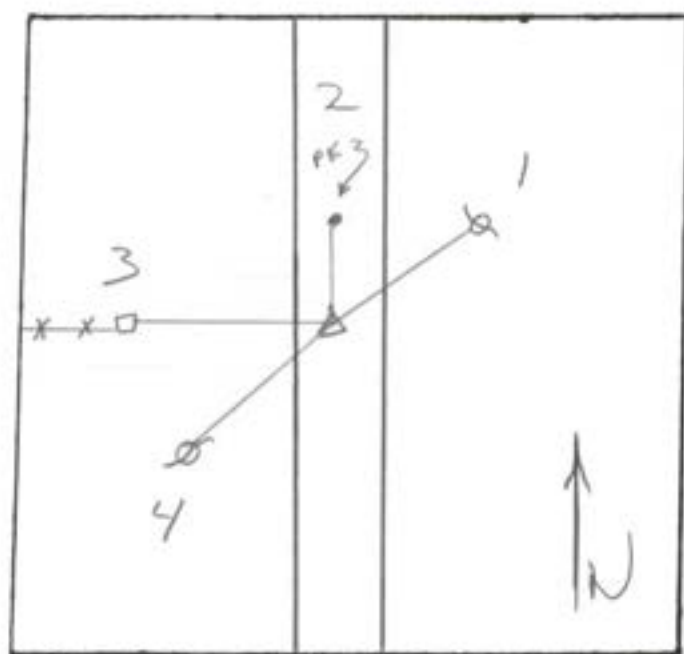

GRAPHIC TIES
(SKETCHED)

SEC 14 TWP 22 RANGE 4


4-15-1980

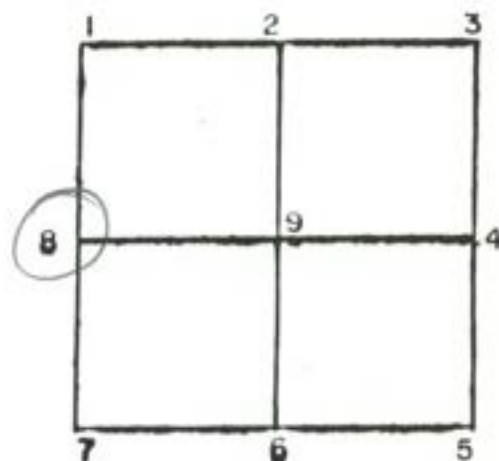

CORNER IDENT. 8 STONE FND 0.7' DEEP

- TIES:
1. 24.28' PK - PWP
 2. 15.0' PK - ² OF 200W.
 3. 25.52' PK - HEADPOST
 4. 66.82' PK - PWP


SEC 14 TWP 22 RANGE 4

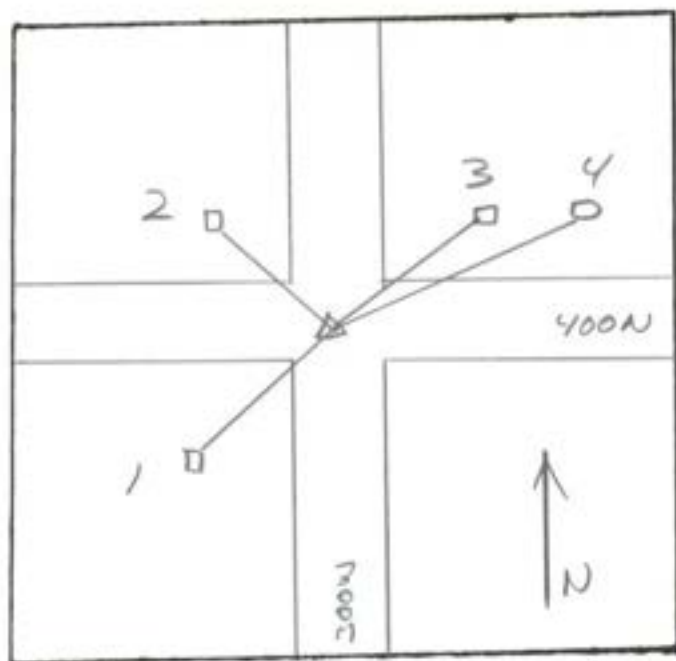

GRAPHIC TIES
(SKETCHED)

SEC 15 TWP 22 RANGE 4


9-27-84

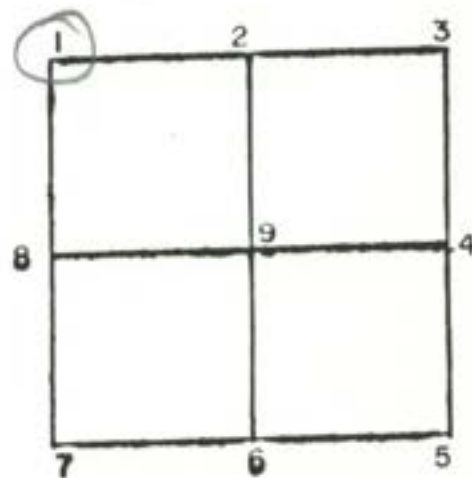

CORNER IDENT. 1 IRON PIN END

TIES: 1. 26.71' HEAD POST
2. 25.98' HEAD POST
3. 26.04' HEAD POST
4. 41.23' FENCE POST


SEC 15 TWP 22 RANGE 4

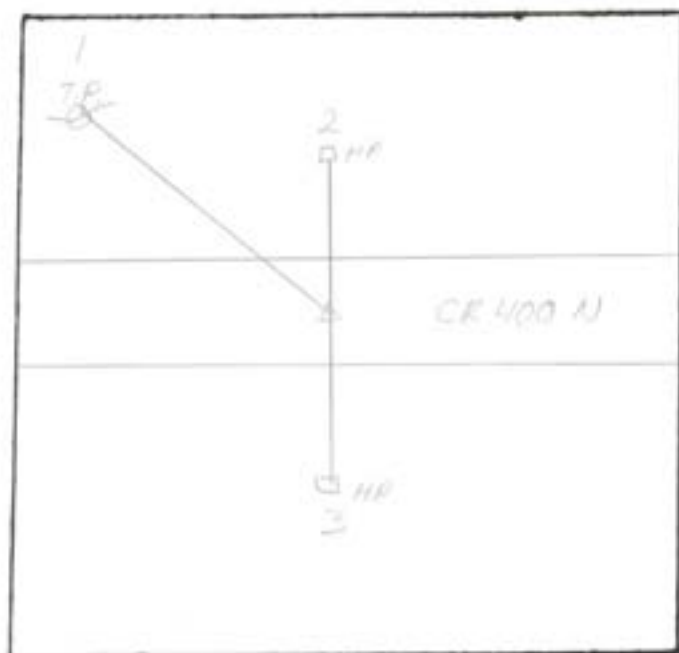

GRAPHIC TIES
(SKETCHED)

SEC 15 TWP 22 RANGE 4

11-13-86

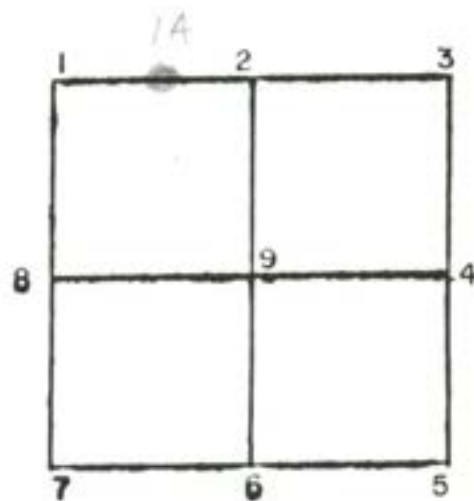

CORNER IDENT. _____


TIES:

1. 48.80'

2. 16.80'

3. 16.80'


SEC 15 TWP 22 RANGE 4

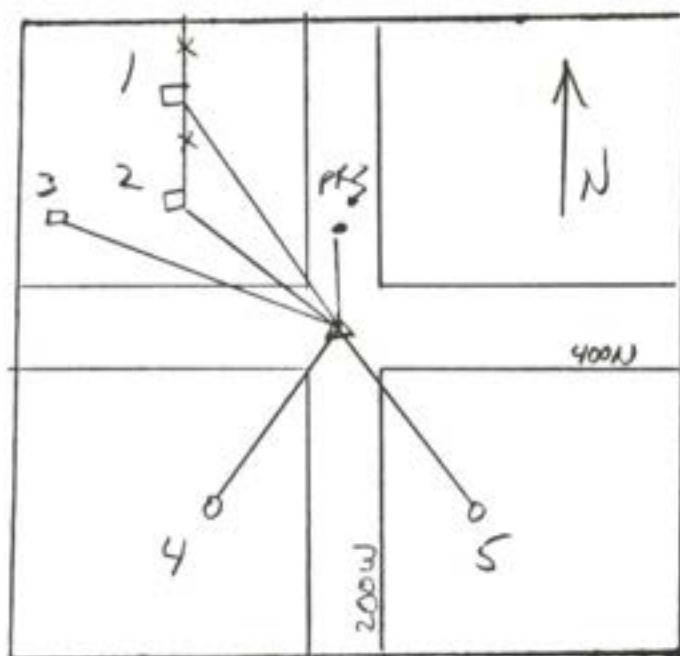

GRAPHIC TIES
(SKETCHED)

SEC 15 TWP 22 RANGE 41


4-8-1980

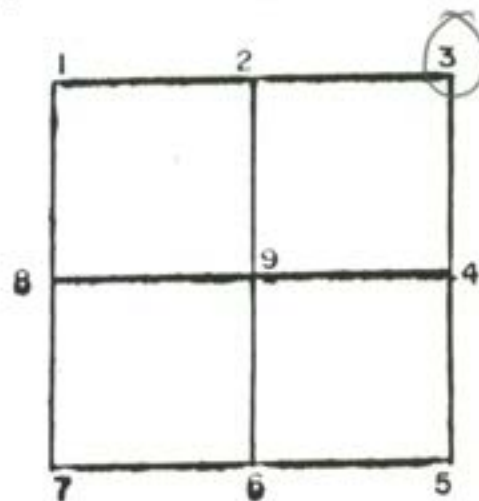

CORNER IDENT. 3 STONE W/Y FND 2' DEEP

TIES:	1.	56.03'	PK - BRACE POST
	2.	49.35'	PK - CORNER POST
	3.	53.36'	PK - FENCE POST
	4.	53.14'	PK - FENCE POST
	5.	48.59'	PK - FENCE POST
	6.	14.98'	PK - ⁴ RP. 200W


SEC 15 TWP 22 RANGE 4

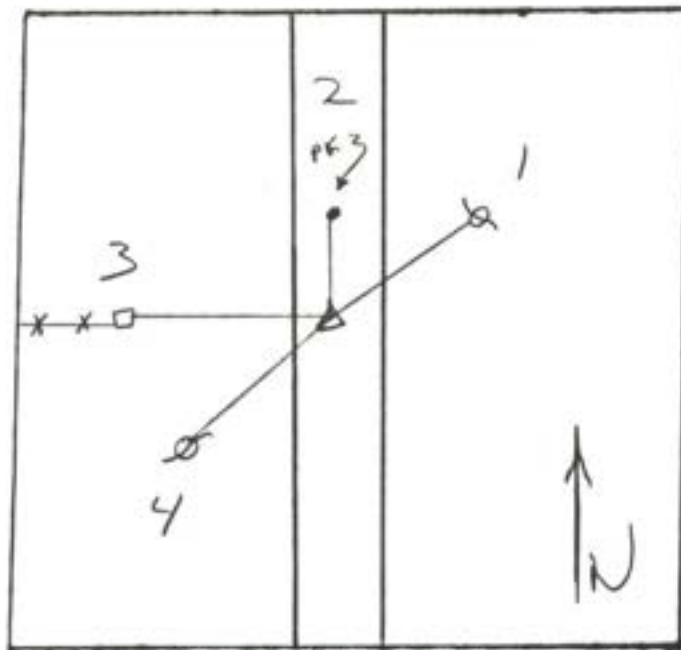

GRAPHIC TIES
(SKETCHED)

SEC 15 TWP 22 RANGE 4

4-15-1980

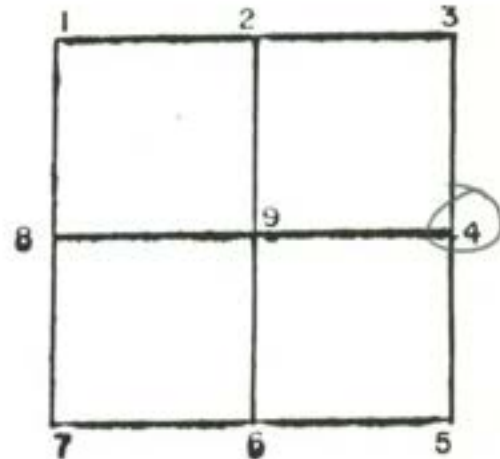

CORNER IDENT. 4 STONE FND 0.7' DEEP

TIES:

1. 24.28' PK - PWP

2. 15.0' PK - ^q OF 200W.


3. 25.52' PK - HEADPOST

4. 66.82' PK - PWP


SEC 15 TWP 22 RANGE 4

SEC. 15 TWP. 22 RANGE 4

4-15-1980

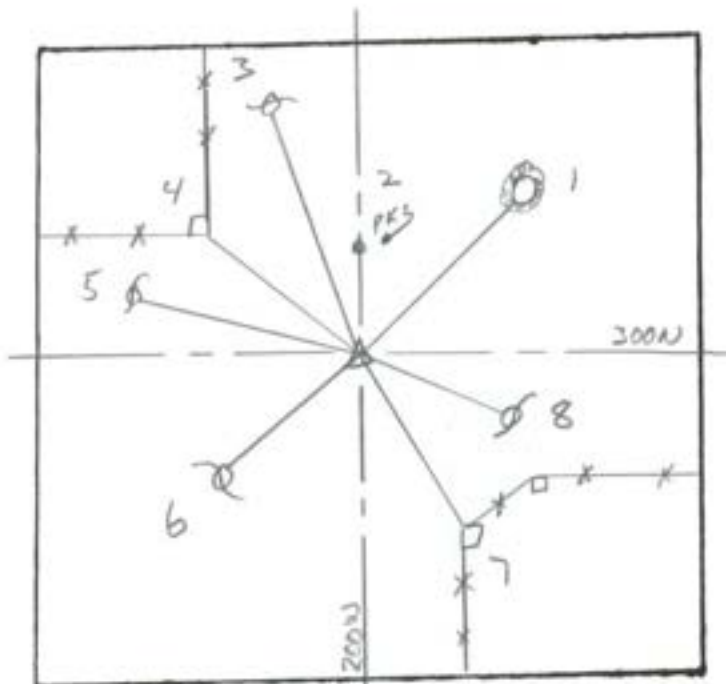

GRAPHIC TIES
(SKETCHED)

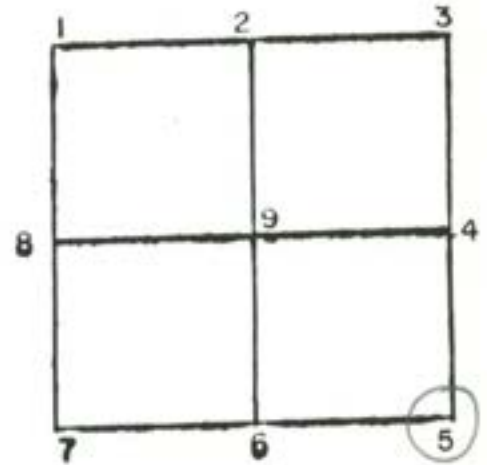


CORNER IDENT. 5 STONE W/POINT


- TIES:
1. 67.60' PK - 24" MAPLE TREE
 2. 15.36' PK - E OF RD. 200W N OF STONE
 3. 33.22' PK - PWP
 4. 31.33' PK - CORNER POST
 5. 59.21' PK - PWP
 6. 27.06' PK - PWP
 7. 53.87' PK - CORNER POST
 8. 43.72' PK - PWP

F.B. 150 P. 16

SEC. 15 TWP. 22 RANGE 4

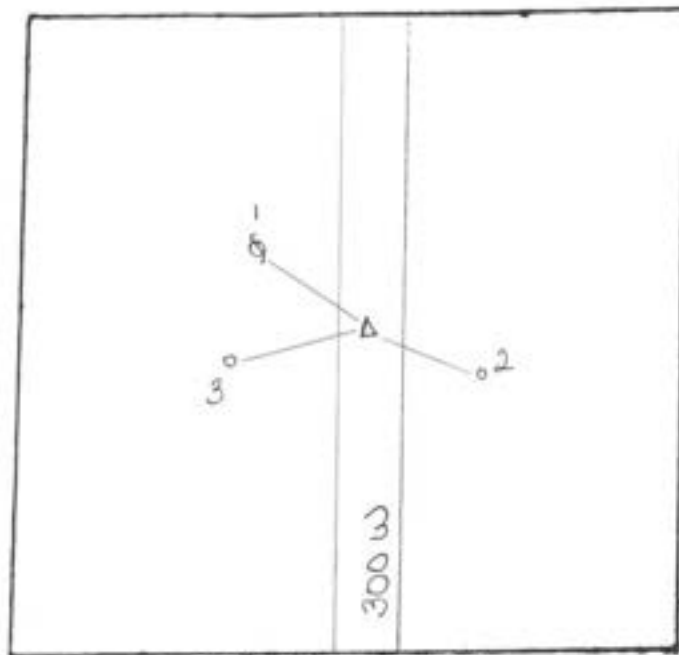

SEC 15 TWP 22 RANGE 4

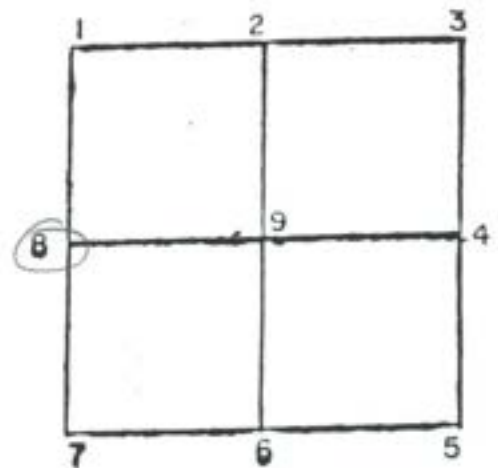


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. STONE @ SURFACE


TIES: 1. 42.35 PK IN PWD
2. 14.43 5/8" REBAR
3. 15.84 5/8" REBAR

SEC 15 TWP 22 RANGE 4

SEC. 16 TWP 22 RANGE 4

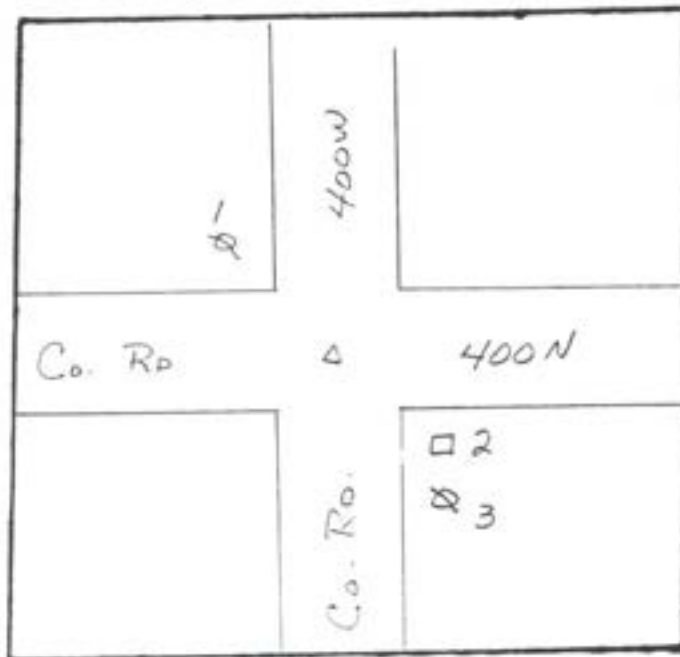

GRAPHIC TIES
(SKETCHED)

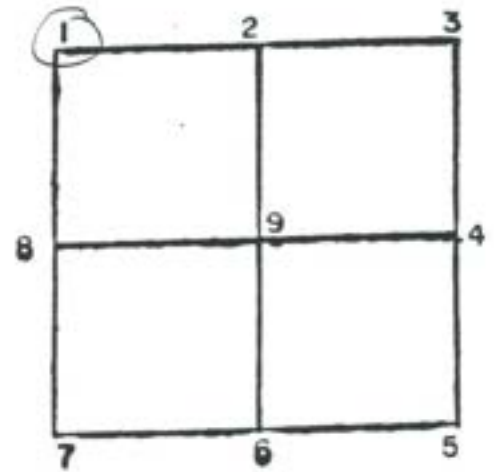


CORNER IDENT. IRON ROD

TIES: 1. 25.95 P.K. NAIL IN

2. 28.14 P.K. NAIL IN


3. 42.83 P.K. NAIL IN POWERPOLE

SEC. 16 TWP 22 RANGE 4

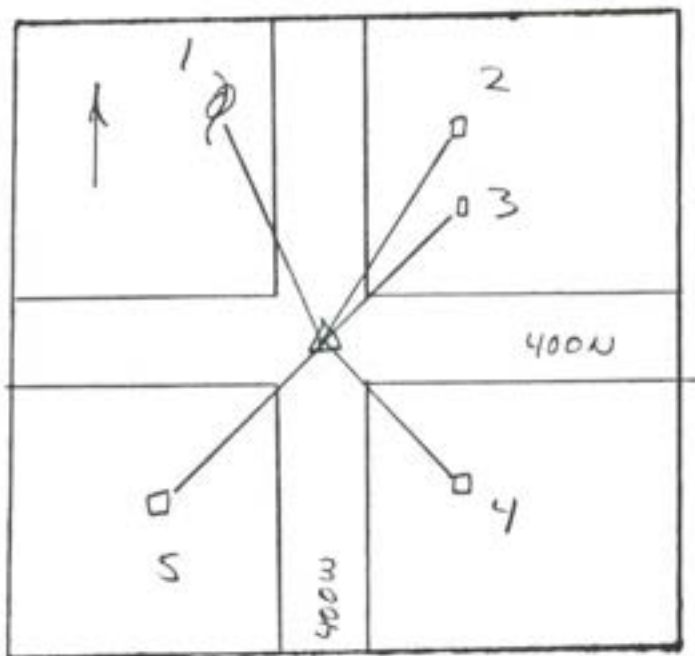

GRAPHIC TIES
(SKETCHED)


SEC 16 TWP 22 RANGE 4

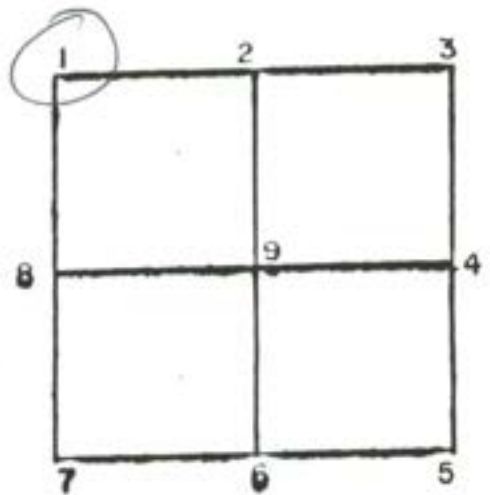

CORNER IDENT. NOT STATED

TIES: 1. 26.10' PNP
2. 36.45' FP
3. 38.60' HP
4. 27.65' HP
5. 27.00' HP


SEC 16 TWP 22 RANGE 4

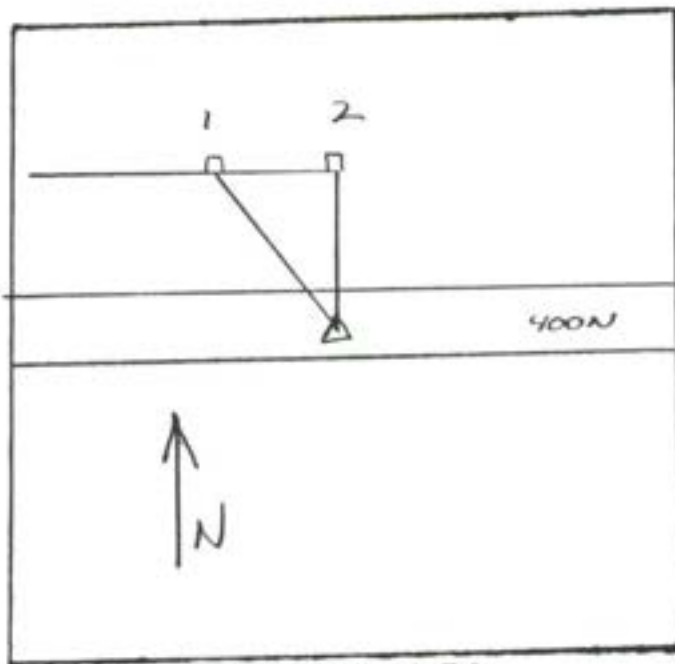

GRAPHIC TIES
(SKETCHED)

SEC. 16 TWP 22 RANGE 4

9-27-84

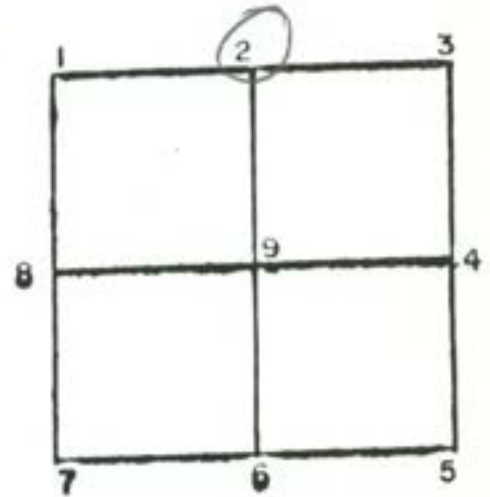


CORNER IDENT. 2 STONE END 6" ↓ SURFACE

TIES: 1. 19.58' FENCE POST


2. 18.21' HEAD POST

SEC 16 TWP 22 RANGE 4

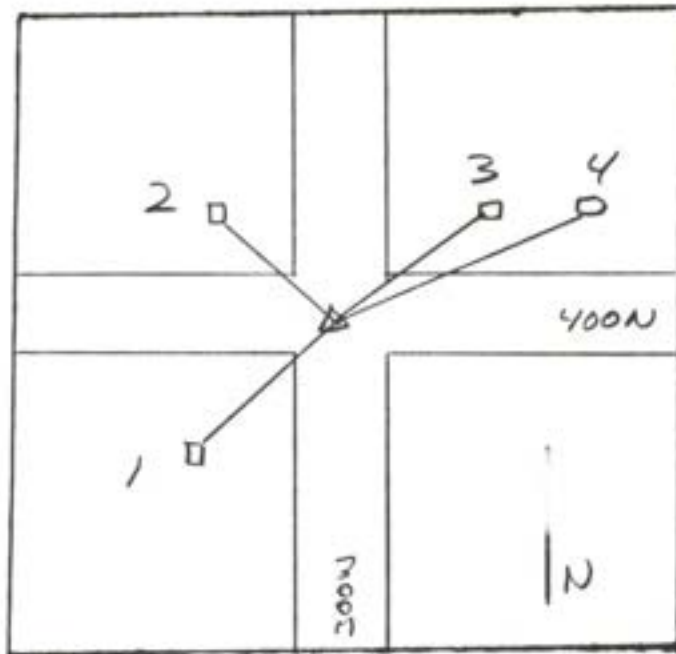

SEC. 16 TWP. 22 RANGE 4

9-27-84

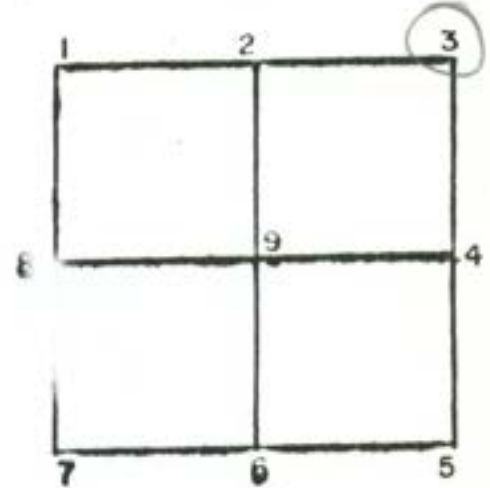

GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 3 IRON PIN FND

TIES: 1. 26.71' HEAD POST
2. 25.98' HEAD POST
3. 26.04' HEAD POST
4. 41.23' FENCE POST

SEC. 16 TWP. 22 RANGE 4




TIME: 1.42.35 PK IN PWP

2 14.43 5/8" REBAR


3 15.84 5/8" REBAR

SEC 16 TWP 22 RANGE 4

SEC 16 TWP 22 RANGE 4

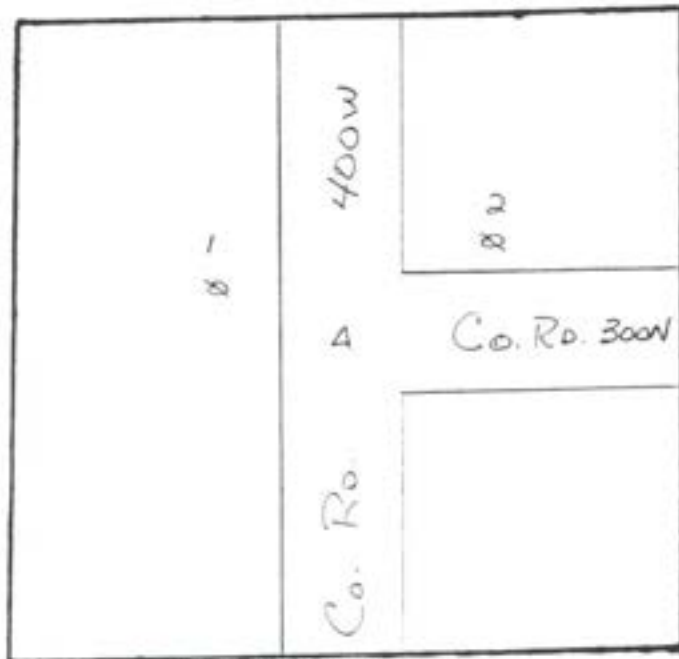

GRAPHIC TIES
(SKETCHED)

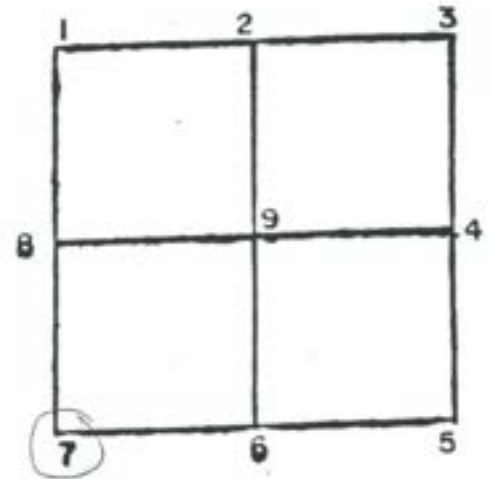


CORNER IDENT. IRON ROD


TIES: 1. 24.38 PK NAIL IN POWER POLE
2. 69.62 PK NAIL IN POWER POLE

SEC 16 TWP 22 RANGE 4

SEC 16 TWP 22 RANGE 4

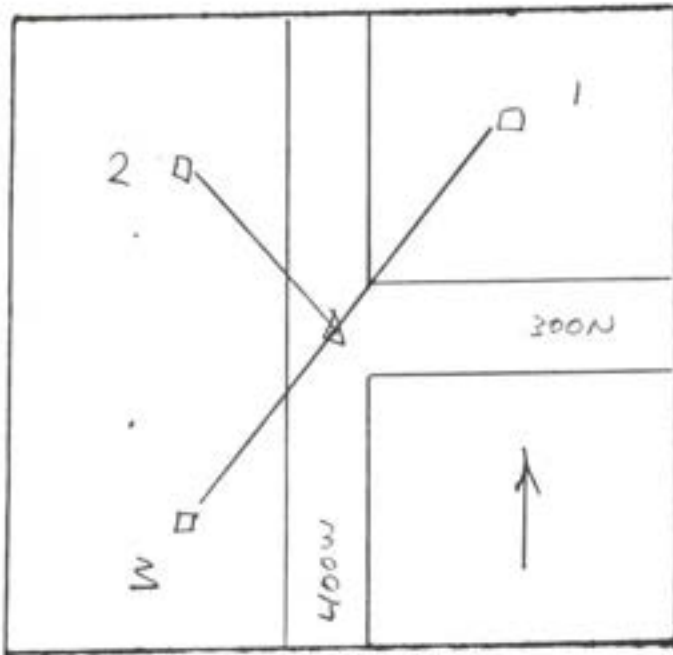


GRAPHIC TIES
(SKETCHED)

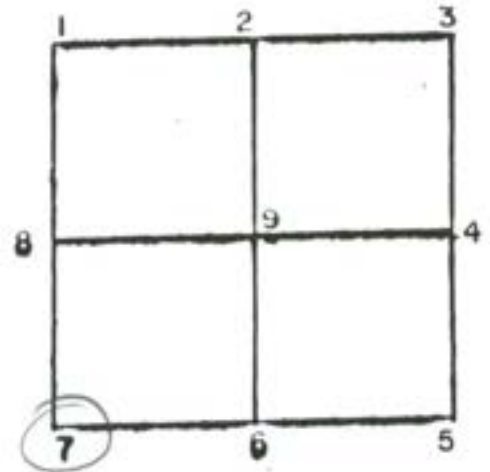

CORNER IDENT. NOT STATED


TIES: 1. 23.45' HP
 2. 25.00' HP
 3. 26.05' HP

SEC 16 TWP 22 RANGE 4

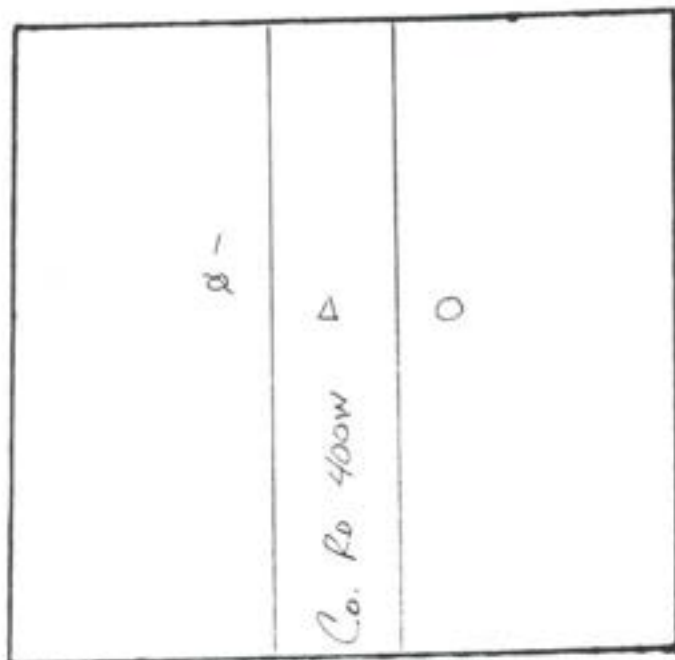

GRAPHIC TIES
(SKETCHED)

SEC. 16 TWP. 22 RANGE 4

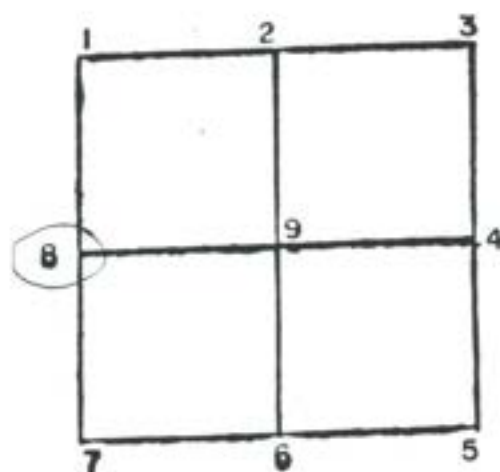


CORNER IDENT. P.K. NAIL


TIES: 1. 64.31 PK NAIL IN POWERPOLE
2. 23.61 PK NAIL IN HEADPOST

SEC. 16 TWP. 22 RANGE 4

SEC 16 TWP 22 RANGE 4

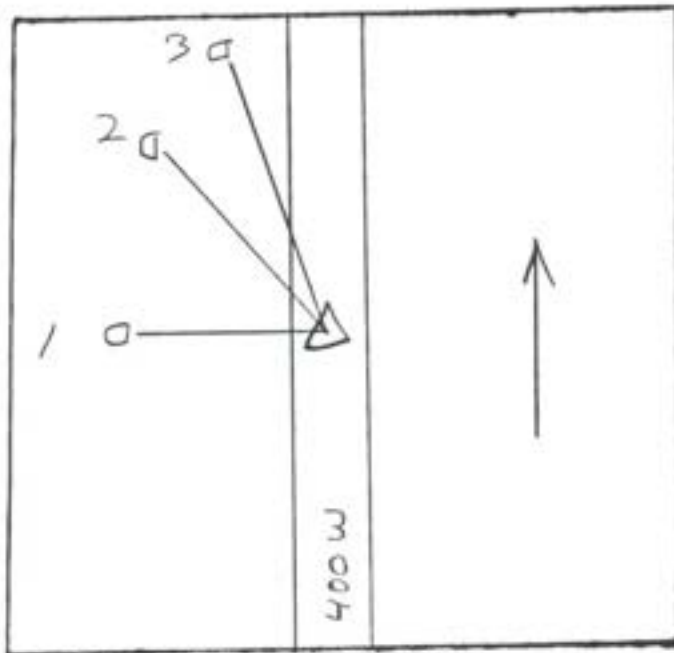

GRAPHIC TIES
(SKETCHED)

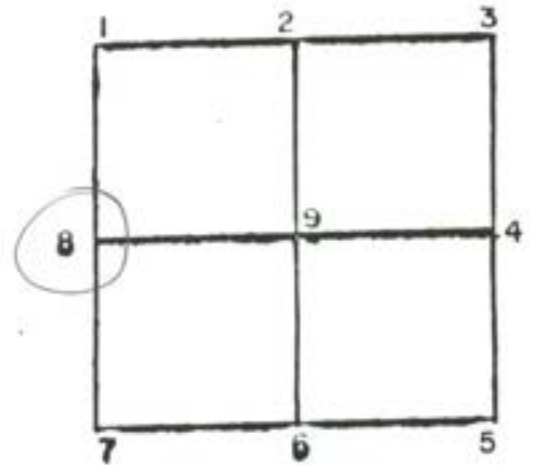

CORNER IDENT. NOT STATED


TIES: 1. 19.60' HP

2. 21.90' FP


3. 33.50' METAL FP

SEC 16 TWP 22 RANGE 4

SEC 17 TWP 22 RANGE 4

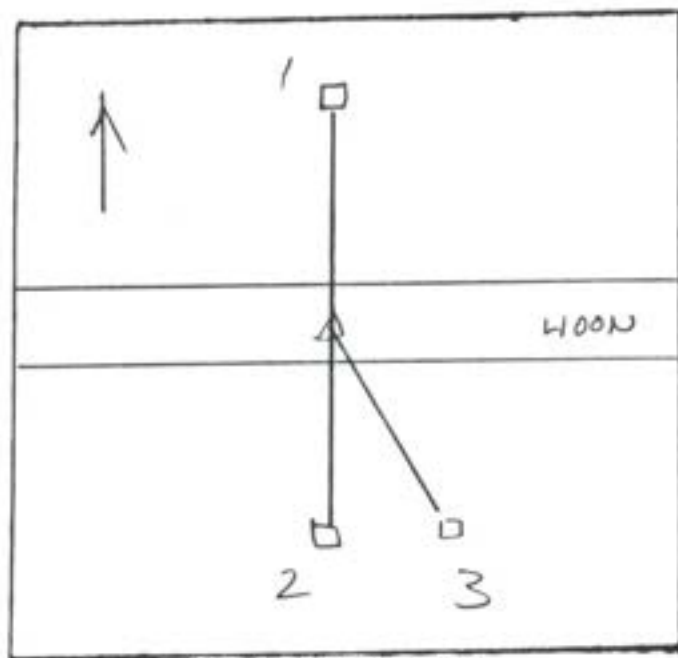

GRAPHIC TIES
(SKETCHED)

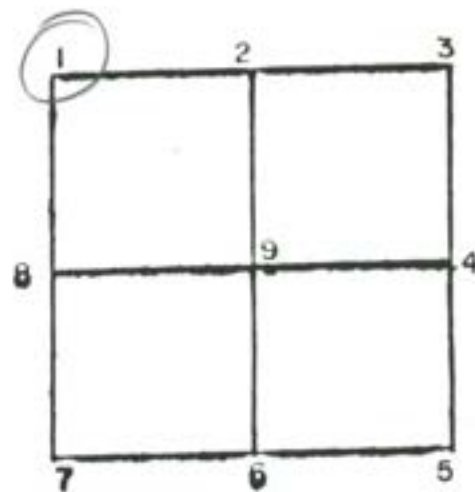


CORNER IDENT. NOT STATED

TIES: 1. 15.60' HP

2. 16.40' HP


3. 18.80' FP

SEC 17 TWP 22 RANGE 4

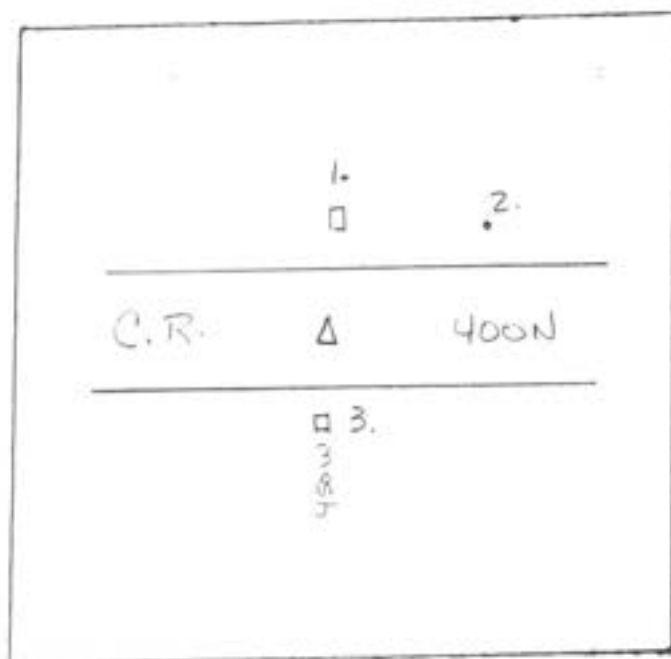

GRAPHIC TIES
(SKETCHED)


SEC. 17 TWP. 22 RANGE 4
6/2000

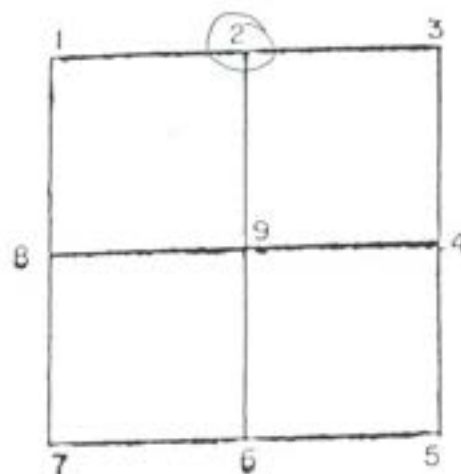

CORNER IDENT. STONE w/x* FOUND 6" DEEP


- TIES: 1. 17.02' - P.K. NAIL IN WEST FACE HEADPOST
2. 25.30' - IRON ROD SET 20' EAST OF HEADPOST
3. 16.88' - P.K. NAIL IN NORTH FACE HEADPOST

SEC. 17 TWP. 22 RANGE 4

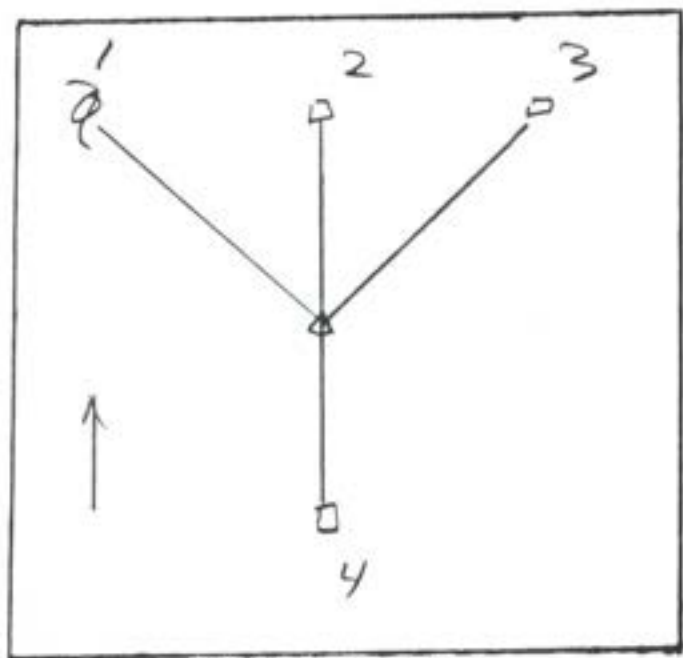

GRAPHIC TIES
(SKETCHED)

SEC. 17 TWP. 22 RANGE 4

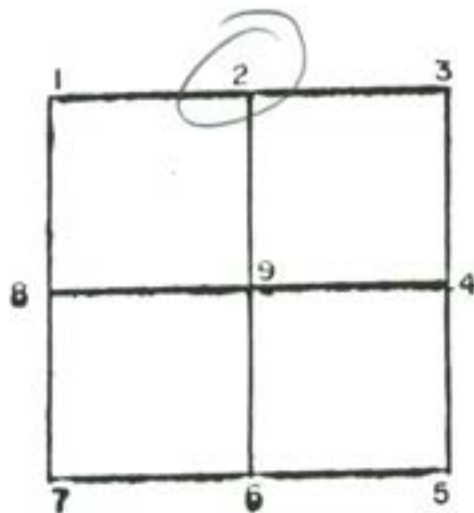


CORNER IDENT. NOT STATED


TIES: 1. 51.50' PWP
2. 16.60' HP
3. 28.20' FP
4. 17.00' HP

SEC 17 TWP 22 RANGE 4

SEC 17 TWP 22 RANGE 4

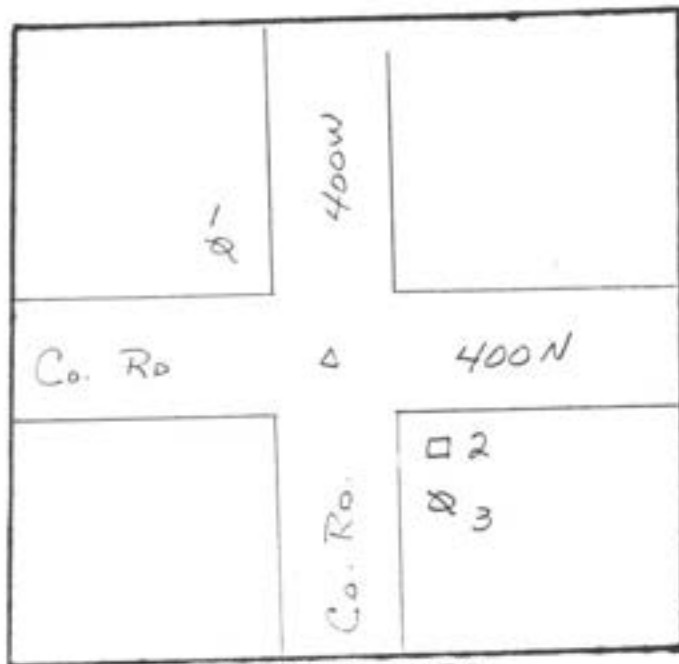

GRAPHIC TIES
(SKETCHED)

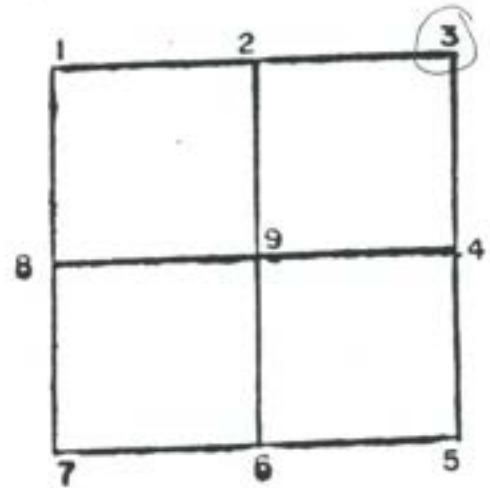


CORNER IDENT. IRON ROD


TIES: 1. 25.95 P.K. NAIL E
2. 28.14 P.K. NAIL EN
3. 42.83 P.K. NAIL EN POWERPOLE

SEC 17 TWP 22 RANGE 4

SEC. 17 TWP. 22 RANGE 4

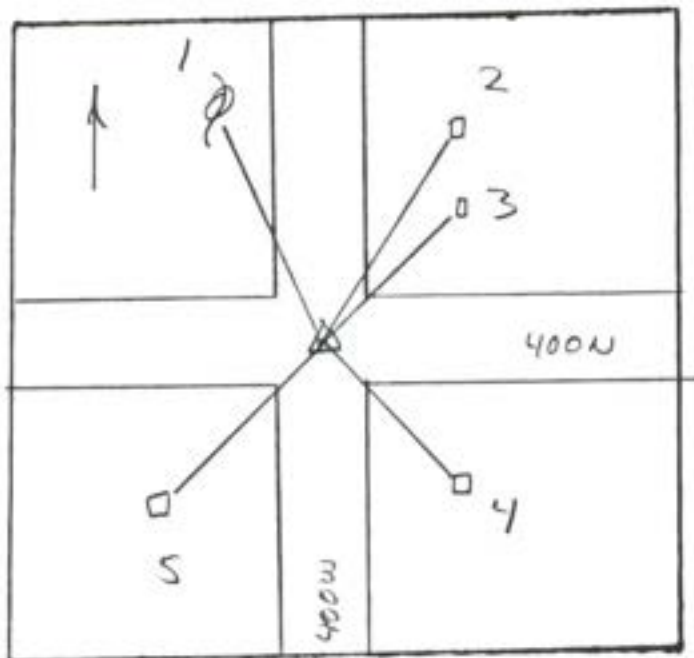


GRAPHIC TIES
(SKETCHED)

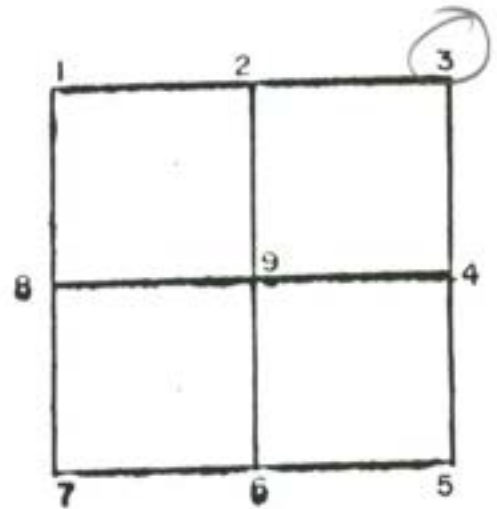

CORNER IDENT. NOT STATED


TIES: 1. 26.10' PWP
 2. 36.45' FP
 3. 38.60' HP
 4. 27.65' HP
 5. 27.00' HP

SEC. 17 TWP. 22 RANGE 4

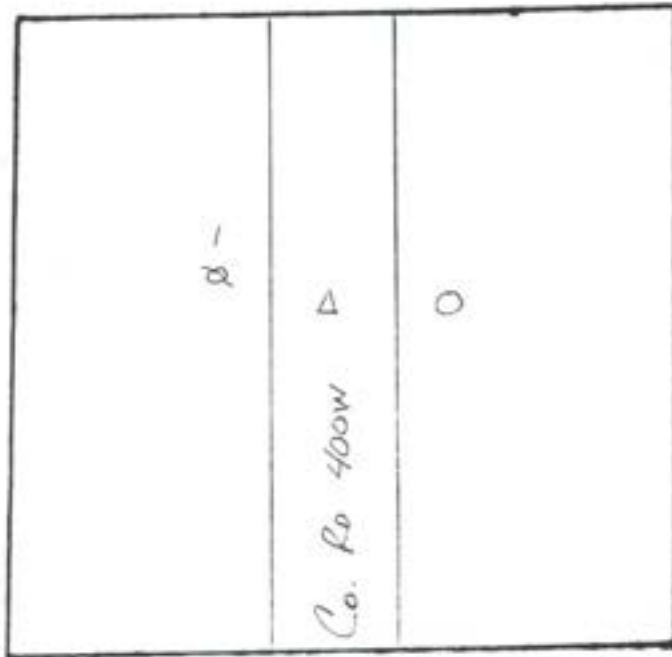

GRAPHIC TIES
(SKETCHED)

SEC 17 TWP 22 RANGE 4

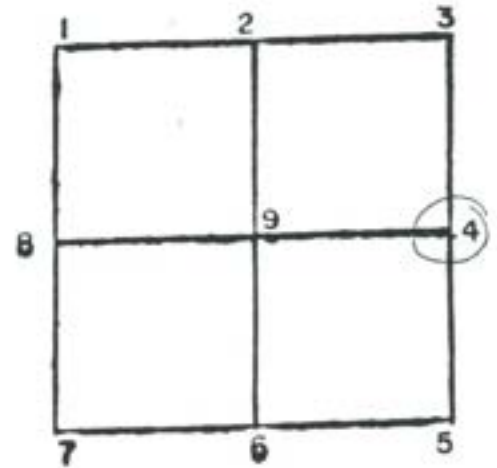


CORNER IDENT. P.K. NAEL


TIES: 1. 64.31 PK NAEL IN POWERPOLE
2. 23.61 PK NAEL IN HEADPOST

SEC 17 TWP 22 RANGE 4

SEC 17 TWP 22 RANGE 4

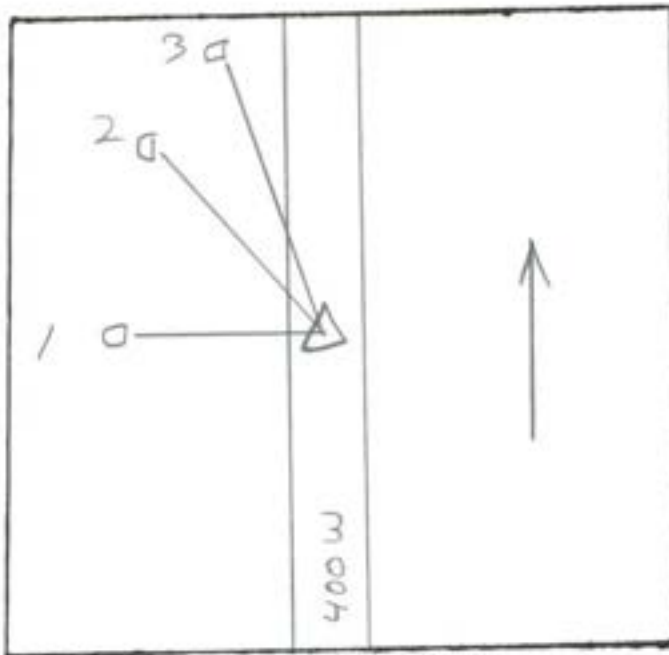

GRAPHIC TIES
(SKETCHED)

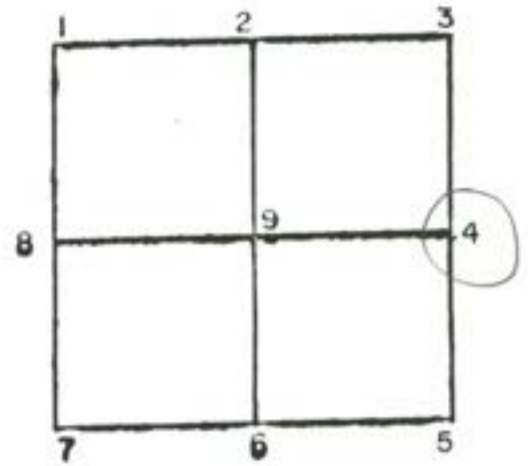

CORNER IDENT. NOT STATED


TIES: 1. 19.60' HP

2. 21.90' FP


3. 33.50' METAL FP

SEC 17 TWP 22 RANGE 4

SEC 17 TWP 22 RANGE 4

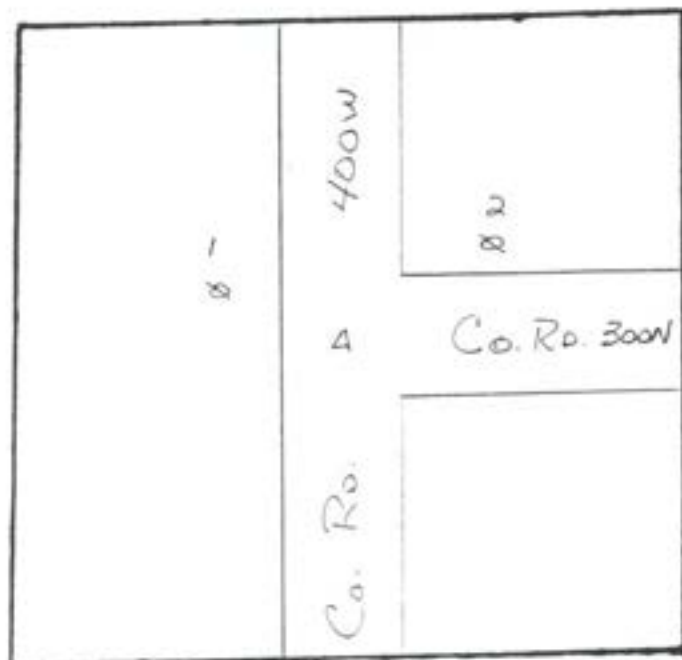

GRAPHIC TIES
(SKETCHED)

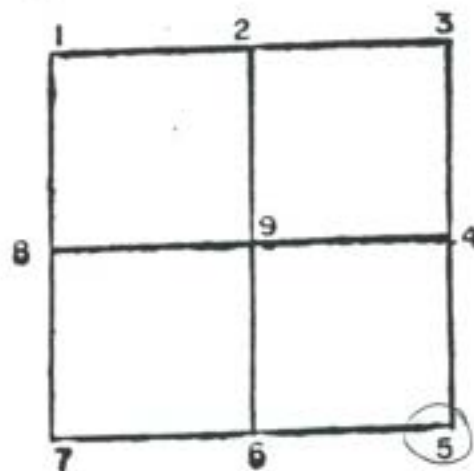


CORNER IDENT. IRON ROD


TIES: 1. 24.38 PK NAIL IN POWER POLE
2. 69.62 PK NAIL IN POWER POLE

SEC 17 TWP 22 RANGE 4

SEC 17 TWP 22 RANGE 4

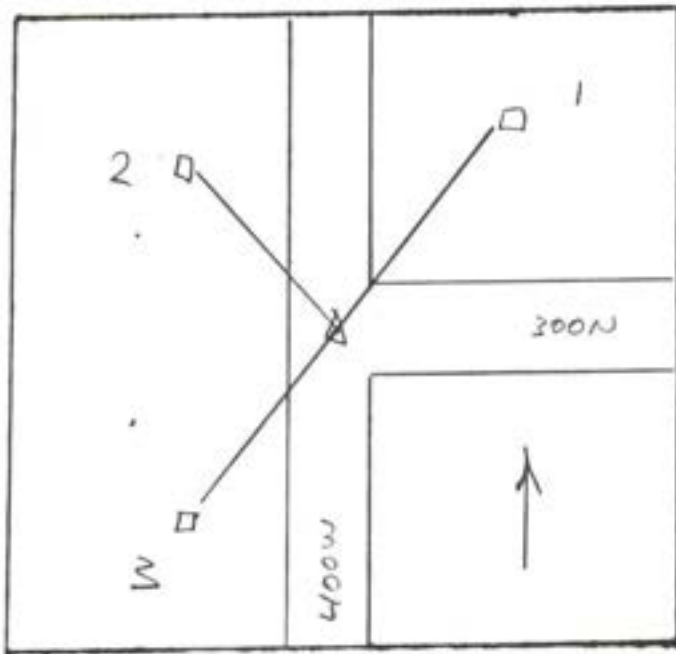


GRAPHIC TIES
(SKETCHED)

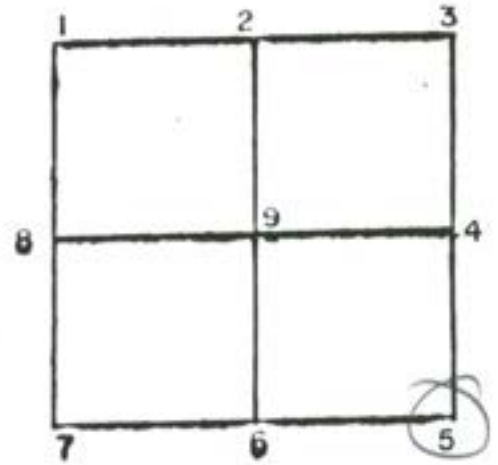


CORNER IDENT. NOT STATED

TIES: 1. 23.45' HP
2. 25.00' HP
3. 26.05' HP

SEC 17 TWP 22 RANGE 4

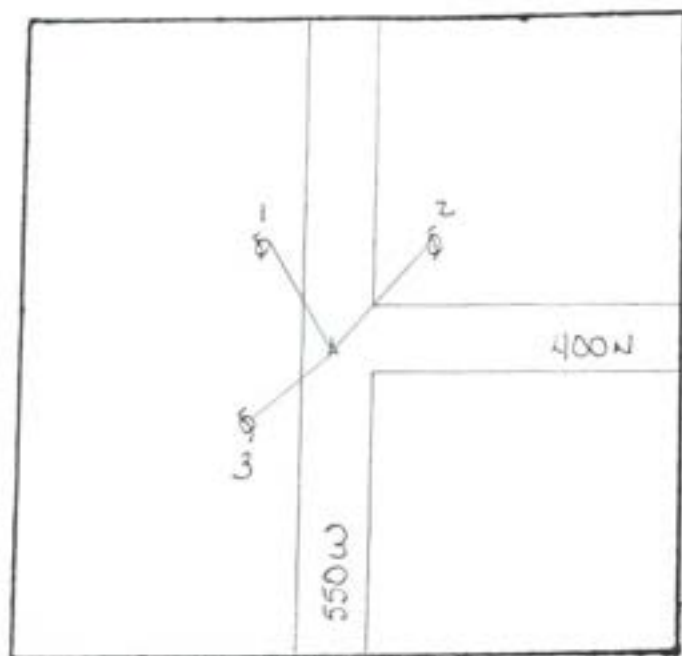

SEC 18 TWP 22 RANGE 4

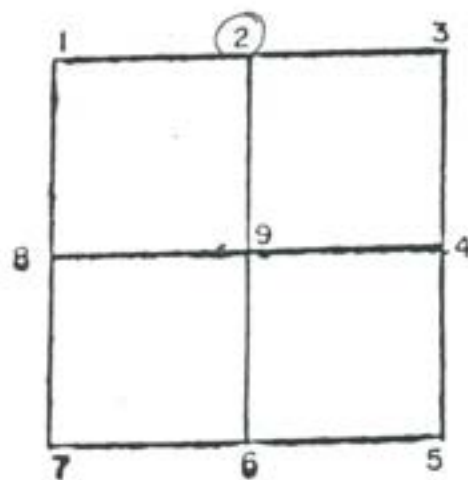


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. NAIL W/ RIBBON 4" deep

- TIES: 1. 37.53' PK NAIL NE FACE PWP
 2. 48.40' PK NAIL + CAP IN PWP
 3. 21.88' PK NAIL IN CAP IN PWP


6/11/01

SEC 18 TWP 22 RANGE 4

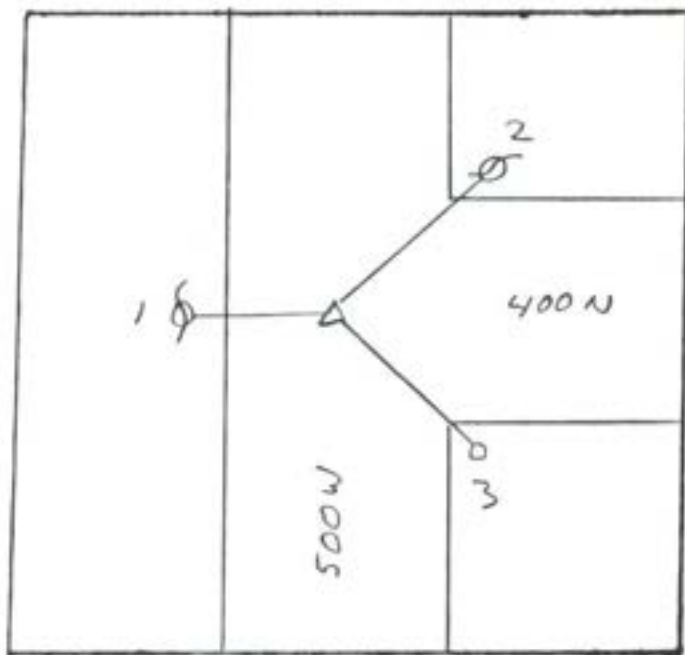

GRAPHIC TIES
(SKETCHED)

SEC 18 TWP 22 RANGE 4

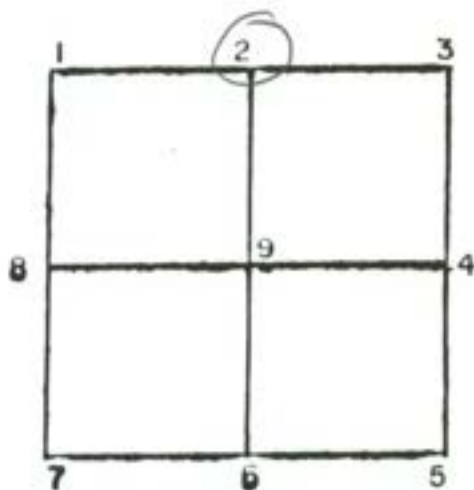

CORNER IDENT. 2

TIES:


1. 19.55' PWP

2. 47.25' PWP


3. 36.23' TELEPHONE PED.

SEC 18 TWP 22 RANGE 4

SEC. 18 TWP 22 RANGE 4

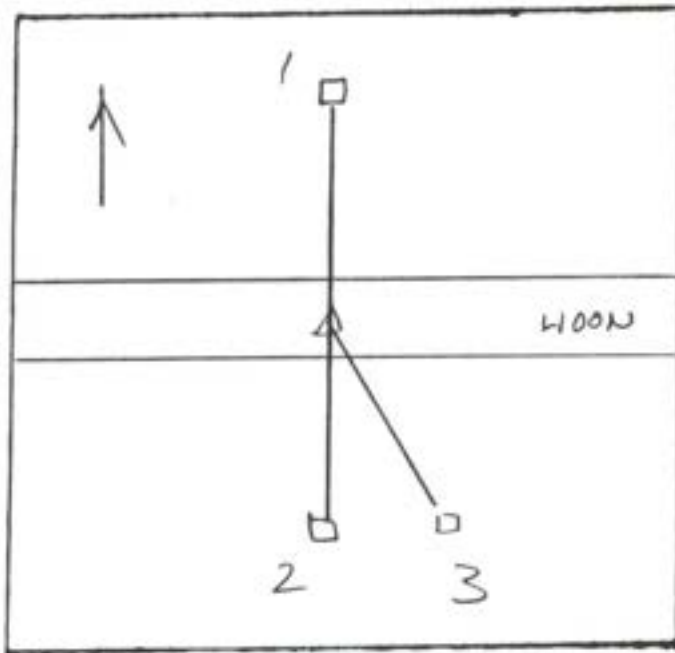

GRAPHIC TIES
(SKETCHED)

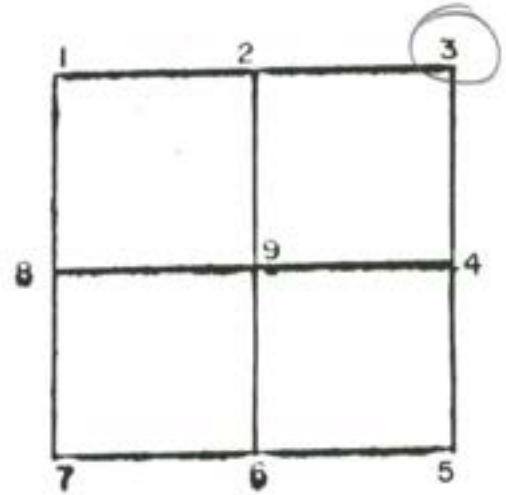


CORNER IDENT. NOT STATED


TIES: 1. 15.60' HP
2. 16.40' HP
3. 18.80' FP

SEC 18 TWP 22 RANGE 4

SEC. 18 TWP. 22 RANGE 4

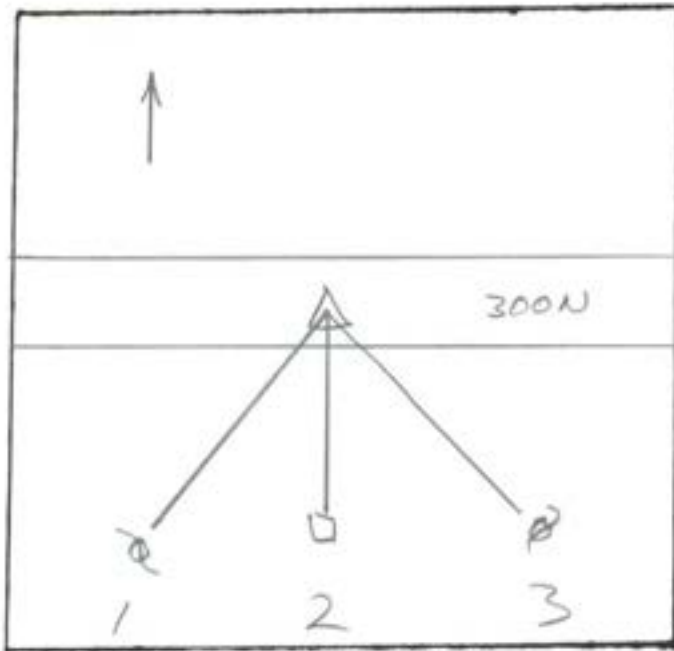

GRAPHIC TIES
(SKETCHED)

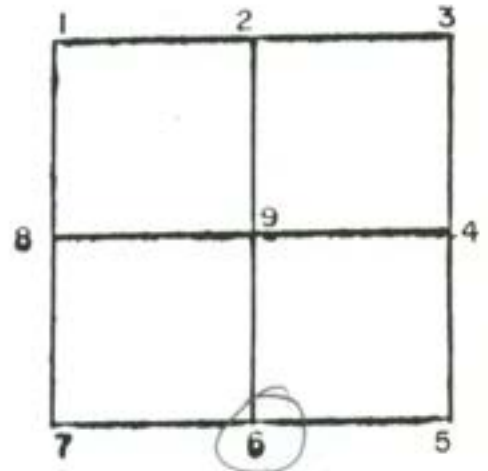

CORNER IDENT. NOT STATED


THIS: 1. 109.30' PWP

2. 19.50' HP


3. 107.00° PWA

SEC 18 TWP 22 RANGE 4

SEC 18 TWP 22 RANGE 4

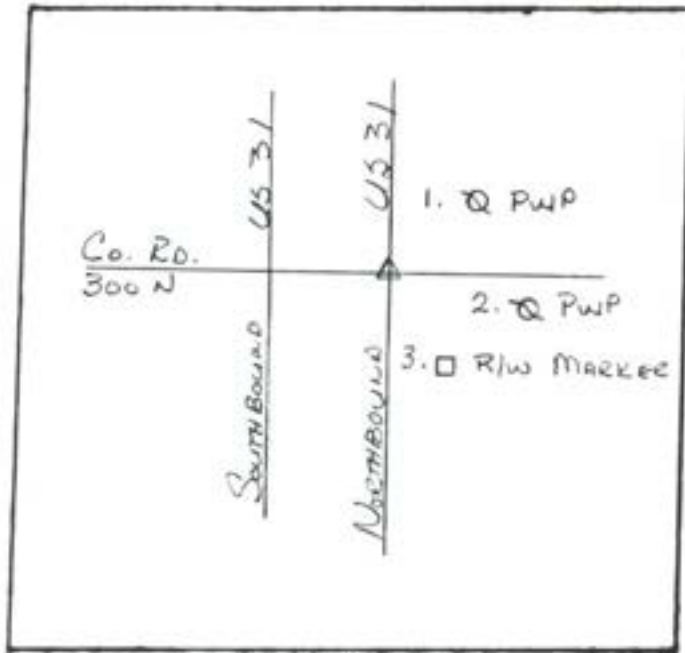

GRAPHIC TIES
(SKETCHED)

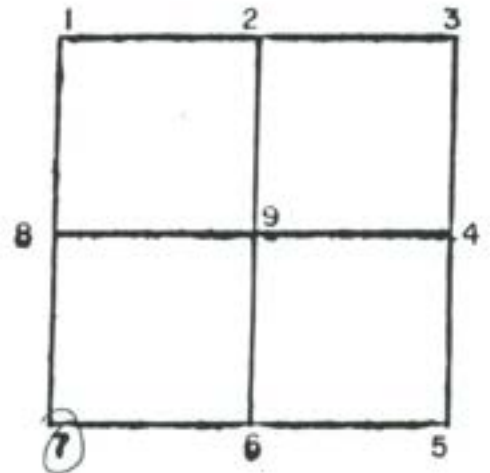


CORNER IDENT. BRASS PLUG


TIES: 1. 88.59' PK NAIL IN NORTHWEST FACE PWP.
2. 125.29' PK NAIL IN NORTH FACE PWP
3. 89.88' NORTHWEST CORNER R/W MARKER

SEC 18 TWP 22 RANGE 4

SEC 18 TWP 22 RANGE 4

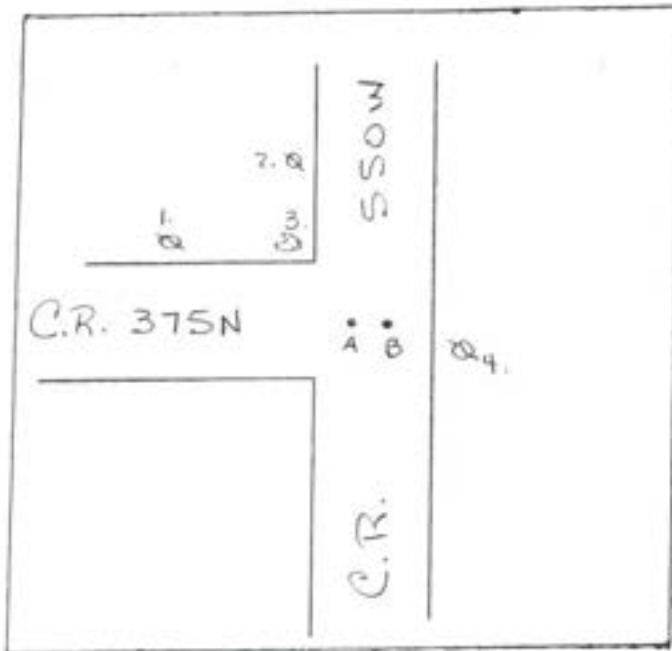

GRAPHIC TIES
(SKETCHED)

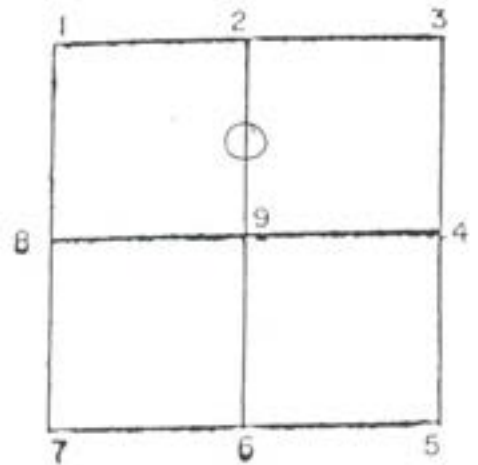

CORNER IDENT. 2 IRON RODS FOUND


TIES: A.

1. 55.65' - P.K. NAIL IN SOUTH FACE PWP
2. 56.78' - P.K. NAIL IN EAST FACE PWP
3. 25.94 - HIGH POINT ON ROCK
4. 19.68 - P.K. NAIL IN SOUTH FACE PWP

B.


1. 61.00' - P.K. NAIL IN SOUTH FACE PWP
2. 58.60' - P.K. NAIL IN EAST FACE PWP
3. 30.09 - HIGH POINT ON ROCK
4. 14.44 - P.K. NAIL IN SOUTH FACE PWP

SEC 18 TWP 22 RANGE 4

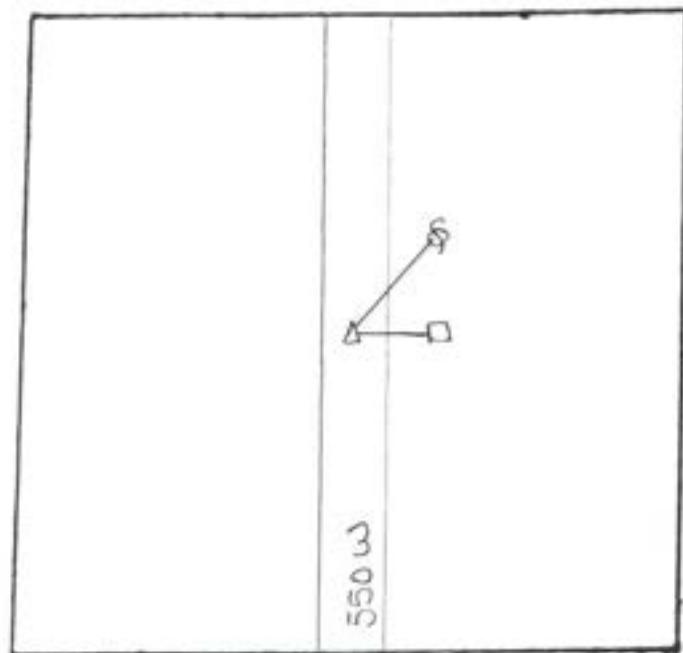

GRAPHIC TIES
(SKETCHED)

SEC. 18 TWP. 22 RANGE 4

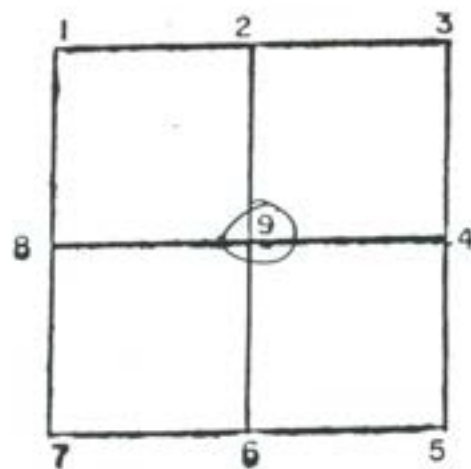

CORNER IDENT. SET 36" x 3/4" cedar

TIES: 1. 26.84' PWP
2. 17.73' HP


SET BY: D.J. MINOR RLS

LS 295008

6/11/01


SEC. 18 TWP. 22 RANGE 4

6/11/01

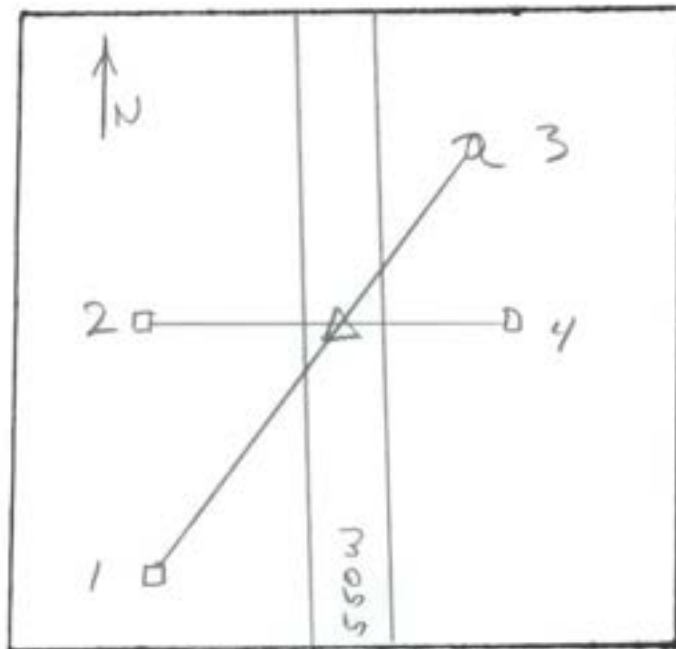

GRAPHIC TIES
(SKETCHED)

SEC. 18 TWP. 22 RANGE 4

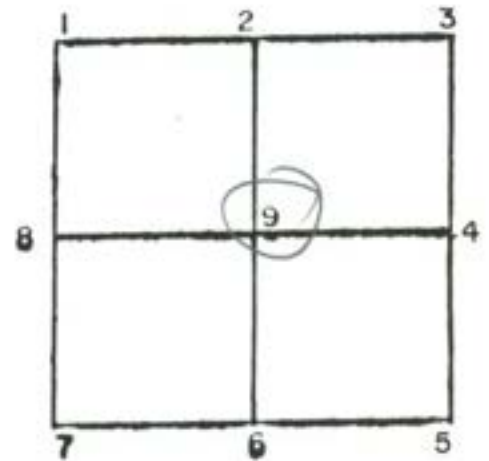


CORNER IDENT. 9 STONE FND 12" ↓ SURFACE


- TIES:
- 1. 18.88' - HEAD POST
 - 2. 16.75' - HEAD POST
 - 3. 26.84' PWP
 - 4. 17.73' HEAD POST
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -
 -

SEC. 18 TWP. 22 RANGE 4

SEC. 18 TWP. 22 RANGE 4
6/2000

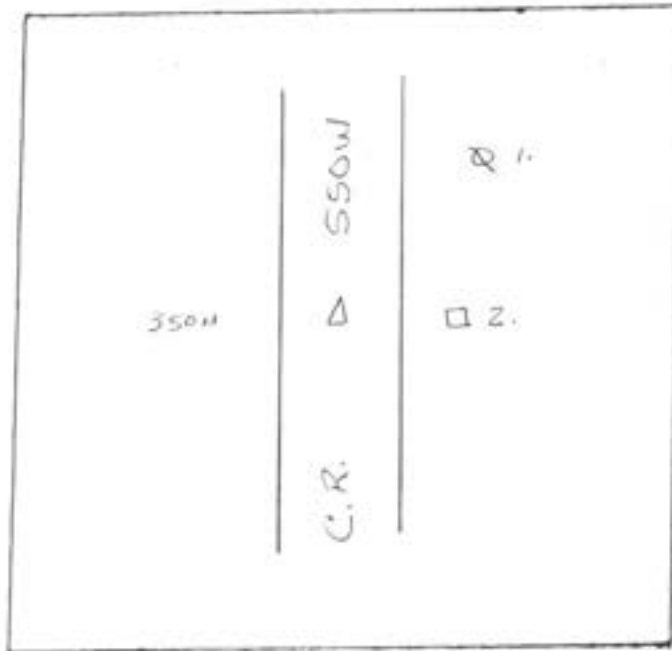

GRAPHIC TIES
(SKETCHED)

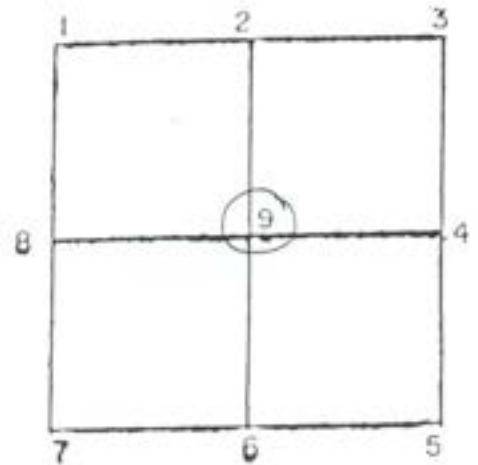


CORNER IDENT. STONE w/*x" FOUND 6" DEEP


TIES: 1. 26.91 - P.R. NAIL IN WEST FACE PWP.
2. 17.77 - " " " " " HEAD POST

SEC. 18 TWP. 22 RANGE 4

SEC 19 TWP 22 RANGE 4

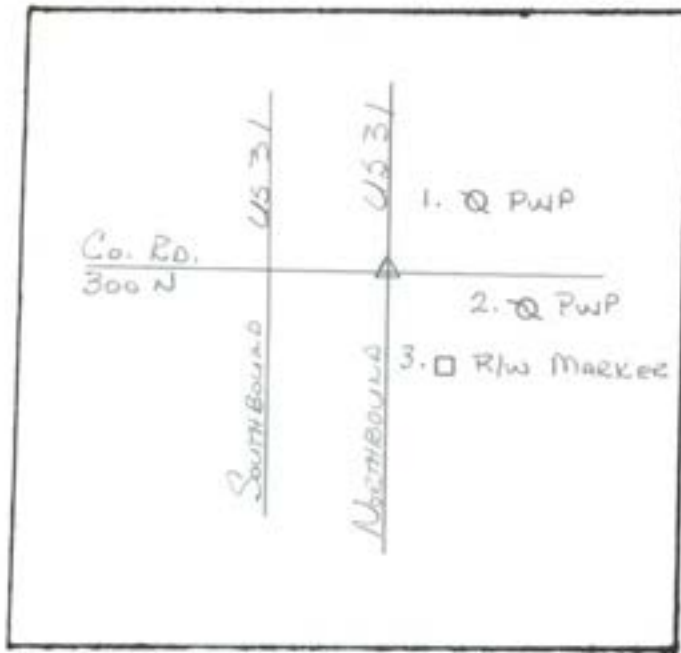

GRAPHIC TIES
(SKETCHED)

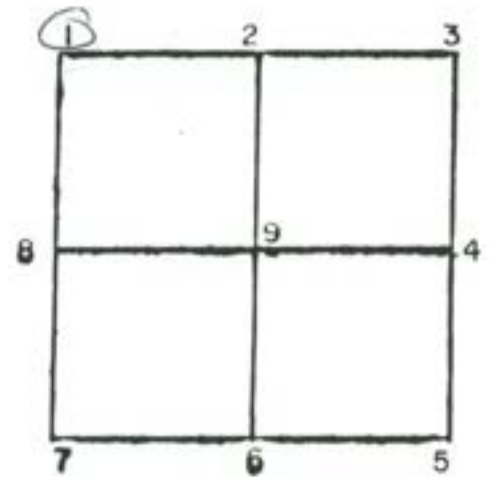


CORNER IDENT. BRASS Plug


TIES: 1. 88.59' PK NAIL IN NORTHWEST FACE PWP.
2. 125.29' PK NAIL IN NORTH FACE PWP
3. 89.88' NORTHWEST CORNER R/W MARKER

SEC 19 TWP 22 RANGE 4

SEC. 19 TWP. 22 RANGE 4

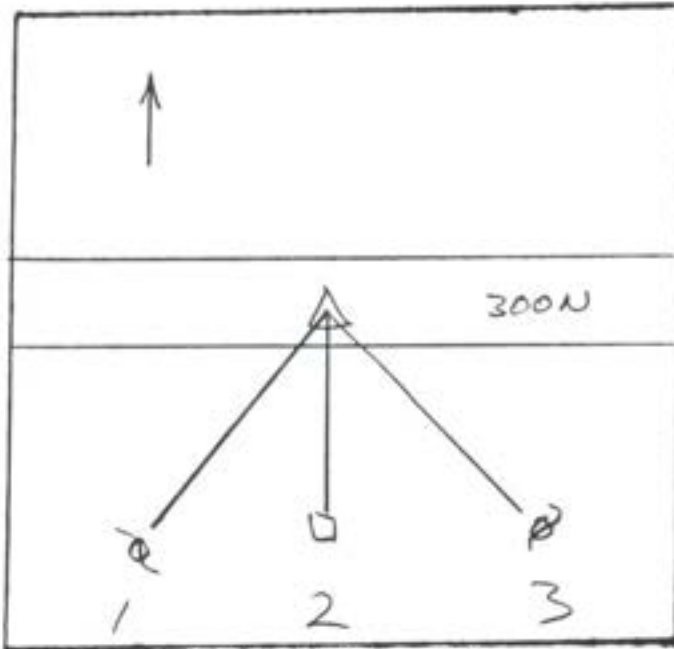

GRAPHIC TIES
(SKETCHED)

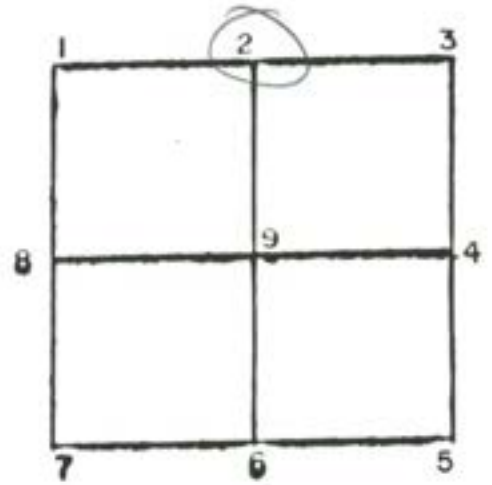

CORNER IDENT. NOT STATED


TIME: 1. 109.30' PWP

2. 19.50' HP


3. 107.00° PWA

SEC 19 TWP 22 RANGE 4

SEC. 19 TWP. 22 RANGE 4

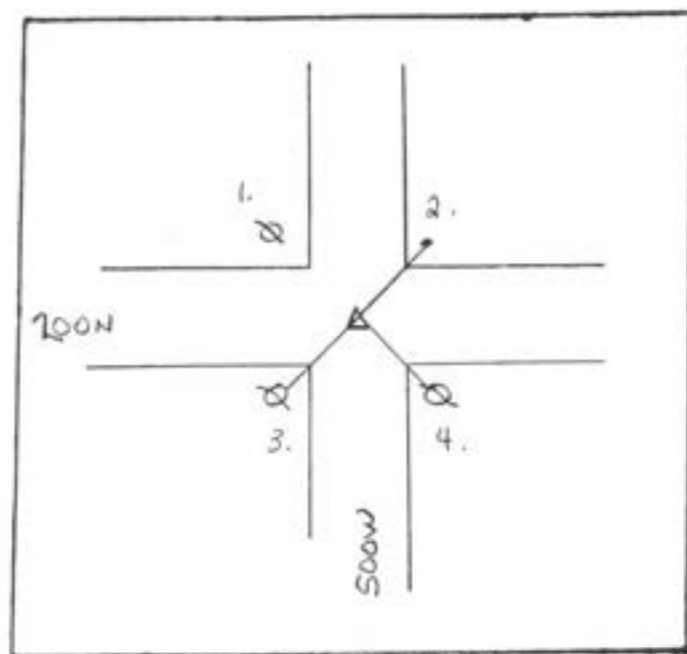

GRAPHIC TIES
(SKETCHED)

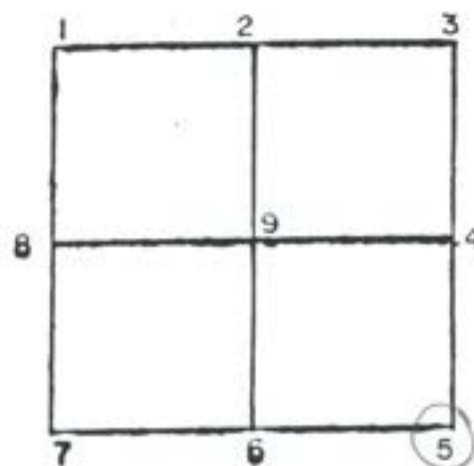

CORNER IDENT. IRON ROD

TIME: 1. —


2. 28.54' 5/8" IRON ROD

3. 27.28' P.K. NAIL IN DWP


4. 31.44' P.K. NAEL IN PWP

SEC 19 TWP 22 RANGE 4

SEC 19 TWP 22 RANGE 4

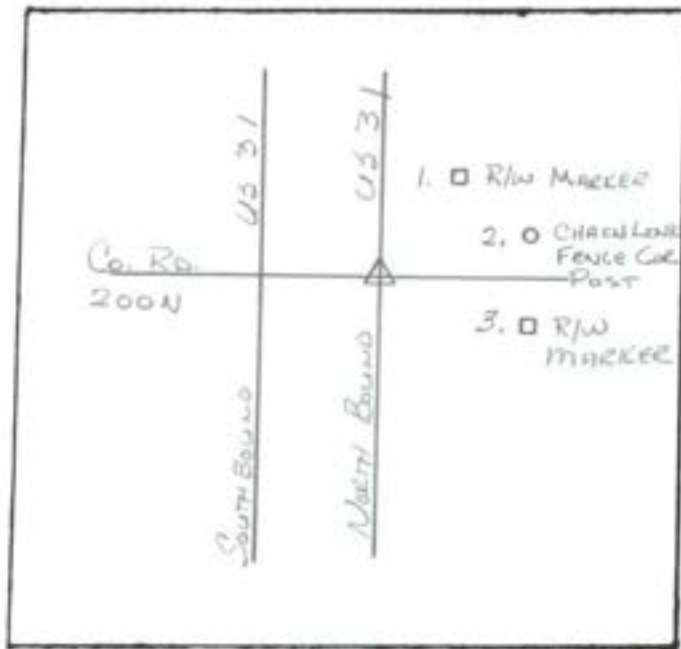

GRAPHIC TIES
(SKETCHED)

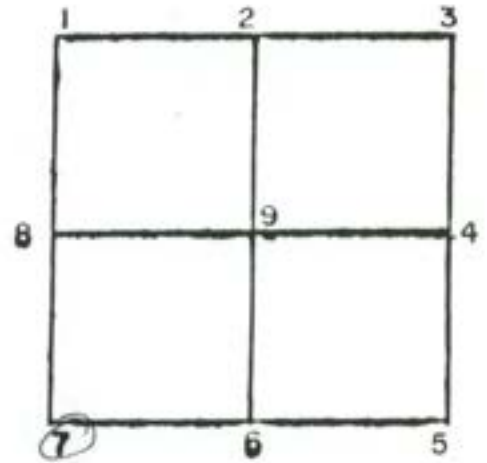


CORNER IDENT. IRON PIN


TIES: 1. 97.50' SOUTHWEST CORNER R/W MARKER
 2. 116.87' SOUTH FACE CHAIN LINK FENCE CORNER POST
 3. 116.07' NORTHWEST CORNER R/W MARKER

SEC 19 TWP 22 RANGE 4

SEC 19 TWP 22 RANGE 4

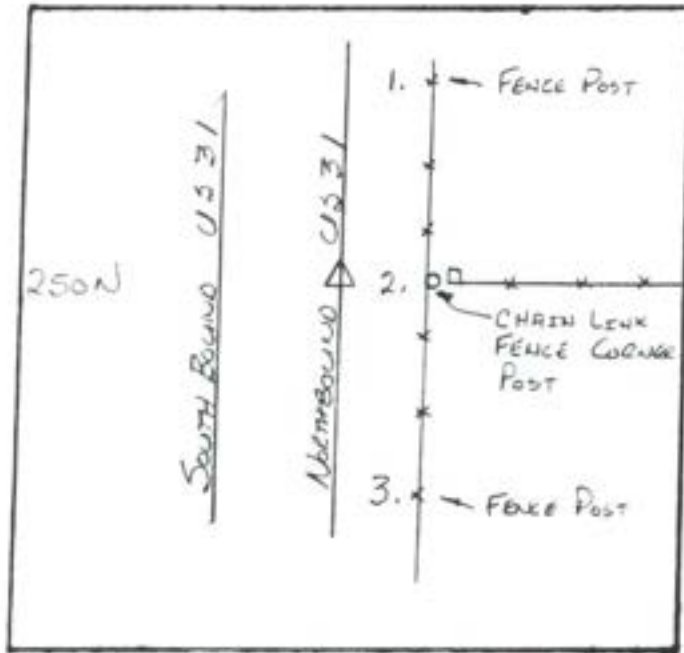

GRAPHIC TIES
(SKETCHED)

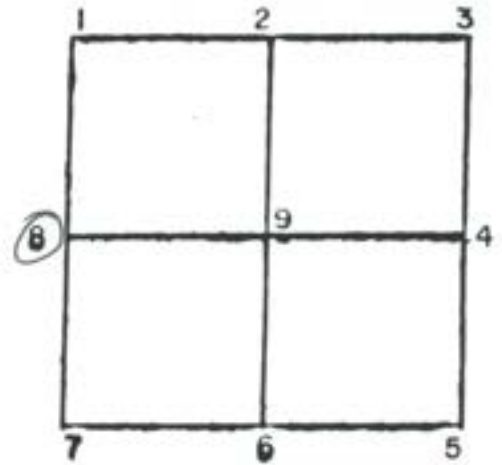


CORNER IDENT. IRON P.D.


TIES: 1. 69.00' E WEST FACE 3RD POST NORTH OF CORNER POST
2. 49.56' WEST FACE CHAIN LINK FENCE CORNER POST
3. 61.85' E WEST FACE 3RD POST SOUTH OF CORNER POST

SEC 19 TWP 22 RANGE 4

SEC 20 TWP 22 RANGE 4

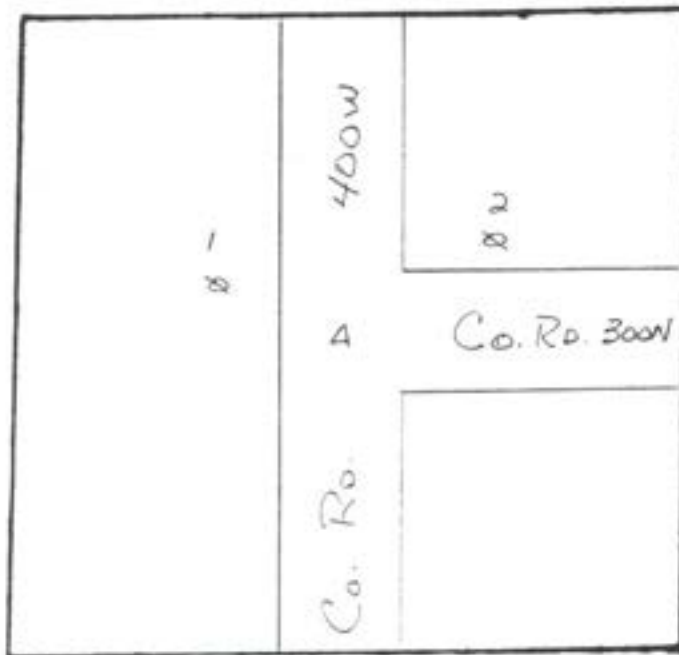

GRAPHIC TIES
(SKETCHED)

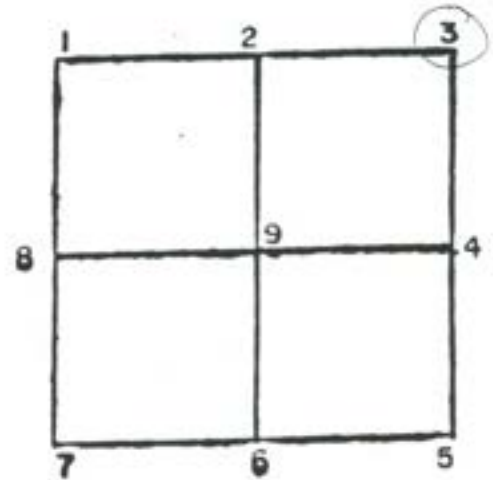


CORNER IDENT. IRON ROD


TIES: 1. 24.38 PK NAIL IN POWER POLE
2. 69.62 PK NAIL IN POWER POLE

SEC 20 TWP 22 RANGE 4

SEC. 20 TWP 22 RANGE 4

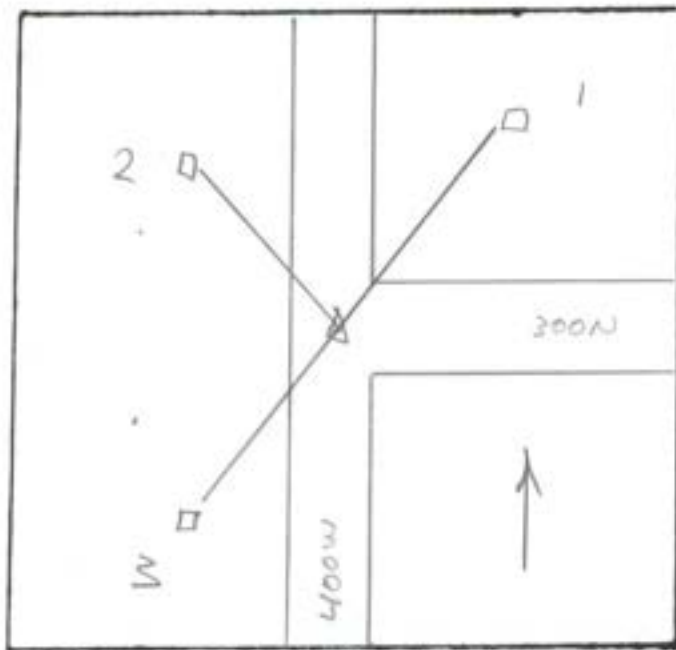

GRAPHIC TIES
(SKETCHED)

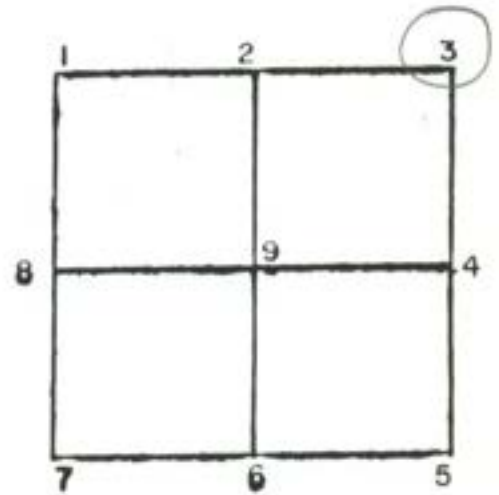

CORNER IDENT. NOT STATED

TIME:	1. 23.45'	HP
	2. 25.00'	HP
	3. 26.05'	HP

SEC 20 TWP 22 RANGE 4

Q2	400W	
Co. Ro	Δ	200N
1 □	Co. Ro.	Q3

TIME: 1. 29.29 P.K. NAIL IN HEADPOST

2. 29.01 P.K. NAEL EN POWER POLE . .



3. 5/12 PK. NAIL IN POWERPOLE

SEC 20 TWP 22 RANGE 4

REFERENCE SHEET

SECTION 20 TOWNSHIP 22 RANGE 4 EAST

DATE OF RECOVERY FEBRUARY 4, 2002

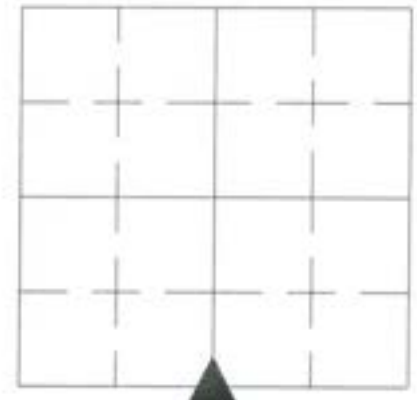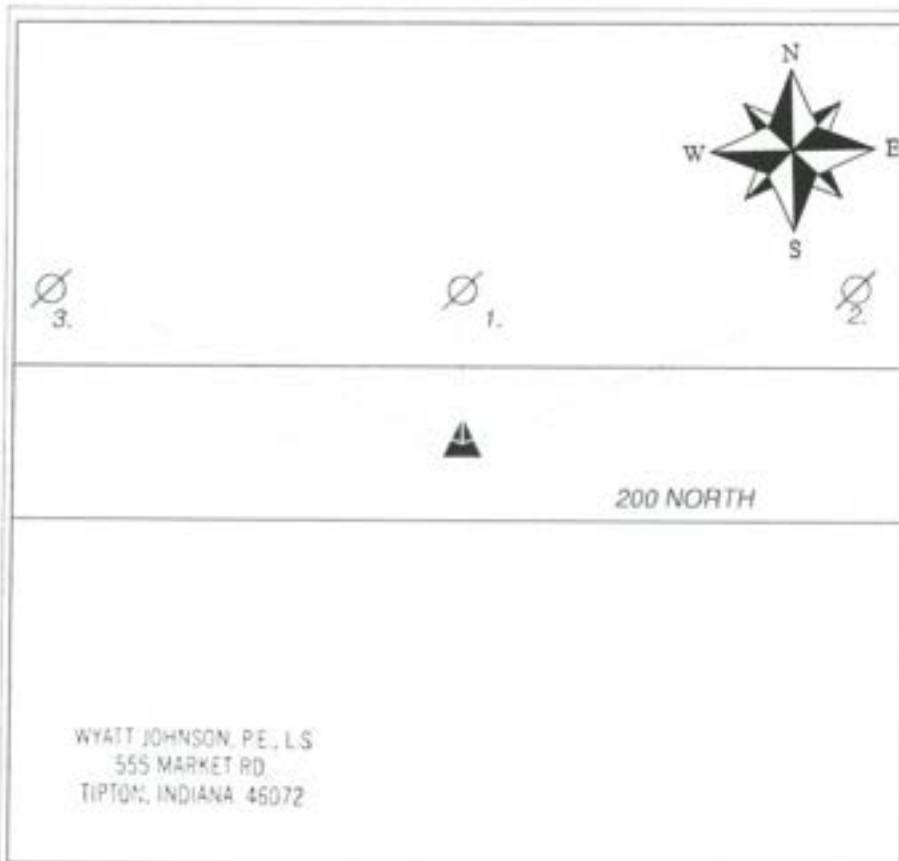

INDIANA COORDINATE SYSTEM
OBSERVATION DATE: _____

CREW: _____

NORTH: _____ EAST: _____

ELEVATION: _____

SURFACE SCALE FACTOR: _____

LATITUDE: _____

LONGITUDE: _____

ELLIPSOID HEIGHT: _____

PARTY CHIEF: ROD KELLY

CREW: ROD KELLY, JARED HENRY


TYPE OF MARKER IDENTIFIED: 1" IRON ROD

HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO REFERENCES IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT. WE DID FIND A PK NAIL IN THE POWERPOLE TO THE NORTH. OUR RECORD INDICATES THE IRON ROD WAS USED BY US IN A PREVIOUS SURVEY. THE ROD WAS FOUND 0.40' BELOW THE SURFACE OF A CHIP AND SEALED ROAD.

REFERENCE	DISTANCE	DESCRIPTION	FOUND	SET
1.	20.44'	PK NAIL IN POWERPOLE	☒	☐
2.	141.23'	MAG NAIL WITH I.D. WASHER IN POWERPOLE	☐	☒
2.	123.97'	MAG NAIL WITH I.D. WASHER IN POWERPOLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐

SEC 21 TWP 22 RANGE 4

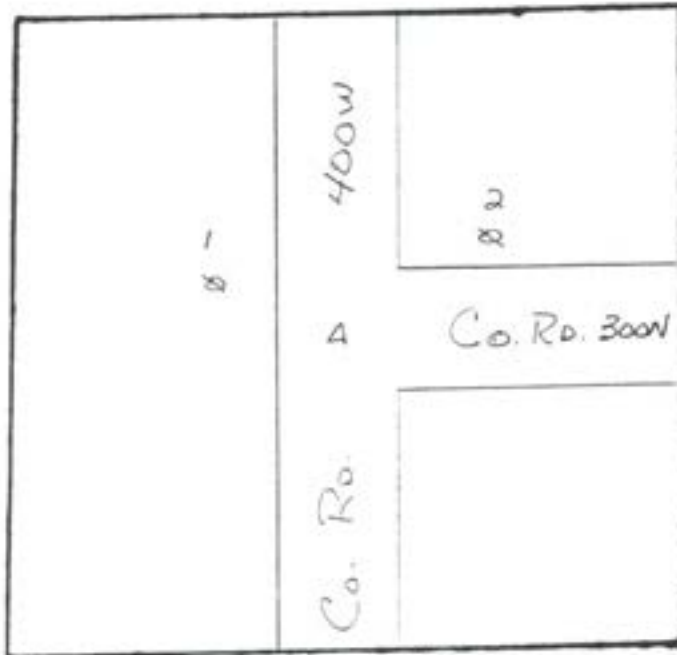

GRAPHIC TIES
(SKETCHED)

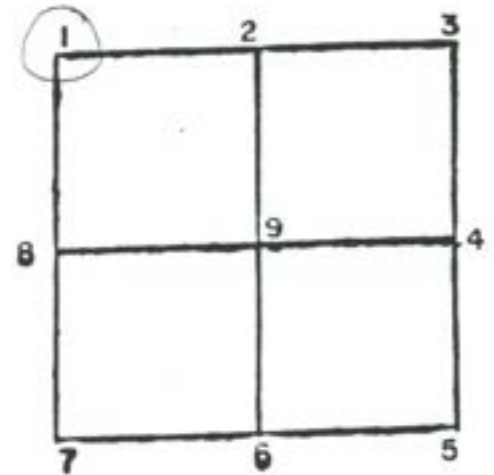


CORNER IDENT. IRON ROD


TIES: 1. 24.38 PK NAIL IN POWER POLE
2. 69.62 PK NAIL IN POWER POLE

SEC 21 TWP 22 RANGE 4

SEC 21 TWP 22 RANGE 4

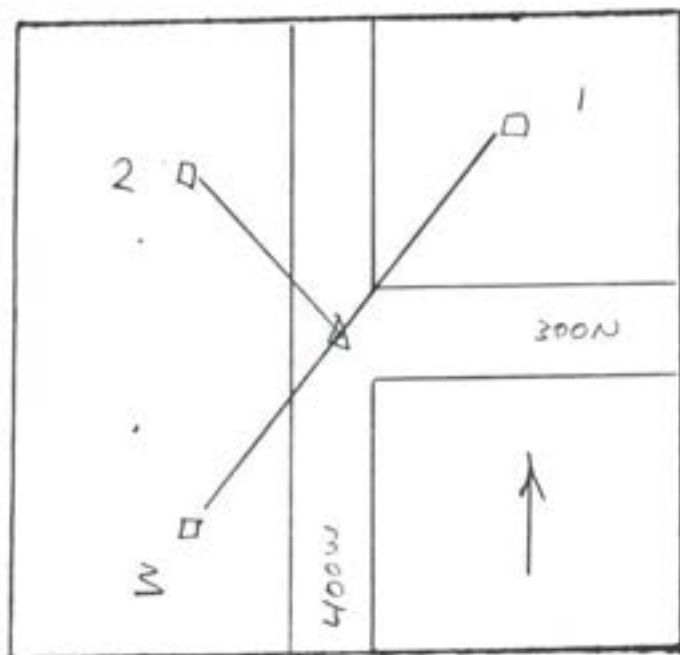


GRAPHIC TIES
(SKETCHED)

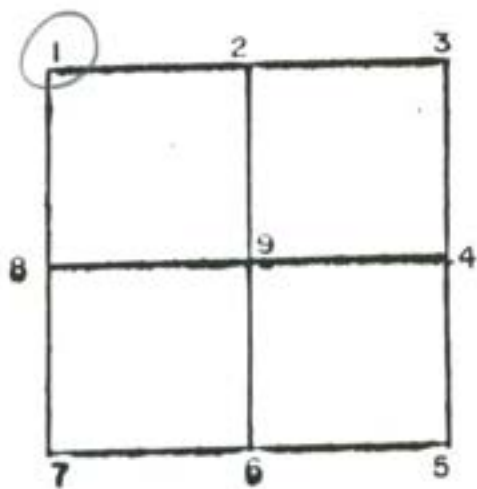

CORNER IDENT. NOT STATED

TIES: 1. 23.45' HP
2. 25.00' HP
3. 26.05' HP


SEC 21 TWP 22 RANGE 4

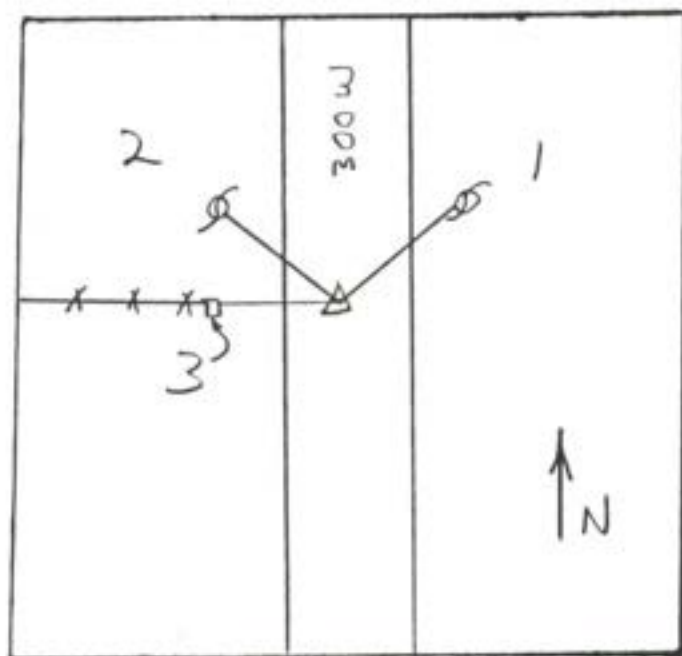

GRAPHIC TIES
(SKETCHED)

SEC. 21 TWP 22 RANGE 4


NOVEMBER 1983

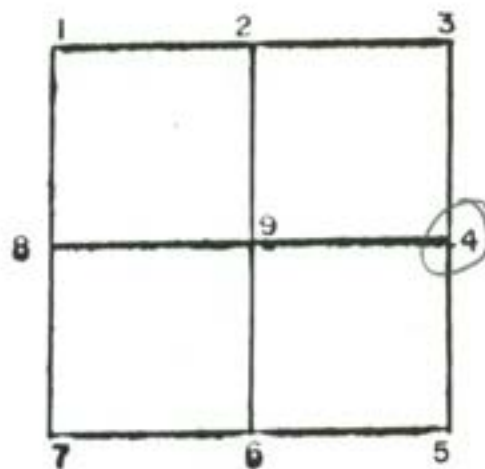

CORNER IDENT. 4 3/4" IRON ROD 2" BELOW SURFACE

- TIES:
- | | | |
|----|------|---------------|
| 1. | 34.7 | PK - PWP |
| 2. | 38.3 | PK - PWP |
| 3. | 18.7 | PK - HEADPOST |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |


SEC. 21 TWP 22 RANGE 4

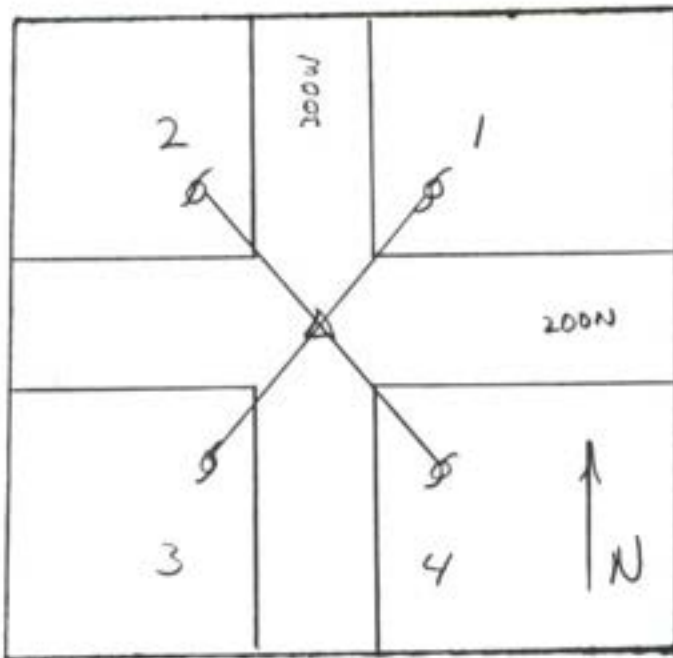

GRAPHIC TIES
(SKETCHED)

SEC 21 TWP 22 RANGE 4


NOVEMBER 1983

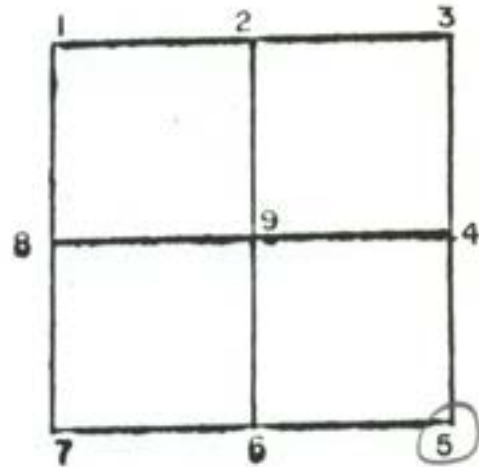

CORNER IDENT. 5 FND STONE W/X 3" BELOW SURFACE

TIME	DEPTH	REMARKS
1.	61.2'	PK - PWP
2.	42.45'	PK - PWP
3.	27.25'	PK - PWP
4.	62.15'	PK - PWP


SEC 21 TWP 22 RANGE 4

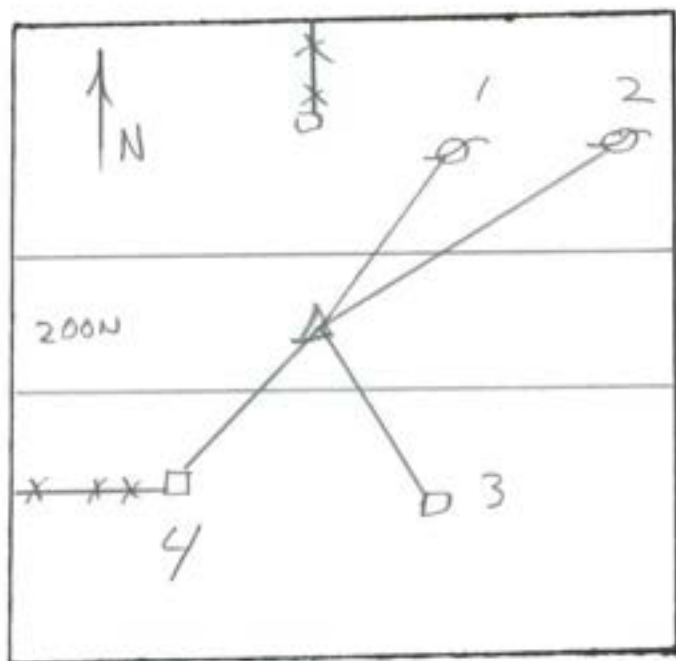

GRAPHIC TIES
(SKETCHED)

SEC. 21 TWP. 22 RANGE 4

NOVEMBER 1983

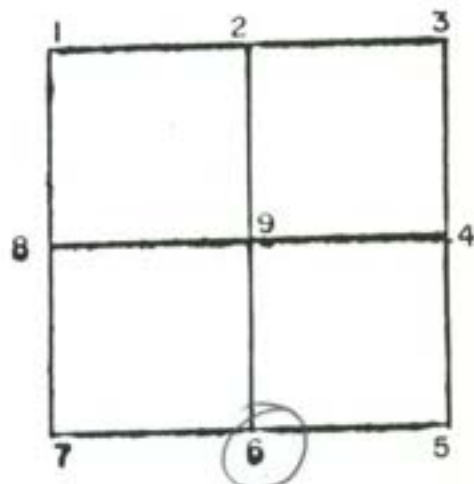

CORNER IDENT. 6 STONE 6" DEEP



TIES: 1. 19.0' PK - PWP
2. 125.55' PK - PWP
3. 34.75' PK - HEADPOST
4. 23.30' PK - HEADPOST

SEC. 21 TWP. 22 RANGE 4

REFERENCE SHEET

SECTION 21 TOWNSHIP 21 RANGE 4 EAST

DATE OF RECOVERY FEBRUARY 7, 2002

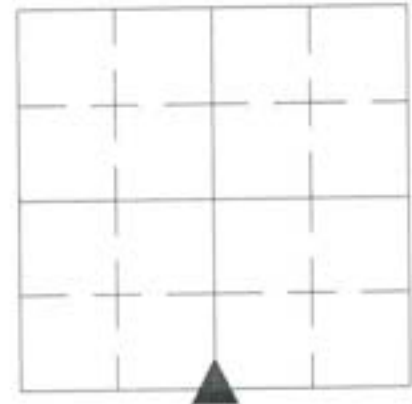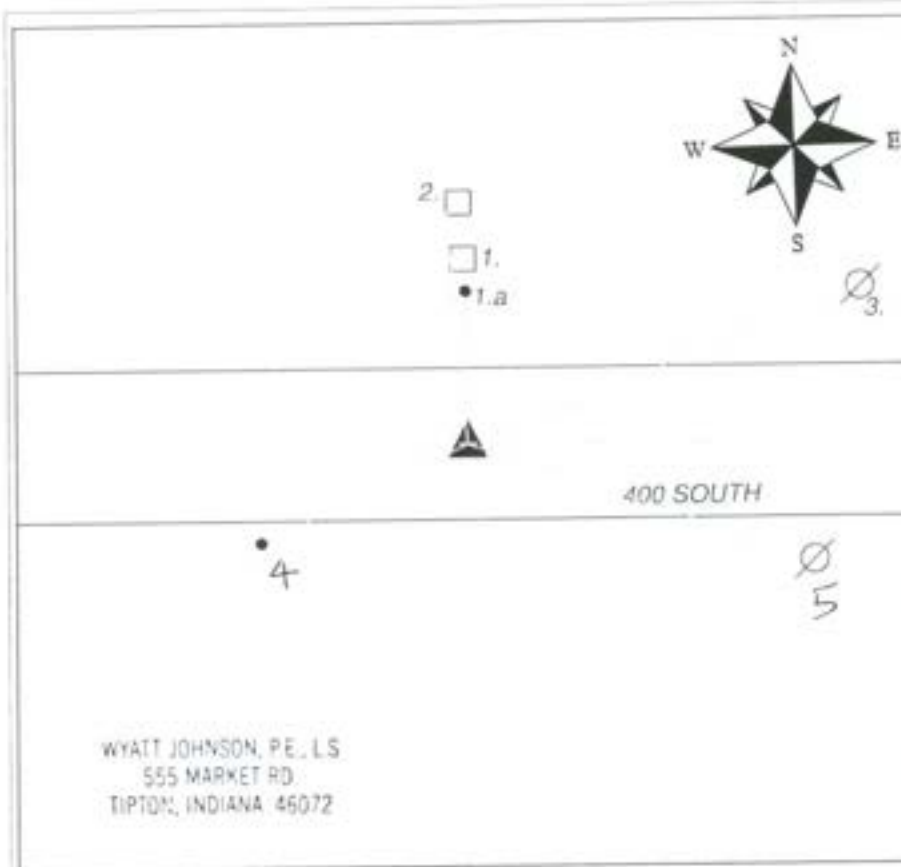

INDIANA COORDINATE SYSTEM
OBSERVATION DATE: _____
CREW: _____
NORTH: _____ EAST: _____
ELEVATION: _____
SURFACE SCALE FACTOR: _____
LATITUDE: _____
LONGITUDE: _____
ELLIPSOID HEIGHT: _____


PARTY CHIEF: ROD KELLY
CREW: ROD KELLY, JARED HENRY

TYPE OF MARKER IDENTIFIED: STONE FOUND
HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO REFERENCES IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT. I FOUND A DEED THAT HAD A LEGAL DESCRIPTION PREPARED BY R.E. MITCHELL THAT REFERENCED A STONE AT THIS CORNER. THE STONE WAS FOUND 1.2' BELOW THE SURFACE OF A CHIP AND SEALED ROAD WITH A DISTINGUISHED HIGH POINT. A 5/8" DIAMETER ROD WAS SET ON THE SOUTH SIDE OF THE STONE FOR THE PURPOSE OF LOCATING THE MONUMENT AT ANOTHER TIME.

REFERENCE	DISTANCE	DESCRIPTION	FOUND	SET
1.	19.94'	PK NAIL IN SE CORNER OF POST	☒	☐
1.a	19.75'	ALUM. CAPPED IRON ROD (R.E.MITCHELL) NEXT TO POST	☒	☐
2.	24.15'	MAG NAIL WITH I.D. WASHER IN POST	☐	☒
3.	55.30'	MAG NAIL WITH I.D. WASHER IN POWERPOLE	☐	☒
4.	18.22'	IRON ROD (REBAR) 1' SOUTH OF EDGE OF ROAD	☐	☒
5.	51.36'	MAG NAIL WITH I.D. WASHER IN CUT OFF POWERPOLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐

SEC 21 TWP 22 RANGE 4

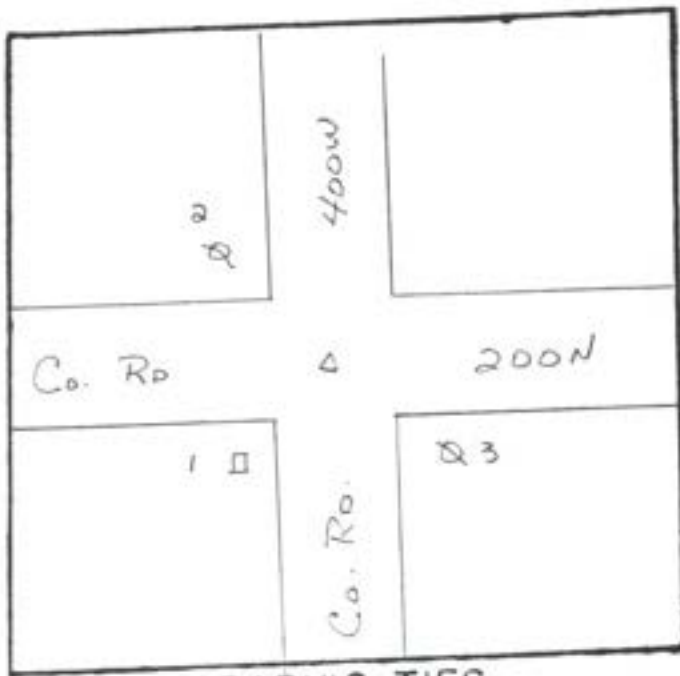


GRAPHIC TIES
(SKETCHED)

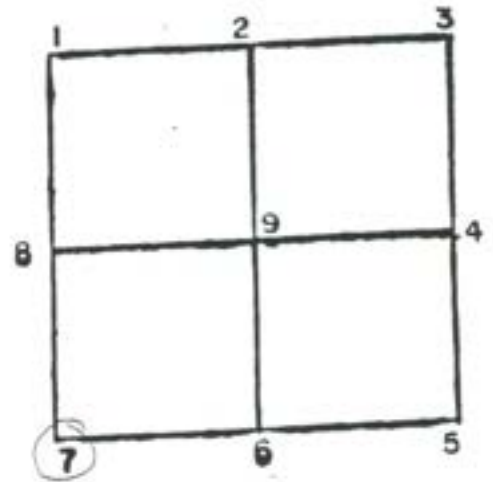

CORNER IDENT. IRON ROD


TIES: 1. 29.29 P.K. NAIL IN HEADPOST
 2. 29.01 P.K. NAIL IN POWERPOLE
 3. 51.12 P.K. NAIL IN POWERPOLE

SEC 21 TWP 22 RANGE 4

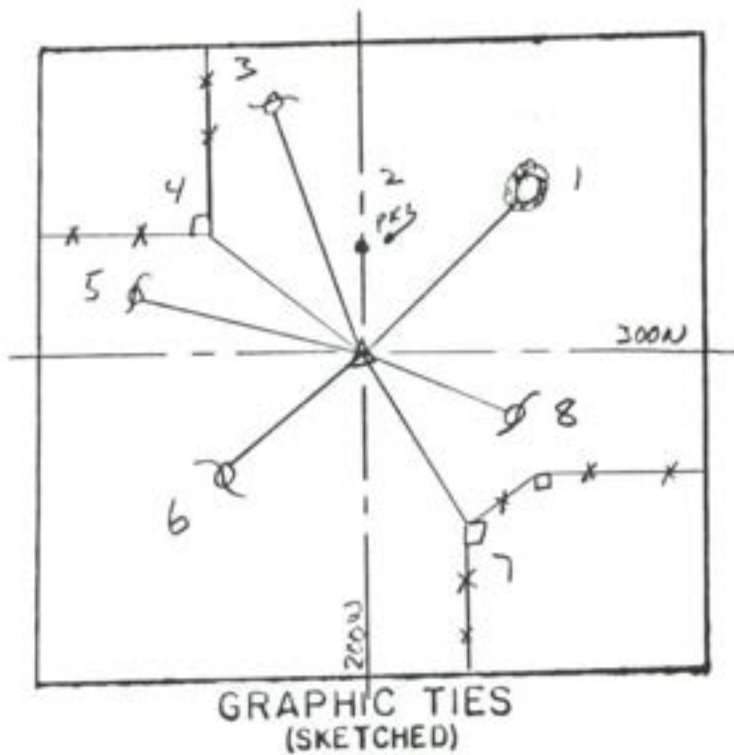

SEC 22 TWP 22 RANGE 4

4-15-1980

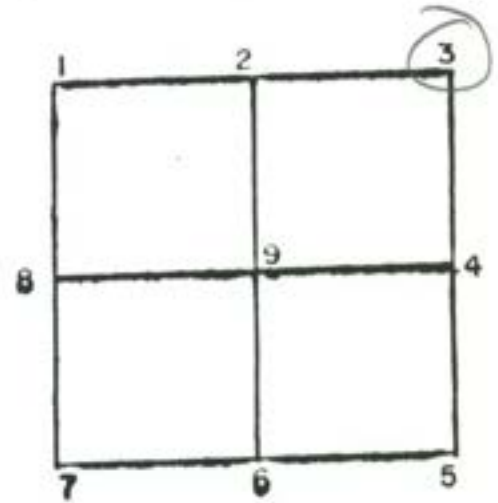


CORNER IDENT. 3 STONE W/POINT

- TIES:
1. 67.60' PK - 24" MAPLE TREE
 2. 15.36' PK - E OF RD. 200W N OF STONE
 3. 33.22' PK - PWP
 4. 31.33' PK - CORNER POST
 5. 59.21' PK - PWP
 6. 27.06' PK - PWP
 7. 53.87' PK - CORNER POST
 8. 43.72' PK - PWP

F.B. 150 P. 16


SEC 22 TWP 22 RANGE 4

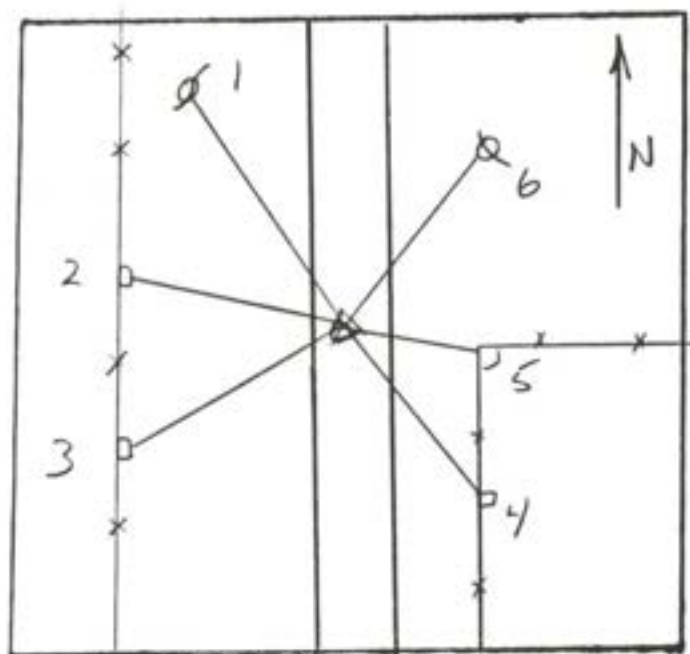

GRAPHIC TIES
(SKETCHED)

SEC 22 TWP 22 RANGE 4

4-18-1980

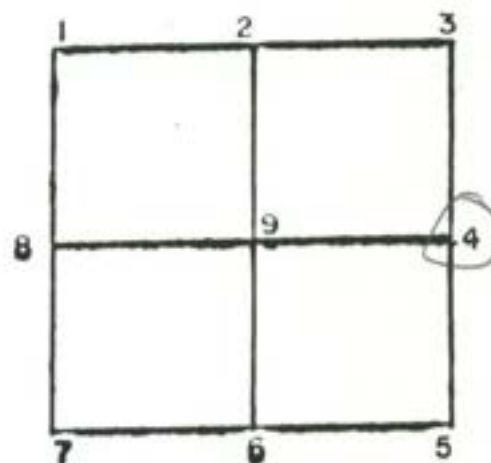


CORNER IDENT. RR SPIKE SET

TIES: 1. 50.75' PK - PWP
2. 22.62' PK - FENCEPOST
3. 22.26' PK - FENCEPOST
4. 48.70' PK - FENCEPOST
5. 20.72' PK - CORNER POST
6. 32.50' PK - PWP

F.B. 150 P. 23


SEC 22 TWP 22 RANGE 4

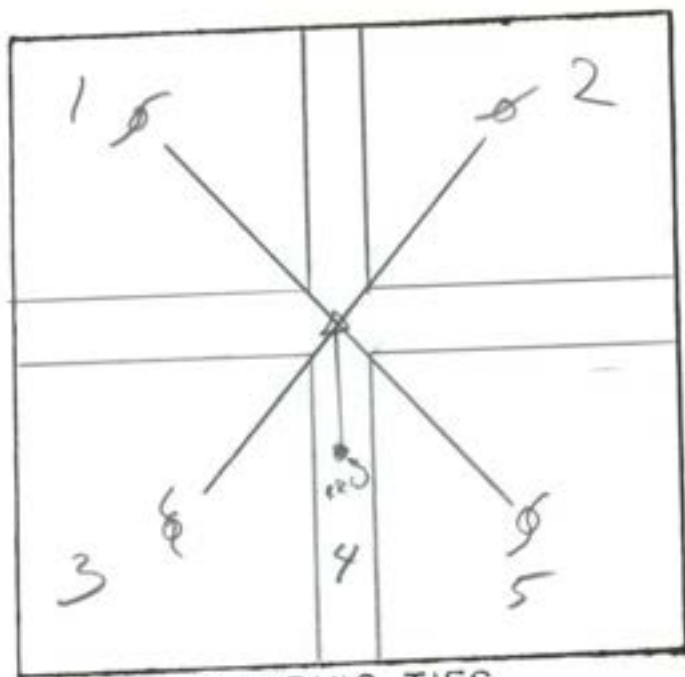

GRAPHIC TIES
(SKETCHED)

SEC. 22 TWP. 22 RANGE 4

4-23-1980

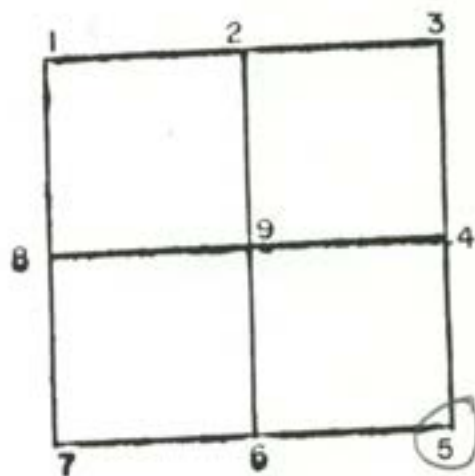

CORNER IDENT. 5 STONE FND 1.6' DEEP W/X

TIES:

1. 66.33' PK - PWP

2. 51.49' PK - PWP

3. 39.22' PK - PWP

4. 1.41' RR SPIKE - RR SPIKE E OF RD. 200W


5. 54.79' PK - PWP

F.B. 150 P. 24

SEC 22 TWP 22 RANGE 4




NOVEMBER 1983

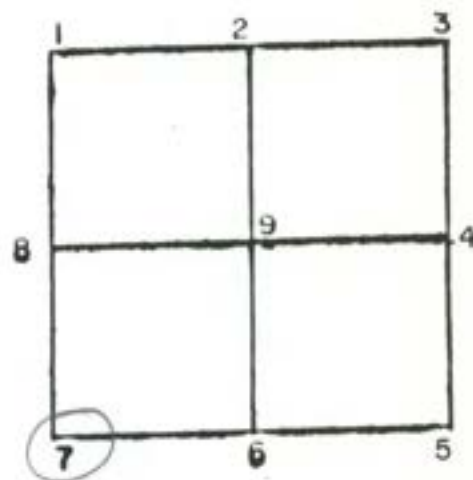

TIME	PK	PWP
1.	61.2'	PK - PWP
2.	42.45'	PK - PWP
3.	27.25'	PK - PWP
4.	62.15'	PK - PWP


SEC 22 TWP 22 RANGE 4

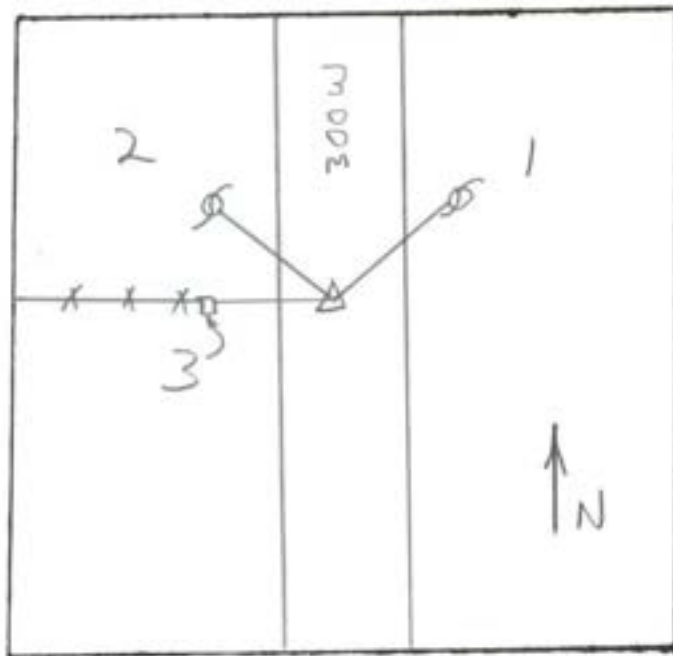

GRAPHIC TIES
(SKETCHED)

SEC 22 TWP 22 RANGE 4


NOVEMBER 1983

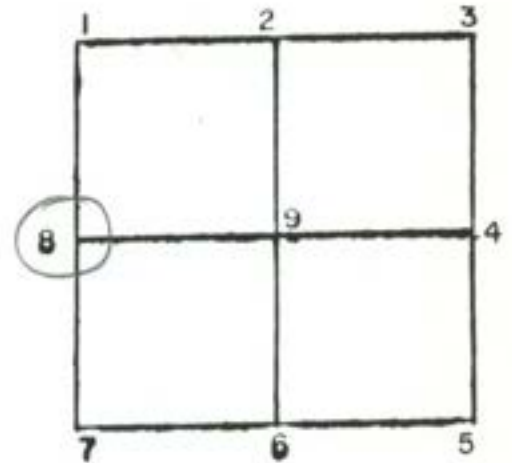

CORNER IDENT. 8 3/4" IRON ROD 2" BELOW SURFACE

TIES: 1. 34.7 PK - PWP
2. 38.3 PK - PWP
3. 18.7 PK - HEADPOST


SEC 22 TWP 22 RANGE 4

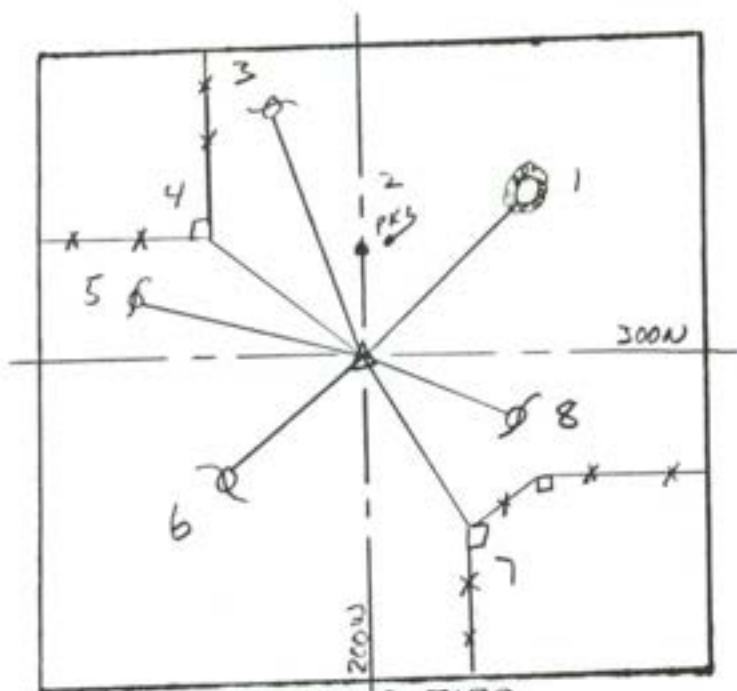

GRAPHIC TIES
(SKETCHED)

SEC 23 TWP 22 RANGE 4

4-15-1980

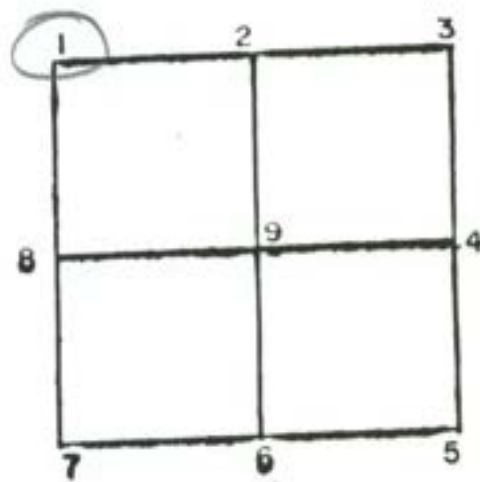


CORNER IDENT. / STONE W/POINT

- TIES:
1. 67.60' PK - 24" MAPLE TREE
 2. 15.36' PK - E OF RD. 200W N OF STONE
 3. 33.22' PK - PWP
 4. 31.33' PK - CORNER POST
 5. 59.21' PK - PWP
 6. 27.06' PK - PWP
 7. 53.87' PK - CORNER POST
 8. 43.72' PK - PWP


F.B. 150 P. 16

SEC 23 TWP 22 RANGE 4

SEC. 23 TWP. 22 RANGE 4
6/2000

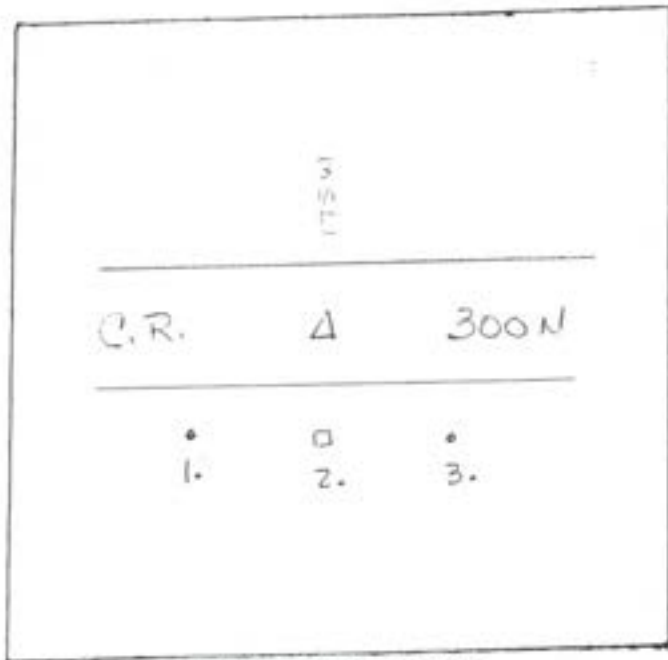

GRAPHIC TIES
(SKETCHED)

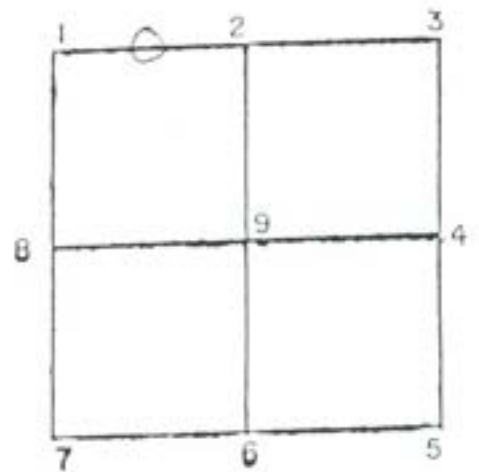


CORNER IDENT. STONE FOUND FLUSH


- TIES: 1. 27.12 - IRON ROD SET 20' WEST OF HEAD POST
2. 17.65 - BOTTOM BOLT IN NORTH FACE OF ROUND HEAD POST
3. 26.42 - IRON ROD SET 20' EAST OF HEAD POST

SEC 23 TWP 22 RANGE 4

SEC. 23 TWP. 22 RANGE 4
6/2000

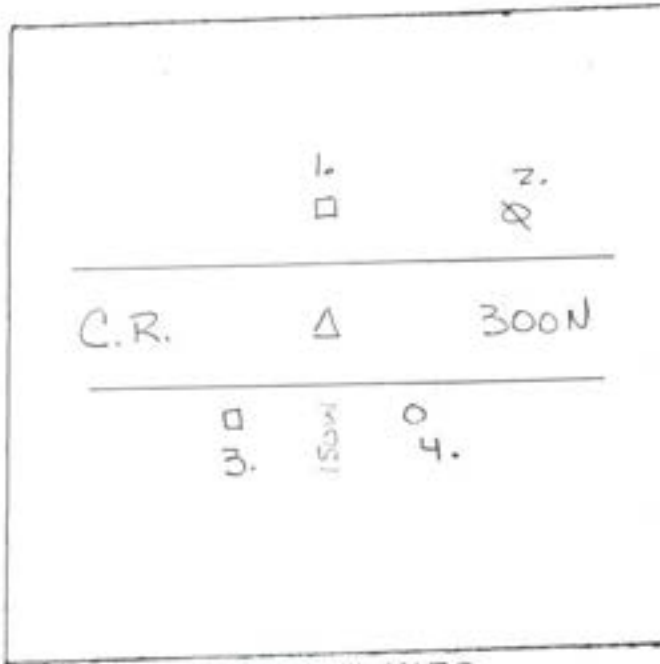


GRAPHIC TIES
(SKETCHED)

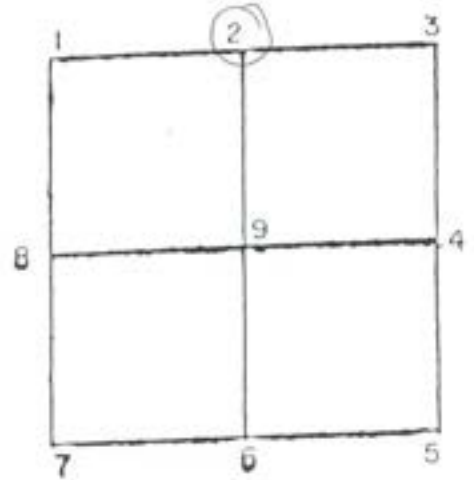

CORNER IDENT. STONE FOUND

TIES: 1. 17.58 - P.K. NAIL IN WEST FACE OF HEAD POST
2. 19.76 - " " " SOUTHEAST FACE OF ROUND HEAD POST
3. 25.75 - " " " WEST FACE " " "
4. 29.20 - " " " NORTHWEST CORNER OF
RAILROAD TIE USED AS HEAD POST


SEC. 23 TWP. 22 RANGE 4

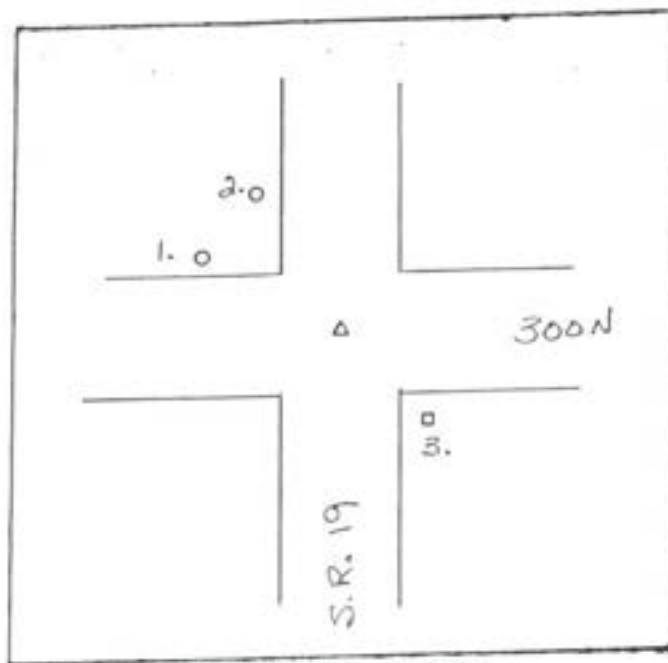

GRAPHIC TIES
(SKETCHED)

SEC 23 TWP 22 RANGE 4


4-15-99

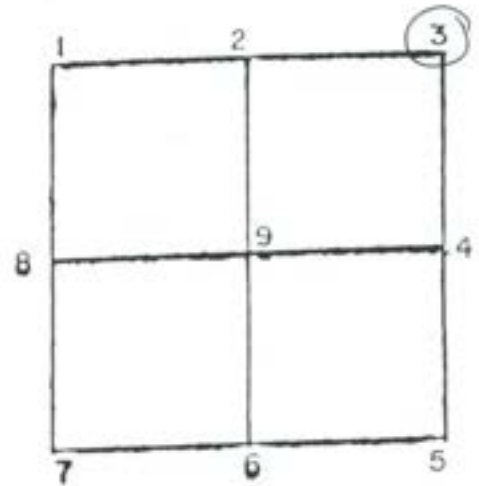

CORNER IDENT. STONE w/x 1.5' DEEP 1.3' IRON ROD SET

TIES: 1. 98.48 P.K. NAIL IN POWER POLE
2. 79.35' " " " "
3. 76.83 " " " HEAD POST


SEC 23 TWP 22 RANGE 4

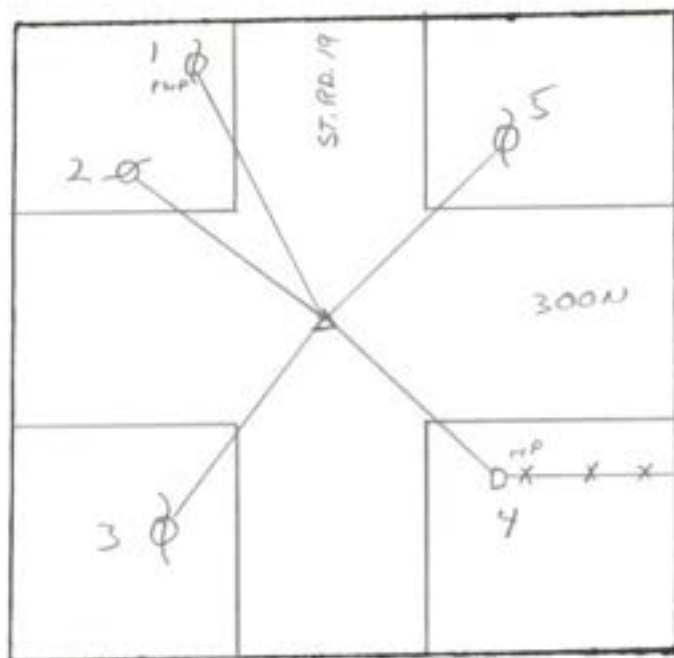

GRAPHIC TIES
(SKETCHED)

SEC. 23 TWP 22 RANGE 4

5-11-82

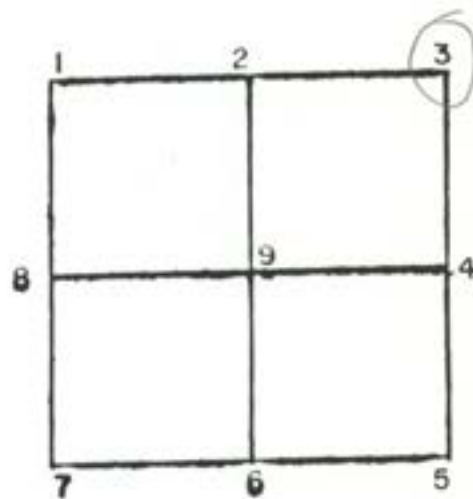

CORNER IDENT. 3 STONE W/X 1.5' D. 1.3' IR. SET OVER X


TIES:

1.	79.10'	PK IN PWP
2.	98.42'	PK IN PWP
3.	67.62'	PK IN PWP
4.	76.64'	PK IN END POST
5.	91.85'	PK IN PWP


SEC 23 TWP 22 RANGE 4

SEC 23 TWP 22 RANGE 4

4-15-99

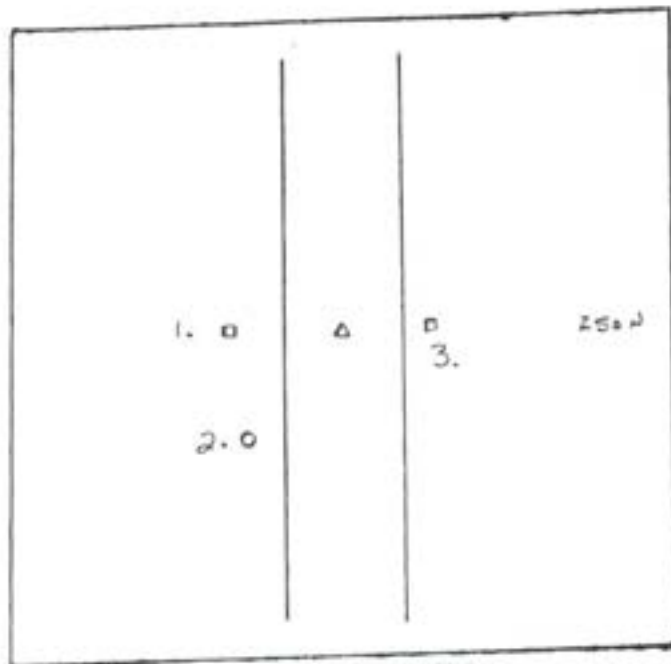


GRAPHIC TIES
(SKETCHED)

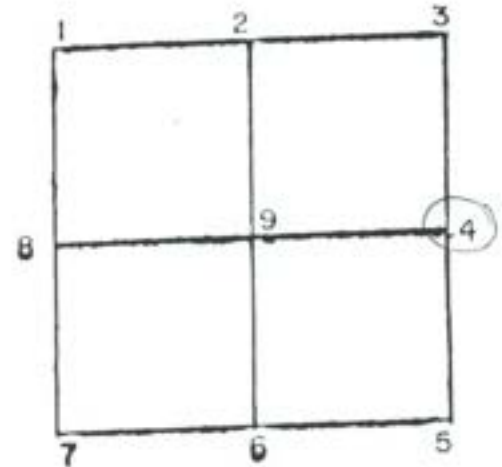

CORNER IDENT. STONE w/x 1.3' DEEP 1.0' IRON ROD SET


- TIES:
1. 46.14 P.K. NAIL IN HEADPOST
 2. 48.74 " " " CUT-OFF TELEPHONE POLE
 3. 39.92 E TOP OF R/W MARKER
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____

SEC 23 TWP 22 RANGE 4

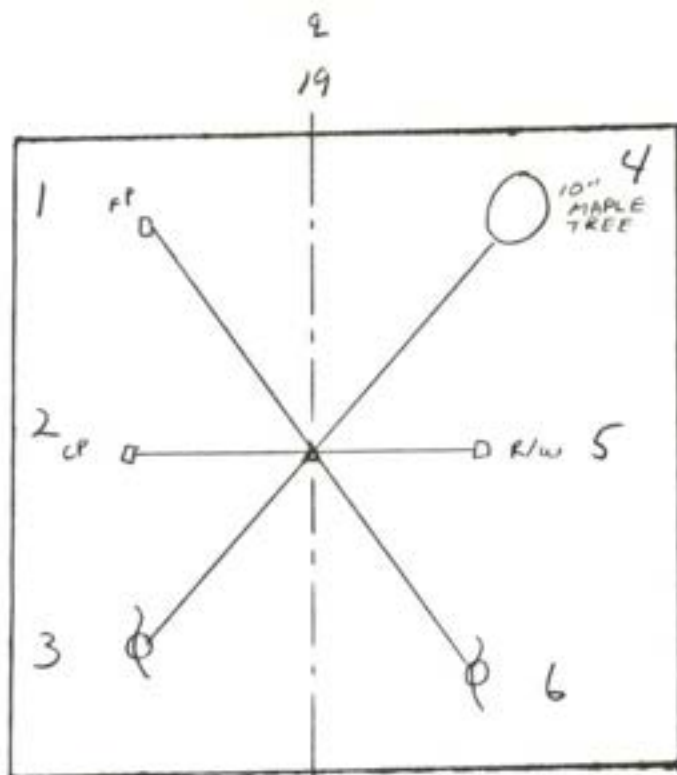

SEC 23 TWP 22 RANGE 4

5-11-82

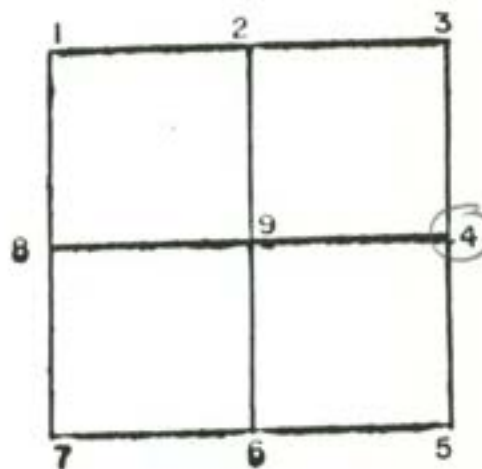


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 4 STONE W/X FND 1.3' DEEP 0.4' FILL
0.9' CONCL. OVER STONE 1.0' I.R. OVER CROSS

- TIES:
1. 51.40' PK IN FENCE POST
 2. 41.07' PK IN CORNER POST
 3. 48.74' PK IN PWD
 4. 37.95' PK IN 10" MAPLE TREE
 5. 39.9' TOP + CENTER OF R/W MARKER
 6. 58.75' PK IN PWP


SEC 23 TWP 22 RANGE 4

SEC. 23 TWP. 22 RANGE 4

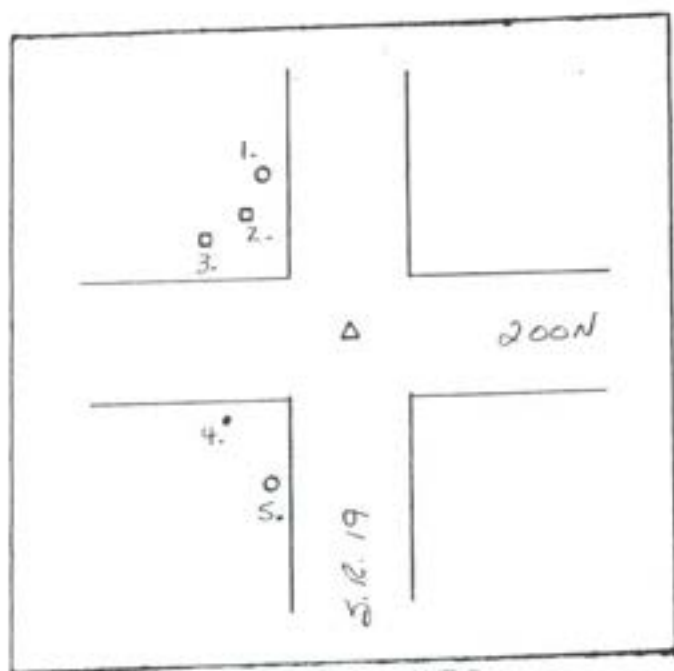

GRAPHIC TIES
(SKETCHED)


4-15-99

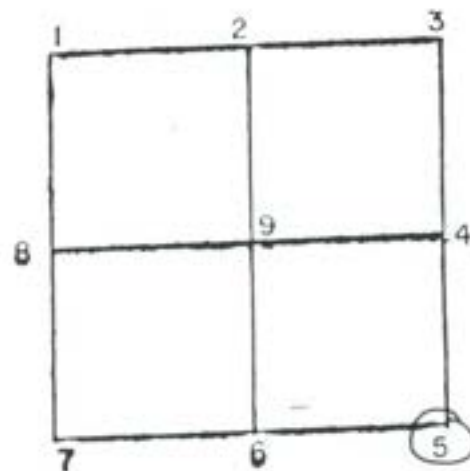

CORNER IDENT. STONE W/ 1.3' DEEP 1.0' IRON ROD SET


- TIES:
- 1. 73.69 P.K. Nail in Power Pole
 - 2. 71.47 P.K. Nail in Corner Post
 - 3. 78.57 " " " "
 - 4. 80.20 E of USGS Benchmark
 - 5. 66.81 P.K. Nail in Power Pole.

SEC. 23 TWP. 22 RANGE 4

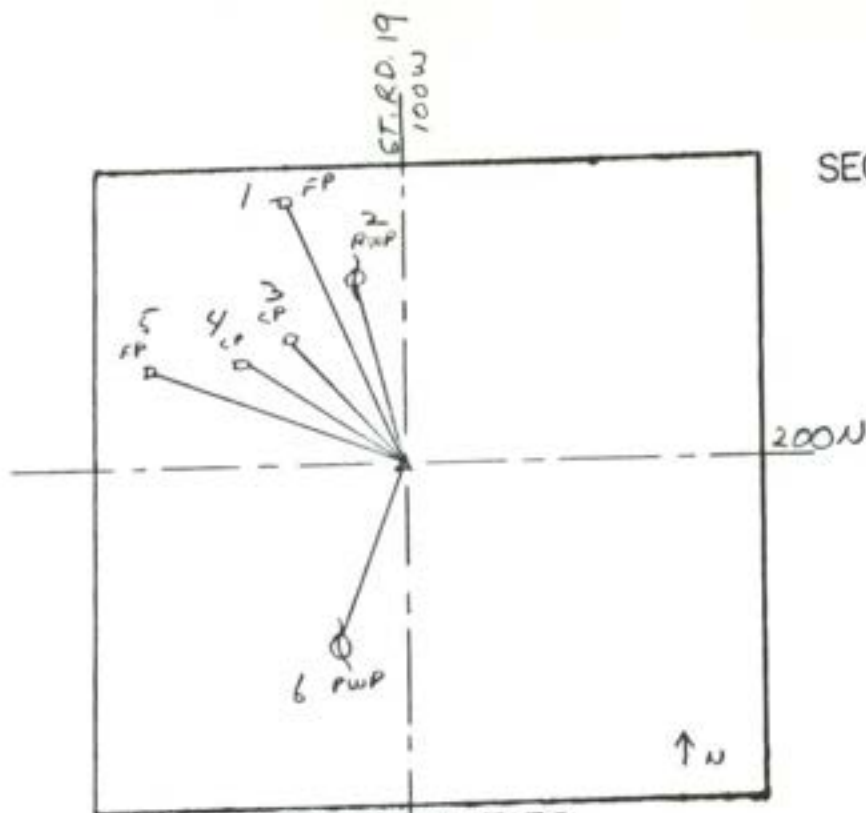

SEC 23 TWP 22 RANGE 4

5-8-80

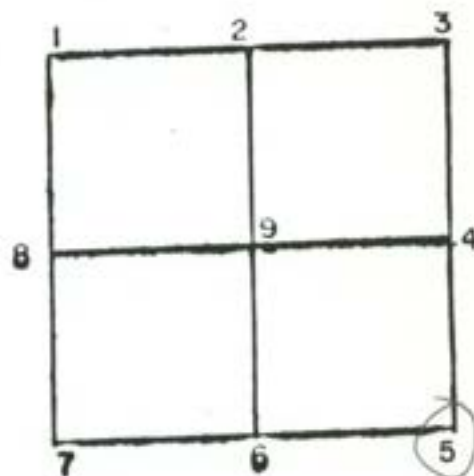


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 5 STONE W/ X END 1.3' DEEP, 0.7' FILL
OVER STONE THEN 0.6' CONC. 12" IRON ROD
SET OVER X

- TIES:
1. 92.50' PK IN FENCE POST
 2. 73.67' PK IN PWP #205-104
 3. 71.52' PK IN CORNER POST
 4. 78.68' PK IN CORNER POST
 5. 100.97' PK IN FENCE POST
 6. 108.23' PK IN PWP #823-1544


SEC 23 TWP 22 RANGE 4

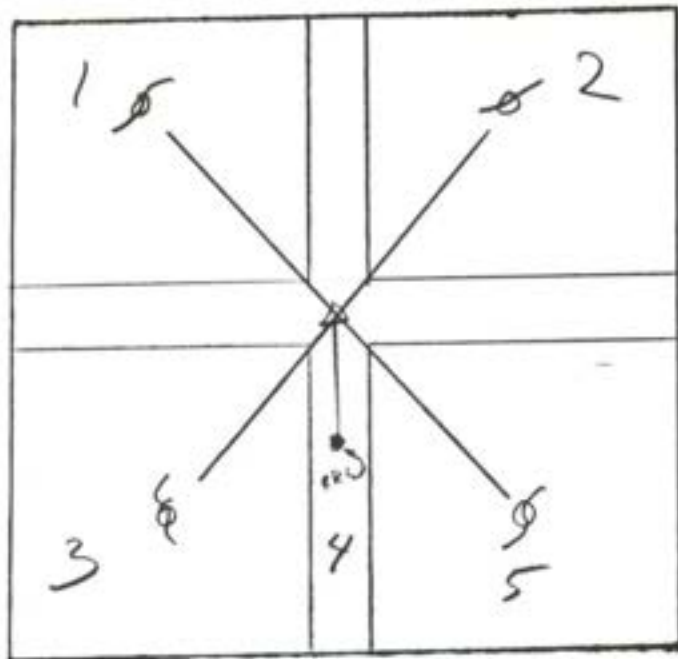

GRAPHIC TIES
(SKETCHED)

SEC 23 TWP 22 RANGE 4

4-23-1980

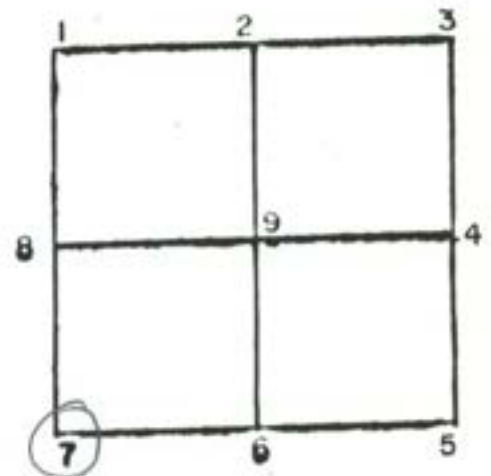


CORNER IDENT. 7 STONE FND 1.6' DEEP W/X

- TIES:
1. 66.33' PK - PWP
 2. 51.49' PK - PWP
 3. 39.22' PK - PWP
 4. 1.41' RR SPIKE - RR SPIKE E OF RD. 200W
 5. 54.79' PK - PWP


FB. 150 P. 24

SEC 23 TWP 22 RANGE 4

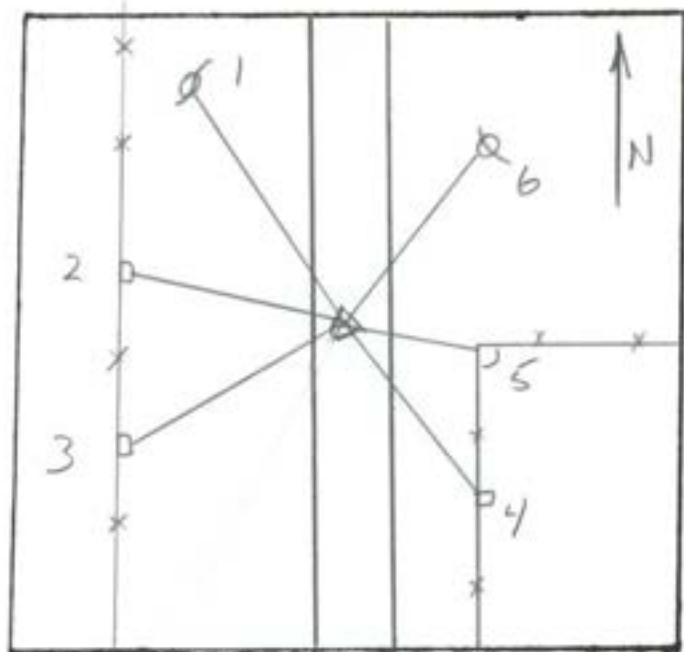

SEC 23 TWP 22 RANGE 4

4-18-1980

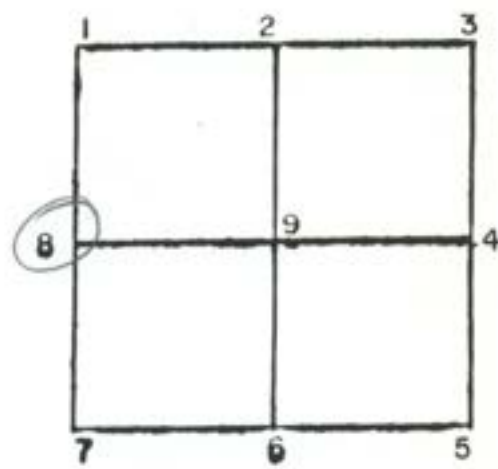


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 8 RR SPIKE SET

- TIES:
- 1. 50.75' PK - PWP
 - 2. 22.62' PK - FENCEPOST
 - 3. 22.26' PK - FENCEPOST
 - 4. 48.70' PK - FENCEPOST
 - 5. 20.72' PK - CORNER POST
 - 6. 32.50' PK - PWP

F.B. 150 P. 23


SEC 23 TWP 22 RANGE 4

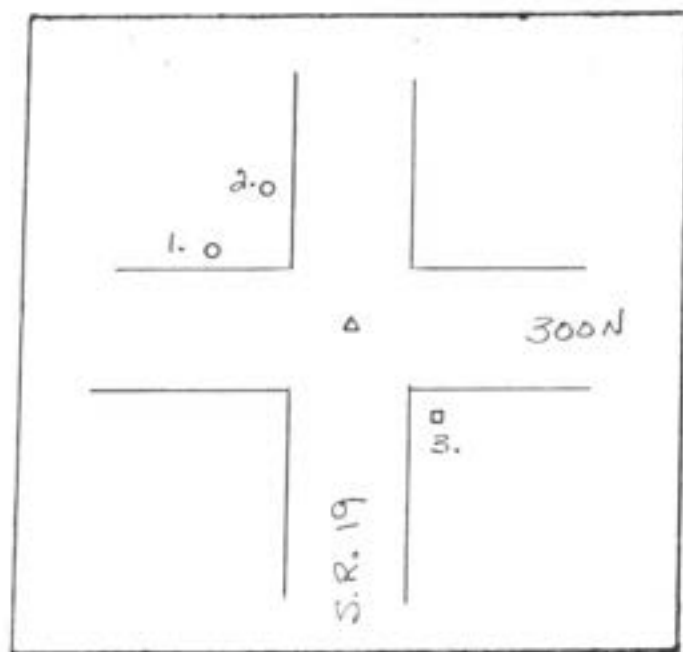

GRAPHIC TIES
(SKETCHED)

SEC 24 TWP 22 RANGE 4

4-15-99

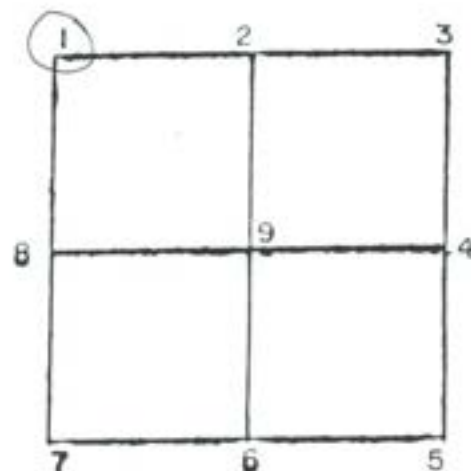


CORNER IDENT. STONE w/x 1.5' DEEP 1.3' IRON ROD SET

TIES: 1. 98.48' P.K. NAIL IN POWER POLE
2. 79.35' " " " "
3. 76.83' " " " HEAD POST

SEC 24 TWP 22 RANGE 4



5-11-82

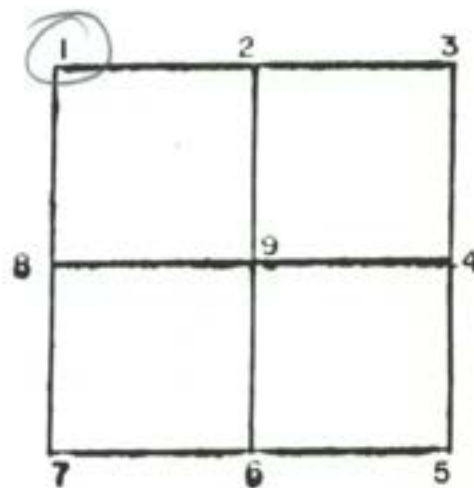

T142:

1. 79.10' PK IN PWP

2. 98.42' PK in PWP

3. 67.62' PK IN PWP

4. 76.64' PK IN END POST

5. 91.85' PK IN PWP

SEC 24 TWP 22 RANGE 4

Diagram illustrating a four-quadrant survey intersection:


- Top-Left Quadrant: C.R.
- Top-Right Quadrant: Q2.
- Bottom-Left Quadrant: Q1.
- Bottom-Right Quadrant: Q3.
- Vertical Line: ROAD
- Horizontal Line: MERIDIAN
- Intersection Symbol: Δ
- Distance/Label: 300N

A 2x2 grid with numbers at the intersections. The top row has 1, 2, and 3. The bottom row has 7, 6, and 5. The left column has 8 and 7. The right column has 4 and 5. The center intersection is 9.


[illegible]

SEC 24 TWP 22 RANGE 4

SEC. 24 TWP. 22 RANGE 4
6/2000

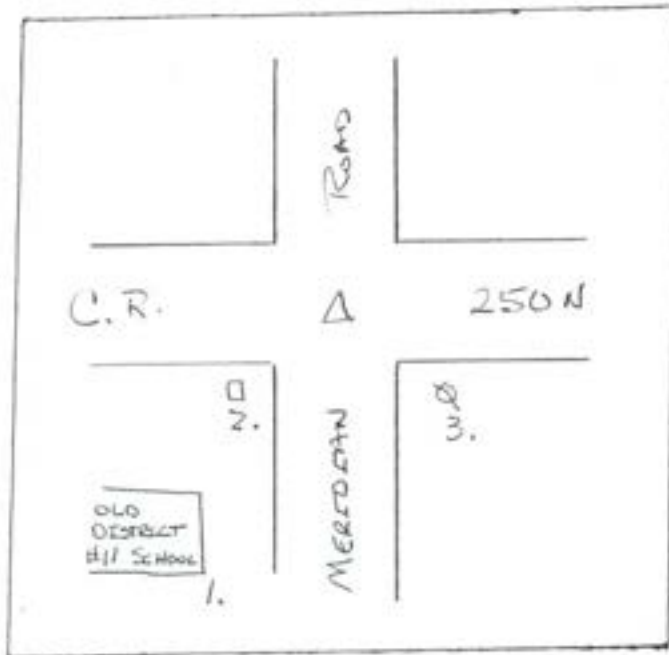

GRAPHIC TIES
(SKETCHED)

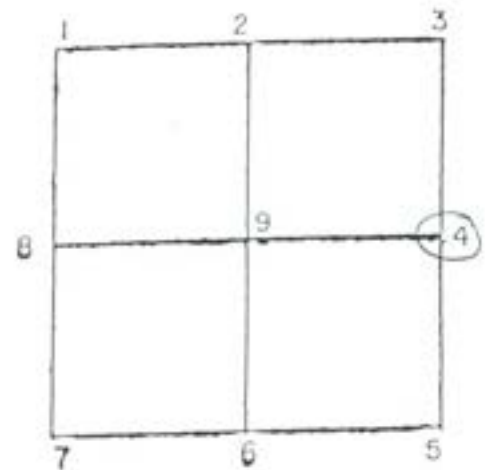


CORNER IDENT. Stone Found Flush

- TIES: 1. 151.10 — Southeast corner of Building 18" up
 2. 25.40 — P.K. Nail in North Face Head Post
 3. 36.90 — " " " PWP.


SEC. 24 TWP. 22 RANGE 4

SEC. 24 TWP 22 RANGE 4

4-15-99

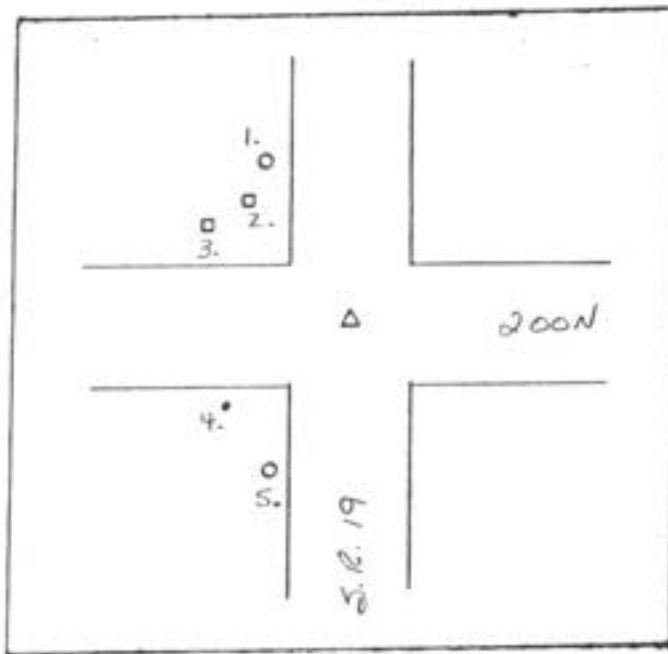


GRAPHIC TIES
(SKETCHED)

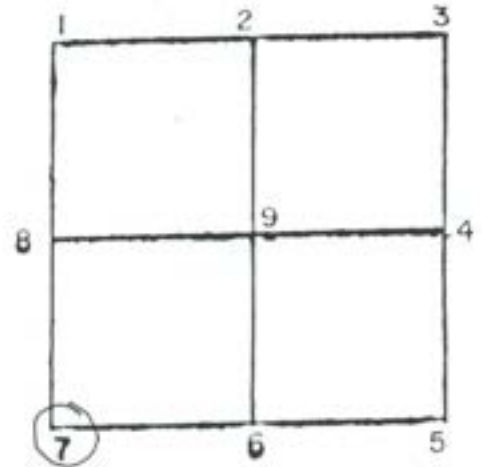

CORNER IDENT. STONE w/x 1.3' DEEP 1.0' IRON ROD SET


TIES: 1. 73.69 P.K. NAIL IN POWERPOLE
2. 71.47 P.K. NAIL IN CORNERPOST
3. 78.57 " " " "
4. 80.20 E OF USGS BENCHMARK
5. 66.81 P.K. NAIL IN POWERPOLE.

SEC 24 TWP 22 RANGE 4

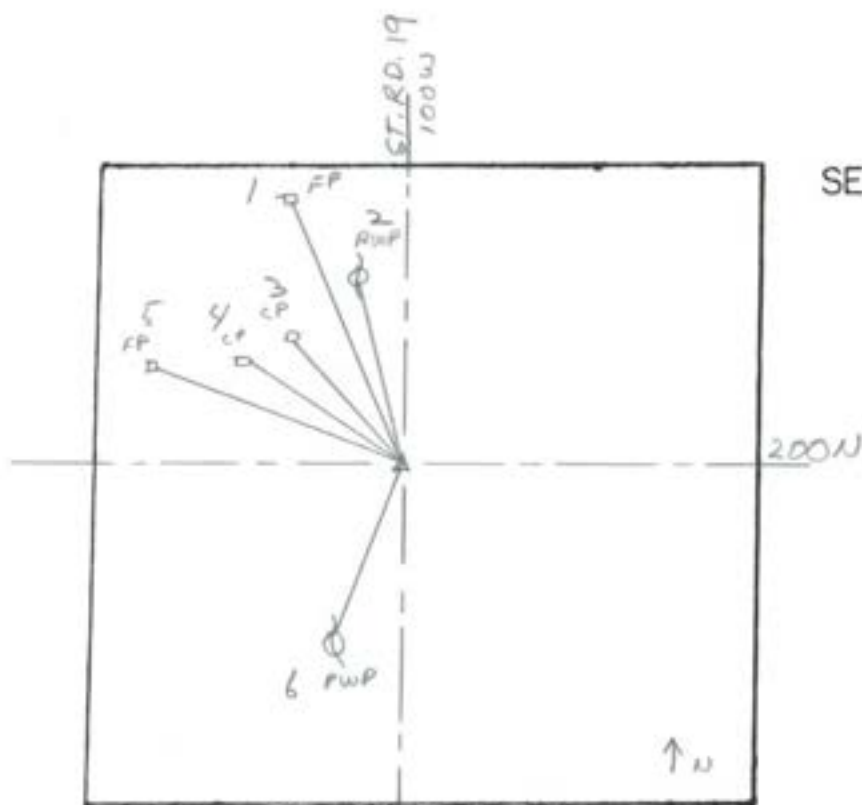

SEC 24 TWP 22 RANGE 4

5-8-80

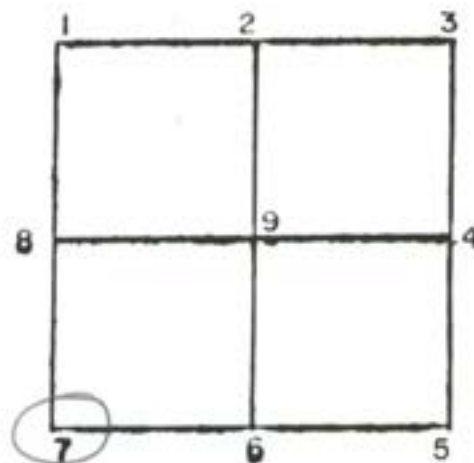


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 7 STONE W/ X END 1.3' DEEP, 0.7' FILL
OVER STONE THEN 0.6' CONC. 12" IRON ROD
SET OVER X

TIES:

1.	92.50'	PK IN FENCE POST
2.	73.67'	PK IN PWP #205-104
3.	71.52'	PK IN CORNER POST
4.	78.68'	PK IN CORNER POST
5.	100.97'	PK IN FENCE POST
6.	108.23'	PK IN PWP #823-1544


SEC 24 TWP 22 RANGE 4

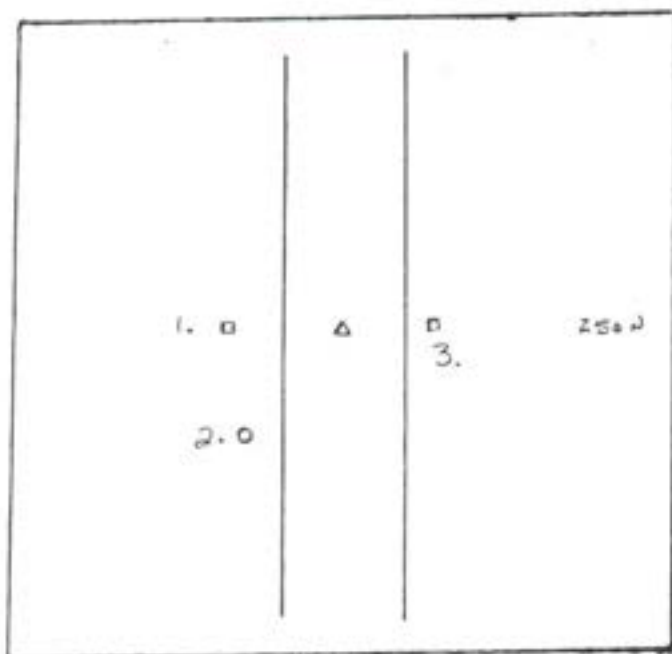

GRAPHIC TIES
(SKETCHED)

SEC 24 TWP 22 RANGE 4


4-15-99

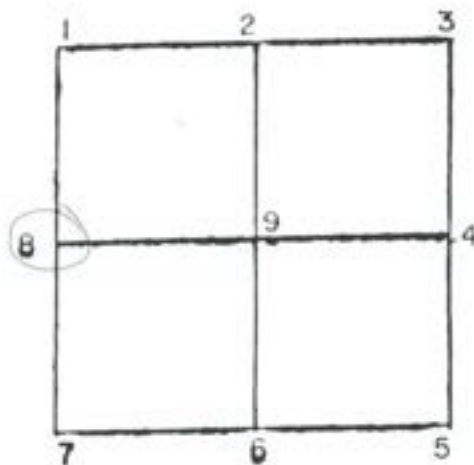

CORNER IDENT. STONE w/x 1.3' DEEP 1.0' IRON ROD SET

- TIES:
1. 46.14 P.K. NAIL IN HEADPOST
 2. 48.74 " " " CUT-OFF TELEPHONE POLE
 3. 39.92 E TOP OF R/W MARKER


SEC 24 TWP 22 RANGE 4

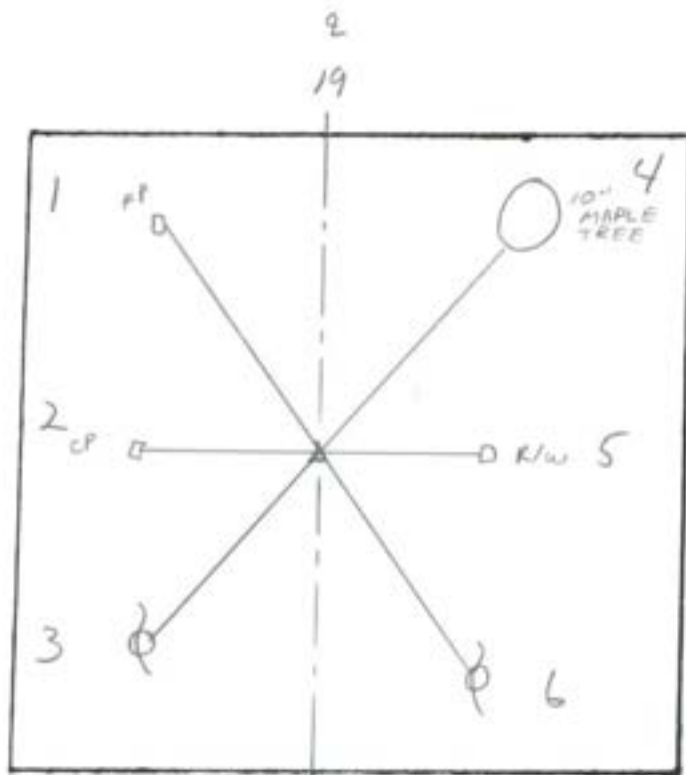

GRAPHIC TIES
(SKETCHED)

SEC 24 TWP 22 RANGE 4


5-11-82

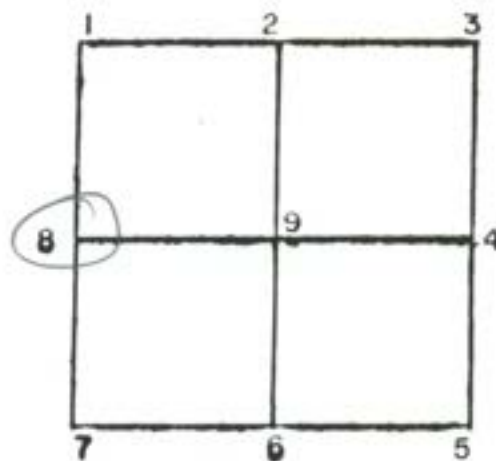

CORNER IDENT. 8 STONE W/X FND 1.3' DEEP 0.4' FILL
0.9' CONC. OVER STONE 1.0' I.R. OVER CROSS

- TIES:
1. 51.40' PK IN FENCE POST
 2. 41.07' PK IN CORNER POST
 3. 48.74' PK IN PWP
 4. 37.95' PK IN 10" MAPLE TREE
 5. 39.9' TOP + CENTER OF R/W MARKER
 6. 58.75' PK IN PWP


SEC 24 TWP 22 RANGE 4

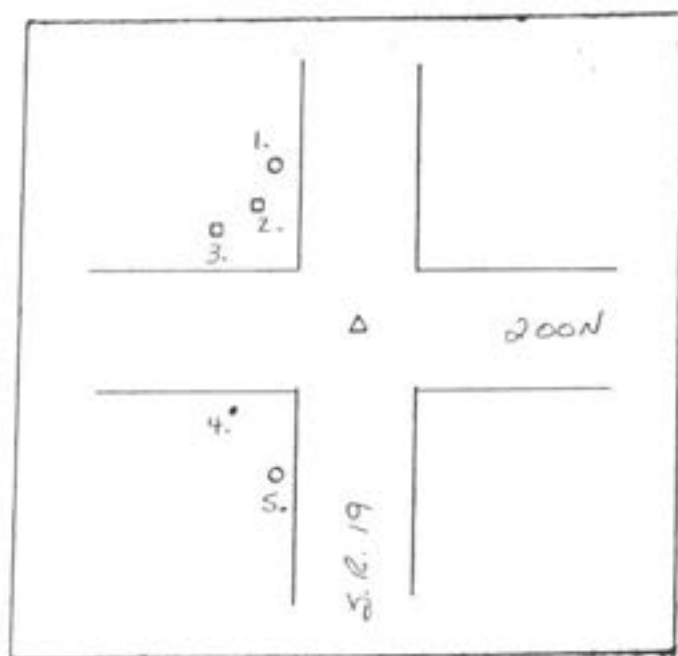

GRAPHIC TIES
(SKETCHED)

SEC 25 TWP 22 RANGE 4


4-15-99

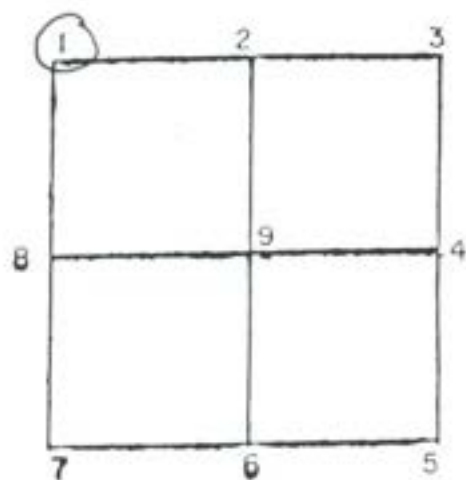

CORNER IDENT. STONE W/X 1.3' DEEP 1.0' IRON ROD SET


TIES: 1. 73.69 P.K. NAEL IN POWERPOLE
2. 71.47 P.K. NAEL IN CORNERPOST
3. 78.57 " " " "
4. 80.20 E OF USGS BENCHMARK
5. 66.81 P.K. NAEL IN POWERPOLE.

SEC 25 TWP 22 RANGE 4

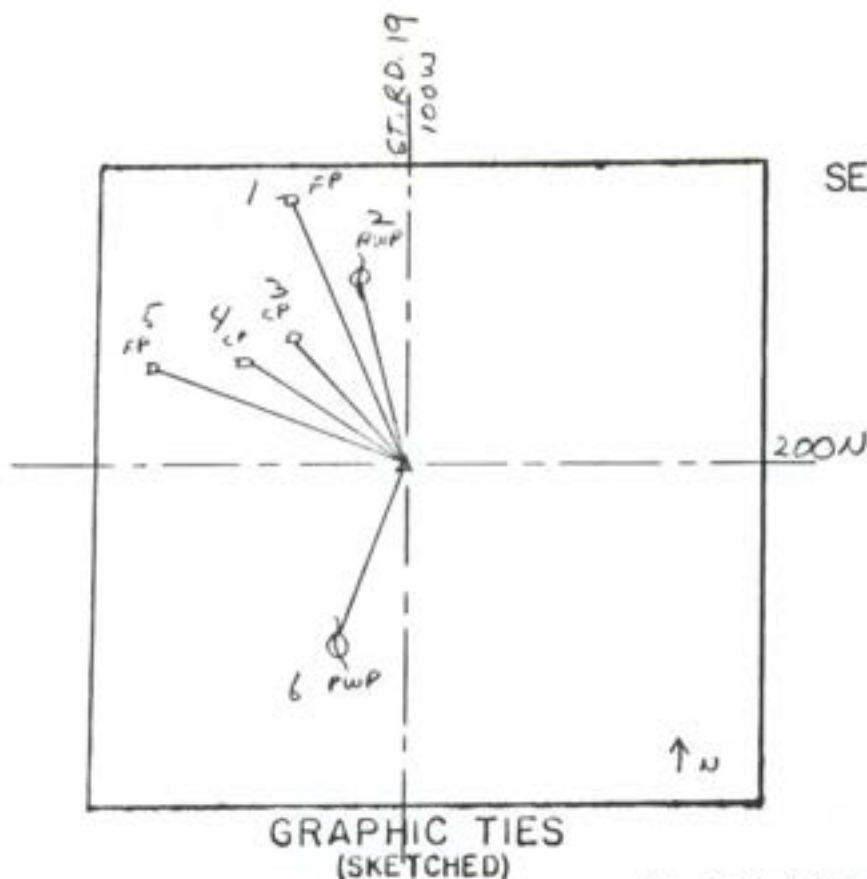

SEC. 25 TWP. 22 RANGE 4

5-8-80

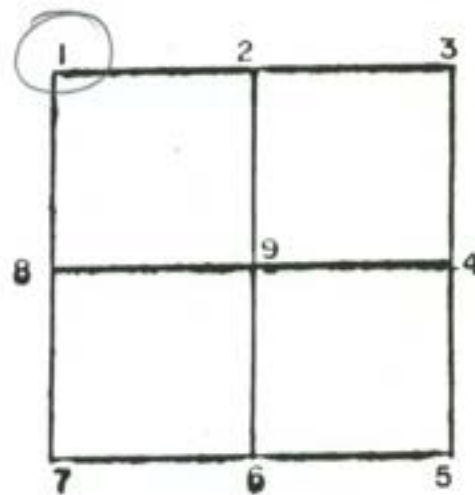


CORNER IDENT. 1 STONE W/ X END 1.3' DEEP, 0.7' FILL
OVER STONE THEN 0.6' CONC. 12" IRON ROD
SET OVER X


- TIES:
- 1. 92.50' PK IN FENCE POST
 - 2. 73.67' PK IN PWP #205-104
 - 3. 71.52' PK IN CORNER POST
 - 4. 78.68' PK IN CORNER POST
 - 5. 100.97' PK IN FENCE POST
 - 6. 108.23' PK IN PWP #823-1544

SEC. 25 TWP. 22 RANGE 4

SEC. 25 TWP. 22 RANGE 4
6/2000

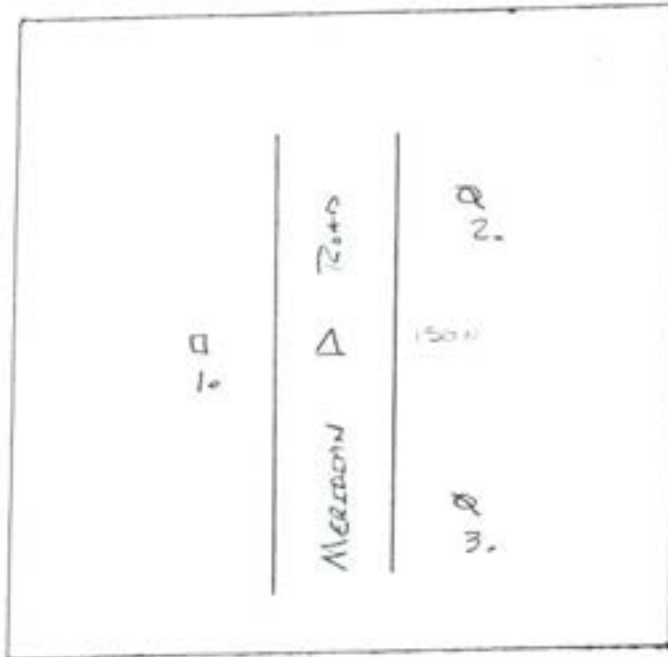

GRAPHIC TIES
(SKETCHED)

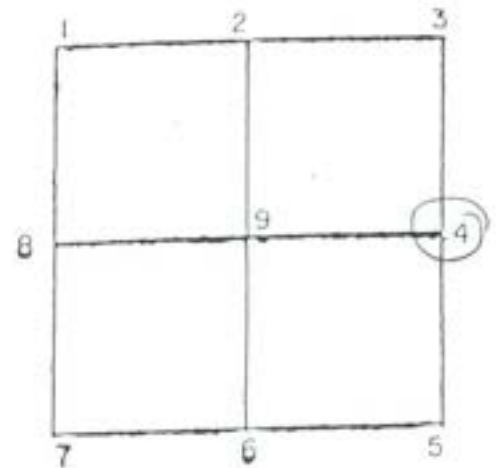


CORNER IDENT. Stone Found 18" Deep / R.R.S. Found


TIES: Stone R.R.S.
 1. 18.69 — P.K. NAIL ON EAST FACE HEADPOST — 18.00
 2. 84.70 — " " " West " PWP — 83.70
 3. 161.73 " " " " " — 163.00

SEC. 25 TWP. 22 RANGE 4

SEC. 25 TWP. 22 RANGE 4
6/2000

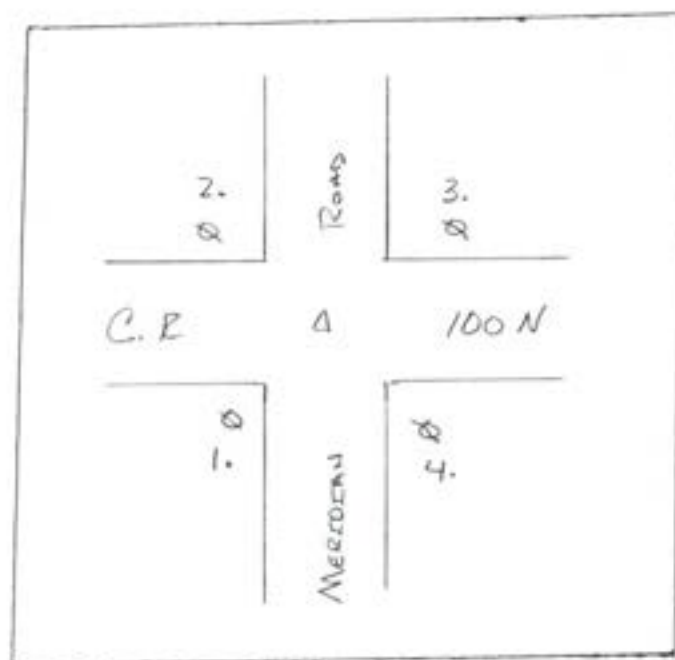

GRAPHIC TIES
(SKETCHED)

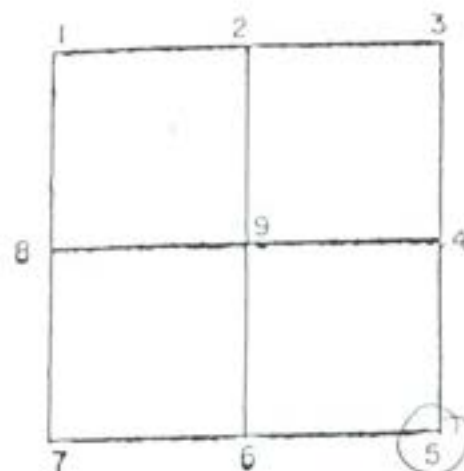


CORNER IDENT. STONE FOUND 18" DEEP

TIES: 1. 49.89 — P.K. NAIL IN NORTHEAST FACE PWP USED AS ROAD SIGN POST
2. 82.40 — " " " SOUTH " "
3. 33.15 — " " " WEST " "
4. 65.88 — " " " " " "


SEC. 25 TWP. 22 RANGE 4

SEC 25 TWP 22 RANGE 4

8-14-80

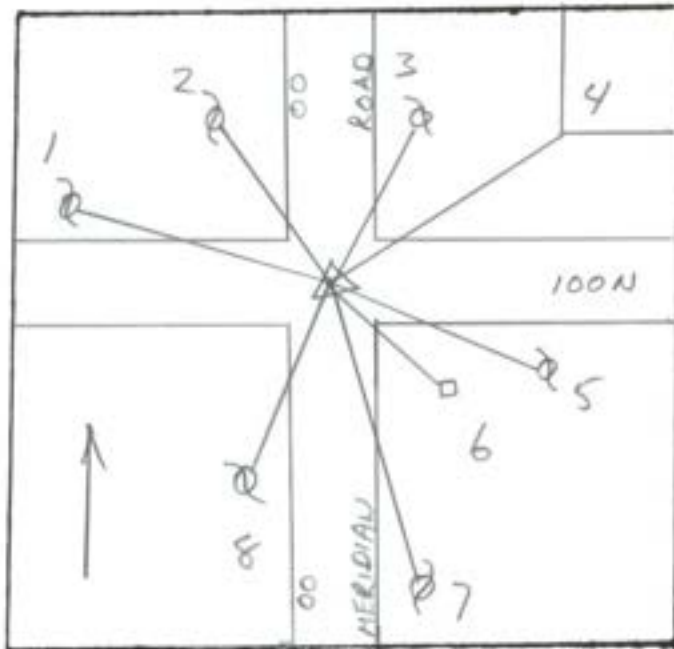


GRAPHIC TIES
(SKETCHED)

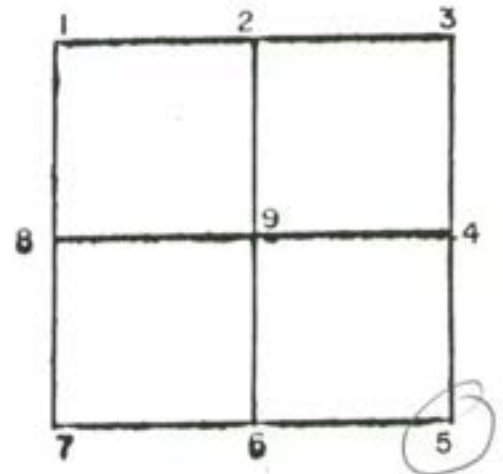

CORNER IDENT. STONE END 18" ↓ SURFACE

TIES: 1. 82.75' PWP
2. 52.58' PWP
3. 33.48' PWP
4. 76.60' BARN SLW CORNER
5. 47.41' PWP
6. 29.22' HEADPOST
7. 65.88' PWP
8. 50.24' PWP


SEC 25 TWP 22 RANGE 4

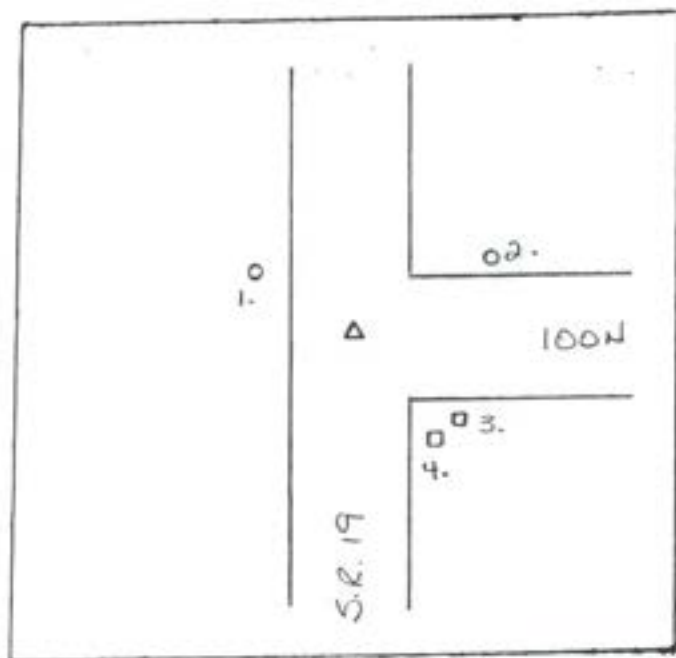

GRAPHIC TIES
(SKETCHED)

SEC. 25 TWP. 22 RANGE 4


4-15-99

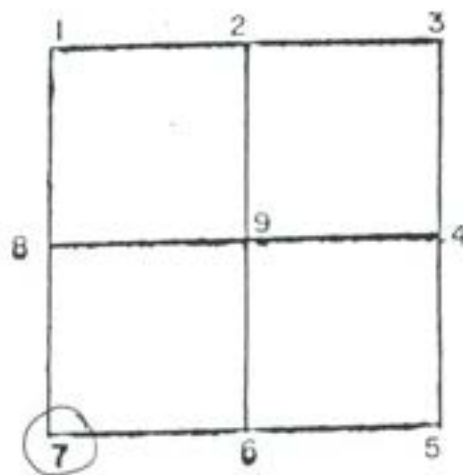

CORNER IDENT. STONE W/DRILL HOLE 11" DEEP 10" IRON ROD SET

- TIES:
1. 38.49' P.K. NAIL IN POWERPOLE
 2. 91.66' " " " "
 3. 78.88' TOP SW CORNER R/W MARKER
 4. 68.07' P.K. NAIL IN POWERPOLE


SEC. 25 TWP. 22 RANGE 4

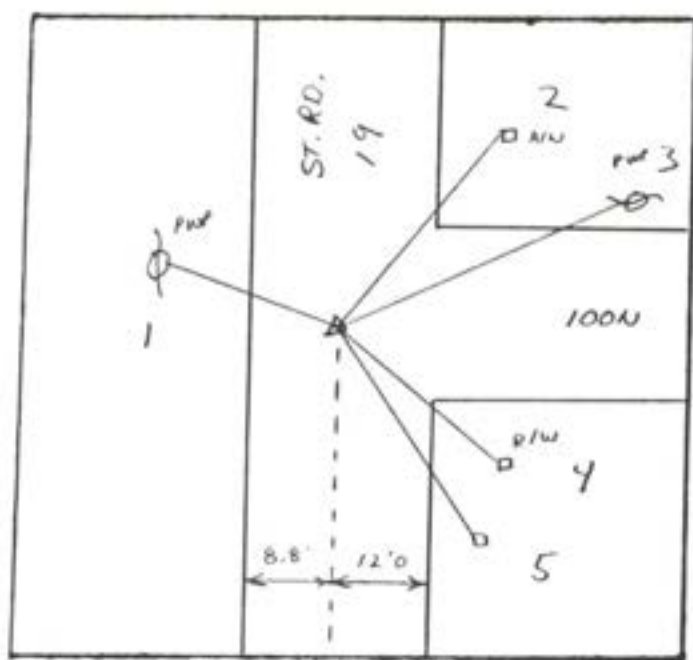

GRAPHIC TIES
(SKETCHED)

SEC. 25 TWP. 22 RANGE 4


5-6-1980

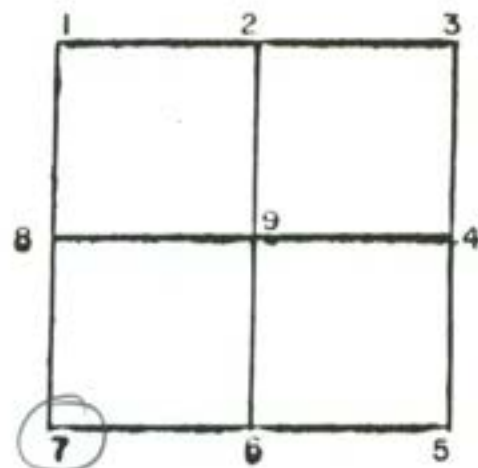

CORNER IDENT. 7 STONE W/DRILL HOLE 11" DEEP 10" IRON ROD OVER HOLE FLUSH W/SURFACE

TIES:	1. 38.69'	PK IN PWP
	2. 79.79'	TOP SW CORNER R/W MARKER
	3. 91.60'	PK IN PWP
	4. 79.03'	TOP SW CORNER R/W MARKER
	5. 68.75'	NOT DESCRIBED


SEC. 25 TWP. 22 RANGE 4

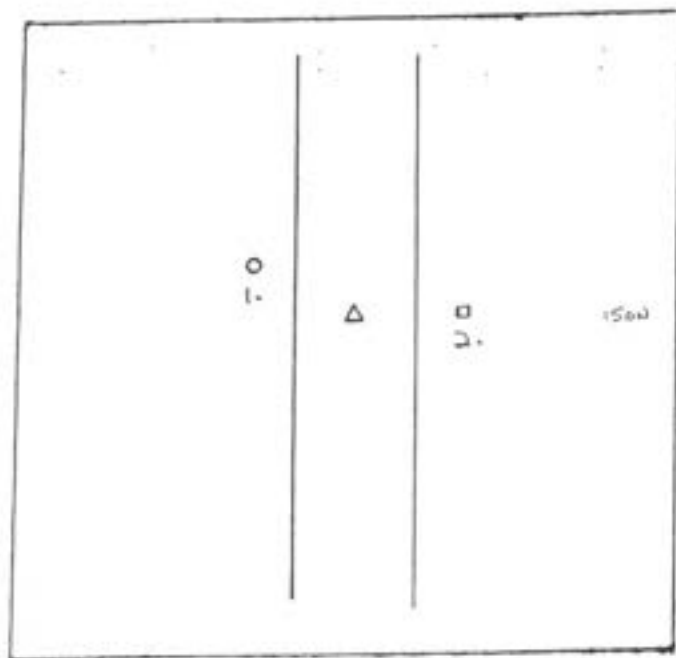

GRAPHIC TIES
(SKETCHED)

SEC. 25 TWP. 22 RANGE 4

4-15-99

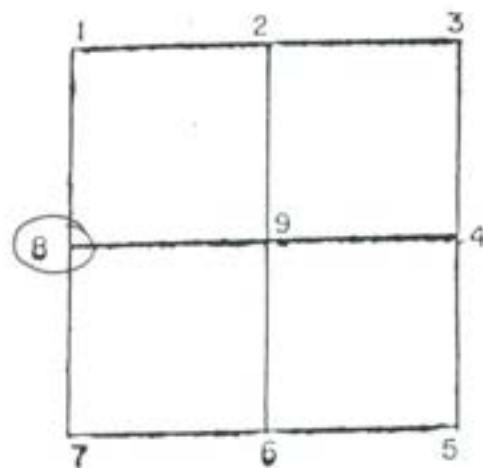


CORNER IDENT. STONE w/ DEEP HOLE IRON ROD SET

TIES: 1. 50.50 P.K. NEEL IN POWERPOLE

2. 40.97 " " " CORNER POST


SEC. 25 TWP. 22 RANGE 4

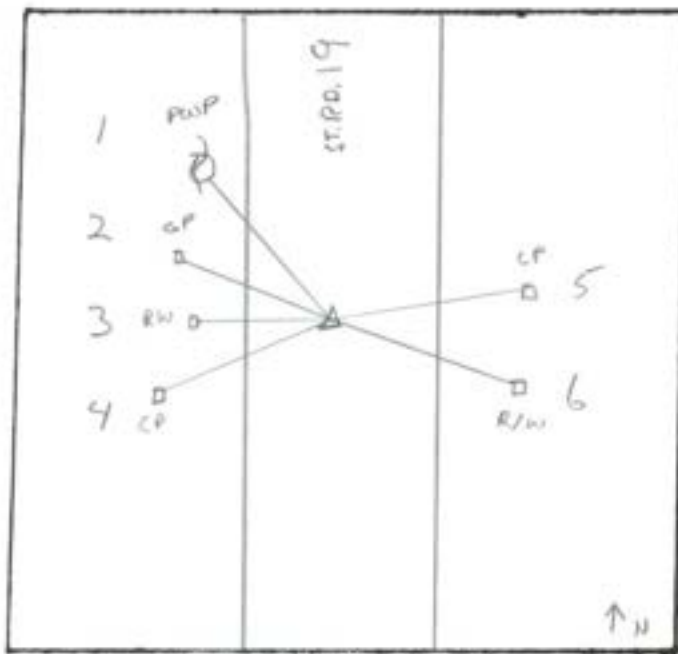

GRAPHIC TIES
(SKETCHED)

SEC. 25 TWP. 22 RANGE 4

5-7-80

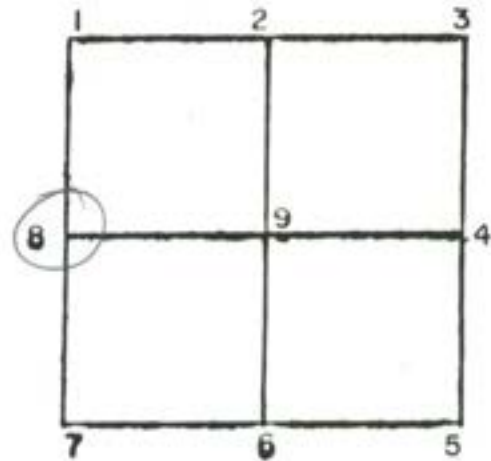


CORNER IDENT. 8 STONE W/DRILL HOLE FAD 0.4" D. / 1.04" I.R. 0.2' UNDER SURFACE ^{OVER DRILL HOLE}

TIES: 1. 49.86' PK IN PWP
2. 43.25' PK IN GATE POST
3. 40.17' TOP OF SE CORNER R/W MARKER
4. 41.02' PK IN CORNER POST
5. 41.20' PK IN CORNER POST
6. 40.38' TOP OF SW CORNER R/W MARKER


SEC. 25 TWP. 22 RANGE 4

SEC 26 TWP 22 RANGE 4

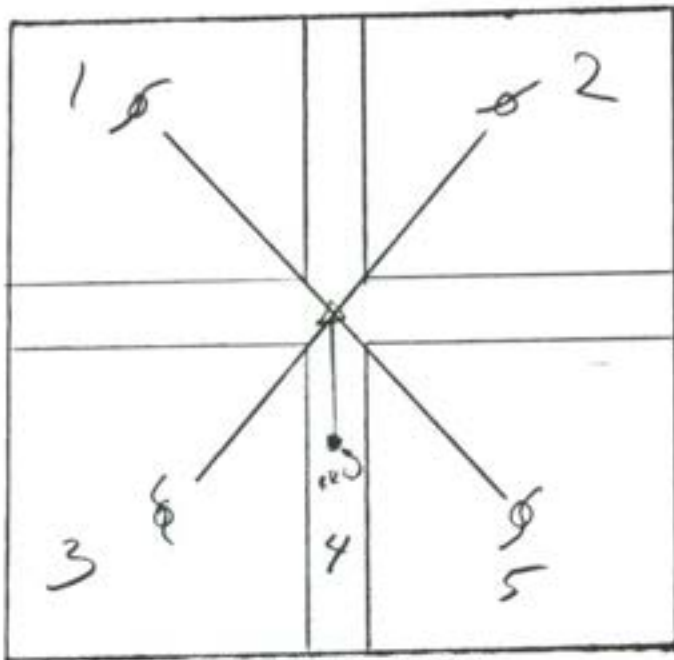

GRAPHIC TIES
(SKETCHED)

4-23-1980

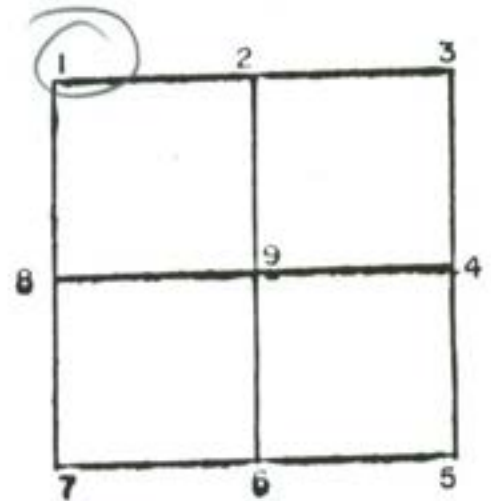


CORNER IDENT. 1 STONE FND 1.6' DEEP W/X

TIES: 1. 66.33' PK - PWP
2. 51.49' PK - PWP
3. 39.22' PK - PWP
4. 1.41' RR SPIKE - RR SPIKE & OF RD. 200W
5. 54.79' PK - PWP


F.B. 150 P. 24

SEC 26 TWP 22 RANGE 4

SEC 26 TWP 22 RANGE 4

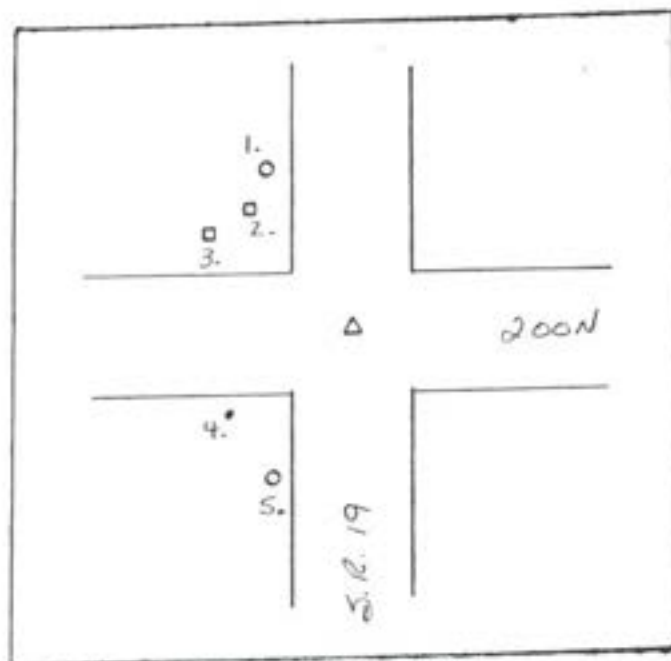


GRAPHIC TIES
(SKETCHED)

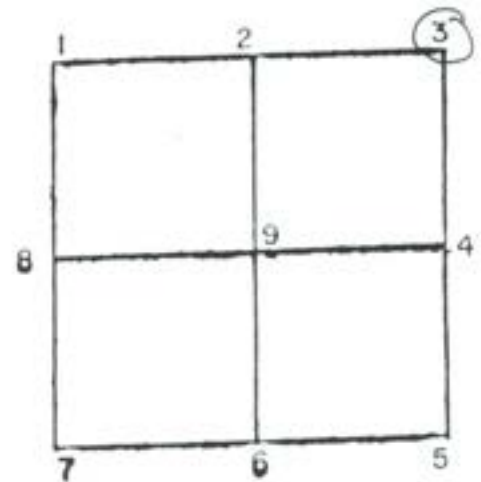

CORNER IDENT. STONE w/x 1.3' DEEP 1.0' IRON ROD SET


TIES: 1. 73.69 P.K. NAIL IN POWERPOLE
2. 71.47 P.K. NAIL IN CORNERPOST
3. 78.57 " " " "
4. 80.20 E OF USGS BENCHMARK
5. 66.81 P.K. NAIL IN POWERPOLE.

SEC 26 TWP 22 RANGE 4

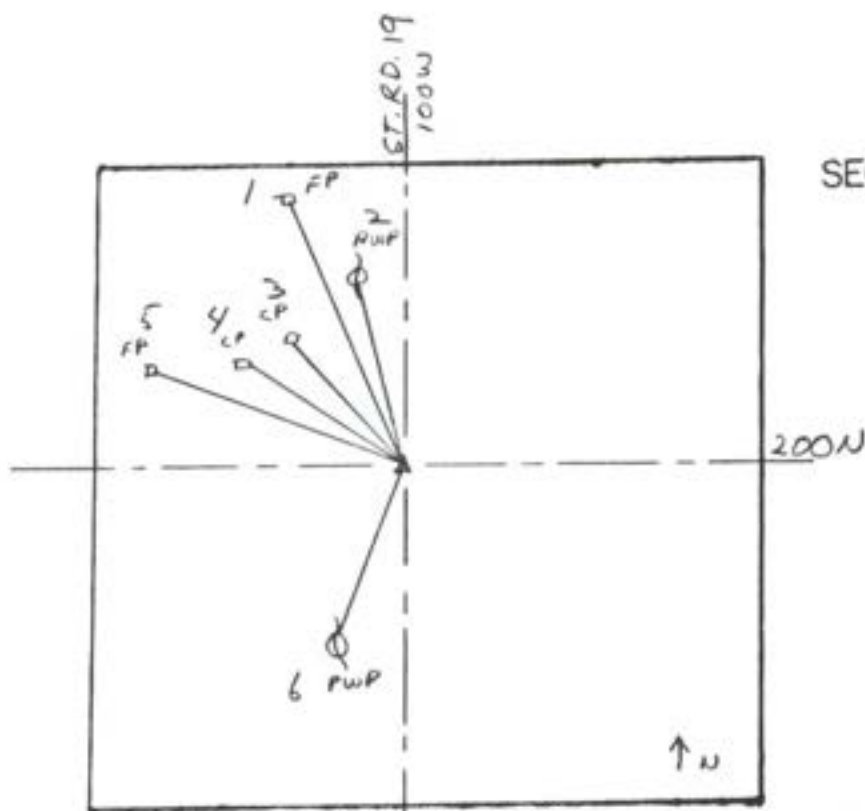

SEC 26 TWP 22 RANGE 4

5-8-80

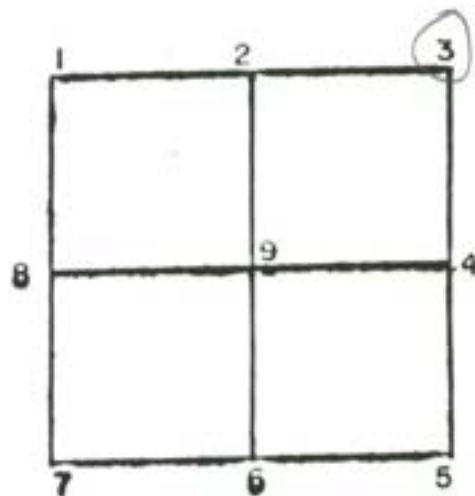


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 3 STONE W/ X FND 1.3' DEEP, 0.7' FILL
OVER STONE THEN 0.6' CONCL. 12" IRON ROD
SET OVER X

- TIES:
1. 92.50' PK IN FENCE POST
 2. 73.67' PK IN PWP #205-104
 3. 71.52' PK IN CORNER POST
 4. 78.68' PK IN CORNER POST
 5. 100.97' PK IN FENCE POST
 6. 108.23' PK IN PWP #823-1544


SEC 26 TWP 22 RANGE 4

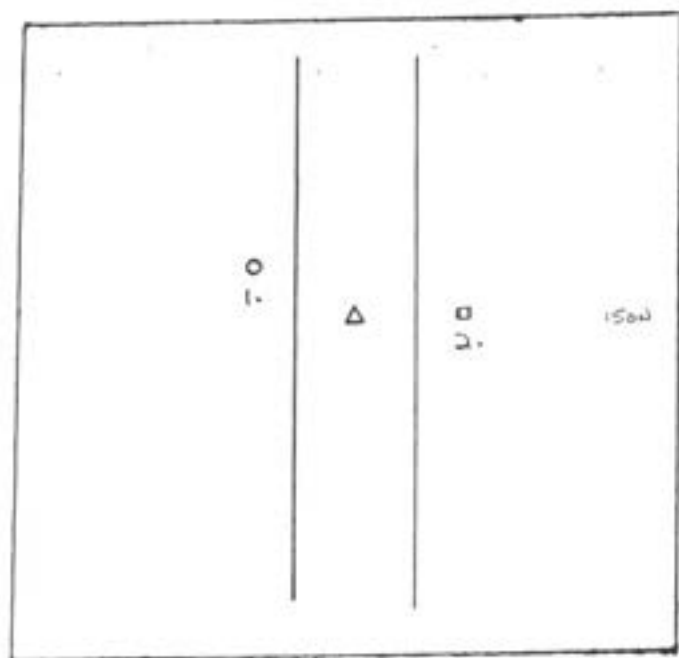

GRAPHIC TIES
(SKETCHED)

SEC. 26 TWP. 22 RANGE 4

4-15-99

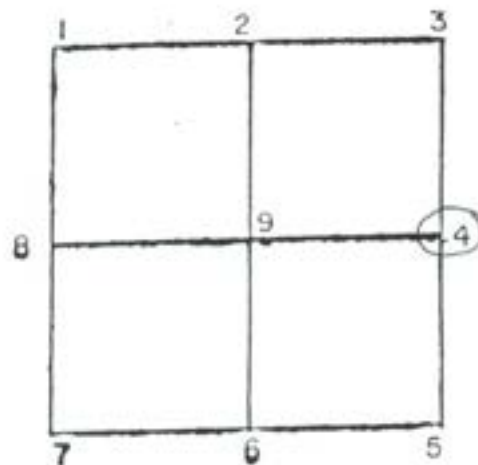


CORNER IDENT. STONE W/ DEEP HOLE IRON ROD SET

TIES: 1. 50.50 P.K. NEEL IN POWERPOLE

2. 40.97 " " " CORNER POST


SEC. 26 TWP. 22 RANGE 4

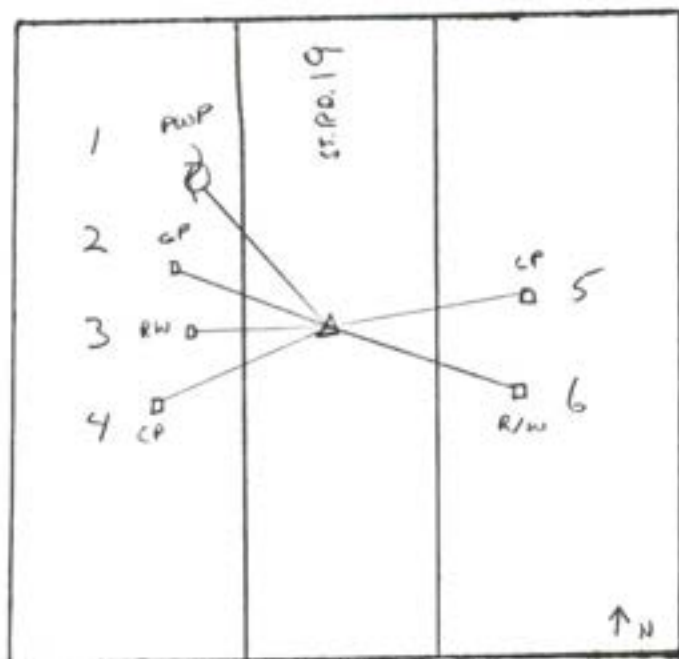

GRAPHIC TIES
(SKETCHED)

SEC. 26 TWP. 22 RANGE 4

5-7-80

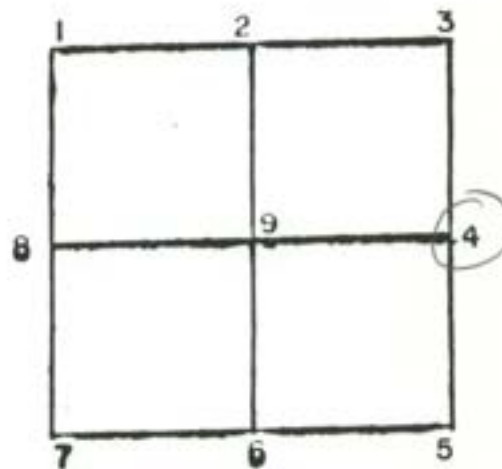


CORNER IDENT. 4 STONE W/DRILL HOLE FIND 0.4" D. / .04" I.R. 12" UNDER SURFACE ^{OVER DRILL HOLE}

TIES:

- | | |
|-----------|-----------------------------|
| 1. 49.86' | PK IN PWP |
| 2. 43.25' | PK IN GATE POST |
| 3. 40.17' | TOP OF SE CORNER R/W MARKER |
| 4. 41.02' | PK IN CORNER POST |
| 5. 41.20' | PK IN CORNER POST |
| 6. 40.38' | TOP OF SW CORNER R/W MARKER |


SEC 26 TWP 22 RANGE 4

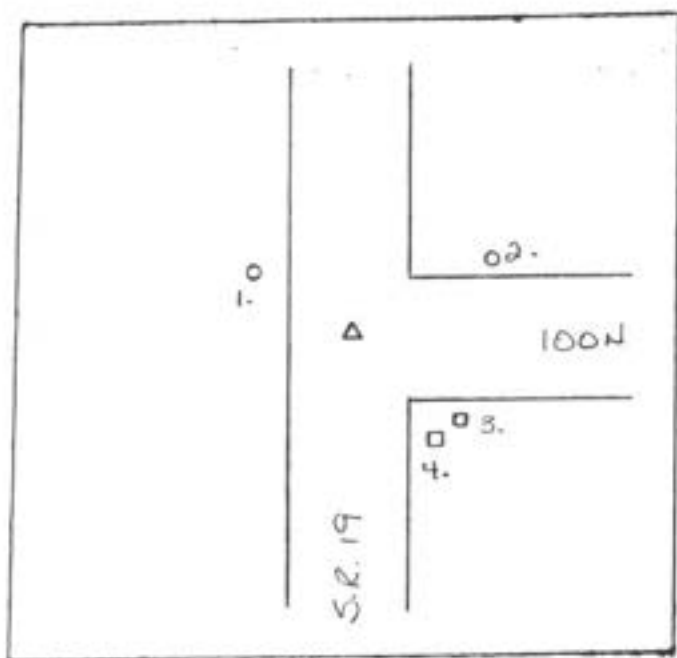

GRAPHIC TIES
(SKETCHED)

SEC. 26 TWP. 22 RANGE 4


4-15-99

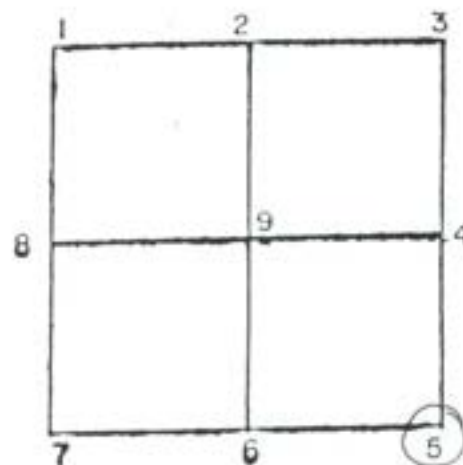

CORNER IDENT. STONE W/ DRILL HOLE 11" DEEP 10" IRON ROD SET

- TIES:
1. 38.49' P.K. NAEL IN POWERPOLE
 2. 91.66' " " " "
 3. 78.88' TOP SW CORNER R/W MARKER
 4. 68.07' P.K. NAEL IN POWERPOLE


SEC. 26 TWP. 22 RANGE 4

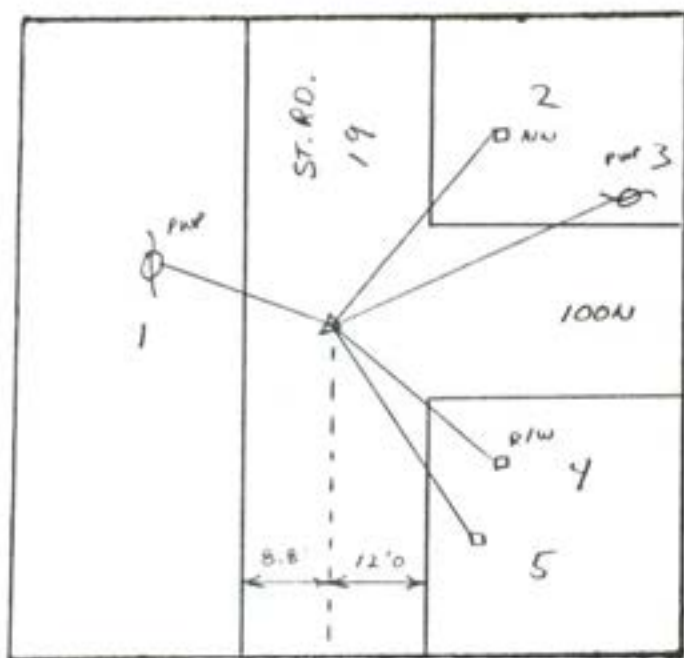

GRAPHIC TIES
(SKETCHED)

SEC 26 TWP 22 RANGE 4

5-6-1980

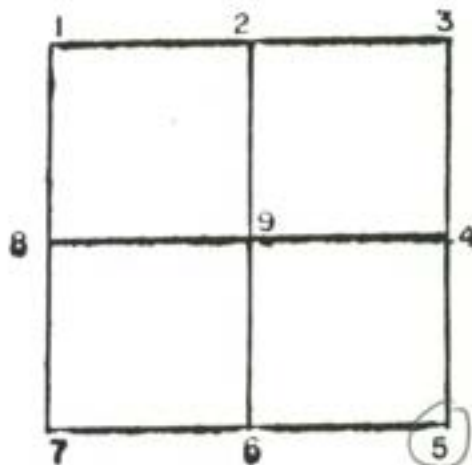

CORNER IDENT. ⁵ STONE W/ DRILL HOLE 11" DEEP 10" IRON ROD OVER HOLE FLUSH W/ SURFACE

THE:	1. 38.69'	PK IN PWP
	2. 79.79'	TOP SW CORNER R/W MARKER
	3. 91.60'	PK IN PWP
	4. 79.03'	TOP SW CORNER R/W MARKER
	5. 68.75'	NOT DESCRIBED

2. 79.79' TOP SW CORNER R/W MARKER.

3. 91.60' PK IN PWP


4. 79.03' TOP SW CORNER R/W MARKER

5. 68.75' NOT DESCRIBED


SEC 26 TWP 22 RANGE 4

SEC 26 TWP 22 RANGE 4

5-2-80

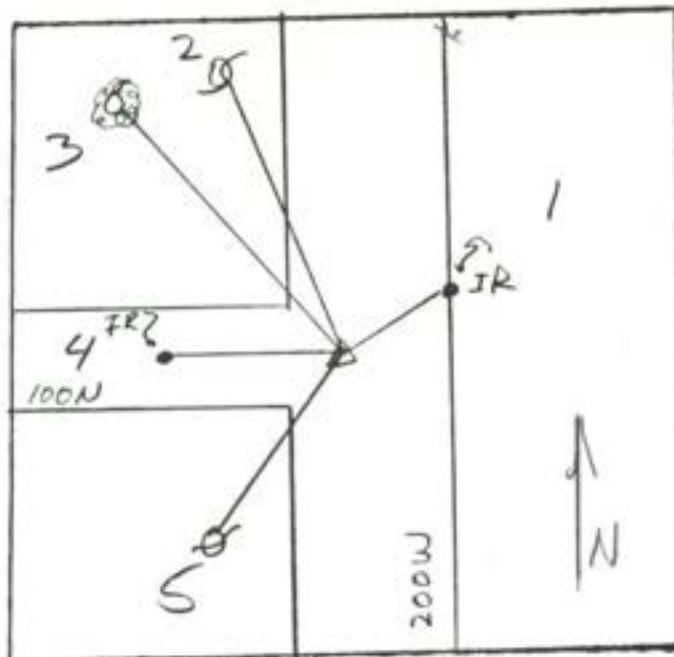

GRAPHIC TIES
(SKETCHED)

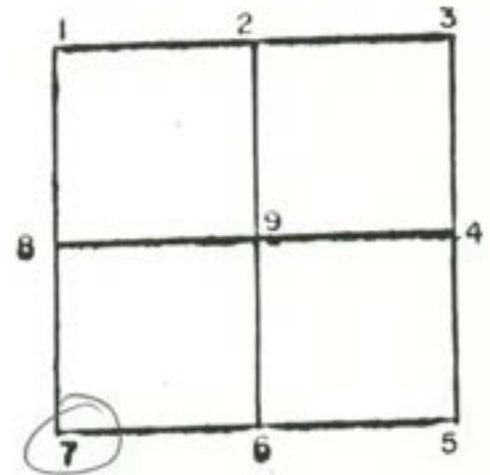


CORNER IDENT. 7 STONE FND MARKED T35 1.2' DEEP

TIES: 1. 23.07' IRON ROD EAST SIDE ROAD
2. 108.44' PK - PWP
3. 62.17' PK - 36" MAPLE TREE
4. 58.17' IRON ROD E OF 100N
5. 24.57' PK - PWP


FR. 150 P. 26

SEC 26 TWP 22 RANGE 4

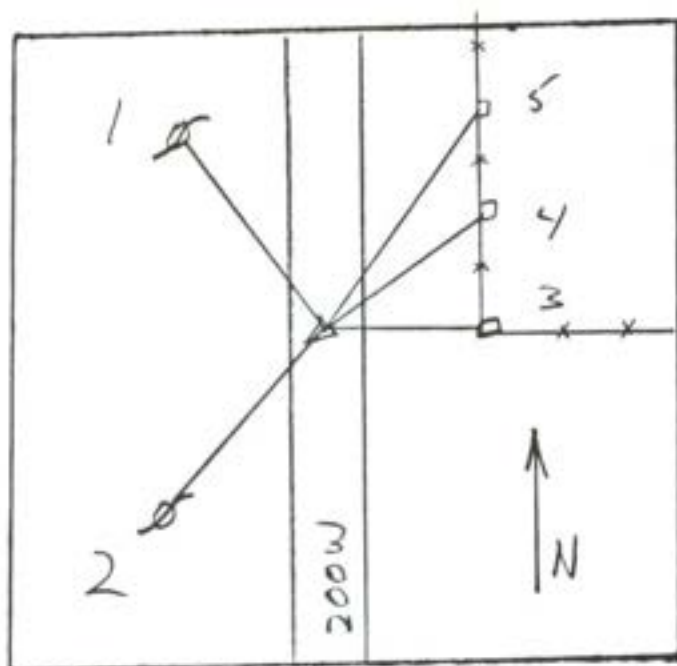

SEC 26 TWP 22 RANGE 4

4-24-1980

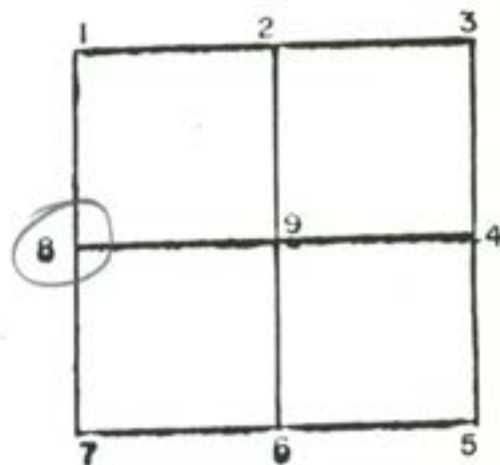


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. 8 STONE END 2.1' DEEP W/ POINT

TIES: 1. 47.10' PK - PWP
2. 99.19' PK - PWP
3. 18.75' PK - CORNER POST
4. 21.88' PK - BRACE POST
5. 39.61' PK - CONCRETE FENCE POST

SEC 26 TWP 22 RANGE 4

NORTH 1/4 CORNER, SECTION 27,
T22N, R4E TIPTON COUNTY, INDIANA
(COUNTY REFERENCE #2 FOR SECTION 27)

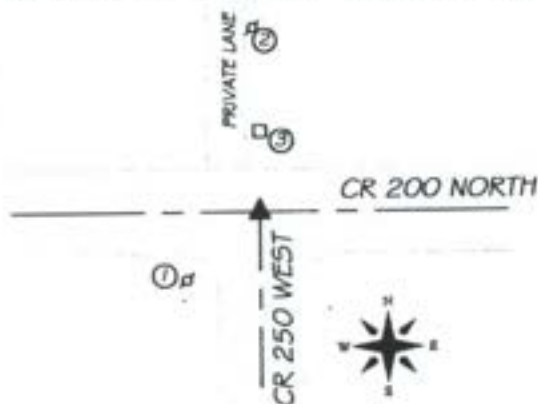


MONUMENT TYPE: 1/2" Ø SMOOTH ROD
DEPTH: 0.1'
HISTORY: NO PREVIOUS REFERENCE

DATE: 9/5/06
FIELD CREW: J.H., J.P.

REF. TIE	DISTANCE	DESCRIPTION	FOUND OR SET
1.	32.45'	MAG NAIL W/ WASHER IN PWP	SET
2.	63.85'	MAG NAIL W/ WASHER IN PWP	SET
3.	20.92'	MAG NAIL W/ WASHER IN FENCE POST	SET

EAST 1/4 CORNER, SECTION 27,
T22N, R4E TIPTON COUNTY, INDIANA
(COUNTY REFERENCE #4 FOR SECTION 27)

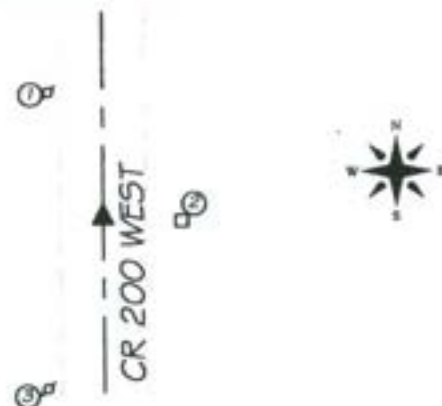


MONUMENT TYPE: 5/8" Ø REBAR
DEPTH: 0.3'
HISTORY: COUNTY REFERENCES A STONE
2.1' DEEP. 2 OF 3 FENCE POSTS SHOWN
ON REFERENCE ARE GONE. OTHER
REFERENCES CHECKED. DID NOT DIG FOR
STONE.

DATE: 9/5/06
FIELD CREW: J.H., J.P.

REF. TIE	DISTANCE	DESCRIPTION	FOUND OR SET
1.	47.1'	PK IN PWP	FOUND
2.	10.0'	PK IN FENCE POST	FOUND
3.	99.3'	MAG NAIL W/ WASHER IN PWP	SET

SOUTH 1/4 CORNER, SECTION 27,
T22N, R4E TIPTON COUNTY, INDIANA
(COUNTY REFERENCE #6 FOR SECTION 27)

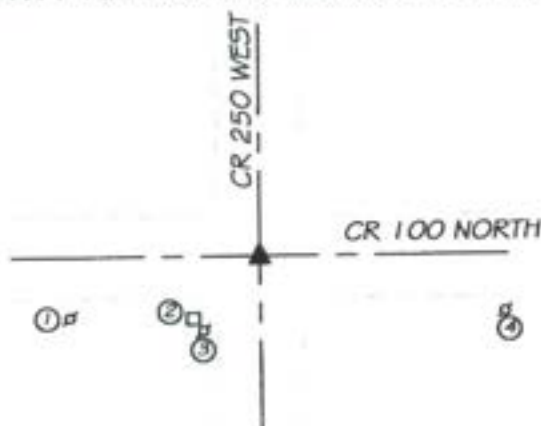


MONUMENT TYPE: STONE
DEPTH: FLUSH
HISTORY: NO PREVIOUS
REFERENCE


DATE: 9/5/06
FIELD CREW: J.H., J.P.

REF. TIE	DISTANCE	DESCRIPTION	FOUND OR SET
1.	61.01'	PK IN PWP	FOUND
2.	24.0'	PK IN FENCE POST	FOUND
3.	25.0'	MAG NAIL W/ WASHER IN PWP	SET
4.	134.1'	PK IN PWP	FOUND

40th PARALLEL SURVEYING, LLC
555 MARKET ROAD, TIPTON, IN 46072
765-454-9099 AND 765-675-6455, FAX: 765-675-7635
wpatb215@msightbb.com




NOVEMBER 1983

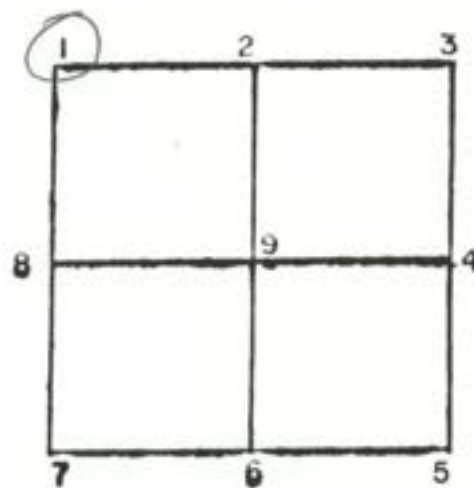

THE:

1.	61.2'	PK - PWP
2.	42.45'	PK - PWP
3.	27.25'	PK - PWP
4.	62.15'	PK - PWP


SEC 27 TWP 22 RANGE 4

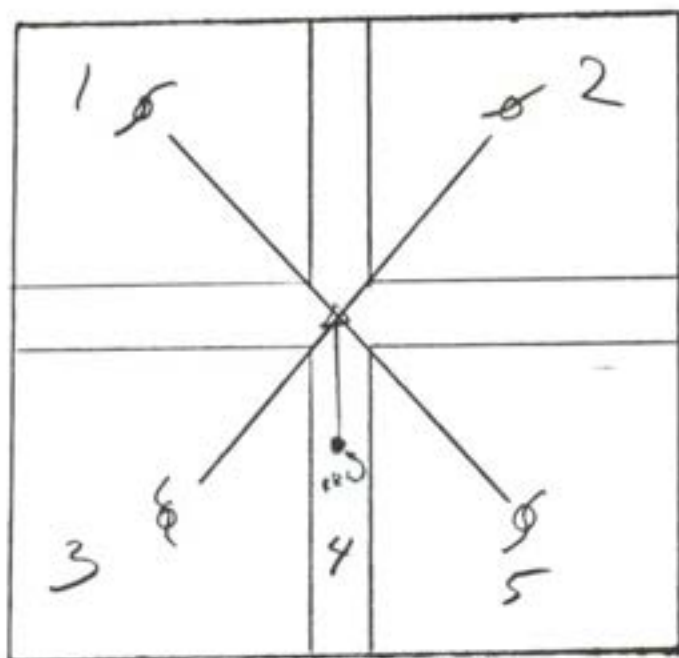

GRAPHIC TIES
(SKETCHED)

SEC. 27 TWP. 22 RANGE 4

4-23-1980

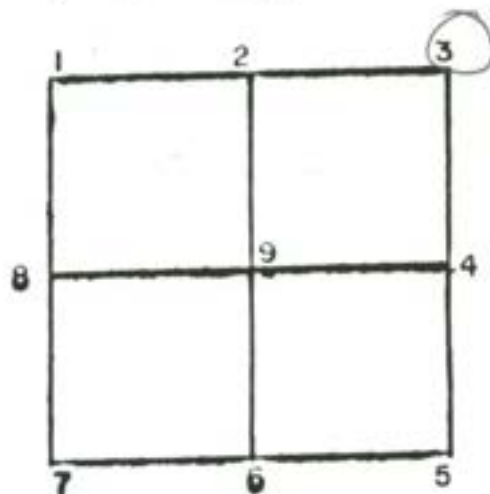


CORNER IDENT. 3 STONE FND 1.6' DEEP W/X

TIES: 1. 66.33' PK - PWP
2. 51.49' PK - PWP
3. 39.22' PK - PWP
4. 1.41' RR SPIKE - RR SPIKE E OF RD. 200W
5. 54.79' PK - PWP

FB. 150 P. 24


SEC. 27 TWP. 22 RANGE 4

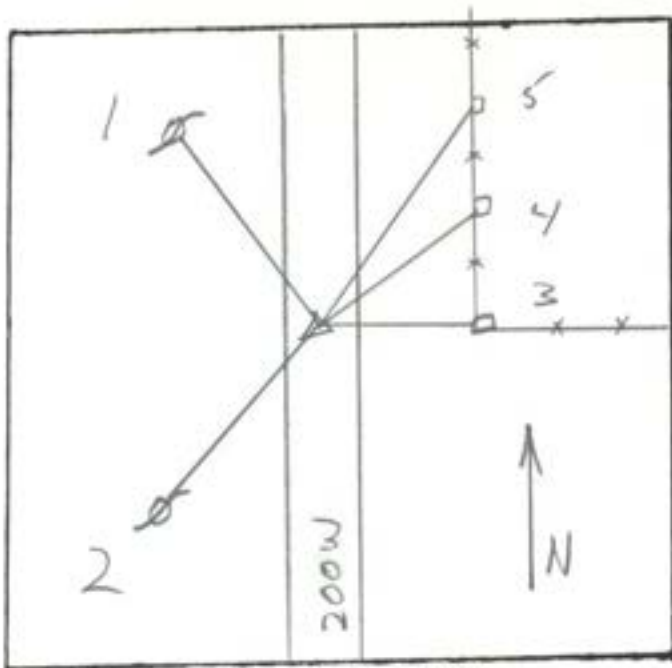

GRAPHIC TIES
(SKETCHED)

SEC 27 TWP 22 RANGE 4

4-24-1980

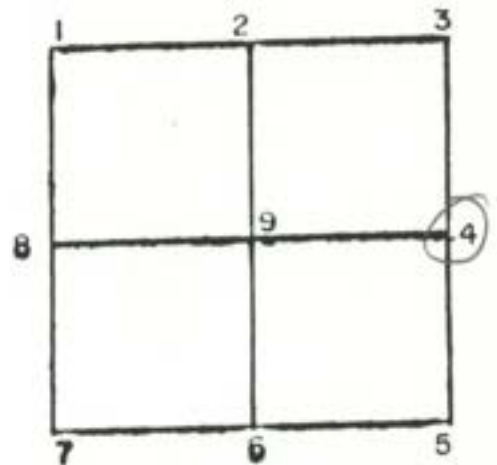


CORNER IDENT. 4 STONE FND 2.1' DEEP W/POINT

TIES:	1.	47.10'	PK - PWP
	2.	99.19'	PK - PWP
	3.	18.75'	PK - CORNER POST
	4.	21.88'	PK - BRACE POST
	5.	39.61'	PK - CONCRETE FENCE POST


SEC 27 TWP 22 RANGE 4

SEC 27 TWP 22 RANGE 4

5-2-80

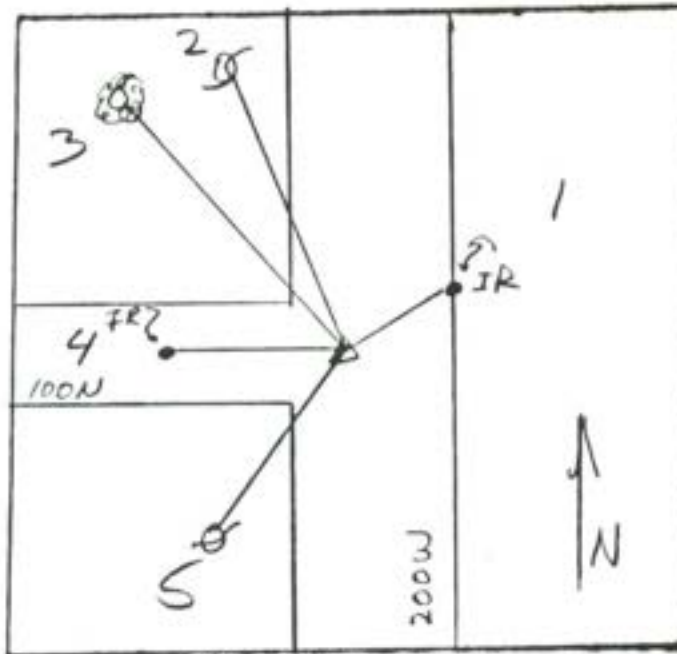

GRAPHIC TIES
(SKETCHED)

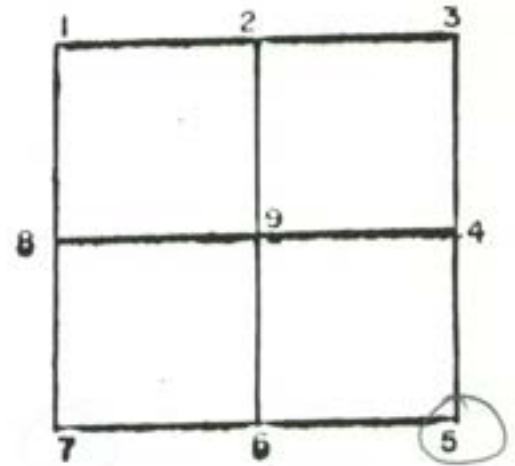


CORNER IDENT. 5 STONE FND MARKED F35 1.2' DEEP

- TIES:
1. 23.07' IRON ROD EAST SIDE ROAD
 2. 108.49' PK - PWP
 3. 62.17' PK - 36" MAPLE TREE
 4. 58.17' IRON ROD 2 OF 100N
 5. 29.57' PK - PWP

FR. 150 P. 26


SEC 27 TWP 22 RANGE 4

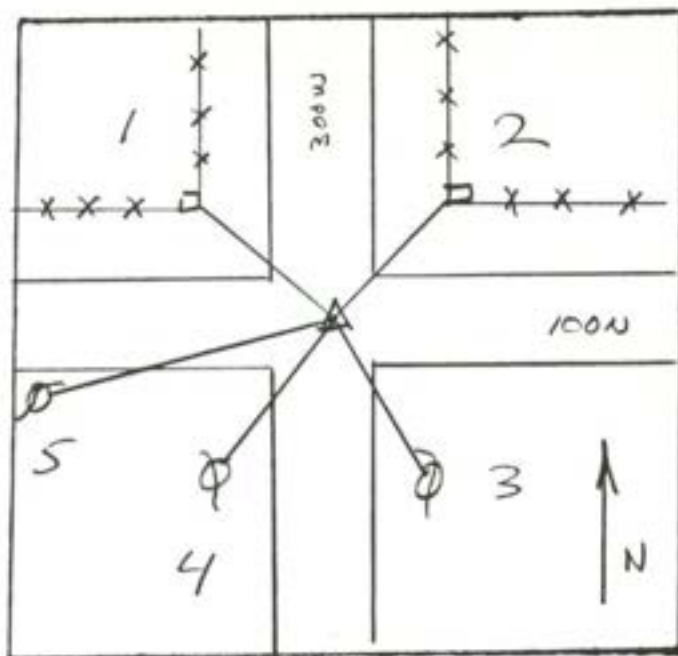

GRAPHIC TIES
(SKETCHED)

SEC. 27 TWP. 22 RANGE 41

7-15-71

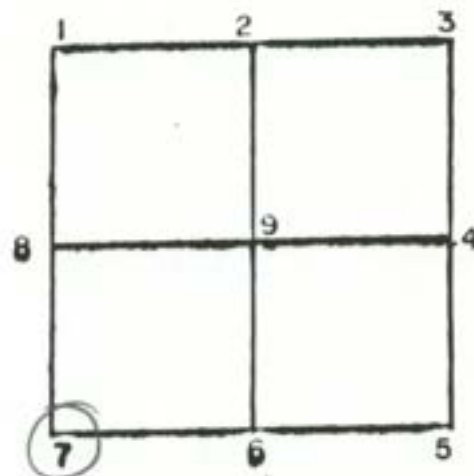


CORNER IDENT. 7 STONE FND. 2.5' DEEP 6/89

TIES: 1. 23.0' PK - HEADPOST
2. 28.4' PK - HEADPOST
3. 21.5' PK - PWP 40.40'
4. 22.0' PK - PWP 33.11'
5. 39.9 PK - PWP 40.05'


SET 5/8" BOLT 10" LONG OVER STONE

SEC. 27 TWP. 22 RANGE 4

SEC 27 TWP 22 RANGE 4

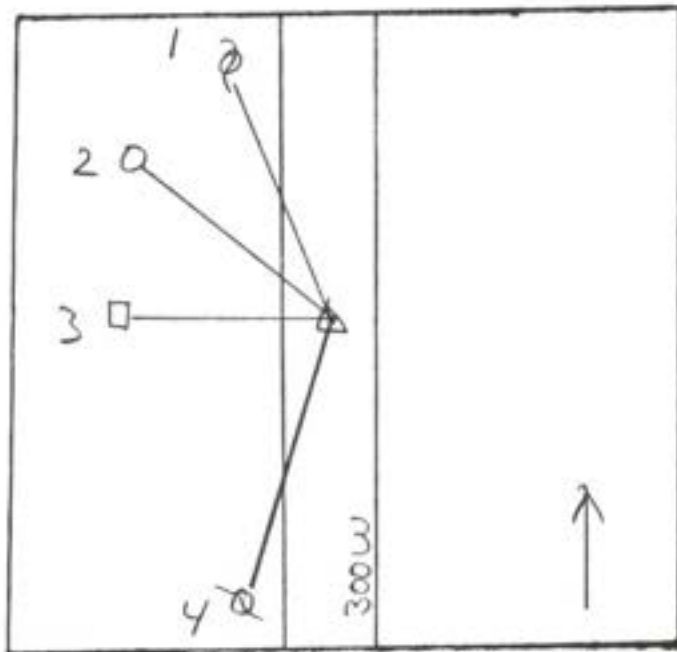

GRAPHIC TIES
(SKETCHED)

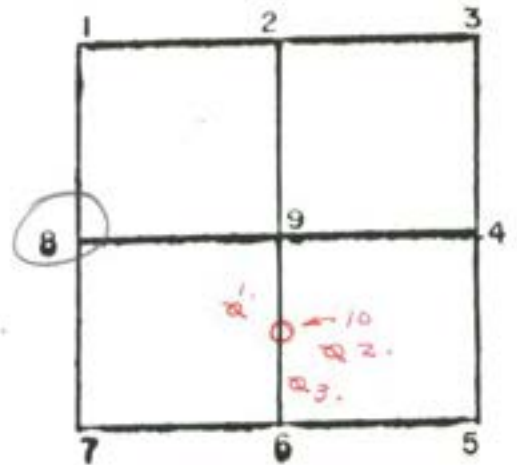

CORNER IDENT. HARRISON MARKER FND 6/89
NOT STATED

TIES: 1. 84.00' PWP 84.40 To PK NACL
2. 22.10' CONCRETE HP 24.05 To NE Cor
3. 19.00' HP 15.98 To SE Cor.
4. 173.10' AWP

#10 Stone Found 26' Deep 6/89


1. 39.18 PK NACL to Power Pole

2. 58.72 " " " " "


3. 53.32 " " " " "

SEC 27 TWP 22 RANGE 4

SEC 28 TWP 22 RANGE 4

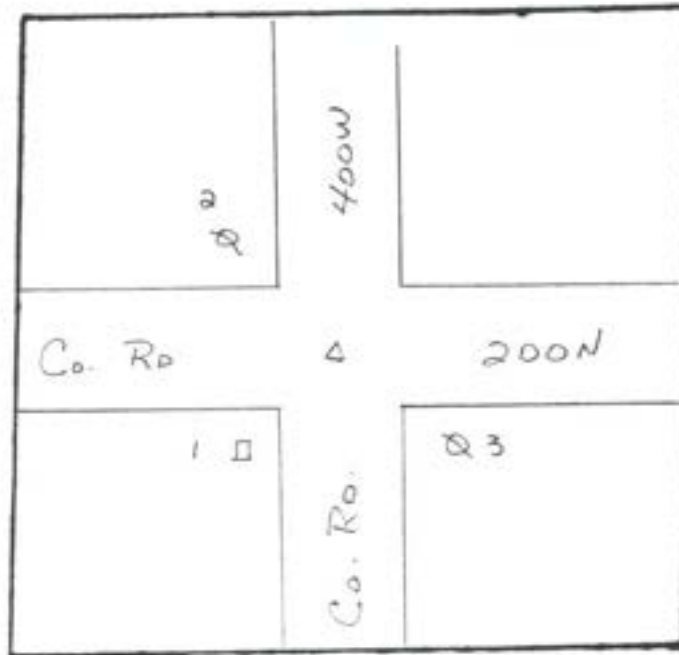


GRAPHIC TIES
(SKETCHED)

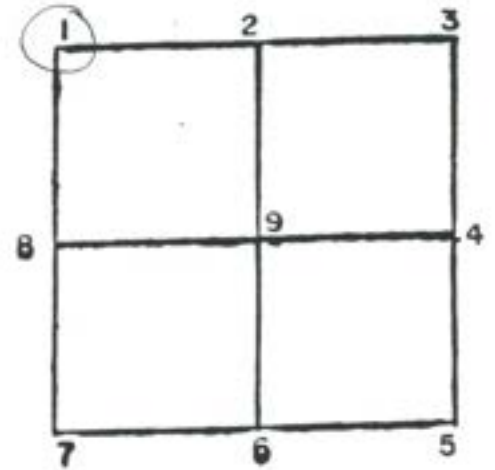

CORNER IDENT. IRON ROD

TIES: 1. 29.29 P.K. NAIL IN HEADPOST
2. 29.01 P.K. NAIL IN POWERPOLE
3. 51.12 P.K. NAIL IN POWERPOLE


SEC 28 TWP 22 RANGE 4

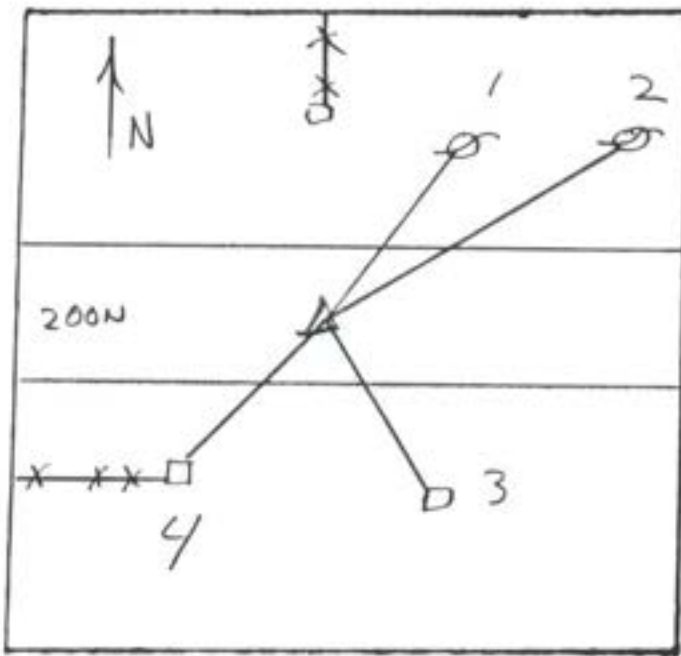

GRAPHIC TIES
(SKETCHED)

SEC 28 TWP 22 RANGE 4


NOVEMBER 1983

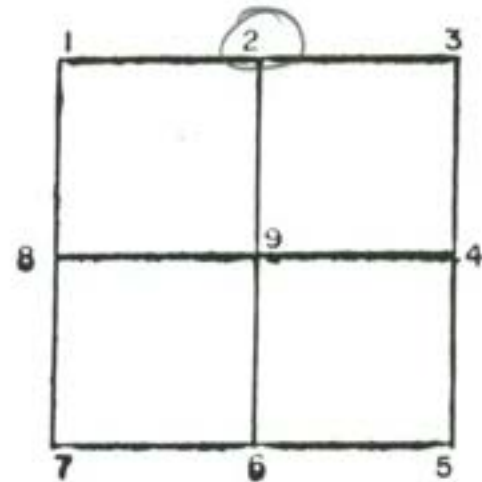

CORNER IDENT. 2 STONE 6" DEEP

TIES: 1. 19.0' PK - PWP
2. 125.55' PK - PWP
3. 34.75' PK - HEADPOST
4. 23.30' PK - HEADPOST


SEC 28 TWP 22 RANGE 4

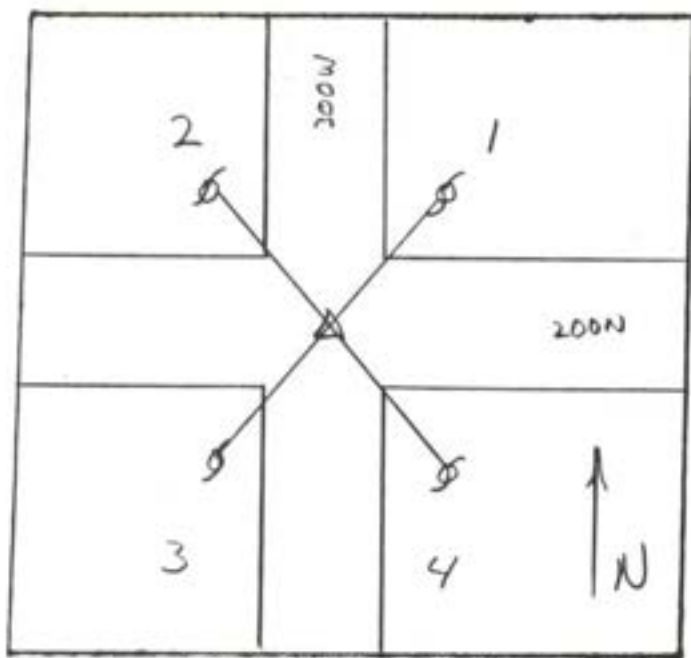

GRAPHIC TIES
(SKETCHED)

SEC 28 TWP 22 RANGE 4

NOVEMBER 1983

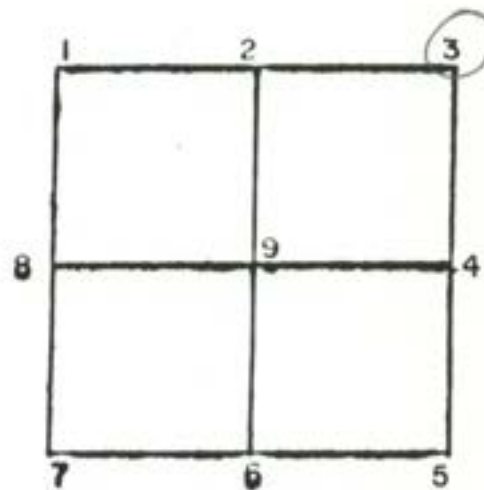


CORNER IDENT. 3 FND STONE W/X 3" BELOW SURFACE


TIES:	1.	61.2'	PK - PWP
	2.	42.45'	PK - PWP
	3.	27.25'	PK - PWP
	4.	62.15'	PK - PWP

SEC 28 TWP 22 RANGE 4

SEC. 28 TWP 22 RANGE 4

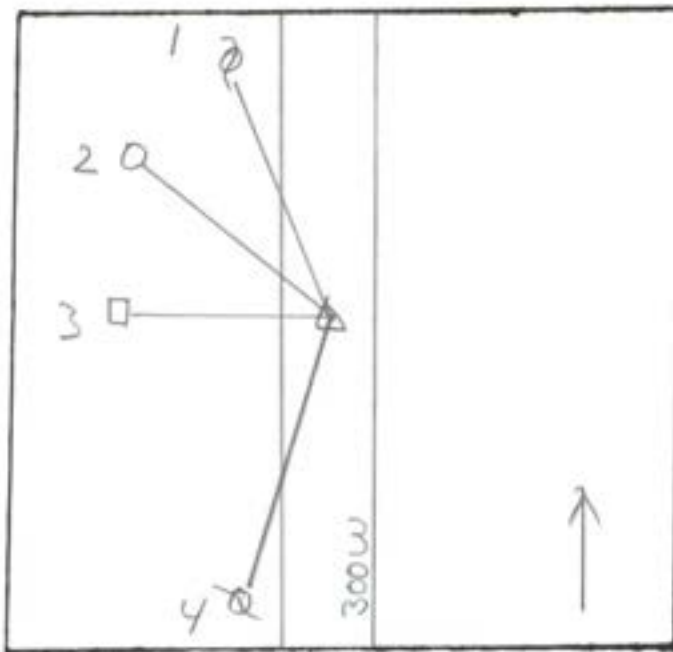


GRAPHIC TIES
(SKETCHED)

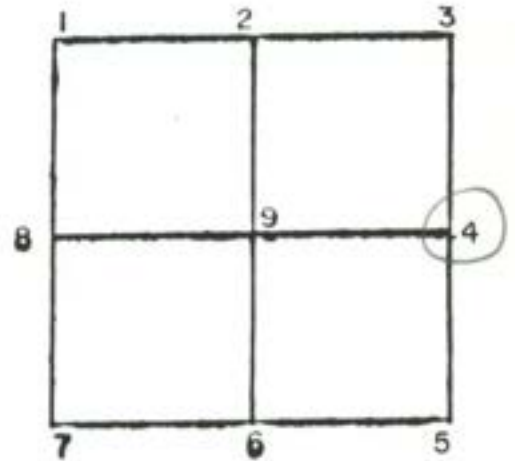

CORNER IDENT. HARRISON MARKER FOUND 6/89
NOT STATED


TIES: 1. 84.00' PWP 84.40 To P.K. Nail
2. 22.10' CONCRETE HP 24.05 To NE Cor
3. 19.00' HP 15.98 To SE Cor
4. 173.10' PWP

SEC 28 TWP 22 RANGE 4

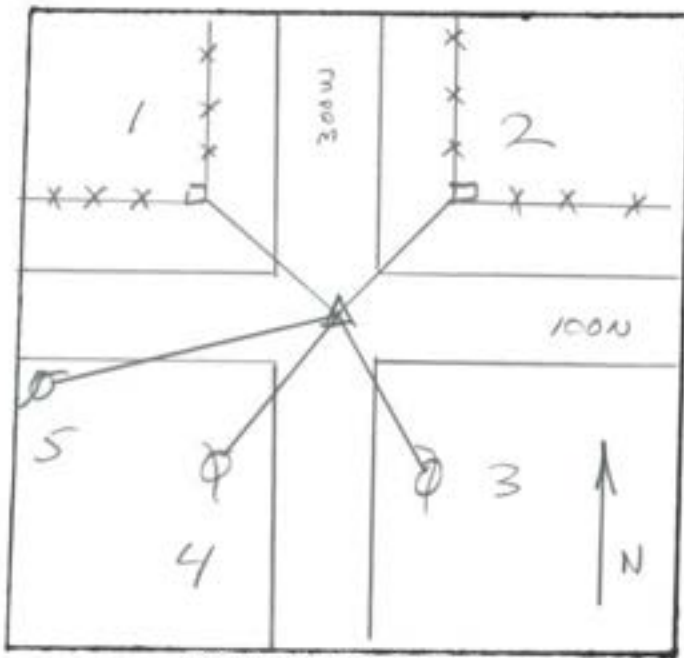

SEC. 28 TWP. 22 RANGE 41

7-15-71

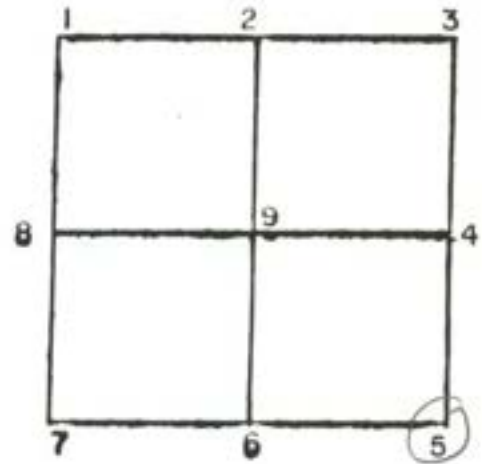


CORNER IDENT. 5 STONE


- TIES:
- 1. 23.0' PK - HEADPOST
 - 2. 28.9' PK - HEADPOST
 - 3. 21.5' PK - PWP
 - 4. 22.0' PK - PWP
 - 5. 39.9 PK - PWP

SEC 28 TWP 22 RANGE 4

SEC 28 TWP 22 RANGE 4

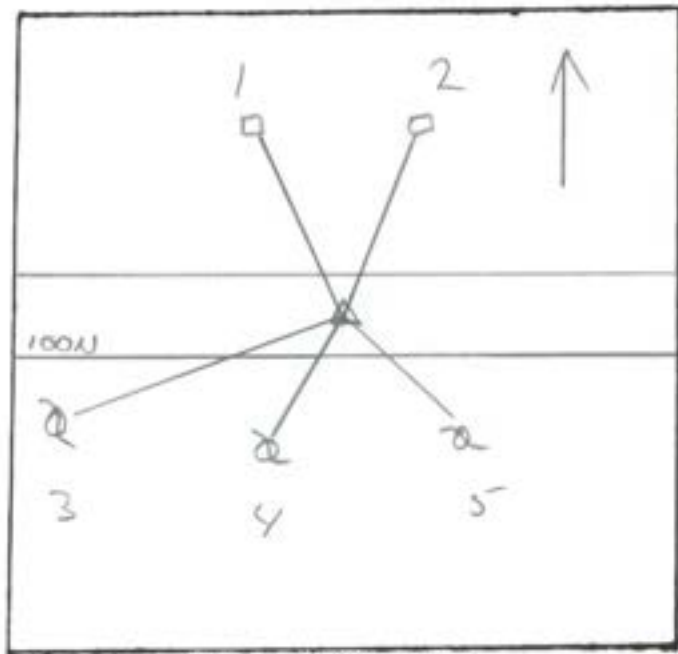

GRAPHIC TIES
(SKETCHED)

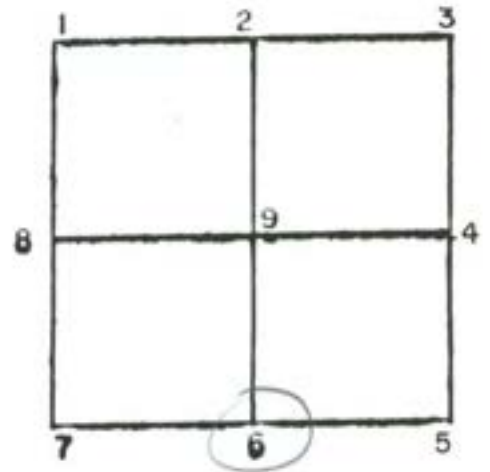


CORNER IDENT. NOT STATED


TIES: 1. 23.00' HP
2. 28.90' HP
3. 39.90' PWP
4. 22.00' PWP
5. 21.50' PWP

SEC 28 TWP 22 RANGE 4

SEC 28 TWP 22 RANGE 4

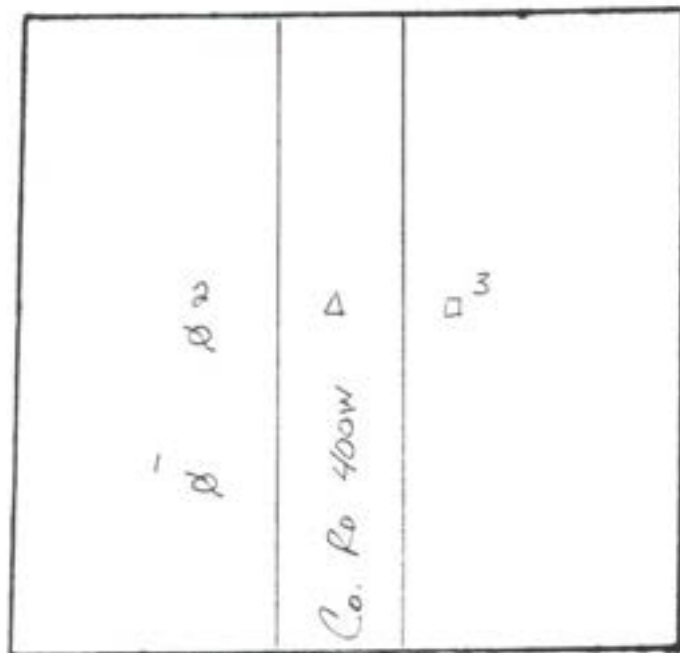

GRAPHIC TIES
(SKETCHED)

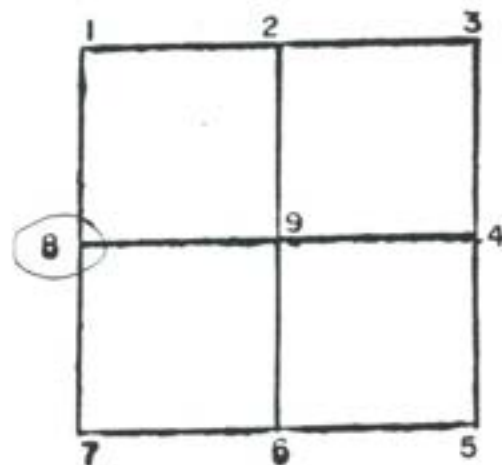


CORNER IDENT. P. V. NOEL


TIES: 1. 174.44 PK NAIL IN POWERPOLE
2. 17.08 PK NAIL IN POWERPOLE
3. 24.50 PK NAIL IN FENCE POST

SEC 28 TWP 22 RANGE 4

SEC. 29 TWP. 22 RANGE 4

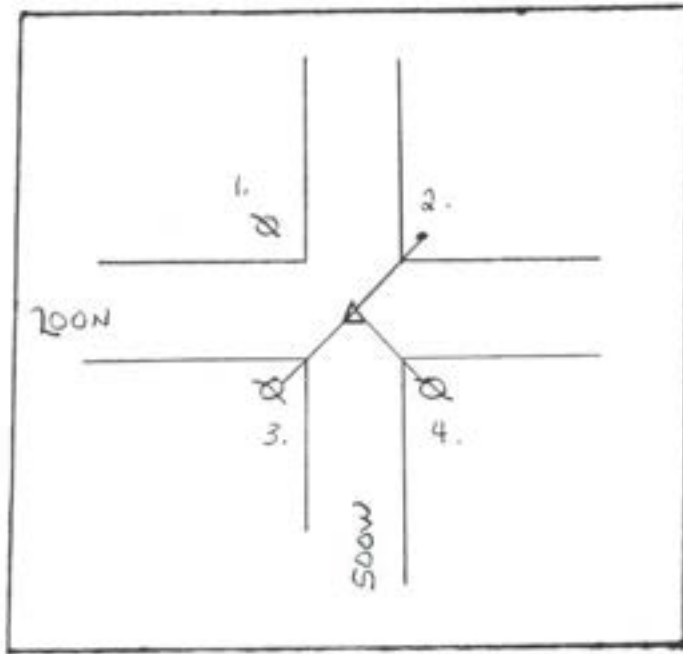

GRAPHIC TIES
(SKETCHED)

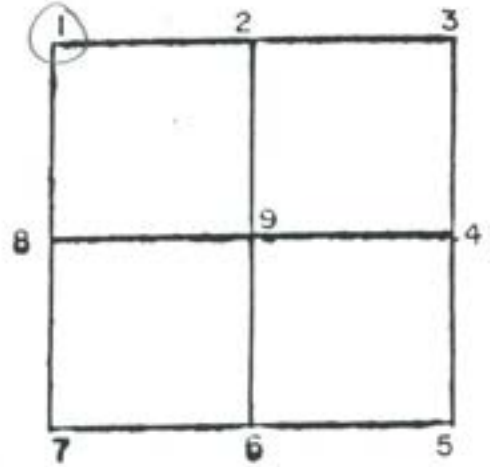

CORNER IDENT. IRON ROD

THIS: 1 —

2. 28.54' 5/8" IRON ROD

3. 27.28' P.K. Nail in PWP



4. 31.44' P.K. NAEL EN PWP

SEC 29 TWP 22 RANGE 4

REFERENCE SHEET

SECTION 29 TOWNSHIP 22 RANGE 4 EAST

DATE OF RECOVERY FEBRUARY 4, 2002

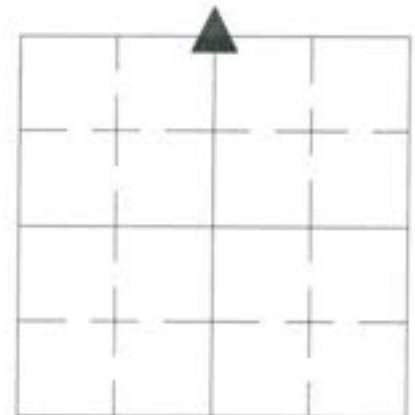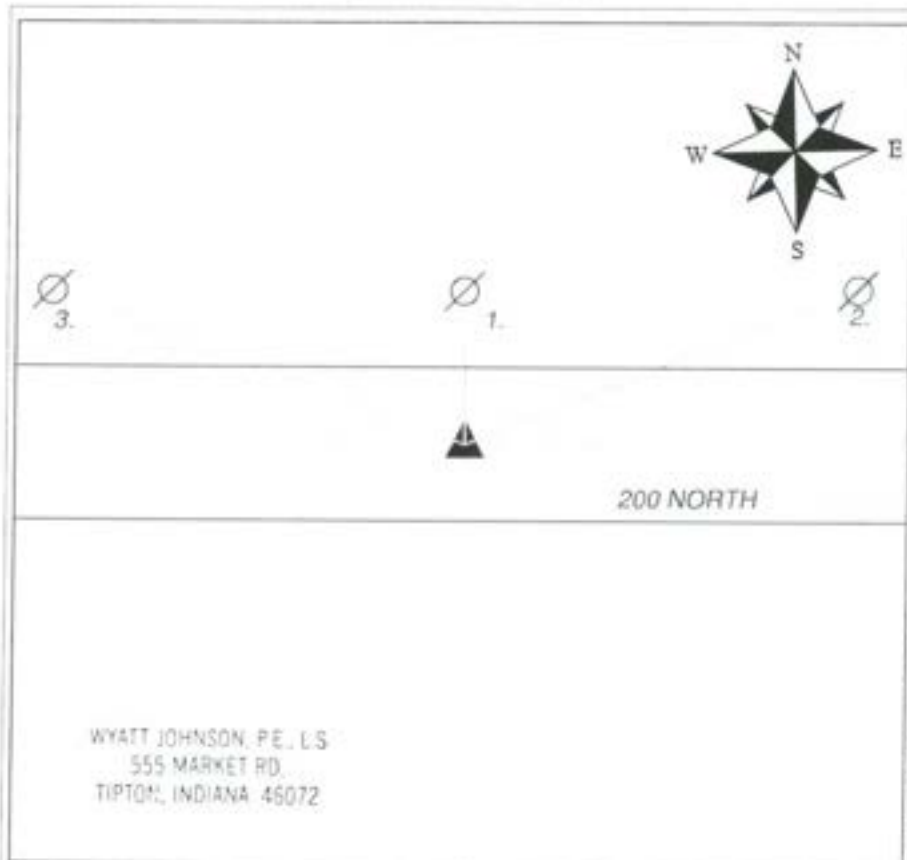

INDIANA COORDINATE SYSTEM
OBSERVATION DATE: _____
CREW: _____
NORTH: _____ EAST: _____
ELEVATION: _____
SURFACE SCALE FACTOR: _____
LATITUDE: _____
LONGITUDE: _____
ELLIPSOID HEIGHT: _____


PARTY CHIEF: ROD KELLY
CREW: ROD KELLY, JARED HENRY

TYPE OF MARKER IDENTIFIED: 1" IRON ROD
HISTORY AND DESCRIPTION OF RECOVERED POINT:


I FOUND NO REFERENCES IN THE COUNTY SURVEYOR'S OFFICE PERTAINING TO THIS QUARTER SECTION MONUMENT. WE DID FIND A PK NAIL IN THE POWERPOLE TO THE NORTH. OUR RECORD INDICATES THE IRON ROD WAS USED BY US IN A PREVIOUS SURVEY. THE ROD WAS FOUND 0.40' BELOW THE SURFACE OF A CHIP AND SEALED ROAD.

REFERENCE	DISTANCE	DESCRIPTION	FOUND SET	
1.	20.44'	PK NAIL IN POWERPOLE	☒	☐
2.	141.23'	MAG NAIL WITH I.D. WASHER IN POWERPOLE	☐	☒
2.	123.97'	MAG NAIL WITH I.D. WASHER IN POWERPOLE	☐	☒
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐
-	-	-	☐	☐

SEC 29 TWP 22 RANGE 4

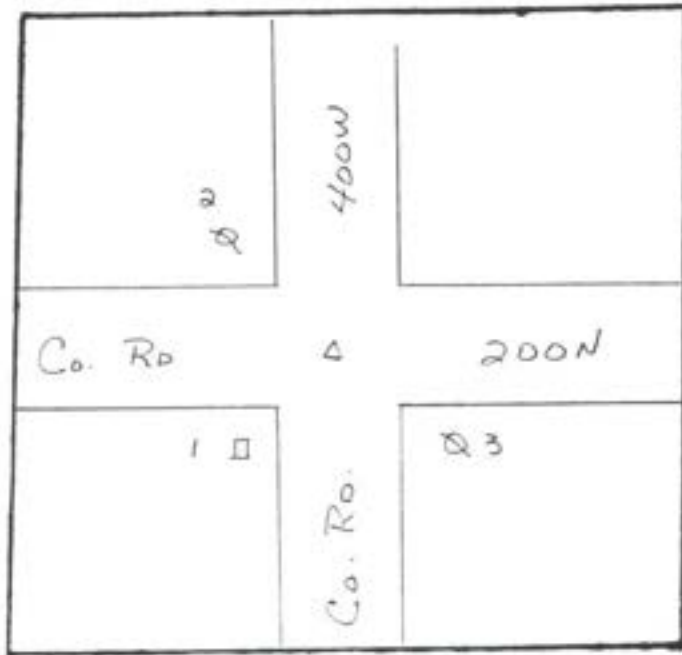

GRAPHIC TIES
(SKETCHED)

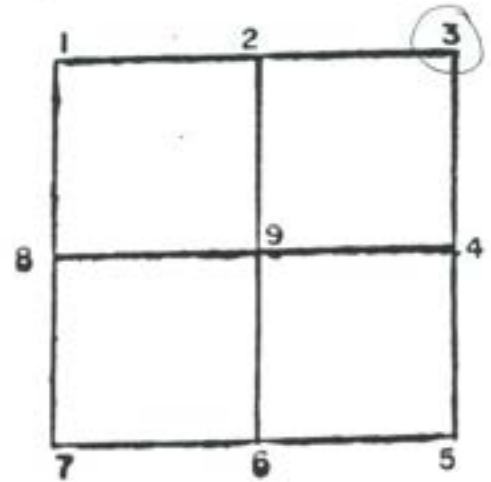

CORNER IDENT. IRON ROD


TIES: 1. 29.29 P.K. NAIL IN HEADPOST

2. 29.01 P.K. NAIL IN POWERPOLE


3. 51.12 P.K. NAIL IN POWERPOLE

SEC 29 TWP 22 RANGE 4

SEC 29 TWP 22 RANGE 4

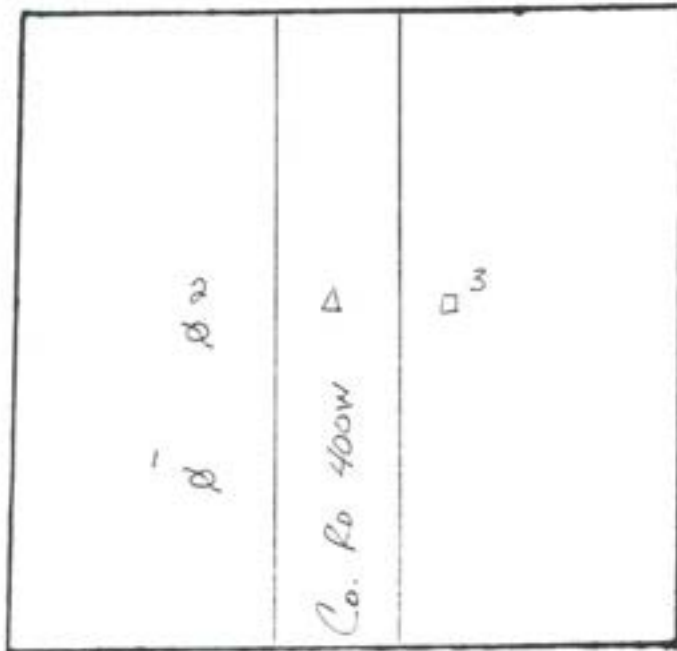

GRAPHIC TIES
(SKETCHED)

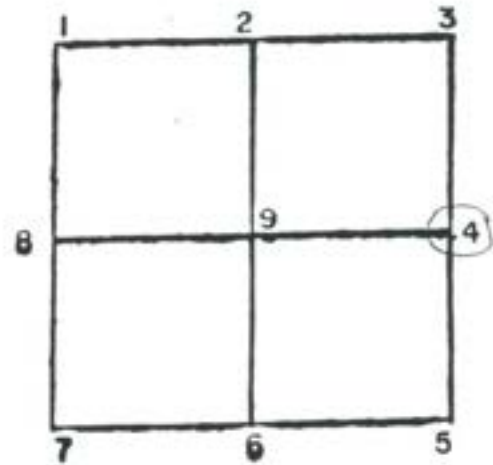


CORNER IDENT. P. V. NAIL


TIES: 1. 174.44 PK NAIL IN POWERPOLE
2. 17.08 PK NAIL IN POWERPOLE
3. 24.50 PK NAIL IN FENCE POST

SEC 29 TWP 22 RANGE 4

SEC 29 TWP 22 RANGE 4

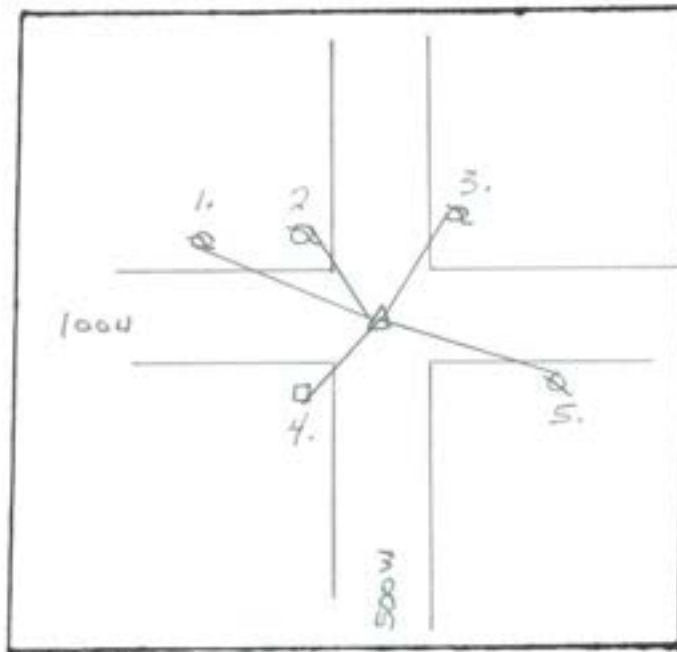

GRAPHIC TIES
(SKETCHED)

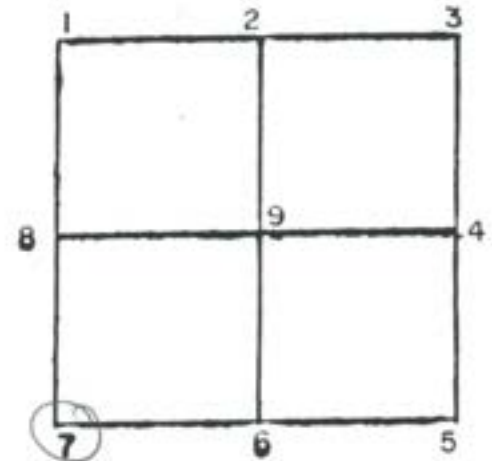


CORNER IDENT. STONE FND. RR3. SET OVER STONE


TIES:	1.	86.03'	PK	NAIL	IN	PWP
	2.	27.27'	"	"	"	"
	3.	34.05'	"	"	"	"
	4.	32.35'	"	"	"	HEADPOST
	5.	56.87'	"	"	"	PWP

SEC 29 TWP 22 RANGE 4

SEC 29 TWP 22 RANGE 4

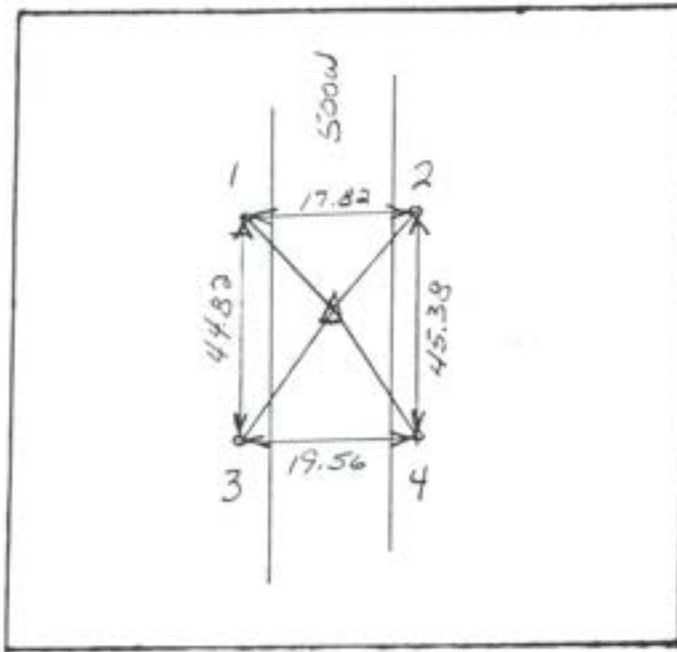

GRAPHIC TIES
(SKETCHED)

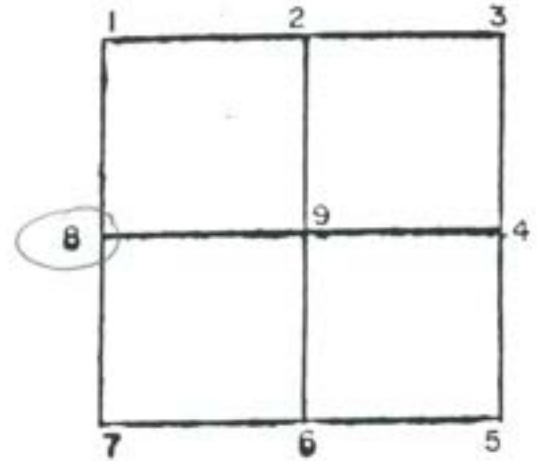


CORNER IDENT. 1" Iron Rod


TIES: 1. 24.95' 5/8" Iron Rod
2. 21.25' " " "
3. 27.66' " " "
4. 27.56' " " "

SEC 29 TWP 22 RANGE 4

SEC 30 TWP 22 RANGE 4

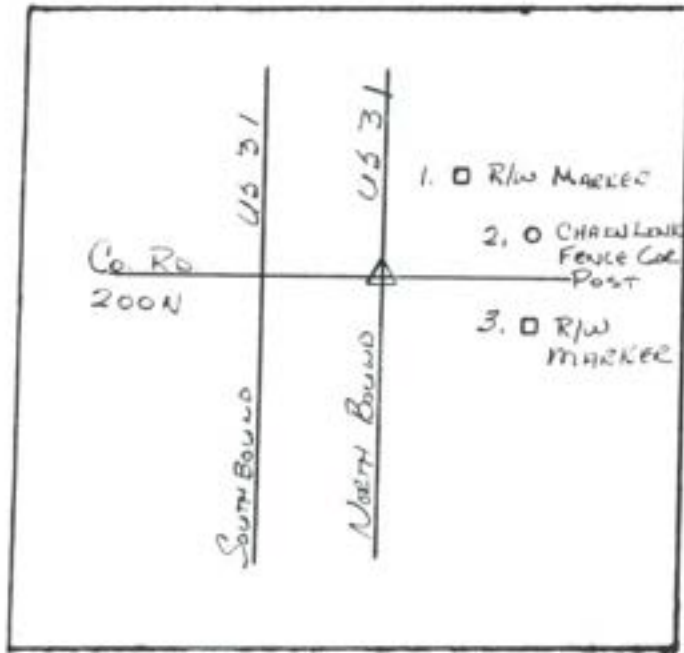

GRAPHIC TIES
(SKETCHED)

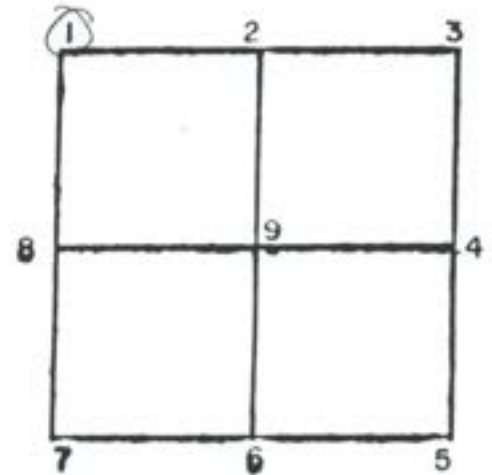


CORNER IDENT. IRON PND


TIES: 1. 97.50' SOUTHWEST CORNER R/W MARKER
 2. 116.87' SOUTH FACE CHAIN LINK FENCE CORNER POST
 3. 116.07' NORTHWEST CORNER R/W MARKER

SEC 30 TWP 22 RANGE 4

SEC 30 TWP 22 RANGE 4

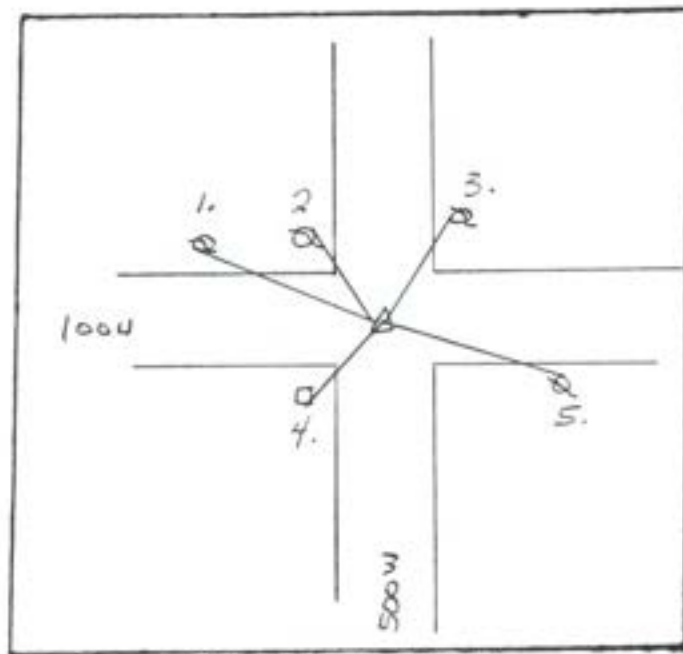

GRAPHIC TIES
(SKETCHED)

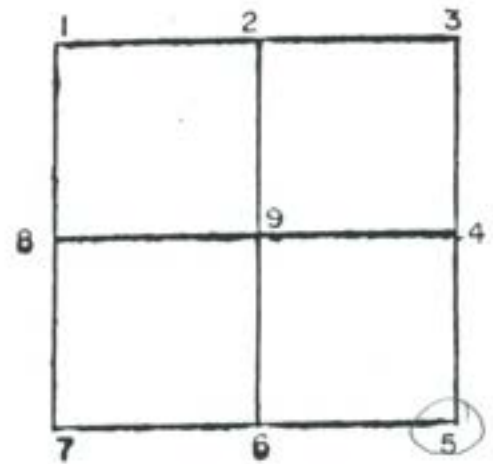


CORNER IDENT. STONE FND. RRS. SET OVER STONE


TIES:	1.	86.03'	PK	NAIL	IN	PWP
	2.	27.27'	"	"	"	"
	3.	34.05'	"	"	"	"
	4.	32.35'	"	"	"	HEADPOST
	5.	56.87'	"	"	"	PWP

SEC 30 TWP 22 RANGE 4

SEC. 30 TWP. 22 RANGE 4

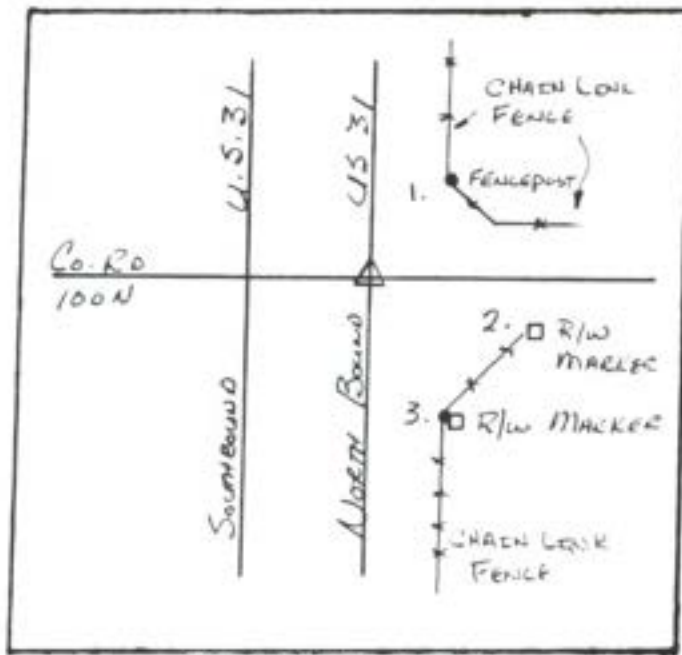

GRAPHIC TIES
(SKETCHED)

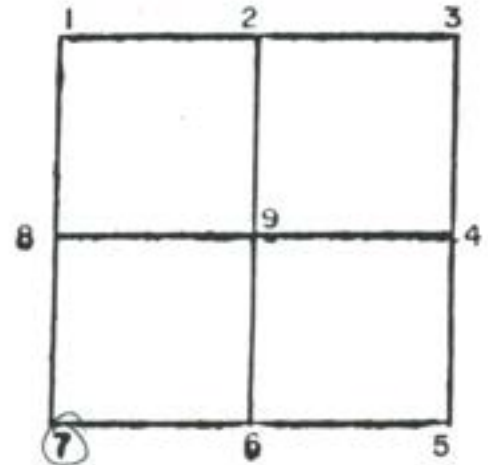


CORNER IDENT. Iron Pin


- TIES:
1. 61.68' Southwest Face CHAIN LINK FENCE POST
 2. 115.38' Southwest corner R/W MARKER.
 3. 117.00' West Face of R/W FENCE POST IN FRONT OF R/W MARKER.

SEC. 30 TWP. 22 RANGE 4

SEC 30 TWP 22 RANGE 4

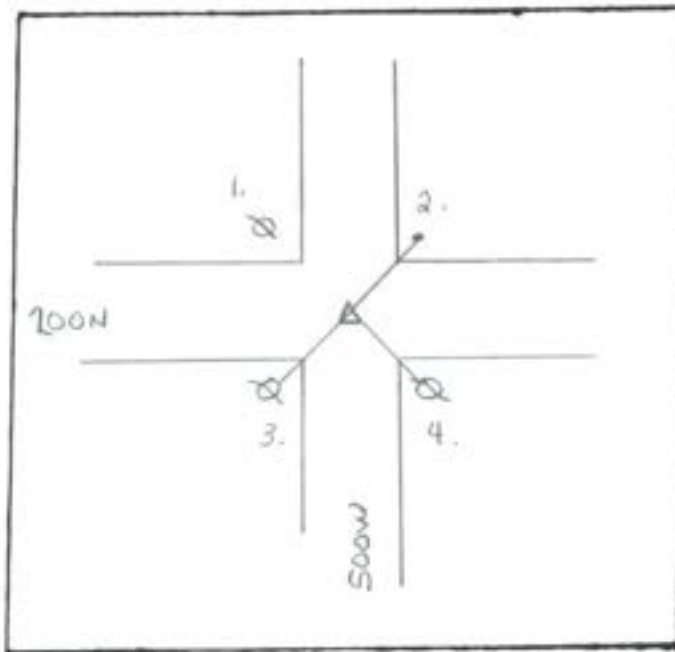


GRAPHIC TIES
(SKETCHED)

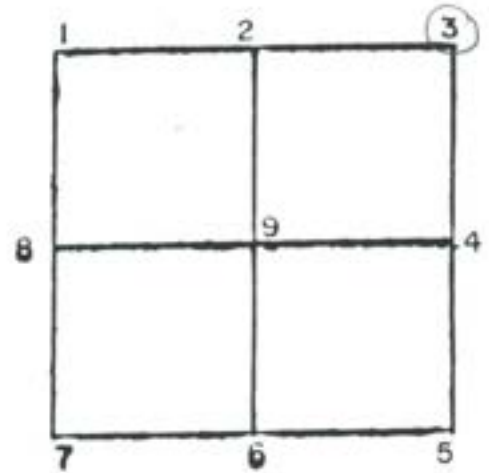

CORNER IDENT. IRON ROD


TIES: 1. —
2. 28.54' 5/8" IRON ROD
3. 27.28' P.K. NACL IN PWP
4. 31.44' P.K. NACL IN PWP

SEC _____ TWP _____ RANGE _____

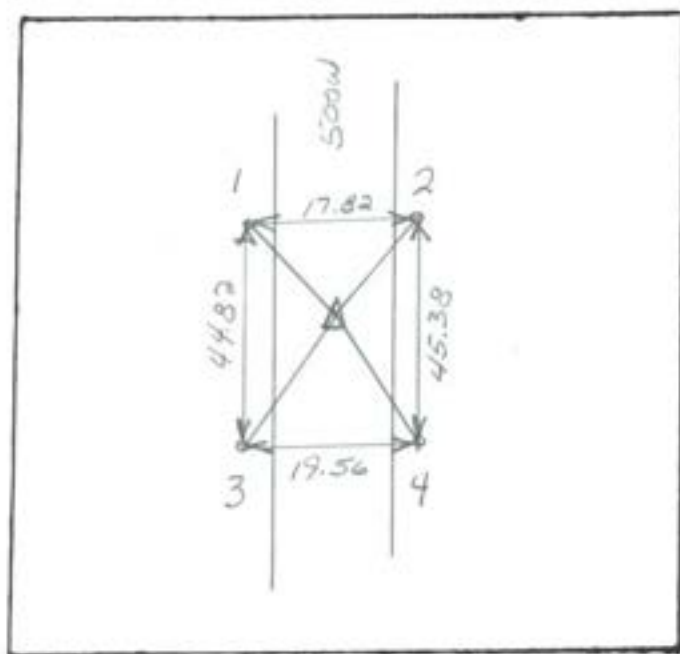

GRAPHIC TIES
(SKETCHED)


SEC 30 TWP 22 RANGE 4

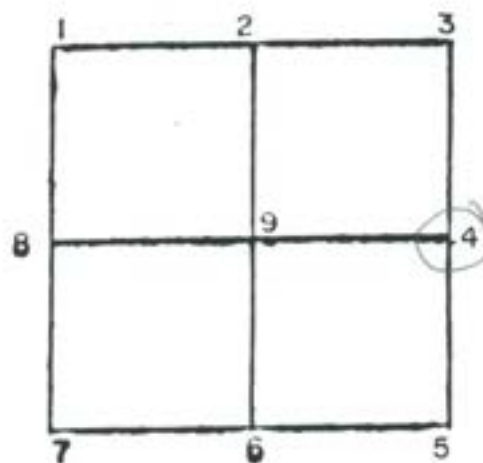

CORNER IDENT. 1" Iron Rod

TIES: 1. 24.95' 5/8" Iron Rod
2. 21.25' " " "
3. 27.66' " " "
4. 27.56' " " "


SEC 30 TWP 22 RANGE 4

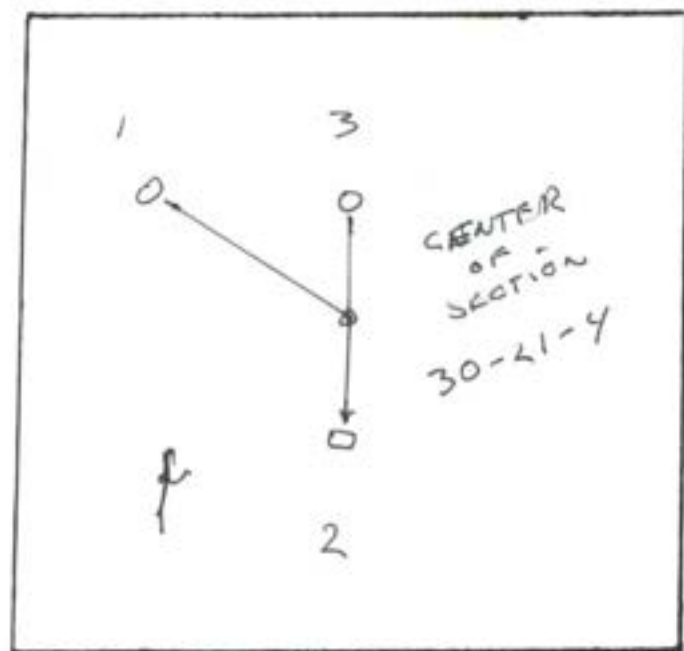

GRAPHIC TIES
(SKETCHED)

SEC 30 TWP 21 RANGE 4

W. Johnson 10/91

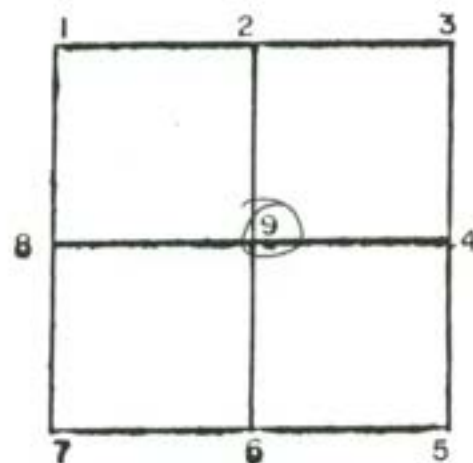


CORNER IDENT. STONE ± 4" DEEP CENTER OF STONE


TIES: 1 33.12'
2 17.92' HEAD POST
3 17.11' CONCRETE HEADPOST

SEC 30 TWP 21 RANGE 4

SEC 31 TWP 22 RANGE 4

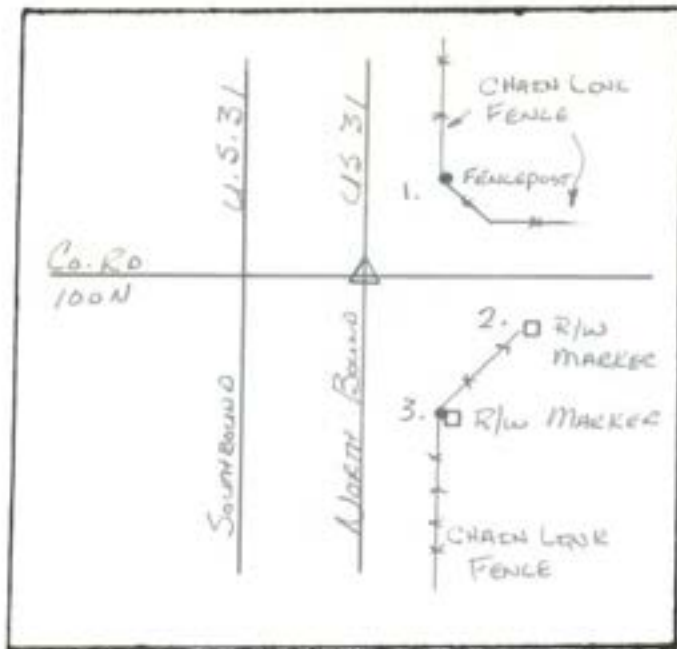

GRAPHIC TIES
(SKETCHED)

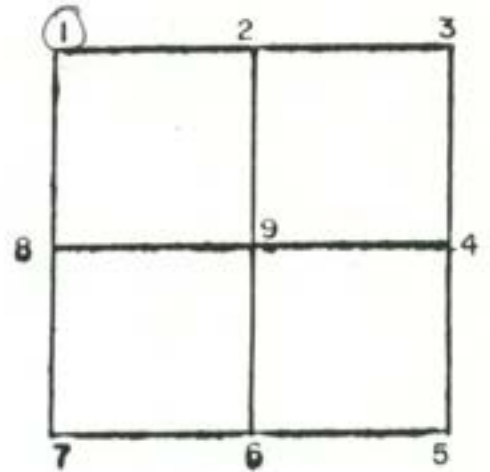


CORNER IDENT. IRON PIN


TIES: 1. 61.68' Southwest Edge Chain Link Fence Post
2. 115.38' Southwest corner R/W Marker.
3. 117.00' West Face of R/W Fence Post in
Front of R/W Marker.

SEC 31 TWP 22 RANGE 4

SEC 31 TWP 22 RANGE 4

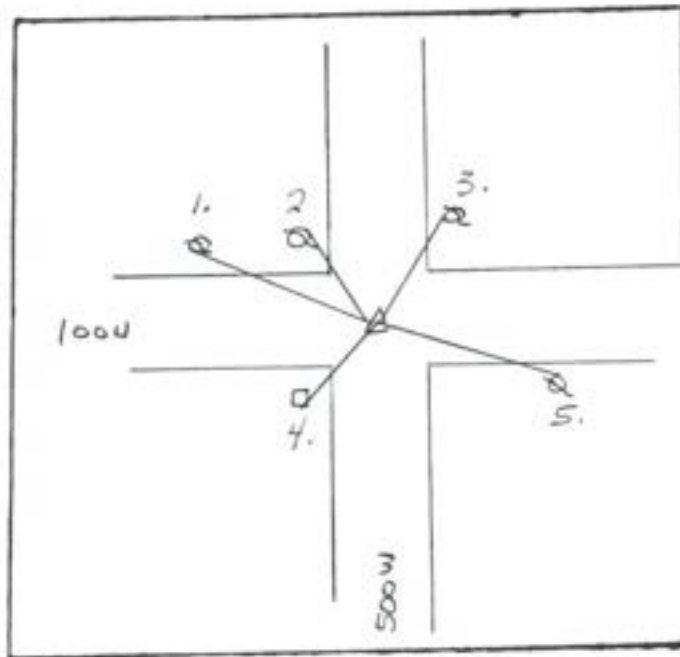

GRAPHIC TIES
(SKETCHED)

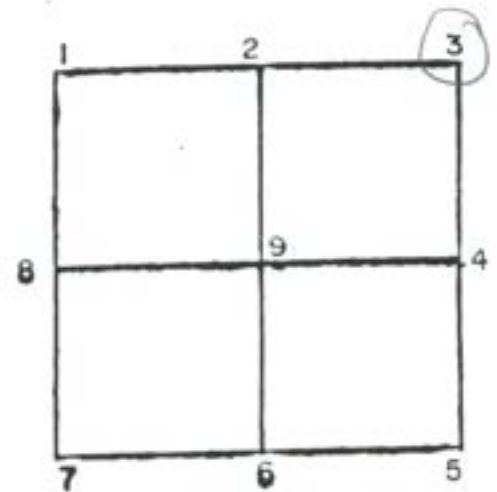


CORNER IDENT. STONE FND. RRS. SET OVER STONE


TIES:		PK	NAIL	IN	PWP
1.	86.03'				
2.	27.27'	"	"	"	"
3.	34.05'	"	"	"	"
4.	32.35'	"	"	"	HEADPOST
5.	56.87'	"	"	"	PWP

SEC 31 TWP 22 RANGE 4

SEC 31 TWP 22 RANGE 4

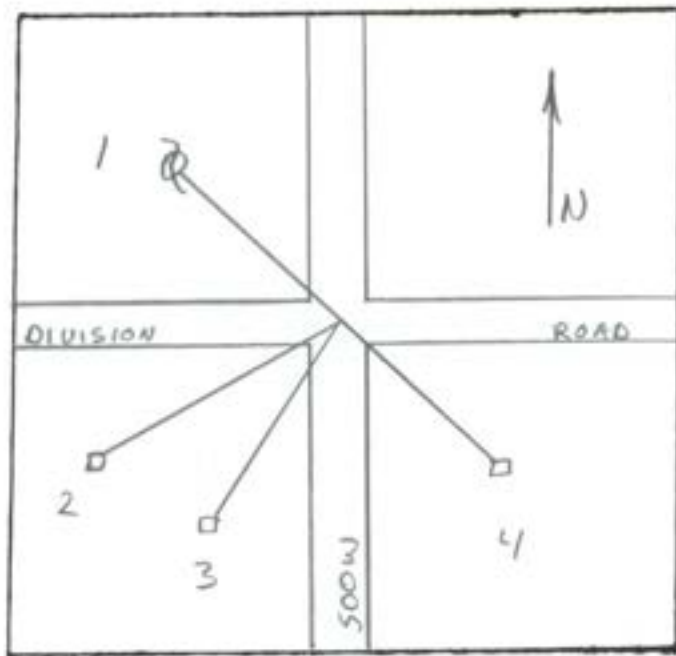

GRAPHIC TIES
(SKETCHED)

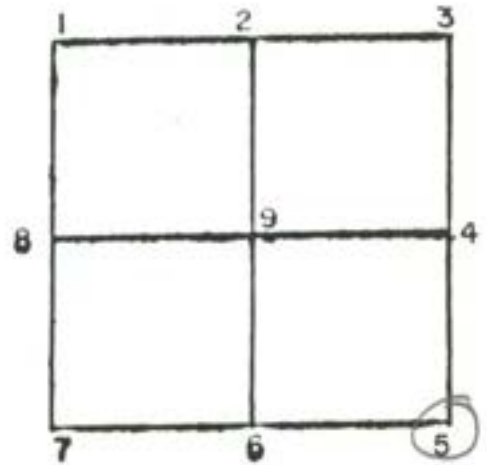


CORNER IDENT. NOT STATED


TIES: 1. 72.30' PWP
2. 49.70' HP
3. 54.70' HP
4. 30.30' HP

SEC 31 TWP 22 RANGE 4

SEC 31 TWP 22 RANGE 4

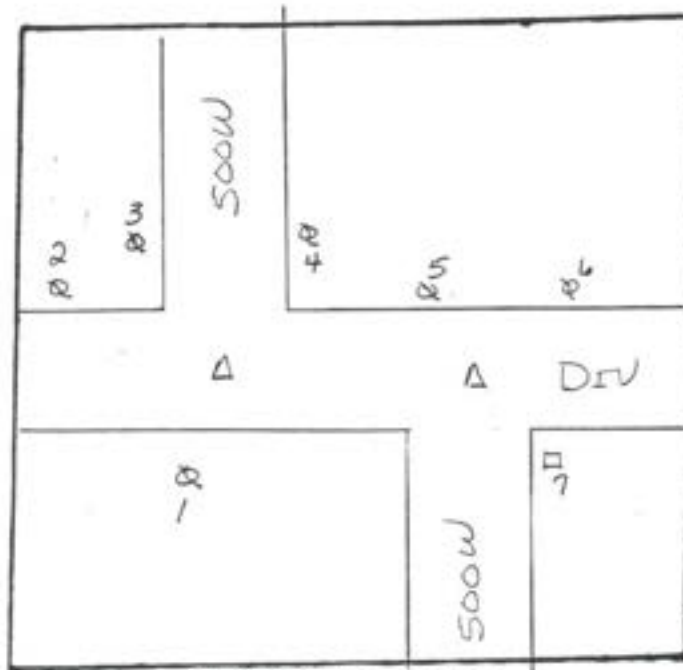

GRAPHIC TIES
(SKETCHED)

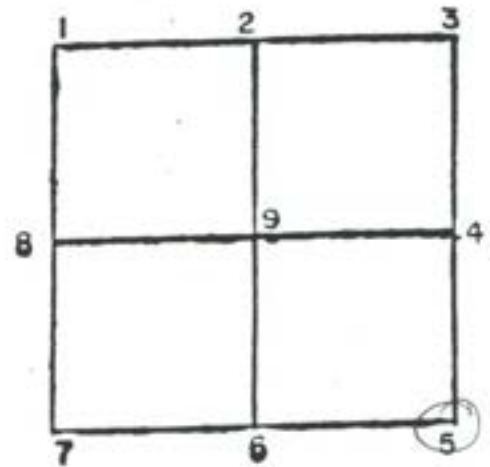

CORNER IDENT. RRS

TIES: 1. 93.02 PK NAIL IN PWP
2. 54.74 " " " PWP
3. 57.25 " " " PWP
4. 61.80 PK NAIL IN TELEPHONE POLE
5. 72.75 " " " PWP
6. 30.91 PK NAIL IN TELEPHONE POLE
7. 70.31 " " " HEADPOST

SEC 31 TWP 22 RANGE 4

A diagram of a beam with a central triangular support. Two points, labeled 1 and 2, are marked on the beam. An upward-pointing arrow is shown to the left of the beam. The text '500w' is written vertically below the beam.


A 2x2 grid with numbers 1-9. The top row contains 1, 2, and 3. The bottom row contains 7, 6, and 5. The left column contains 8 and 7. The right column contains 4 and 5. The center cell is labeled 9.

THIS: 1 IRON ROD 17.5'


2 IRON ROD 17.5'

SEC 31 TWP 22 RANGE 4

SEC 31 TWP 22 RANGE 4

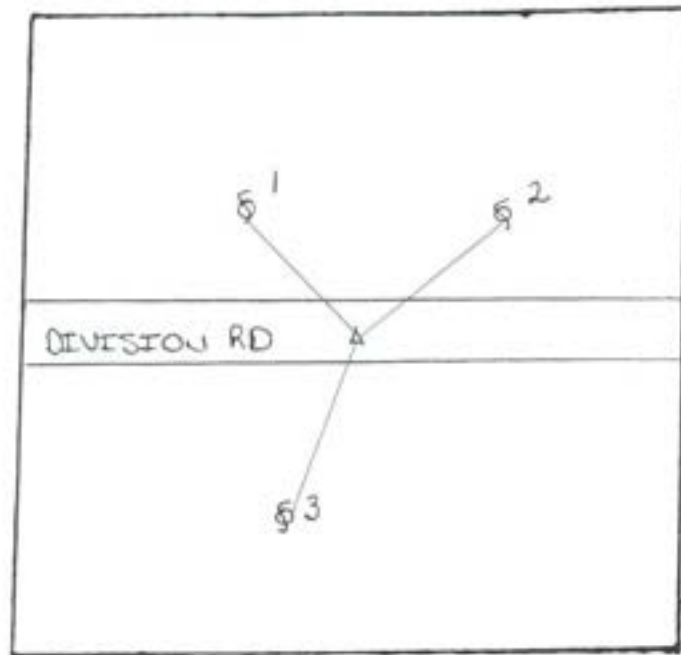

GRAPHIC TIES
(SKETCHED)

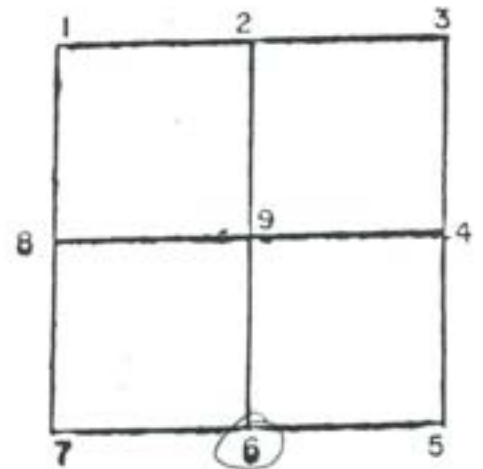


CORNER IDENT. IP in Steel mon.

- TIES: 1. 10.40 meters AZ 316° PK Nail in PWP
2. 28.042 meters AZ 77° PK Nail in PWP
3. 9.918 meters AZ 182° PK Nail in PWP
- _____

3/6/01

SEC 31 TWP 22 RANGE 4



CORNER IDENT. NOT STATED


TIME: 1. 19.34 CONCRETE HP

2. 18.90' FP


3. 39.23' PWP

SEC 31 TWP 22 RANGE 4

SEC 31 TWP 22 RANGE 4

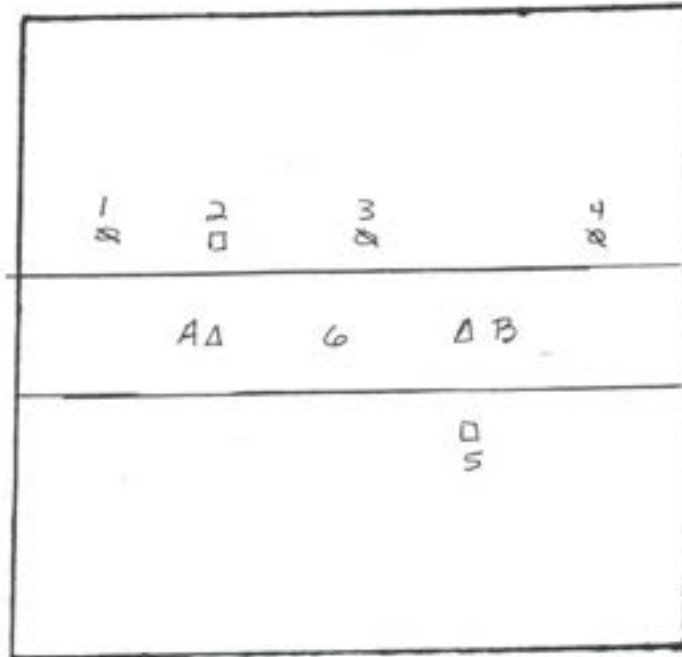

GRAPHIC TIES
(SKETCHED)

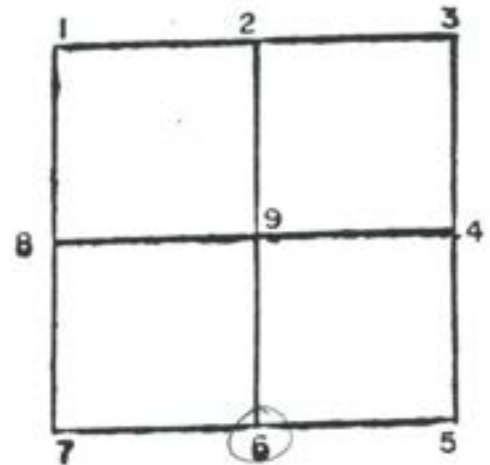

CORNER IDENT. RRS

TIES: A B

1. 27.69 PK NAIL IN TELEPHONE POLE

2. 25.13 " " " HEAD POST


3. 99.19 " " " TELEPHONE POLE 36.10

4. " " " " " 113.32


5. " " " " HEAD POST 25.77

6. 122.58 DISTANCE BETWEEN RRS

SEC 31 TWP 22 RANGE 4

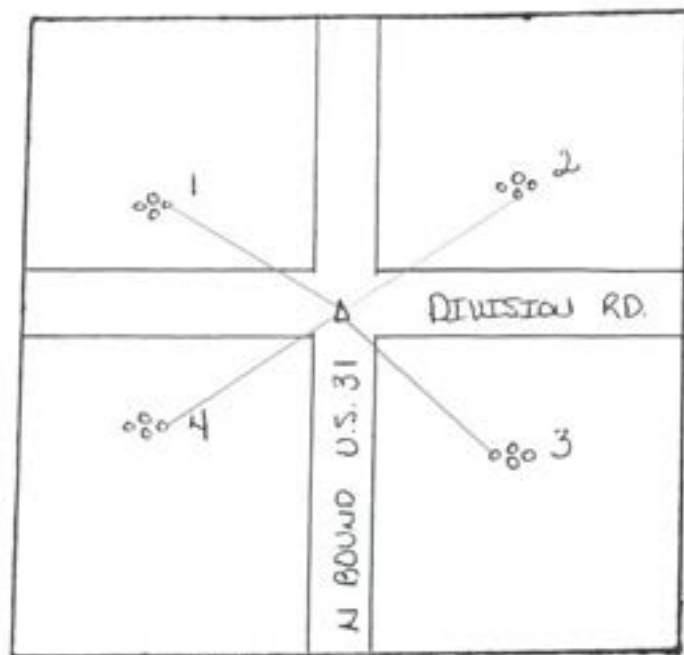

SEC. 31 TWP. 22 RANGE 4

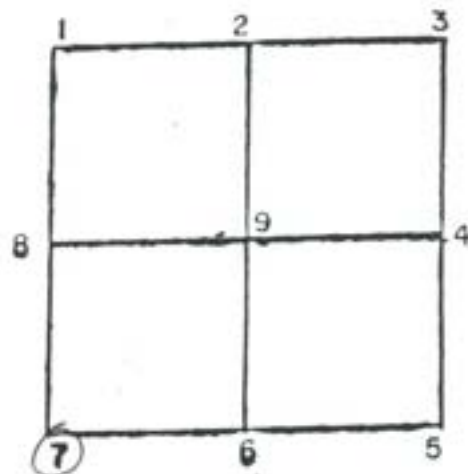

GRAPHIC TIES
(SKETCHED)


CORNER IDENT. Mag nail over brass plug found. 15 deep

- TIES:
- 1. 43.521 meters AZ 296° + cut E. bolt traffic light
 - 2. 24.540 meters AZ 50° + cut S bolt traffic light
 - 3. 25.275 meters AZ 140° + cut W bolt traffic light
 - 4. 45.053 meters AZ 250° + cut E bolt traffic light.


SEC. 31 TWP. 22 RANGE 4

3/6/01

SEC 31 TWP 22 RANGE 4

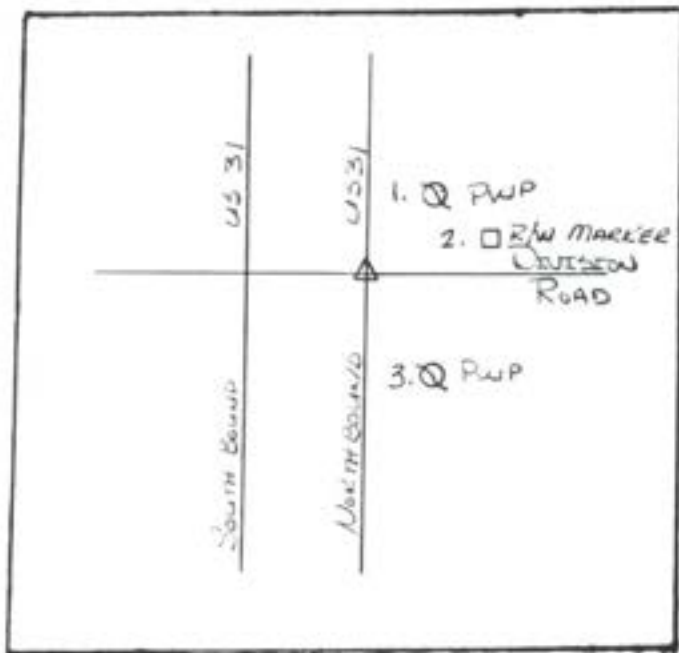

GRAPHIC TIES
(SKETCHED)

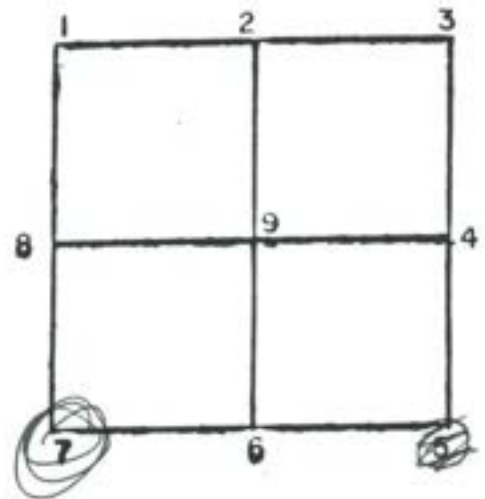


CORNER IDENT. BRASS PLUG


TIES: 1. 71.54' PK NAIL IN NORTHWEST FACE PWP
2. 116.18' SOUTHWEST CORNER R/W MARKER
3. 98.84' PK NAIL IN SOUTHWEST FACE PWP

SEC 31 TWP 22 RANGE 4

SEC 31 TWP 22 RANGE 4

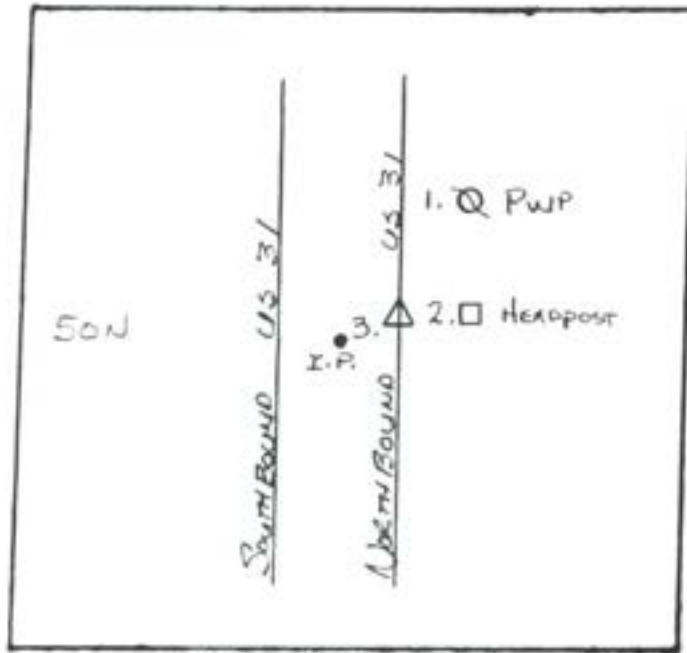

GRAPHIC TIES
(SKETCHED)

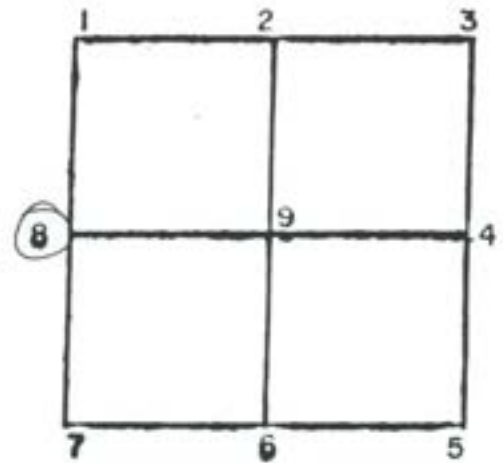


CORNER IDENT. BRASS PLUG


TIES: 1. 114.01' P.K. NAIL IN NORTHWEST FACE PWP
2. 52.34' P.K. NAIL IN SOUTH FACE HEADPOST
3. 35.75' I.P. SET IN MEDIAN @ STA. 154100

SEC 31 TWP 22 RANGE 4

SEC 32 TWP 22 RANGE 4

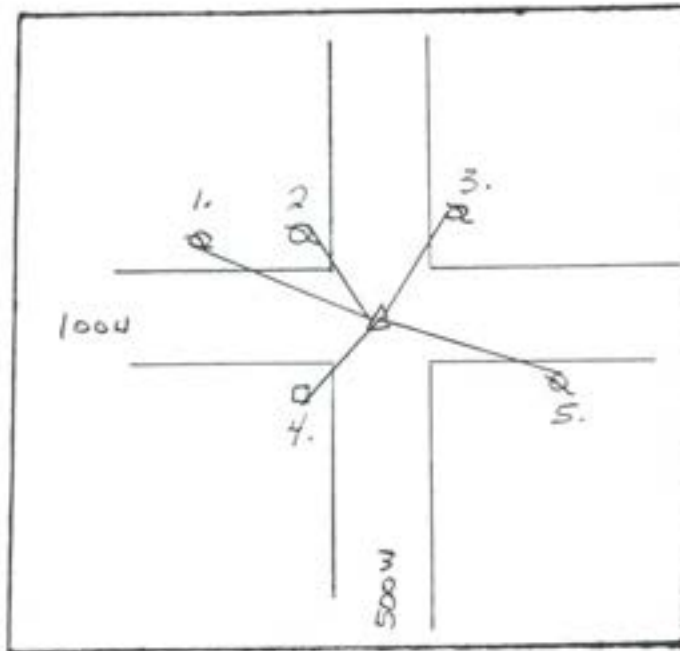


GRAPHIC TIES
(SKETCHED)

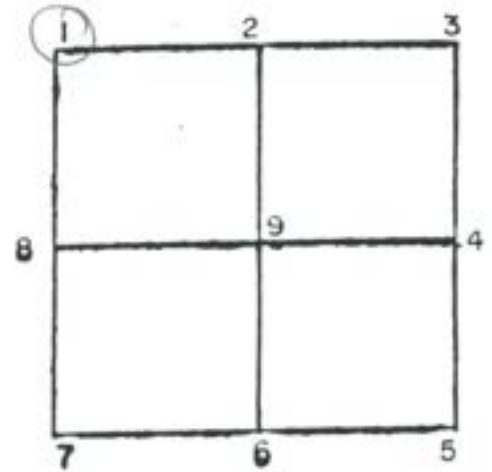


CORNER IDENT. STONE FND. R.R.S. SET OVER STONE

TIES:	1.	86.03'	PK	NAIL	IN	PWP
	2.	27.27'	"	"	"	"
	3.	34.05'	"	"	"	"
	4.	32.35'	"	"	"	HEADPOST
	5.	56.87'	"	"	"	PWP

SEC 32 TWP 22 RANGE 4

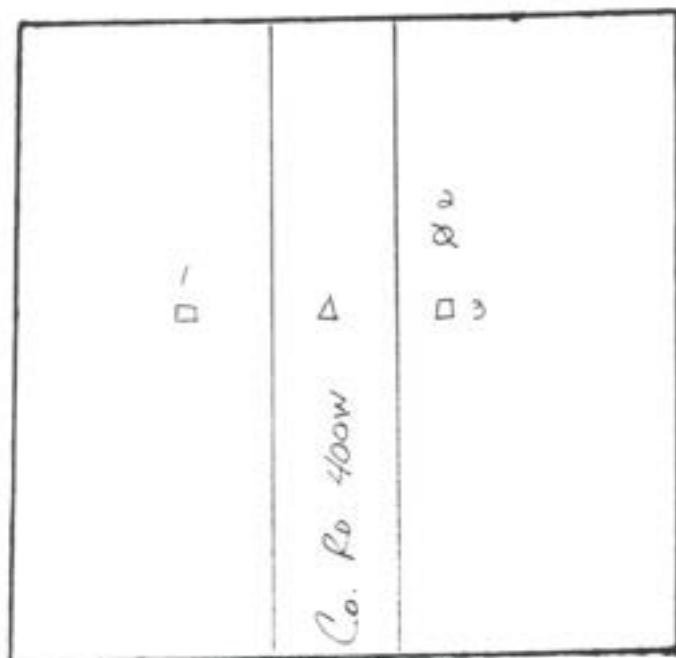

SEC 32 TWP 22 RANGE 4

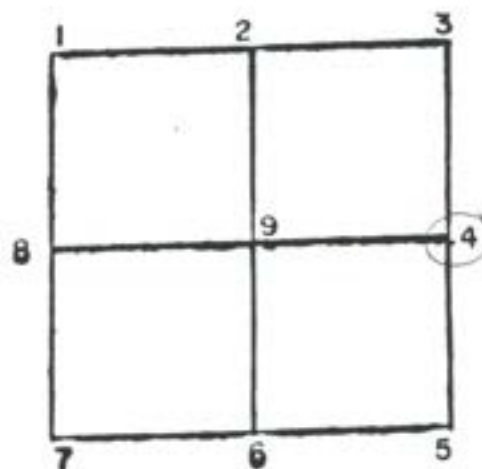


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. IRON ROD


TIES: 1. 20.42 PK NAIL IN HEADPOST
2. 18.97 PK NAIL IN POWERPOLE
3. 19.92 PK NAIL IN HEADPOST

SEC 32 TWP 22 RANGE 4

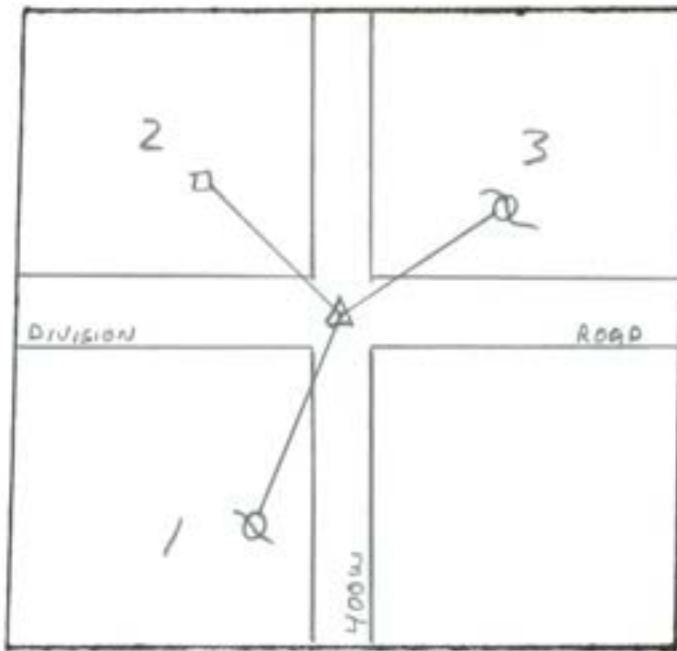

GRAPHIC TIES
(SKETCHED)

SEC 32 TWP 22 RANGE 4


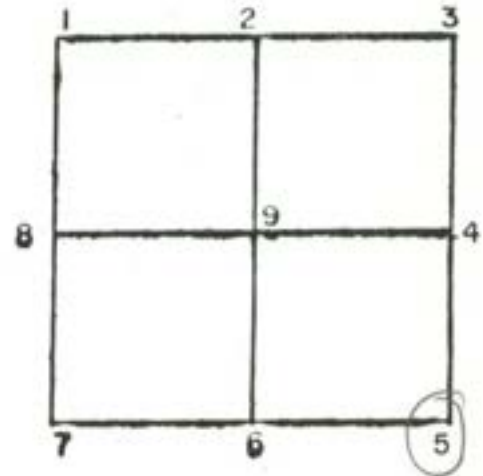


CORNER IDENT. NOT STATED

TIES: 1. 32.81' PWP
2. 32.81' HP
3. 51.65' PLWP

SEC 32 TWP 22 RANGE 4

SEC 32 TWP 22 RANGE 4

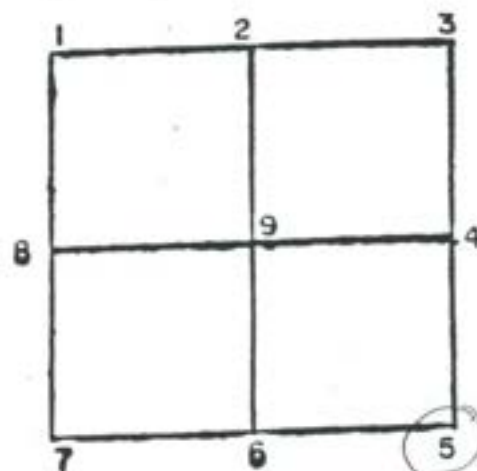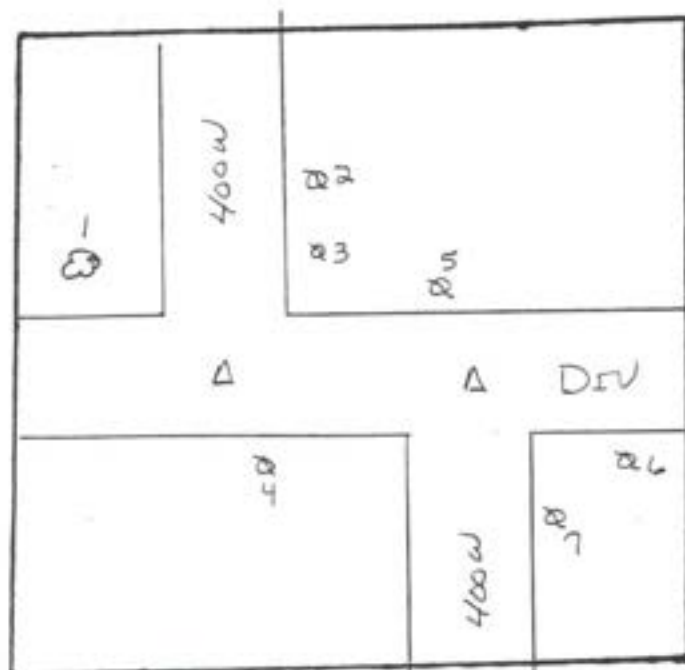


GRAPHIC TIES
(SKETCHED)

CORNER IDENT. RRS


TIES: 1. 53.59 PK NAIL IN 30" OAK TREE
2. 58.6 " " " PWP
3. 35.40 " " " TELEPHONE POLE
4. 26.45 PK NAIL IN PWP
5. 30.15 " " " TELEPHONE POLE
6. 65.25 PK NAIL IN PWP
7. 58.30 " " " "

SEC 32 TWP 22 RANGE 4

SEC. 32 TWP 22 RANGE 4

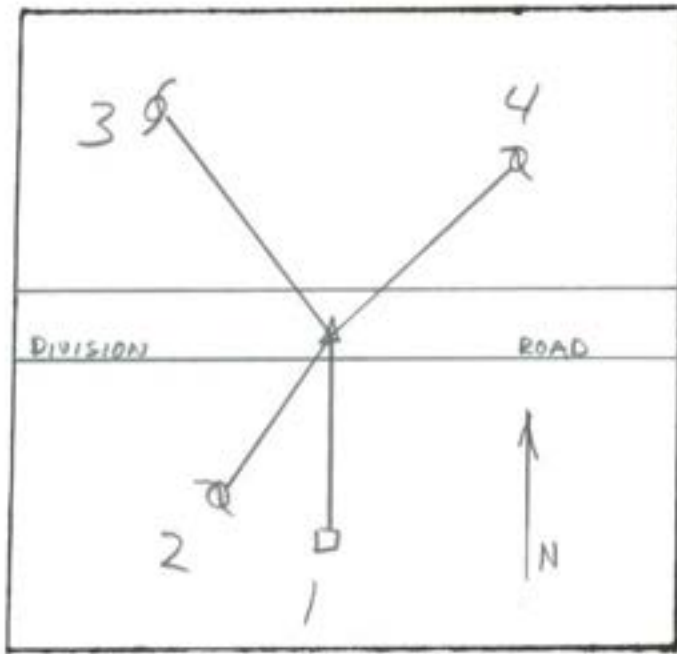

GRAPHIC TIES
(SKETCHED)

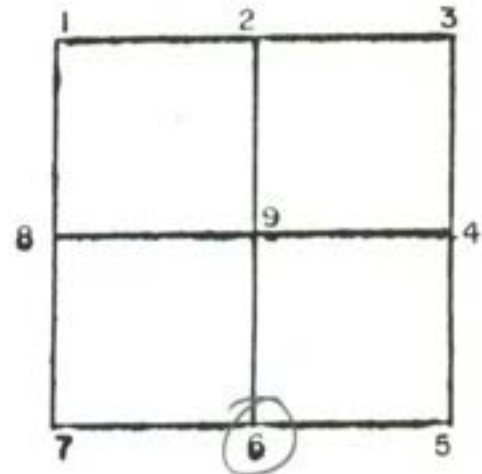


CORNER IDENT. 6 NOT STATED


TIES:	1.	25.00°	HP
	2.	26.30°	PWP
	3.	76.00°	PWP
	4.	64.10°	PWP

SEC 32 TWP 22 RANGE 4

SEC 32 TWP 22 RANGE 4

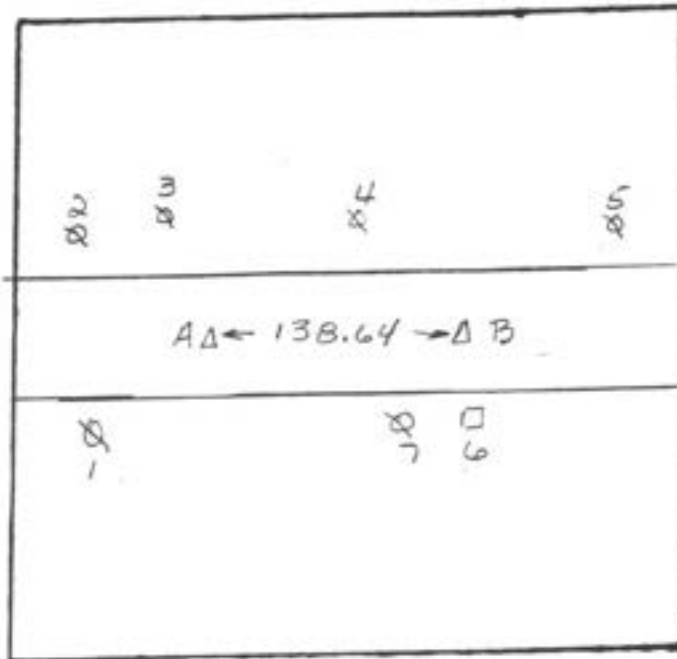

GRAPHIC TIES
(SKETCHED)

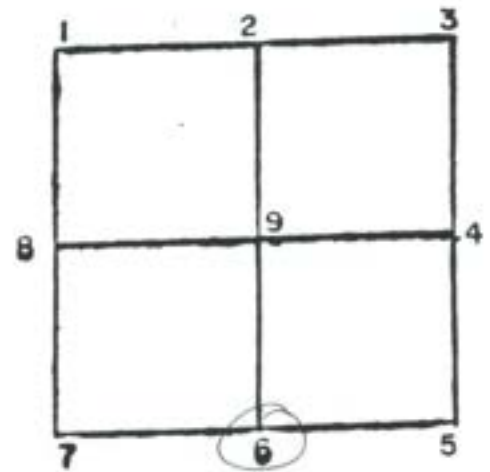


CORNER IDENT. RRS


TIES:	<u>A</u>				<u>B</u>
1.	107.34	PK	Nail	in	PWP
2.	88.47	"	"	"	TELEPHONE POLE
3.	58.09	"	"	"	LIGHT POLE
4.	71.18	"	"	"	TELEPHONE POLE 76.39
5.	"	"	"	"	" 64.03
6.	"	"	"	"	HEADPOST 25.23
7.	"	"	"	"	PWP 26.61

SEC _____ TWP _____ RANGE _____

SEC 32 TWP 22 RANGE 4

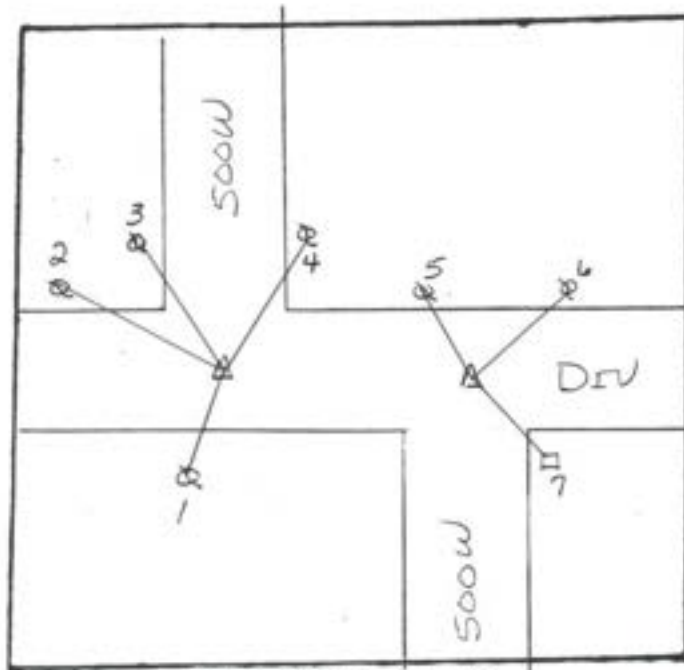

GRAPHIC TIES
(SKETCHED)

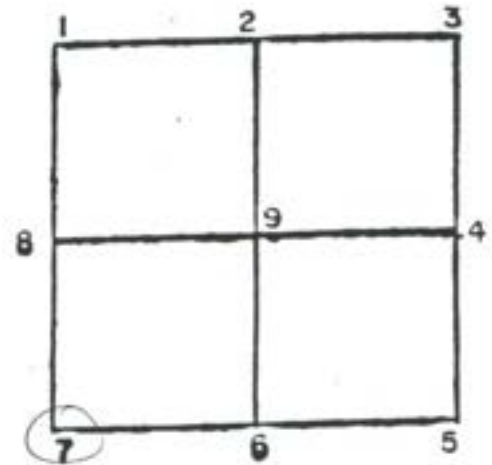


CORNER IDENT. RRS


TIES:	1.	93.02	PK	NAIL	IN	PWP
	2.	54.74	"	"	"	PWP
	3.	57.25	"	"	"	PWP
	4.	61.80	PK	NAIL	IN	TELEPHONE POLE
	5.	72.75	"	"	"	PWP
	6.	30.91	PK	NAIL	IN	TELEPHONE POLE
	7.	70.31	"	"	"	HEADPOST

SEC 32 TWP 22 RANGE 4

SEC. 32 TWP. 22 RANGE 7

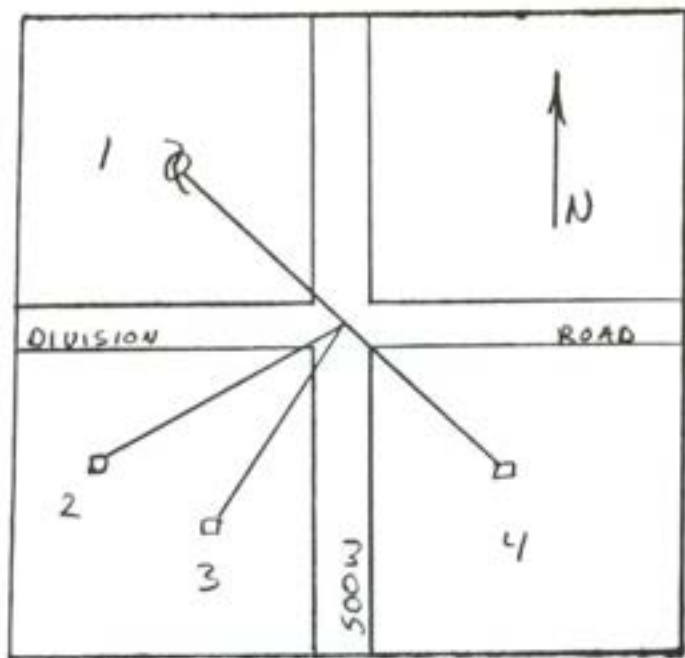

GRAPHIC TIES
(SKETCHED)

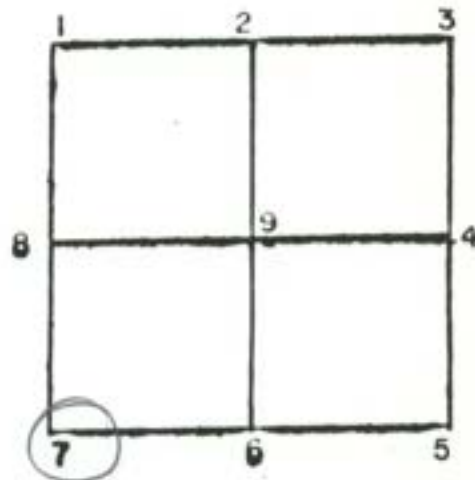


CORNER IDENT. NOT STATED


Time	Angle	Point
1.	72.30'	PWP
2.	49.70'	HP
3.	54.70'	HP
4.	30.30'	HP

SFC 32 TWP 22 RANGE 4

SEC 32 TWP 22 RANGE 4

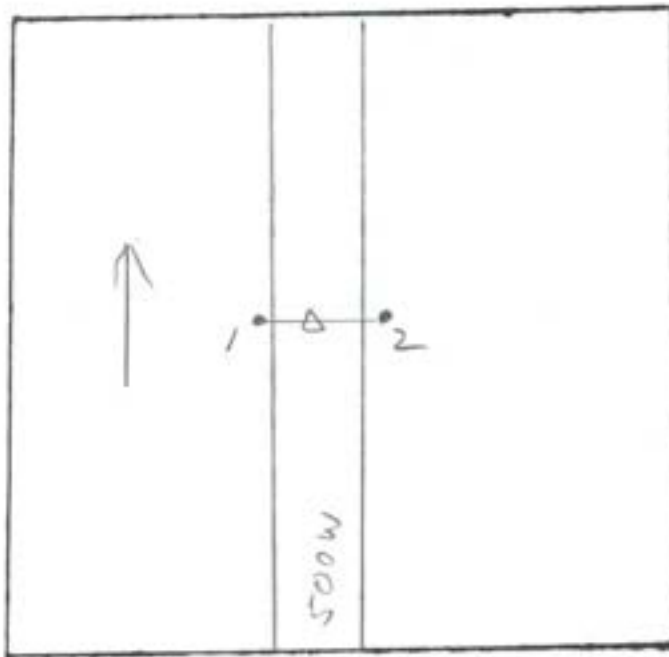


GRAPHIC TIES
(SKETCHED)

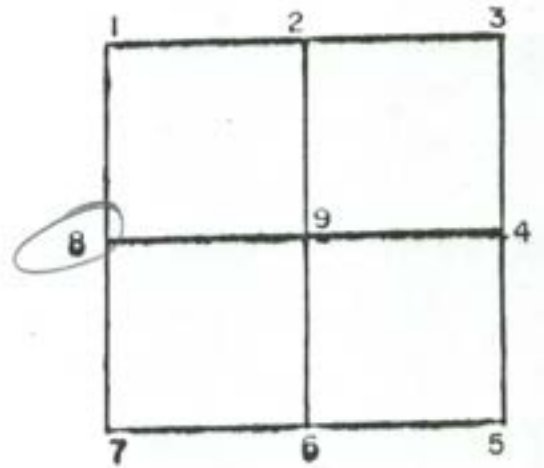

CORNER IDENT. SET NAIL

TIES: 1 IRON ROD 17.5'
2 IRON ROD 17.5'


SEC 32 TWP 22 RANGE 4

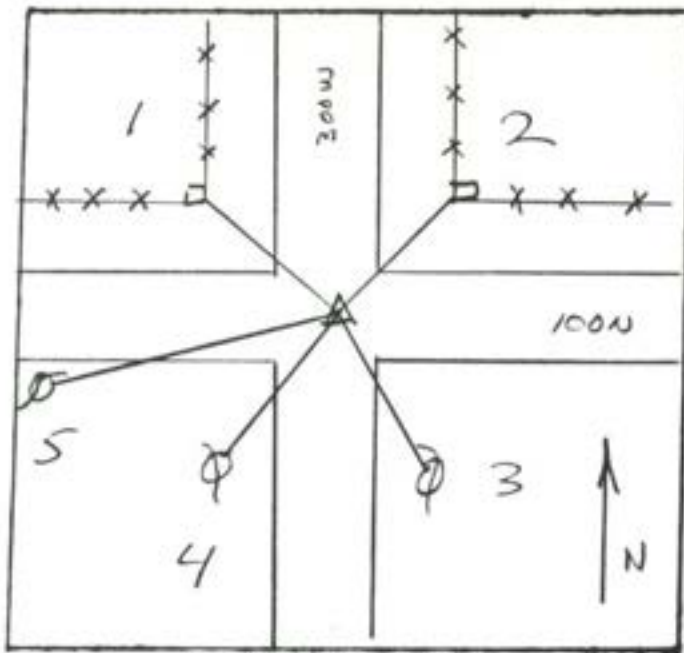

GRAPHIC TIES
(SKETCHED)

SEC. 33 TWP. 22 RANGE 41

7-15-71

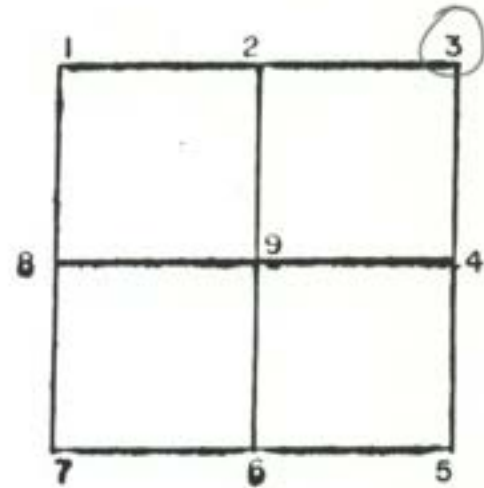


CORNER IDENT. 3 STONE FND 2.5' DEEP 6/89

TIES: 1. ~~23.0'~~ PK - HEADPOST
2. ~~28.4'~~ PK - HEADPOST
3. ~~21.5'~~ PK - PWP 40.40'
4. ~~22.0'~~ PK - PWP 33.11'
5. ~~39.9~~ PK - PWP 40.05'


SET 5/8" BOLT 10" LONG OVER STONE

SEC 33 TWP 22 RANGE 4

SEC 33 TWP 22 RANGE 4

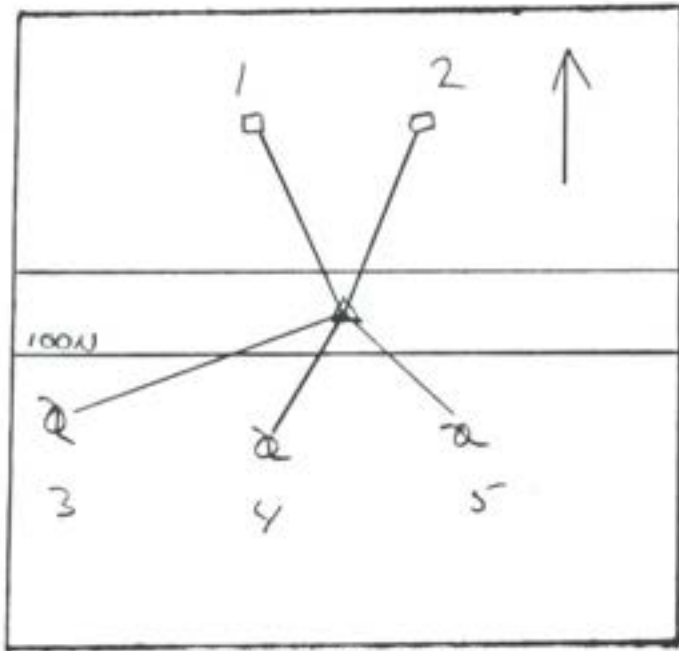

GRAPHIC TIES
(SKETCHED)

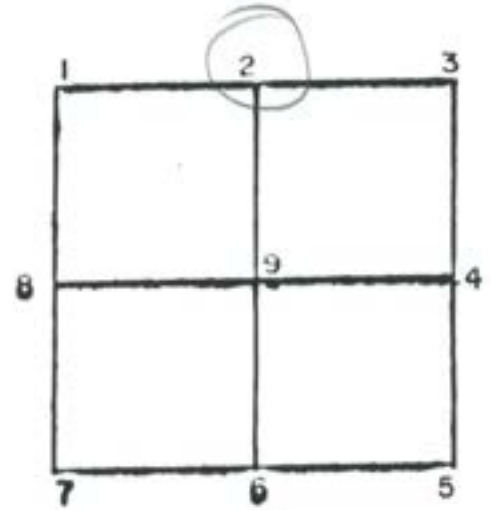


CORNER IDENT. NOT STATED


TIES: 1. 23.00' HP
2. 28.90' +IP
3. 39.90' PWP
4. 22.00' PWP
5. 21.50' PWP

SEC 33 TWP 22 RANGE 4

SEC. 33 TWP. 22 RANGE 4

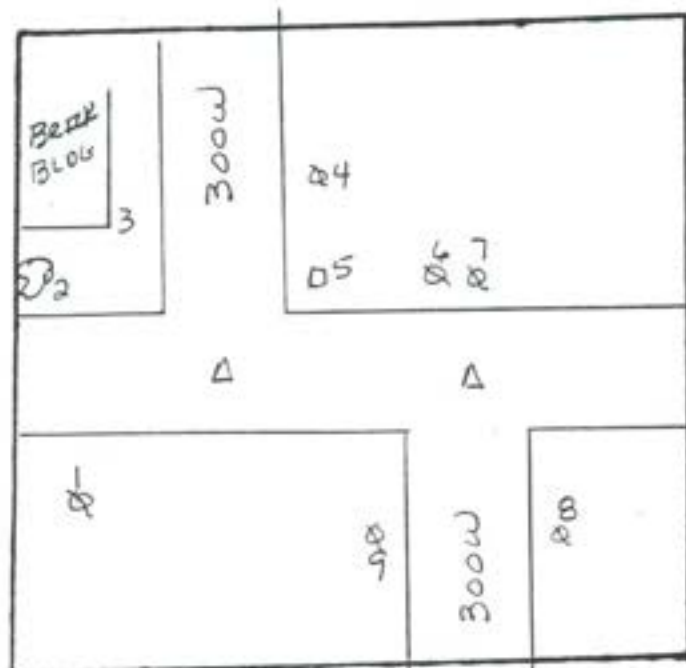

GRAPHIC TIES
(SKETCHED)

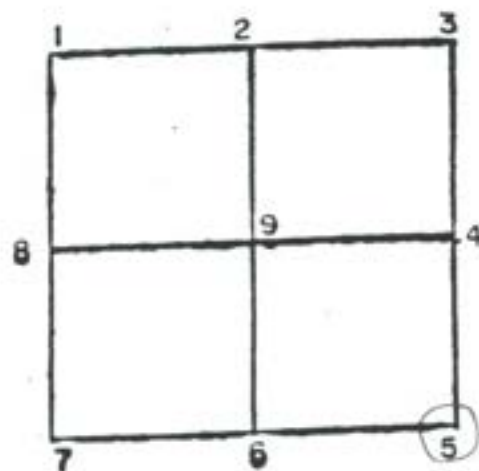


CORNER IDENT. RRS


TIES: 1. 21.70 PK NAIL IN PWP
2. 99.50 " " " 48" Ø TREE
3. 108.83 SE COR BECK BLOW
4. 58.81 PK NAIL IN TELEPHONE POLE
5. 30.73 SW COR CONCRETE HEADPOST
6. 69.31 PK NAIL IN PWP
7. 21.00 " " " TELEPHONE POLE
8. 40.41 " " " GUY POLE
9. 53.31 " " " PWP

SEC. 33 TWP. 22 RANGE 4

SEC 33 TWP 22 RANGE 4

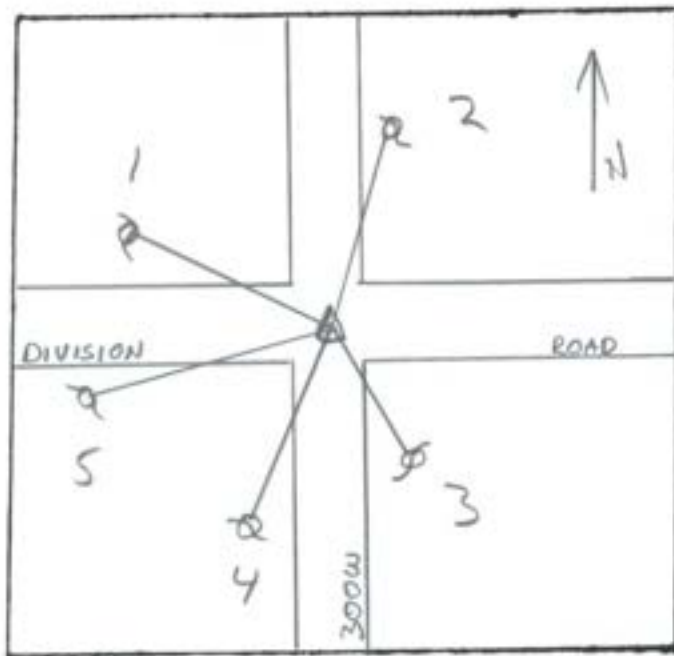

GRAPHIC TIES
(SKETCHED)

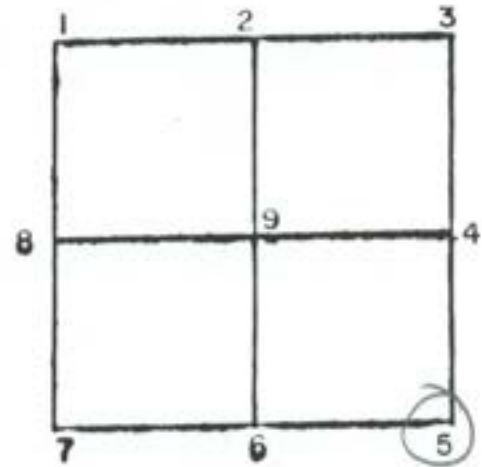


CORNER IDENT. NOT STATED


TIES:	1. 69.40'	PWP
	2. 21.20'	PWP
	3. 39.70'	PWP
	4. 51.20'	PWP
	5. 69.40'	PWP

SEC 33 TWP 22 RANGE 4

SEC 33 TWP 22 RANGE 4

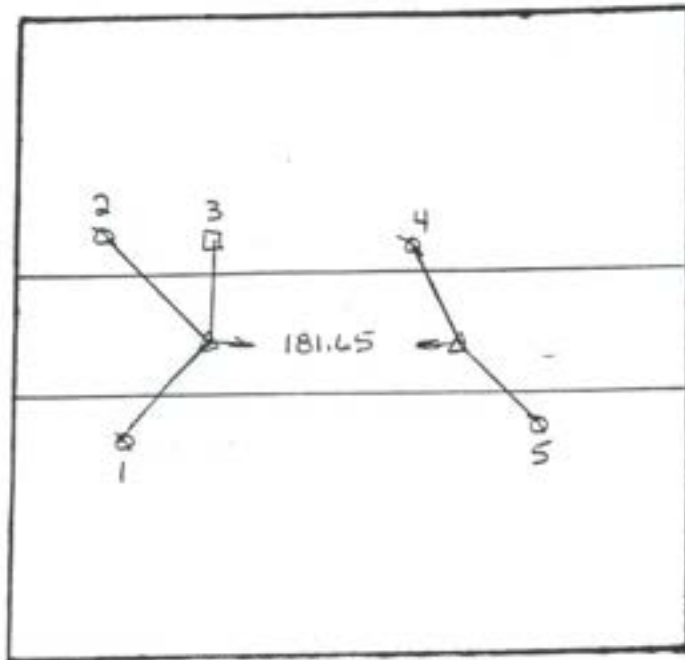

GRAPHIC TIES
(SKETCHED)

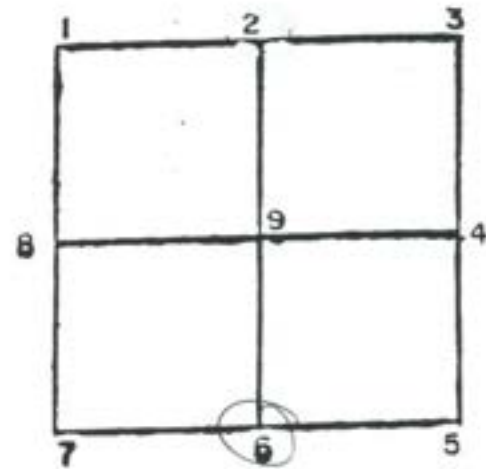


CORNER IDENT. RRS

TIES:


1.	49.52	PK	NAIL	IN	PWP
2.	51.15	"	"	"	TELEPHONE POLE
3.	26.53	"	"	"	HEAD POST
4.	39.07	"	"	"	TELEPHONE POLE
5.	31.65	"	"	"	PWP

SEC 33 TWP 22 RANGE 4

SEC 33 TWP 22 RANGE 4

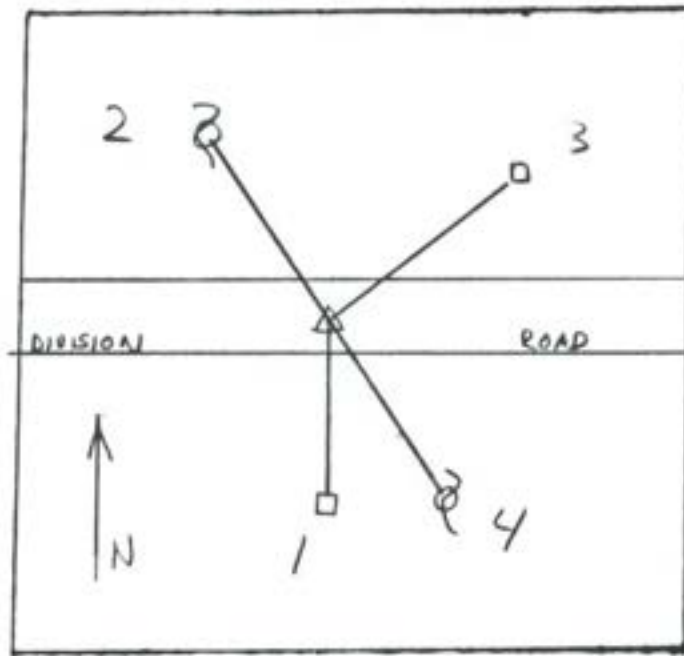

GRAPHIC TIES
(SKETCHED)

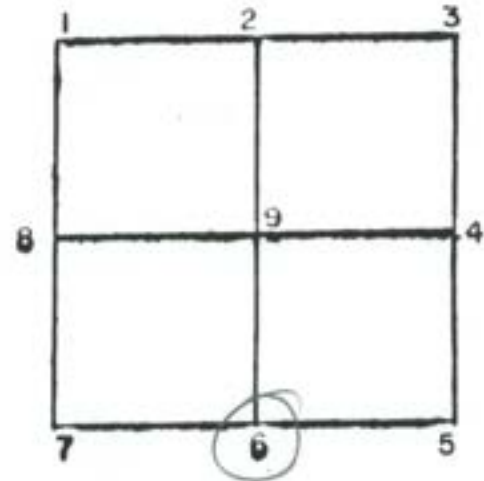


CORNER IDENT. NOT STATED


TIES: 1. 27.90' HP
2. 39.20' PWP
3. 25.00' HP
4. 31.65' PWP

SEC 33 TWP 22 RANGE 4

SEC. 33 TWP. 22 RANGE 4

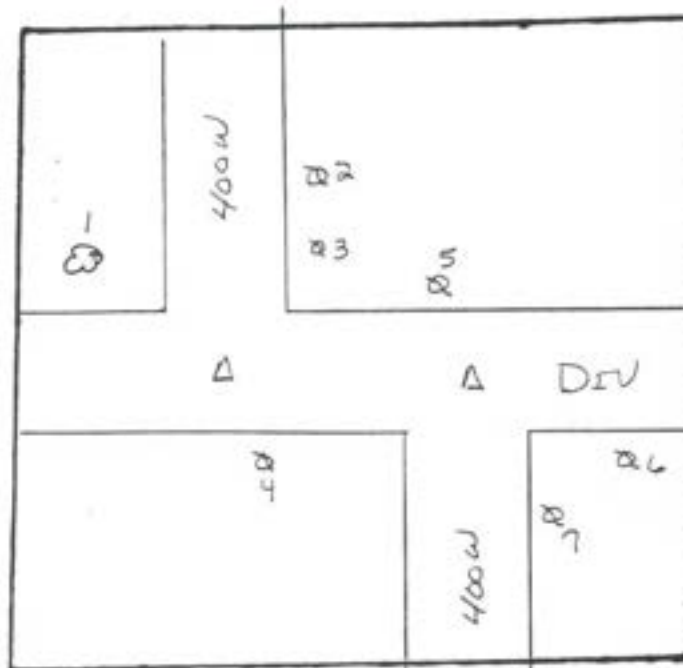

GRAPHIC TIES
(SKETCHED)

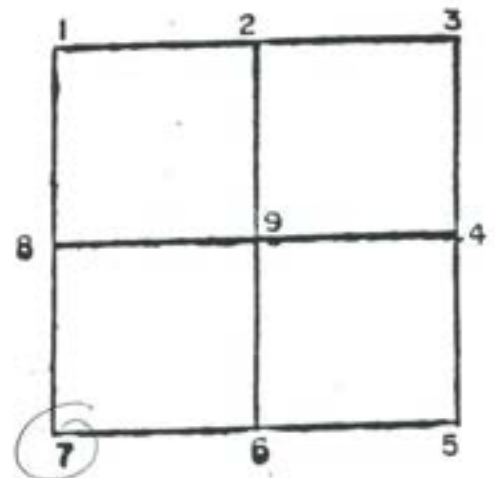


CORNER IDENT. RRS


TIES: 1. 53.59 PK NAIL IN 30" OAK TREE
2. 58.6 " " " PWP
3. 35.40 " " " TELEPHONE POLE
4. 26.45 PK NAIL IN PWP
5. 30.15 " " " TELEPHONE POLE
6. 65.25 PK NAIL IN PWP
7. 58.30 " " " "

SEC. 33 TWP. 22 RANGE 4

SEC 33 TWP 22 RANGE 4

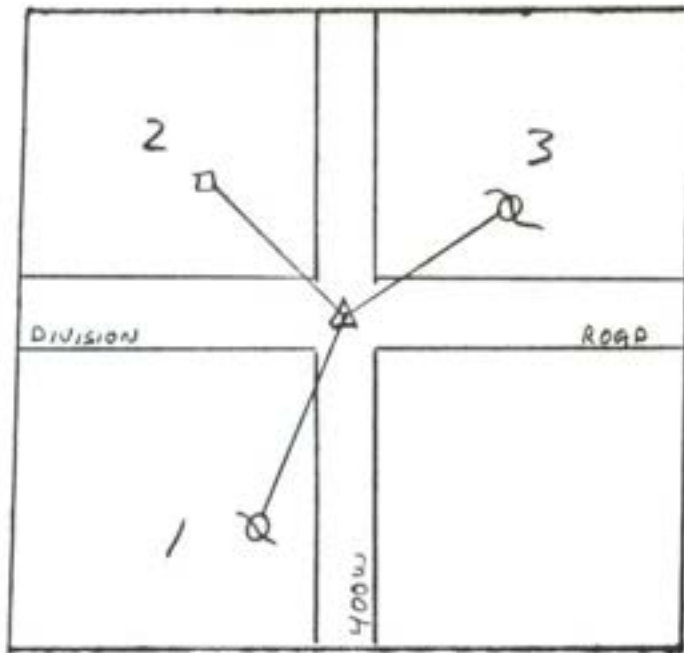

GRAPHIC TIES
(SKETCHED)

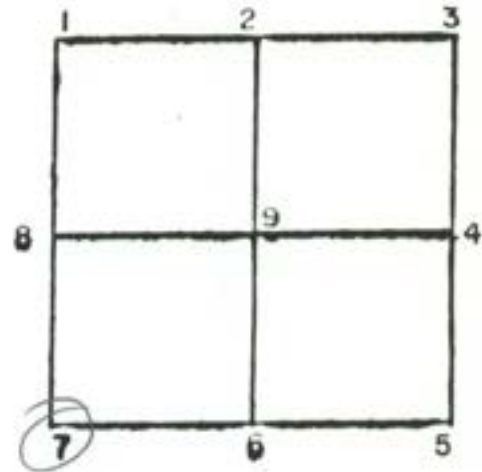


CORNER IDENT. NOT STATED


TIES: 1. 32.81' PLWP
2. 32.81' HP
3. 51.65' PLWP

SEC 33 TWP 22 RANGE 4

SEC 33 TWP 22 RANGE 4

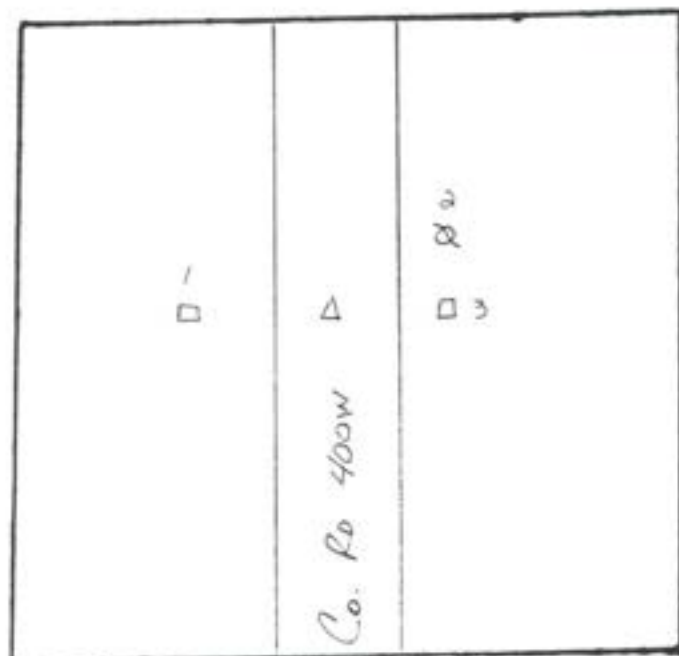


GRAPHIC TIES
(SKETCHED)

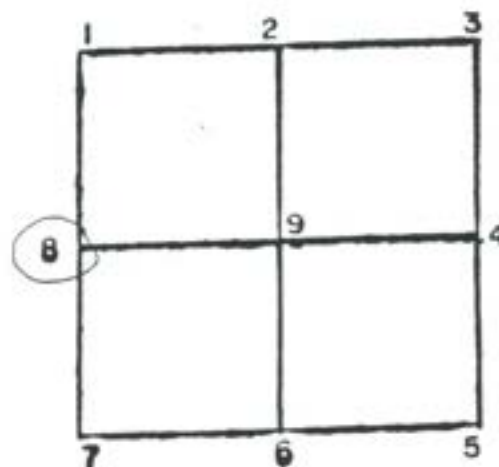

CORNER IDENT. IRON ROD

TIES: 1. 20.42 PK NAIL IN HEADPOST
2. 18.97 PK NAIL IN POWERPOLE
3. 19.92 PK NAIL IN HEADPOST


SEC 33 TWP 22 RANGE 4

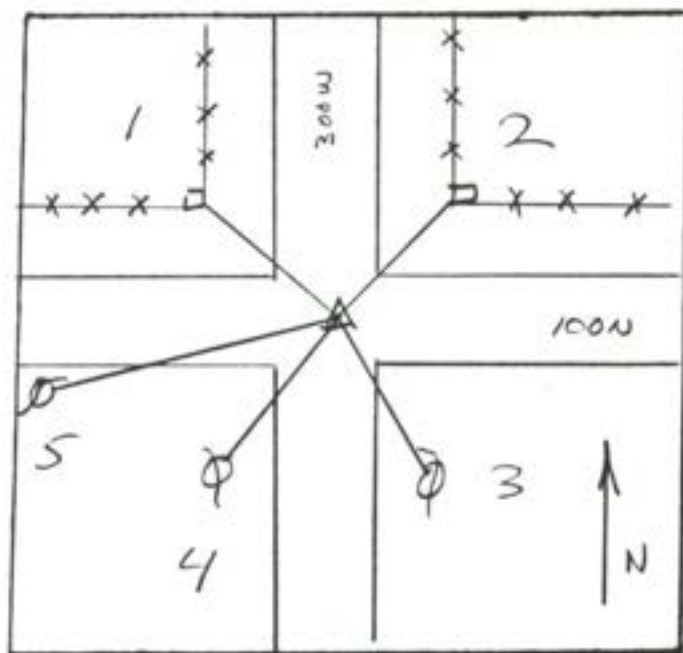

GRAPHIC TIES
(SKETCHED)

SEC 34 TWP 22 RANGE 4

7-15-71

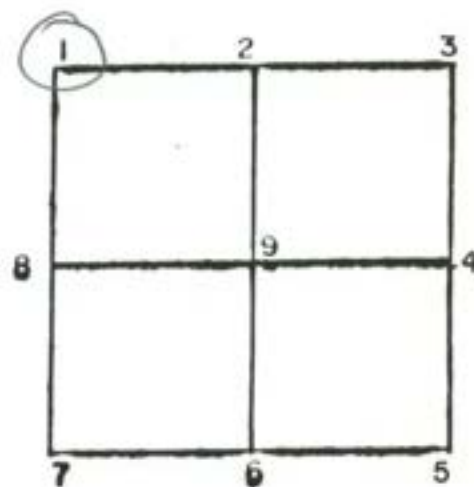


CORNER IDENT. 1 STONE FND 2.5' DEEP 6/89

TIES: 1. 23.0' PK - HEADPOST
2. 28.9' PK - HEADPOST
3. 21.5' PK - PWP 40.40'
4. 22.0' PK - PWP 33.11'
5. 39.9 PK - PWP 40.05'

SET 5/8" BOLT 10" LONG OVER STONE


SEC 34 TWP 22 RANGE 4

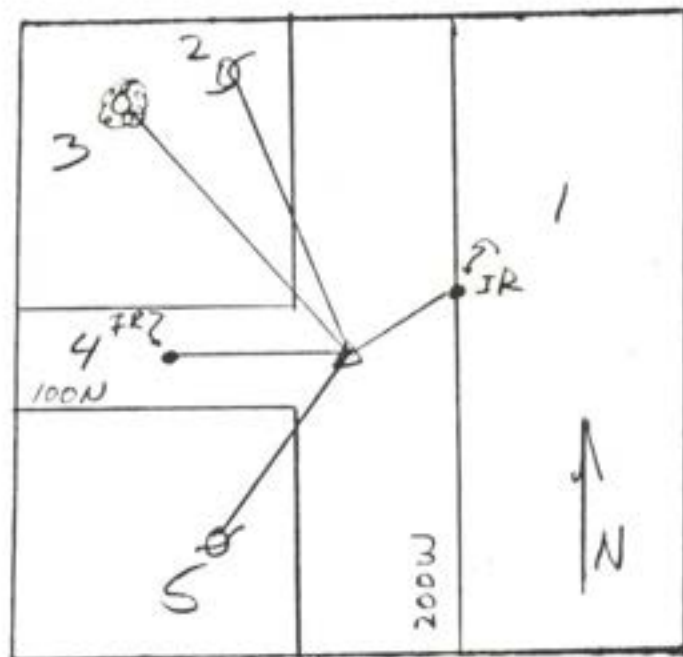

GRAPHIC TIES
(SKETCHED)

SEC 34 TWP 22 RANGE 4

5-2-80

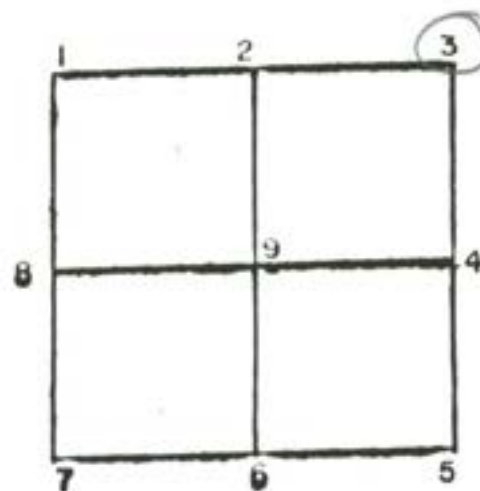

CORNER IDENT. 3 STONE FND MARKED 1.2' DEEP

TIES:

1. 23.07' IRON ROD EAST SIDE ROAD

2. 108.49' PK - PWP


3. 62.17' PK - 36" MAPLE TREE

4. 58.11' IRON ROD 2 OF 100N

5. 24.57' PK - PWP

FR. 150 P. 26


SEC 34 TWP 22 RANGE 4

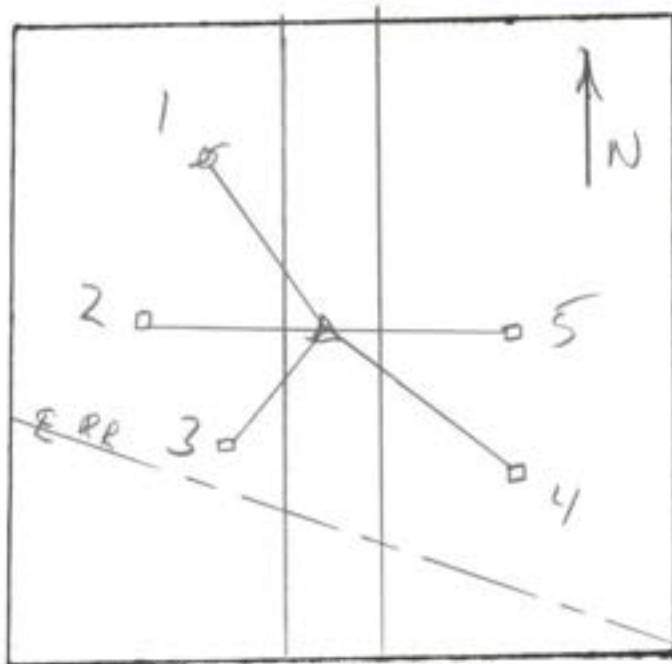

GRAPHIC TIES
(SKETCHED)

SEC 34 TWP 22 RANGE 4

5-5-1980

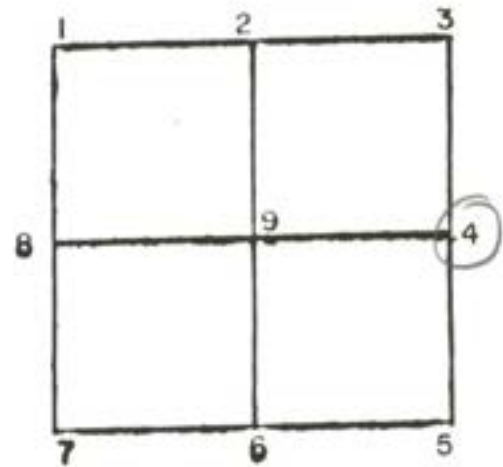


CORNER IDENT. 4 FND BOLT SPIKE REPLACED W/IRON ROD

TIES:


1. 67.70' PK - PWP
2. 52.75' PK - FENCE POST
3. 14.30' PK - RR SIGN
4. 95.63' PK - FENCE POST
5. 73.33' PK - FENCE POST

SEC 34 TWP 22 RANGE 4

SEC 34 TWP 22 RANGE 4

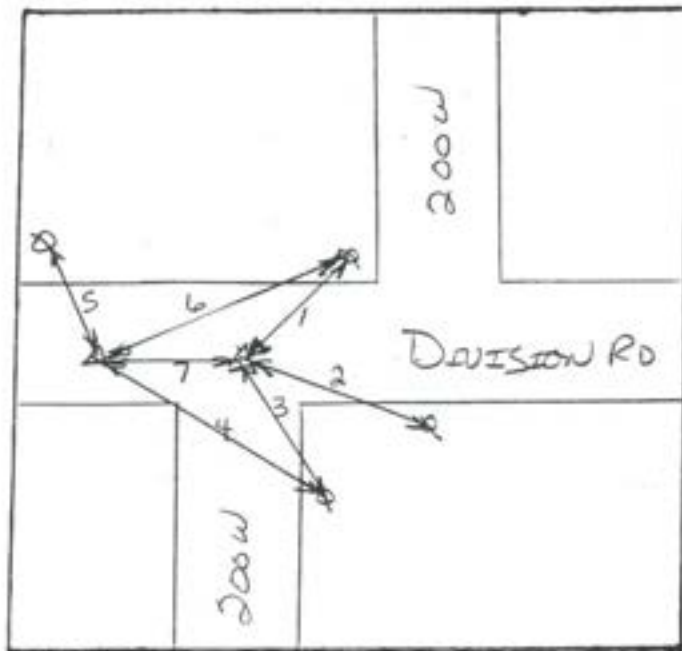

GRAPHIC TIES
(SKETCHED)

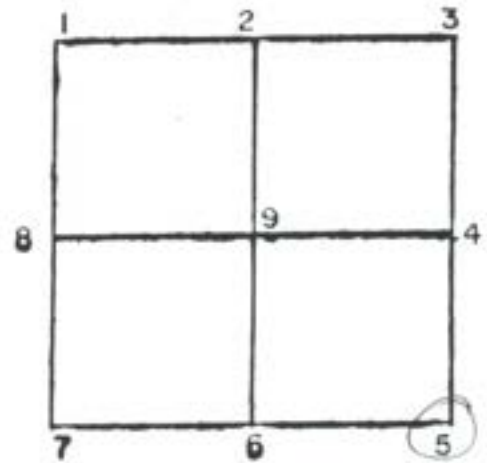


CORNER IDENT. _____


TIES: 1. 28.08 PK NAD EN PWP
 2. 72.74 " " " "
 3. 78.68 " " " "
 4. 114.24 " " " "
 5. 84.60 " " " "
 6. 86.45 " " " "
 7. 66.05 DISTANCE BETWEEN CORNERS

SEC 34 TWP 22 RANGE 4

SEC 34 TWP 22 RANGE 4

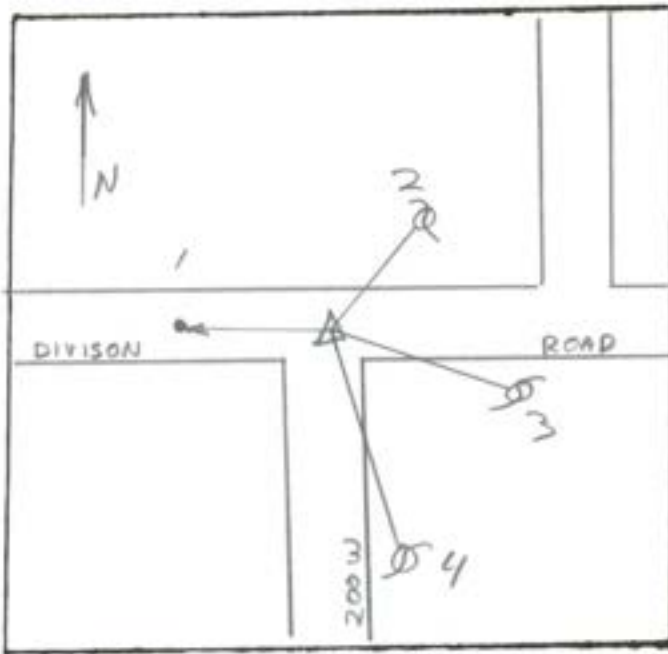

GRAPHIC TIES
(SKETCHED)

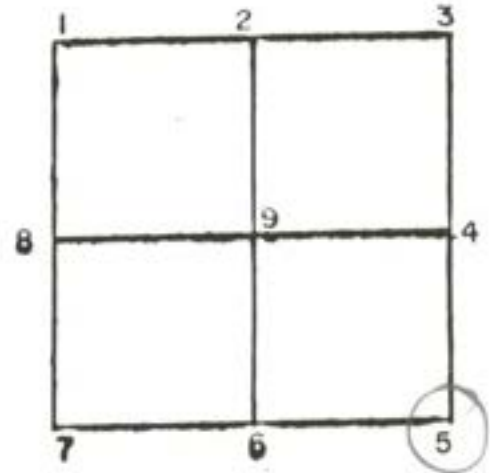


CORNER IDENT. RR SPIKE FND


TIES: 1. 66.05' PK IN E OF DIVISION ROAD
2. 28.08' PWP
3. 72.74' PWP
4. 78.68' PWP

SEC 34 TWP 22 RANGE 4

SEC 34 TWP 22 RANGE 4

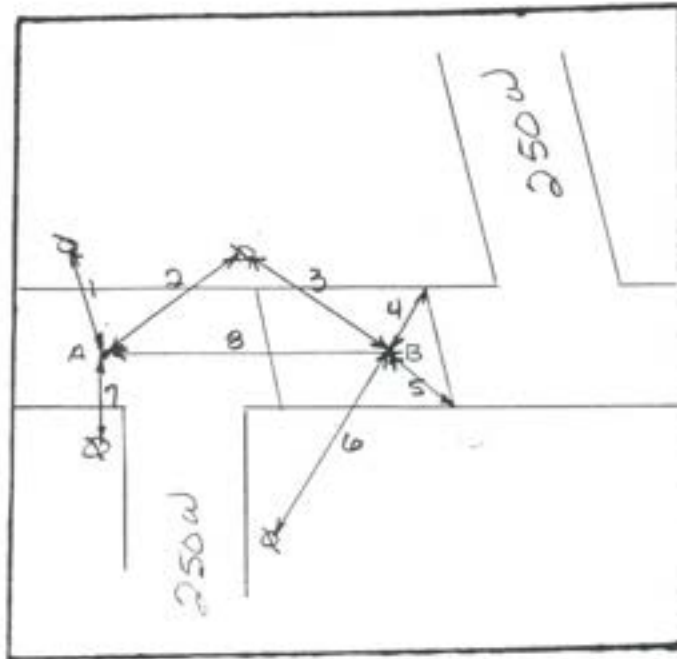

GRAPHIC TIES
(SKETCHED)

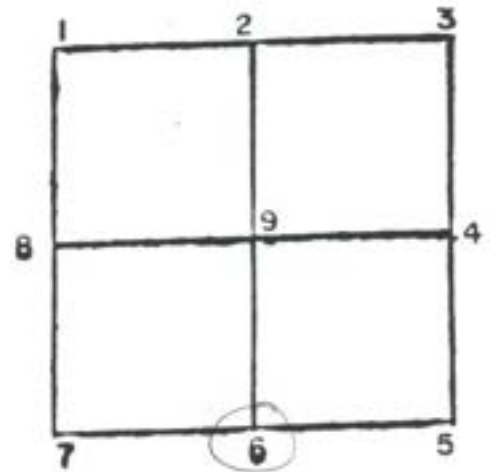


CORNER IDENT. A-RRS B '+' IN BRIDGE DECK


TIES:	1	2	3	4	5	6	7	8
	44.98'	PK	NAIL	IN	PWP			
	88.09	"	"	"	TELEPHONE POLE			
	54.70	"	"	"	"	"		
	16.39				NE COR DECK			
	23.59				SE "	"		
	62.19	"	"	"	PWP			
	45.44	"	"	"	"			
	135.34	DISTANCE BETWEEN POINTS						

SEC 34 TWP 22 RANGE 4

SEC. 34 TWP. 22 RANGE 4

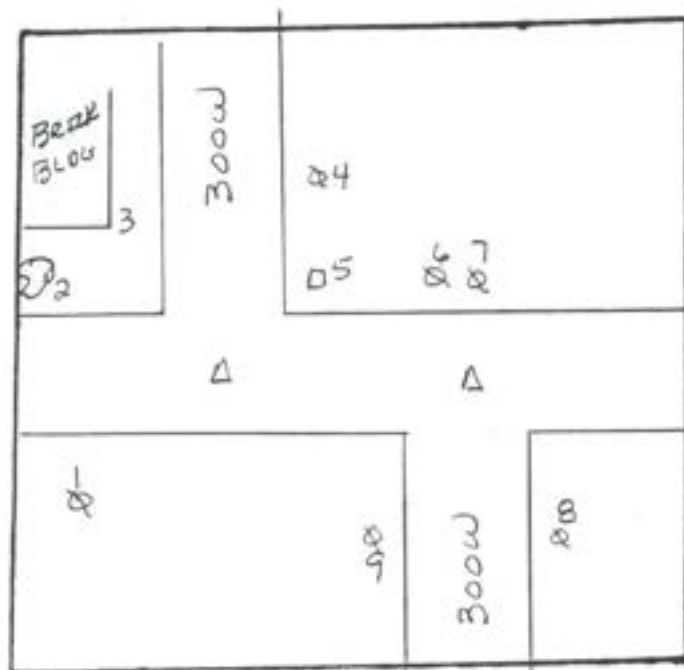

GRAPHIC TIES
(SKETCHED)

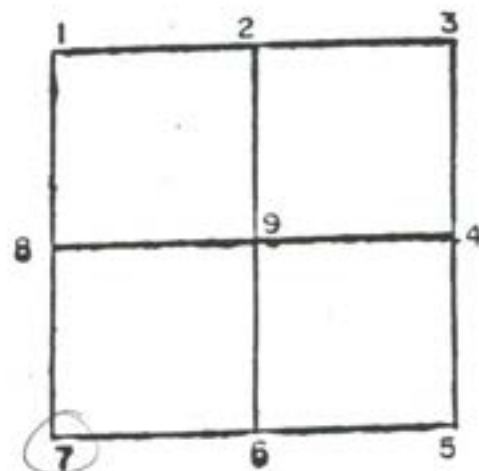


CORNER IDENT. RRS


TIES: 1. 21.70 PK NAIL IN PWP
2. 99.50 " " " 48" Ø TREE
3. 108.83 SE COR BEAK BLOW
4. 58.81 PK NAIL IN TELEPHONE POLE
5. 30.73 SW COR CONCRETE HEADPOST
6. 69.31 PK NAIL IN PWP
7. 21.00 " " " TELEPHONE POLE
8. 40.41 " " " GUY POLE
9. 53.31 " " " PWP

SEC. 34 TWP. 22 RANGE 4

SEC 34 TWP 22 RANGE 4

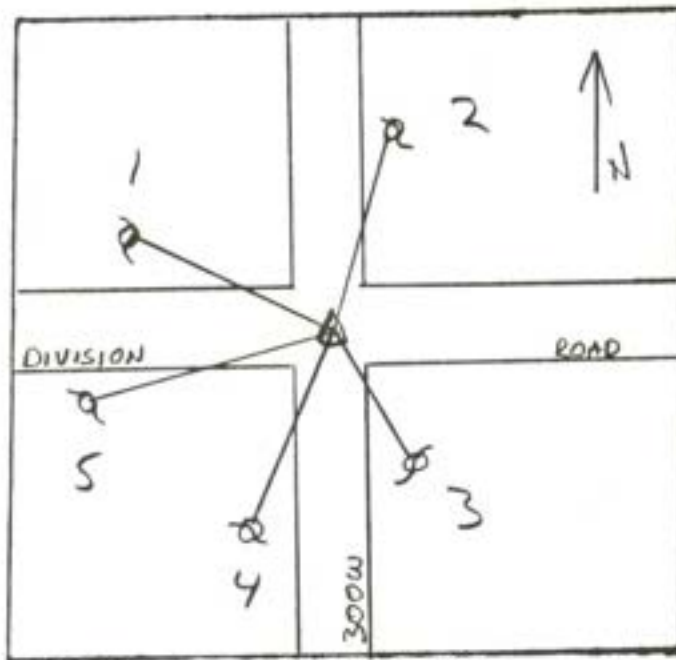

GRAPHIC TIES
(SKETCHED)

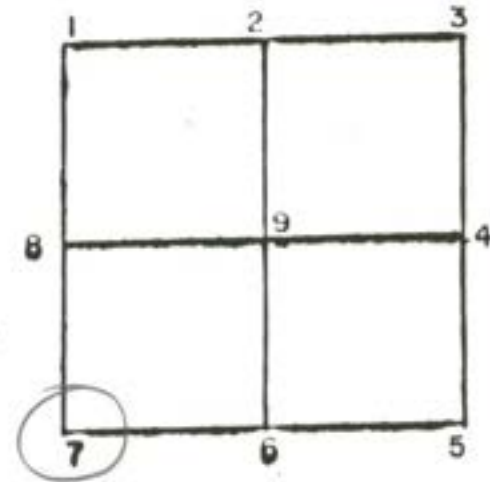


CORNER IDENT. NOT STATED

TIES: 1. 69.40' PWP
2. 21.20' PWP
3. 39.70' PWP
4. 51.20' PWP
5. 69.40' PWP


SEC 34 TWP 22 RANGE 4

SEC. 35 TWP. 22 RANGE 4

5-2-80

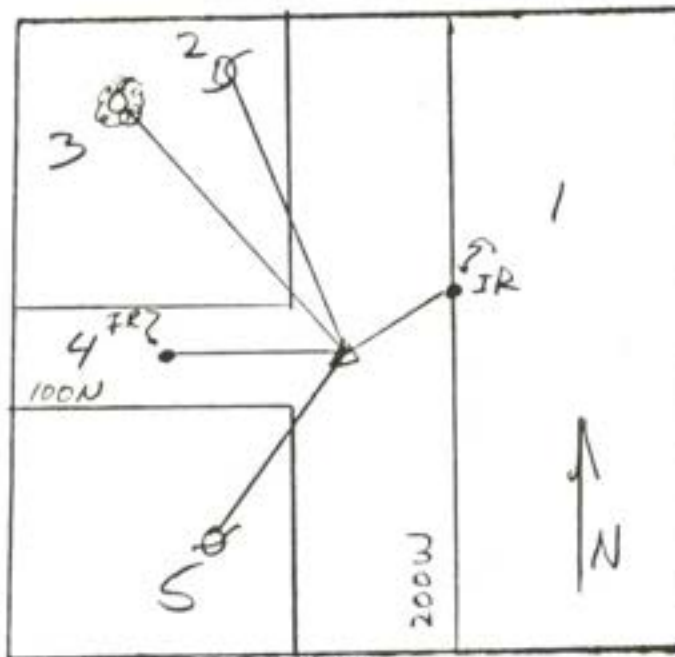

GRAPHIC TIES
(SKETCHED)

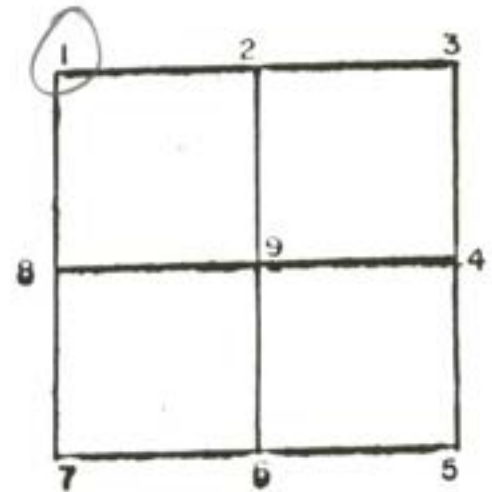


CORNER IDENT. 1 STONE END MARKED FS 1.2' DEEP

- TIES:
1. 23.07' IRON ROD EAST SIDE ROAD
 2. 108.49' PK - PWP
 3. 62.17' PK - 36" MAPLE TREE
 4. 58.17' IRON ROD 2 OF 100N
 5. 24.57' PK - PWP

F.B. 150 P. 26


SEC 35 TWP 22 RANGE 4

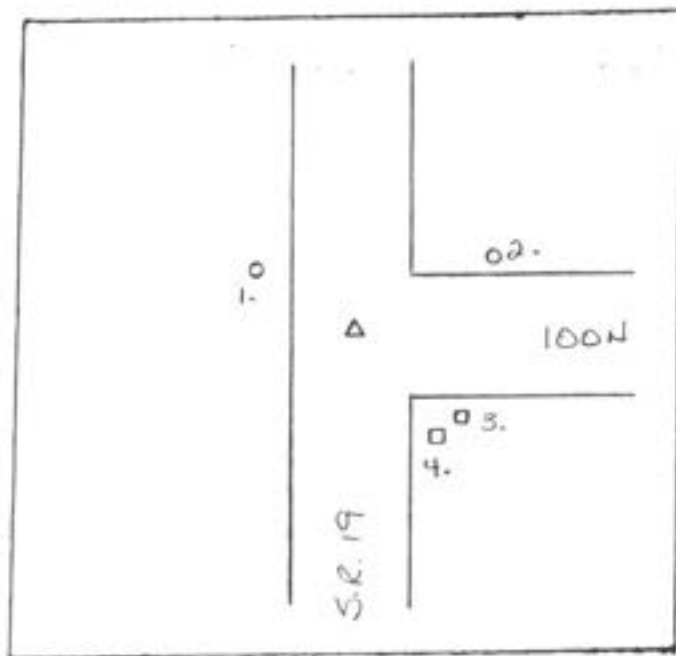

GRAPHIC TIES
(SKETCHED)

SEC 35 TWP 22 RANGE 4


4-15-99

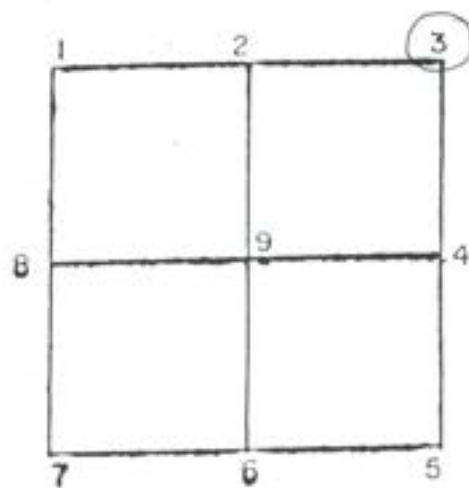

CORNER IDENT. STONE W/DRILL HOLE 11" DEEP 10" IRON ROD SET

- TIES:
1. 38.49' P.K. NAEL IN POWER POLE
 2. 91.66' " " " "
 3. 78.88' TOP SW CORNER R/W MARKER
 4. 68.07' P.K. NAEL IN POWER POLE


SEC 35 TWP 22 RANGE 4

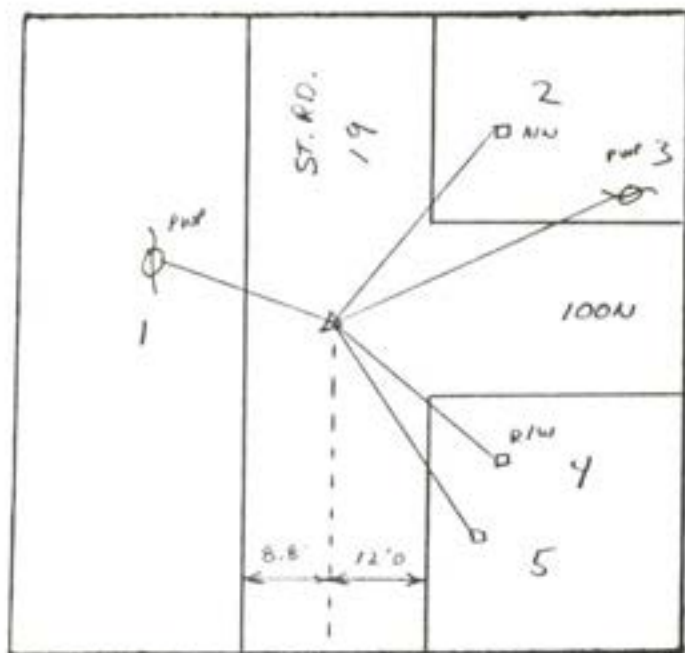

GRAPHIC TIES
(SKETCHED)

SEC 35 TWP 22 RANGE 4

5-6-1980

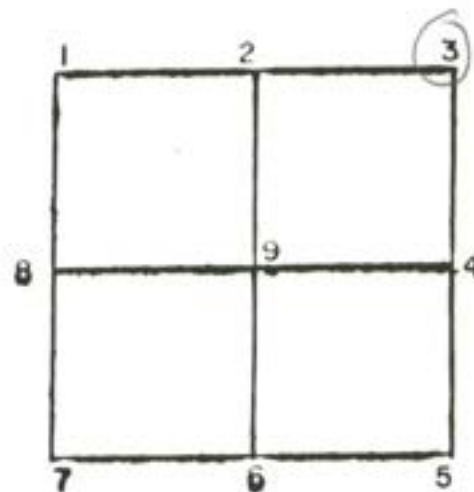


CORNER IDENT. → STONE W/DRILL HOLE 11" DEEP 10" IRON ROD OVER HOLE FLUSH W/SURFACE

TIES: 1. 38.69' PK IN PWP
2. 79.79' TOP SW CORNER R/W MARKER
3. 91.60' PK IN PWP
4. 79.03' TOP SW CORNER R/W MARKER
5. 68.75' NOT DESCRIBED


SEC 35 TWP 22 RANGE 4

SEC. 35 TWP. 22 RANGE 4

4-15-99

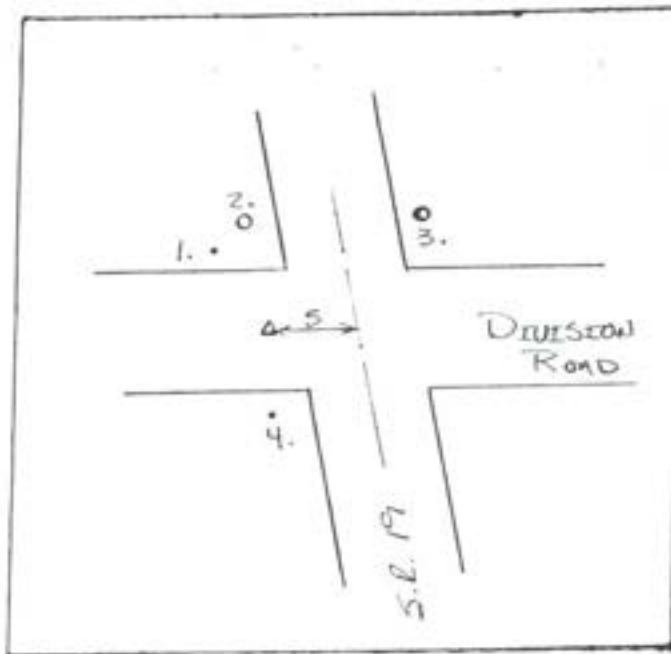

GRAPHIC TIES
(SKETCHED)

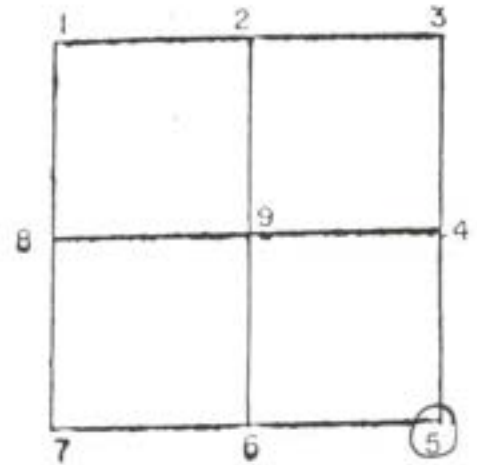


CORNER IDENT. STONE

- TIES: 1. 52.27' E S.R. 19 & DIVISION ROAD SIGN POST
2. 99.82' P.K. NAIL IN POWERPOLE
3. 89.75' " " " "
4. 34.00' NW CORNER OF STOP SIGN POST
5. 20.4' FROM E OF S.R. 19


THIS SECTION CORNER HAS AN 8" MANHOLE TYPE
CASTING. STONE IS VISIBLE BY REMOVING COVER.
LOCATION MEASUREMENTS ARE TO APPROX E OF CASTING
DO NOT USE FOR STONE LOCATION.

SEC. 35 TWP. 22 RANGE 4

SEC 35 TWP 22 RANGE 4

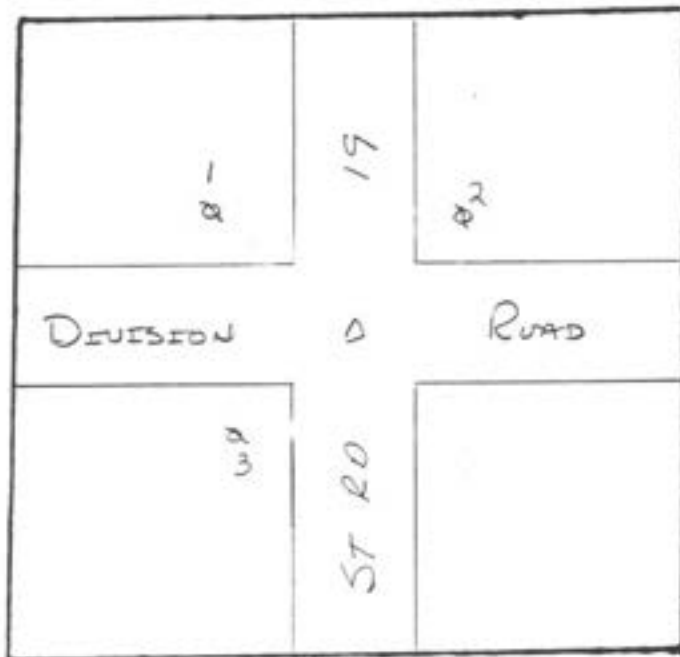


GRAPHIC TIES
(SKETCHED)

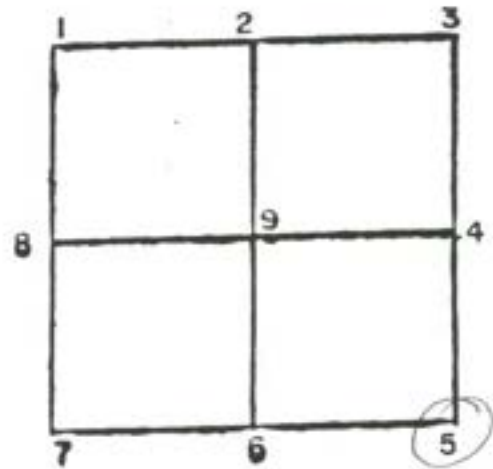

CORNER IDENT. STONE FOUND


THES:	1.	99.82'	PK	NaEL	FN	PWP
	2.	89.75	"	"	"	"
	3	58.82	"	"	"	"

SEC 35 TWP 22 RANGE 4

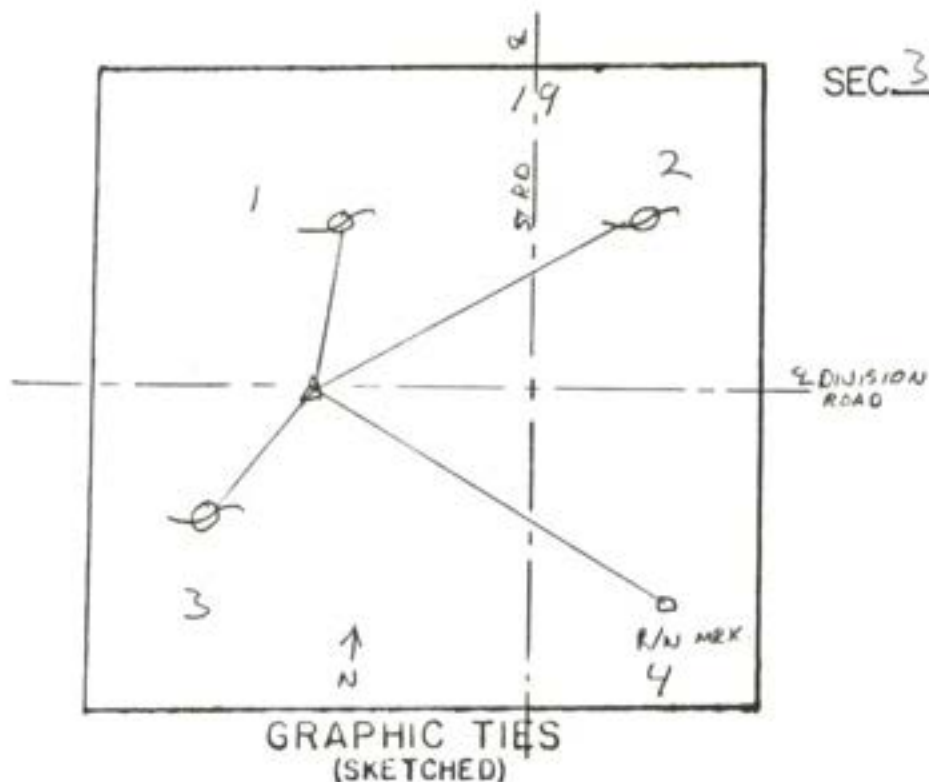

SEC 35 TWP 22 RANGE 4


4-25-80

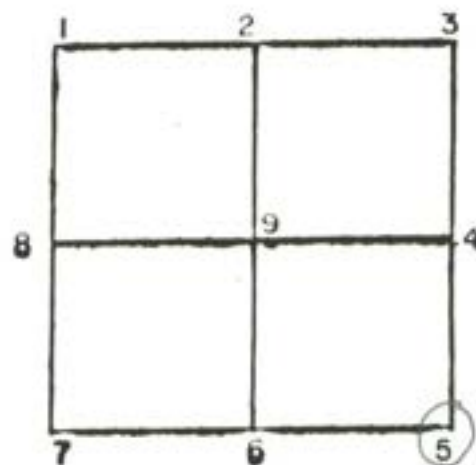


CORNER IDENT. 5 STONE FND 2.3' DEEP MARKED T 35 CASTING SET 4-25-1980

- TIES:
1. 99.87' PK IN POWER POLE
 2. 83.34' PK IN POWER POLE
 3. 67.00' PK IN POWER POLE
 4. 103.08' SW CORNER OF ST. RD. R/N MARKER

SEC 35 TWP 22 RANGE 4

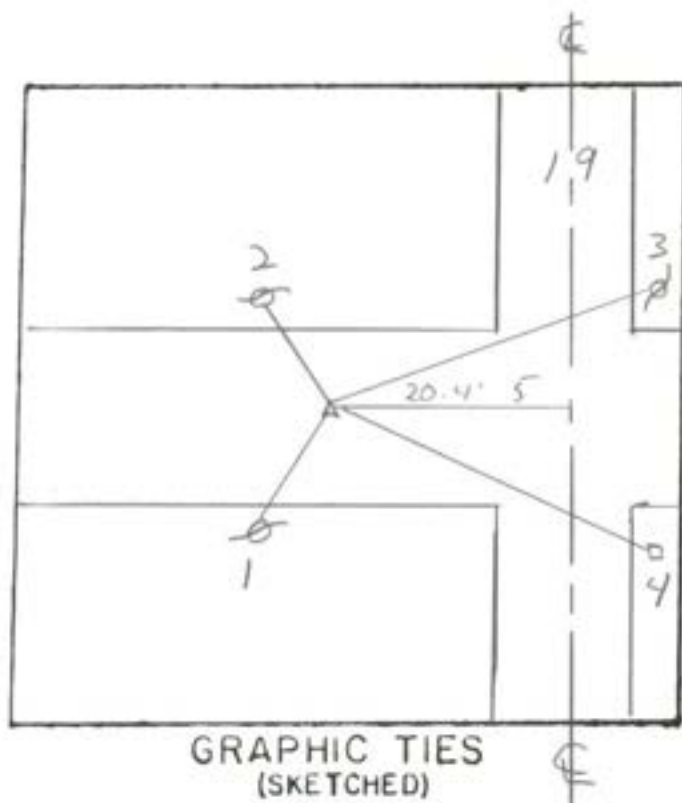

SEC. 35 TWP. 22 RANGE 4
4-25-80

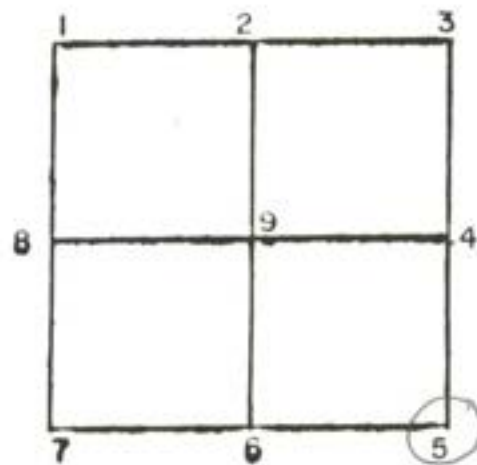


CORNER IDENT. 5

TIES:


1.	67.00'	PWP
2.	99.87'	PWP
3.	83.34'	PK IN PWP
4.	103.08'	SW CORNER R/W MARKER
5.	20.4'	TO E OF ST. RD. 19

SEC. 35 TWP. 22 RANGE 4

SEC 35 TWP 22 RANGE 4

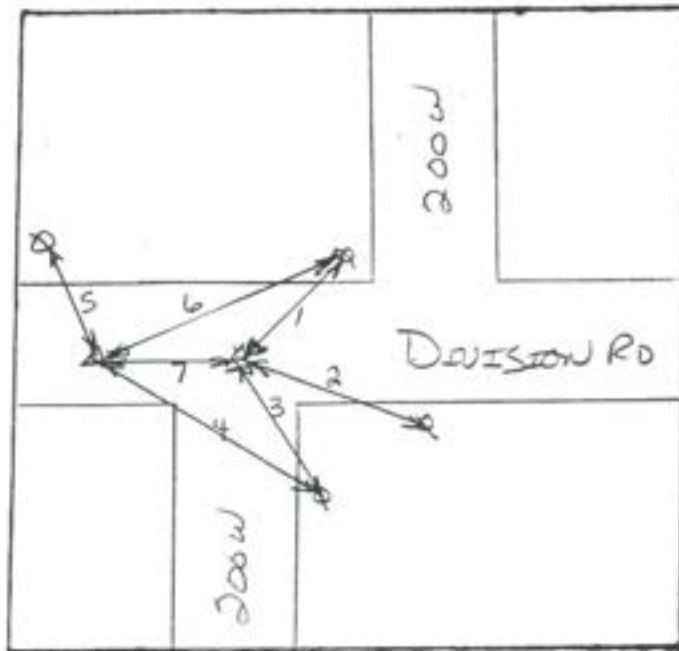


GRAPHIC TIES
(SKETCHED)

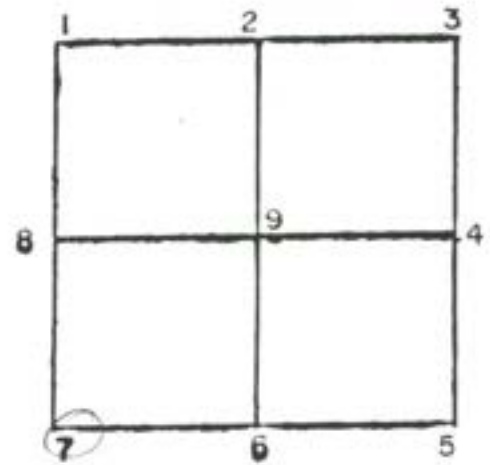

CORNER IDENT. _____


TIES:	1.	28.08	PK	NAD	IN	PWP
	2.	72.74	"	"	"	"
	3.	78.68	"	"	"	"
	4.	114.24	"	"	"	"
	5.	84.60	"	"	"	"
	6.	86.45	"	"	"	"
	7.	66.05	DISTANCE BETWEEN CORNERS			

SEC 35 TWP 22 RANGE 4

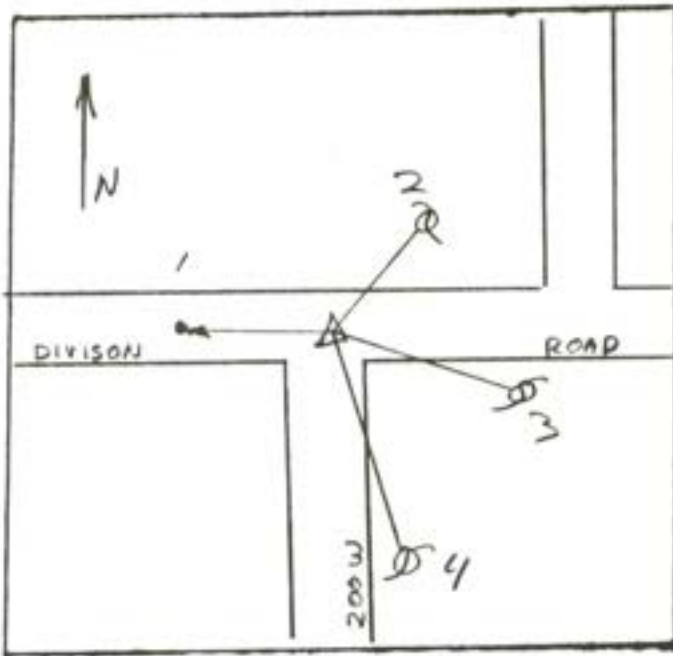

GRAPHIC TIES
(SKETCHED)

SEC. 35 TWP. 22 RANGE 4

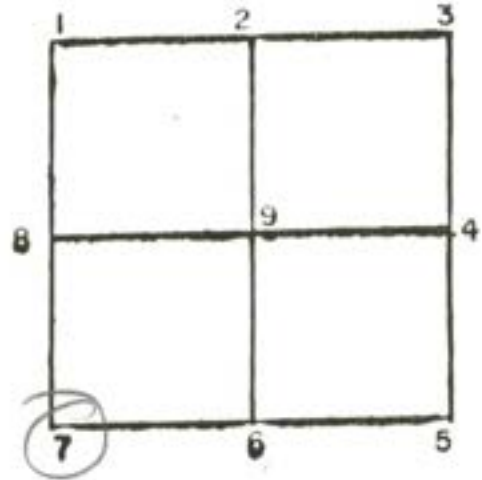

CORNER IDENT. RR SPIKE FND


TIES: 1. 66.05' PK IN $\frac{1}{2}$ OF DIVISION ROAD

2. 28.08' PWP

3. 72.74' PWP

4. 78.68' PWP


SEC. 35 TWP. 22 RANGE 4

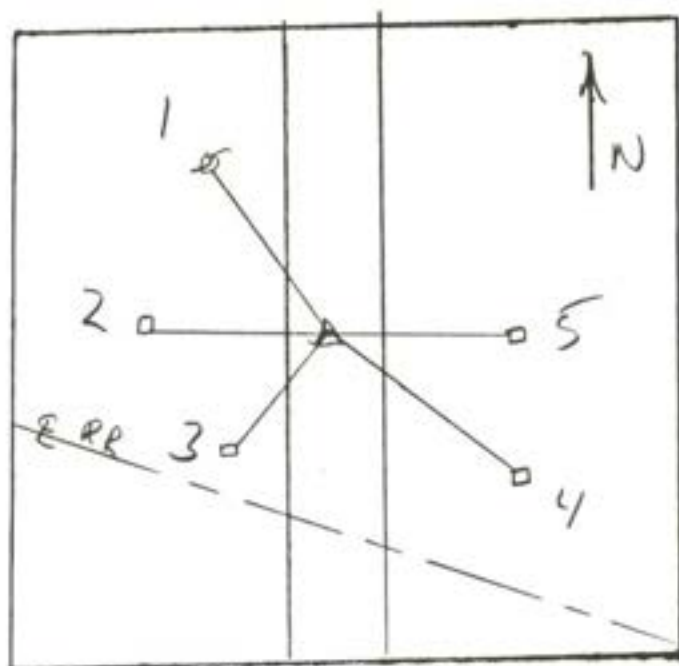

GRAPHIC TIES
(SKETCHED)

SEC. 35 TWP. 22 RANGE 4

5-5-1980

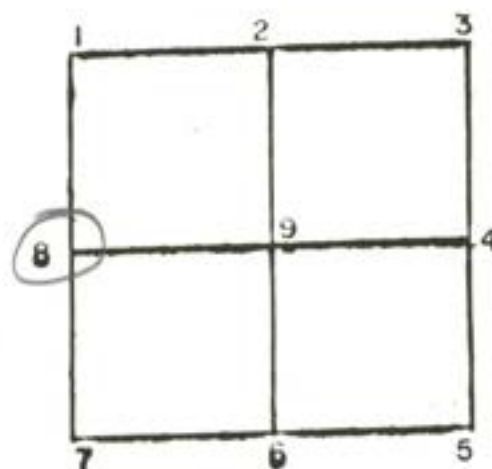


CORNER IDENT. 8 FND BOLT SPIKE REPLACED W/IRON ROD

TIES:

1.	67.70'	PK - PWP
2.	52.75'	PK - FENCE POST
3.	14.30'	PK - RR SIGN
4.	95.63'	PK - FENCE POST
5.	73.33'	PK - FENCE POST


SEC 35 TWP 22 RANGE 4

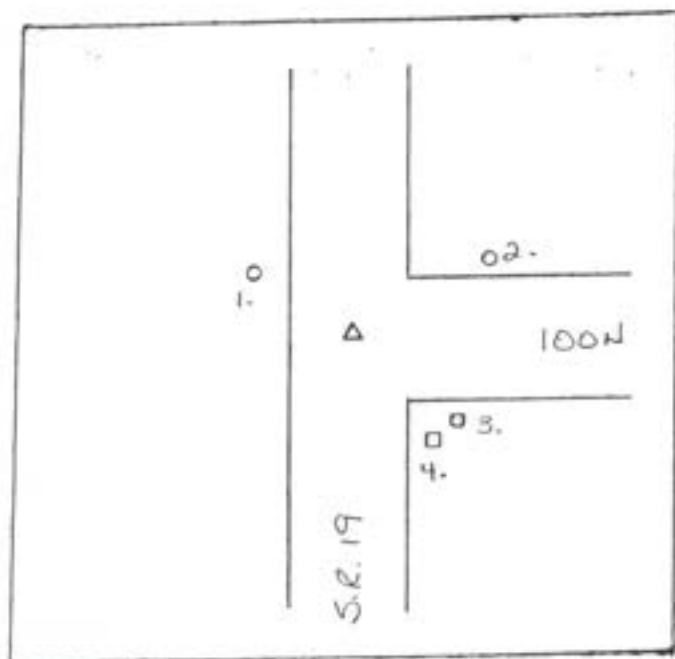

GRAPHIC TIES
(SKETCHED)

SEC. 36 TWP. 22 RANGE 4


4-15-99

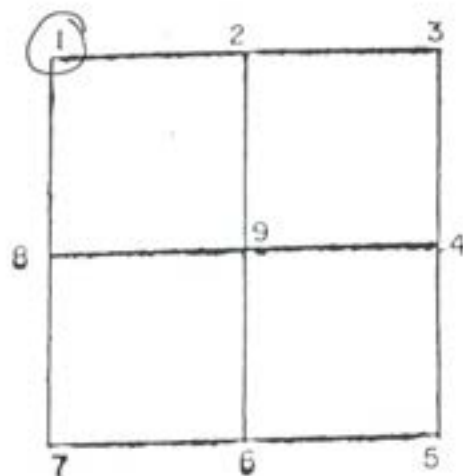

CORNER IDENT. STONE w/ DRILL HOLE 11" DEEP 10" IRON ROD SET

- TIES:
1. 38.49' P.K. NAEL IN POWER POLE
 2. 91.66' " " " "
 3. 78.88' TOP SW CORNER R/W MARKER
 4. 68.07' P.K. NAEL IN POWER POLE


SEC. 36 TWP. 22 RANGE 4

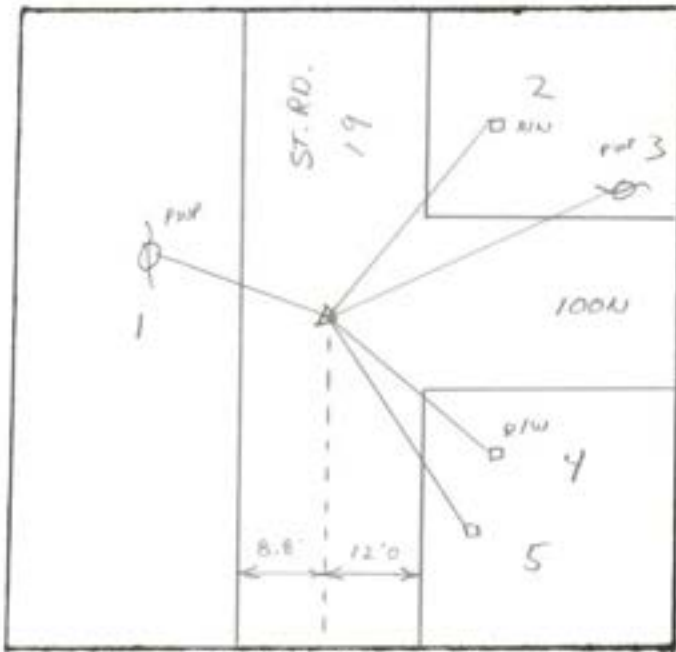

GRAPHIC TIES
(SKETCHED)

SEC 36 TWP 22 RANGE 4

5-6-1920

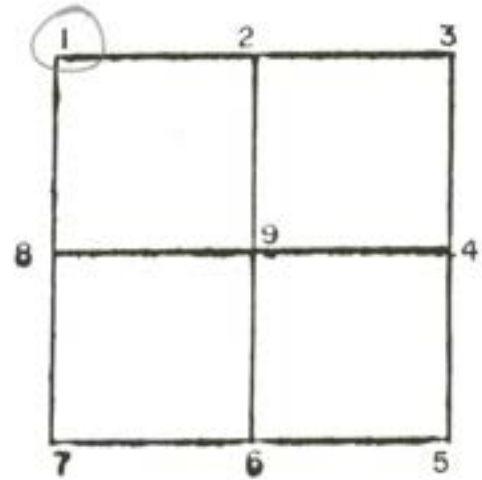


CORNER IDENT. 1 STONE W/DRILL HOLE 11" DEEP 10" IRON ROD OVER HOLE FLUSH W/SURFACE


TIES: 1. 38.69' PK IN PWP
2. 79.79' TOP SW CORNER R/W MARKER
3. 91.60' PK IN PWP
4. 79.03' TOP SW CORNER R/W MARKER
5. 68.75' NOT DESCRIBED

SEC 36 TWP 22 RANGE 4

SEC. 36 TWP. 22 RANGE 4
6/2000

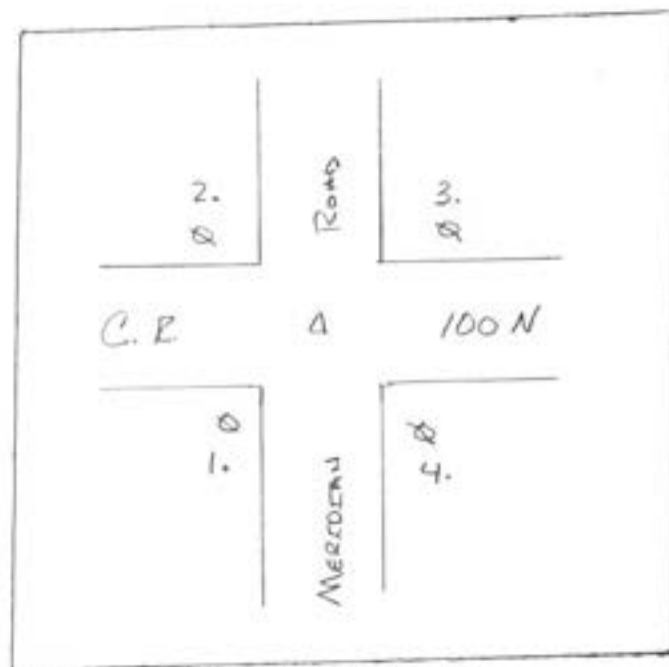

GRAPHIC TIES
(SKETCHED)

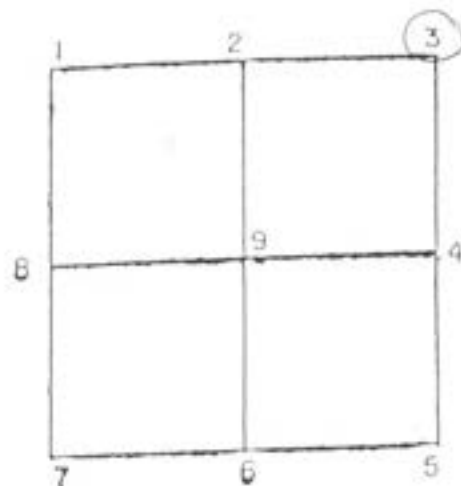


CORNER IDENT. STONE FOUND 18" DEEP

TIES: 1. 49.89 — P.K. NAIL IN NORTHEAST FACE PWP USED AS ROAD SIGN POST
2. 82.40 — " " " SOUTH " "
3. 33.15 — " " " WEST " "
4. 65.88 — " " " " " "


SEC. 36 TWP. 22 RANGE 4

SEC 36 TWP 22 RANGE 4

8-14-80

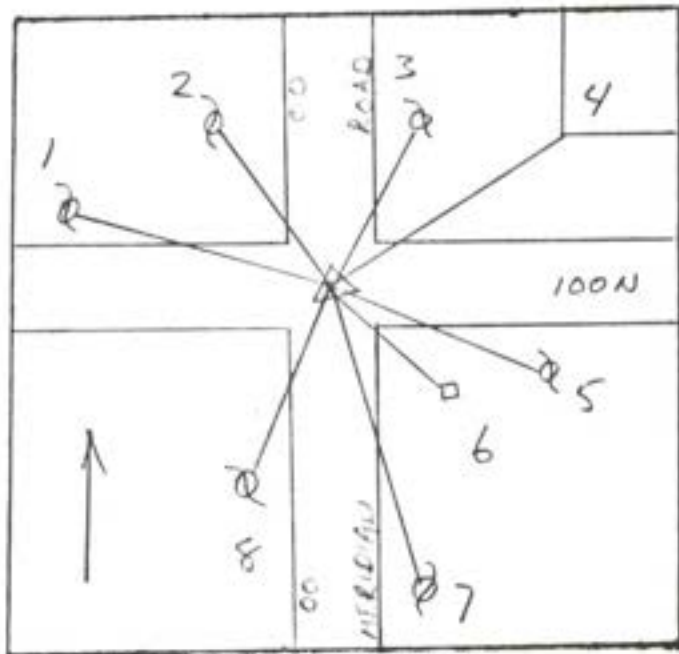

GRAPHIC TIES
(SKETCHED)

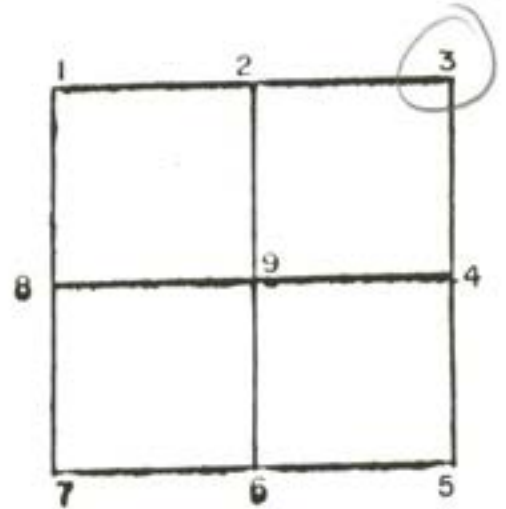


CORNER IDENT. STONE END 18" ↓ SURFACE


TIES: 1. 82.75' PWP
 2. 52.58' PWP
 3. 33.48' PWP
 4. 76.60' BARN SW CORNER
 5. 47.41' PWP
 6. 29.22' HEADPOST
 7. 65.88' PWP
 8. 50.24' PWP

SEC 36 TWP 22 RANGE 4

SEC. 36 TWP. 22 RANGE 4

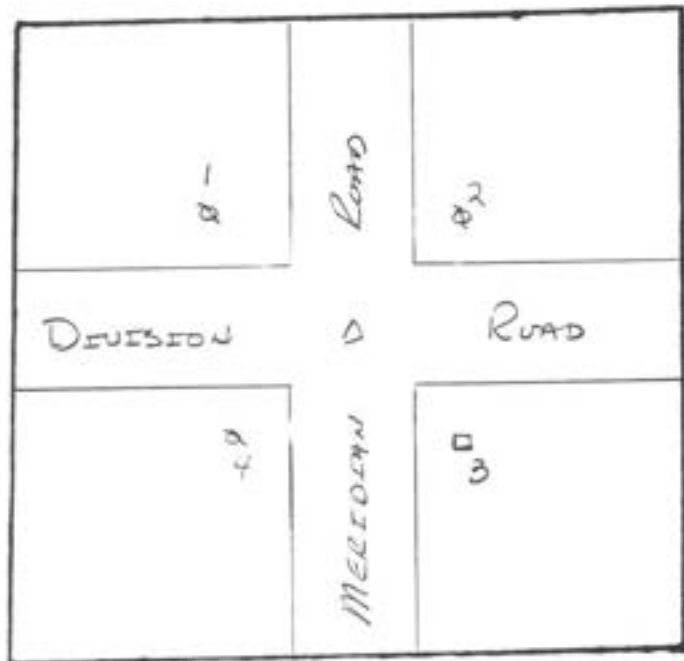

GRAPHIC TIES
(SKETCHED)

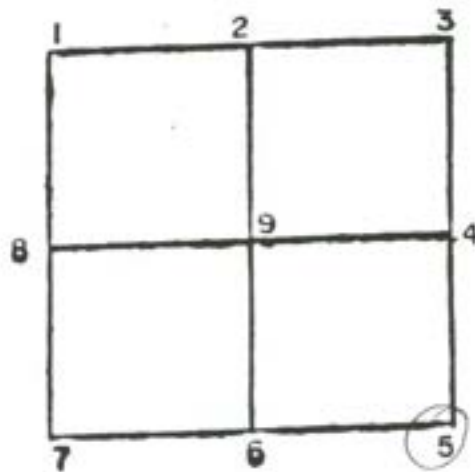


CORNER IDENT. Stone Found


TIES:		PK	NAIL	IN	TELEPHONE POLE
1.	43.20	"	"	"	PWP
2	60.33	"	"	"	HEADPOST
3	29.60	"	"	"	PWP
4.	58.68	"	"	"	

SEC 36 TWP 22 RANGE 4

SEC 36 TWP 22 RANGE 4

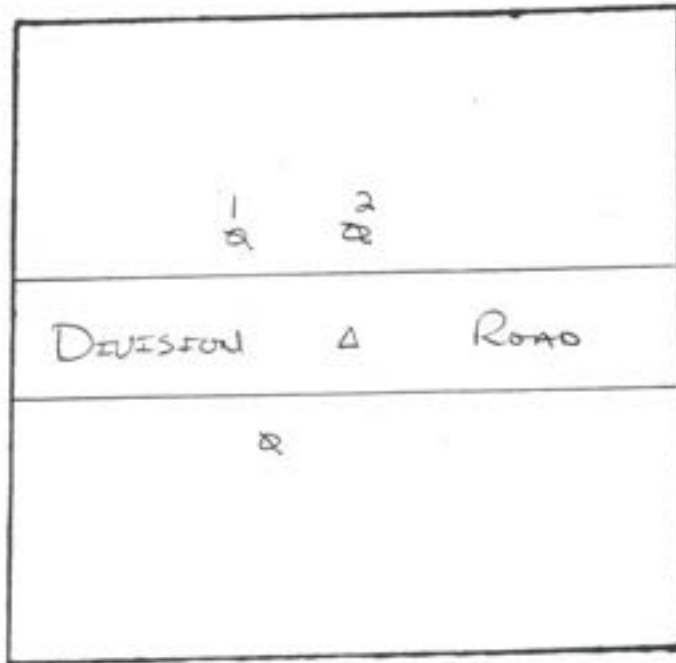

GRAPHIC TIES
(SKETCHED)

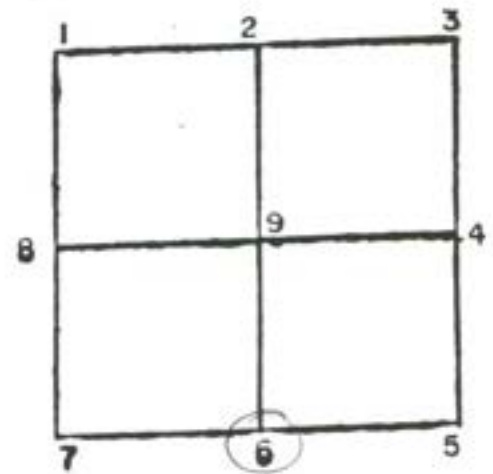


CORNER IDENT. _____

TIES: 1. 55.77' PK NAIL IN PWP
2. 19.69' " " " "
3. 55.05 " " " "


SEC 36 TWP 22 RANGE 4

SEC. 36 TWP. 22 RANGE 4

4-15-99

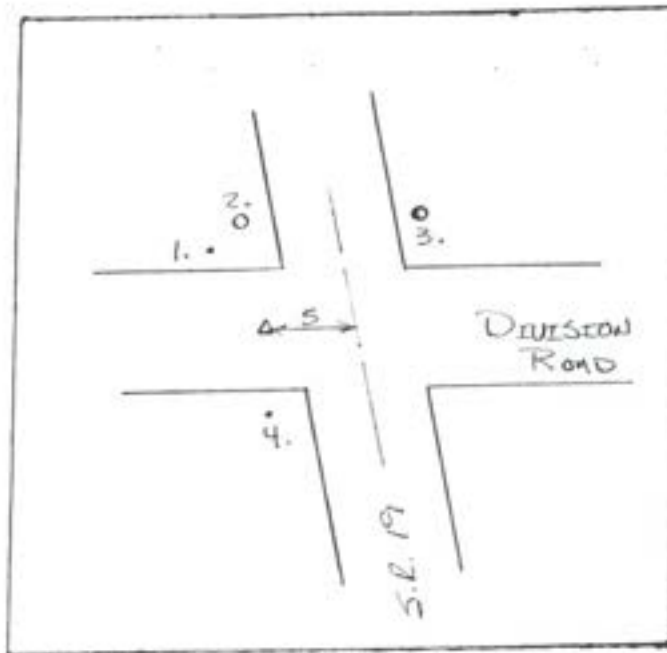

GRAPHIC TIES
(SKETCHED)

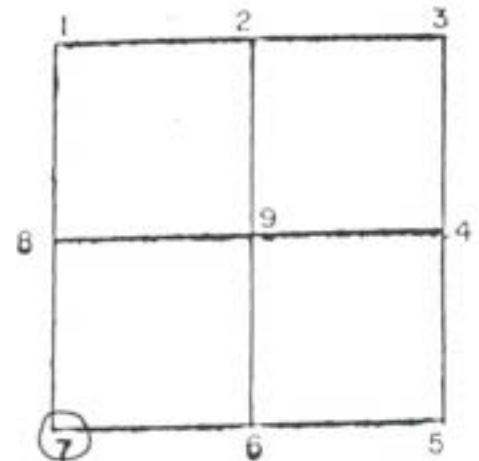


CORNER IDENT. STONE

- TIES: 1. 52.27' E S.R. 19 & DIVISION ROAD SIGN POST
2. 99.82' P.K. NAIL IN POWER POLE
3. 89.75' " " " "
4. 34.00' NW CORNER OF STOP SIGN POST
5. 20.4' FROM E OF S.R. 19


THIS SECTION CORNER HAS AN 8" MANHOLE TYPE
CASTING. STONE IS VISIBLE BY REMOVING COVER.
LOCATION MEASUREMENTS ARE TO APPROX E OF CASTING
DO NOT USE FOR STONE LOCATION.

SEC. 36 TWP. 22 RANGE 4

SEC. 36 TWP. 27 RANGE 4

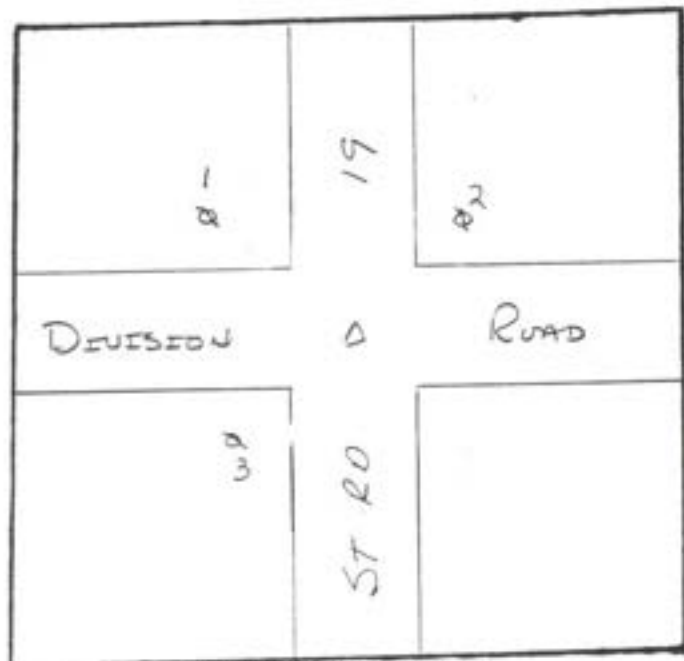


GRAPHIC TIES
(SKETCHED)

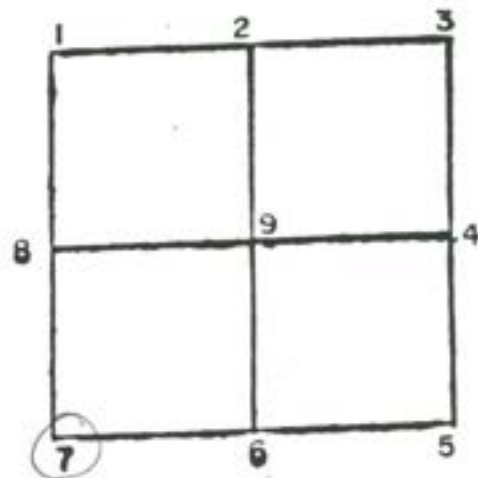

CORNER IDENT. STONE FOUND


TIES:	PK	NAIL	FN	PWP
1.	99.82'	"	"	"
2	89.75	"	"	"
3	58.82	"	"	"

SEC 36 TWP 22 RANGE 4

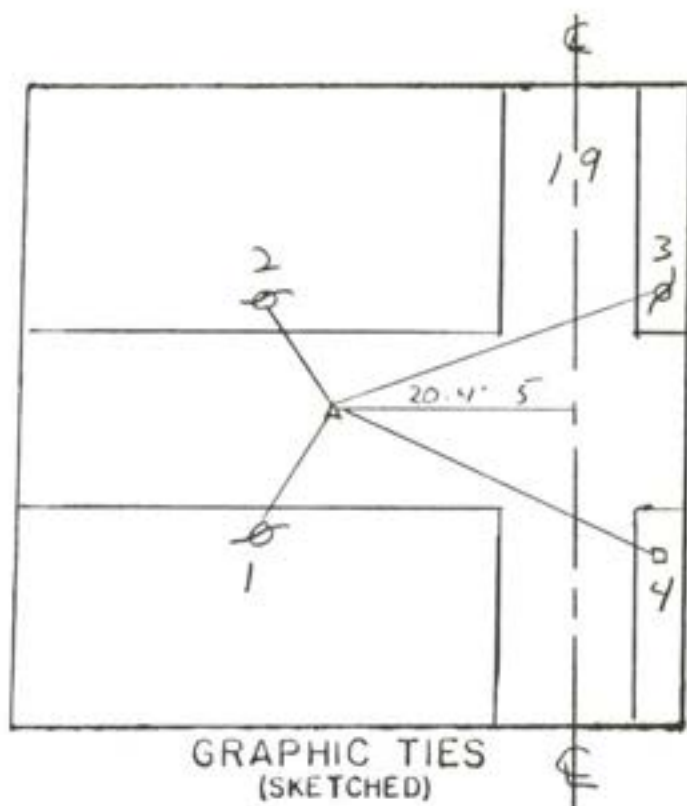

SEC. 36 TWP. 22 RANGE 4


4-25-80

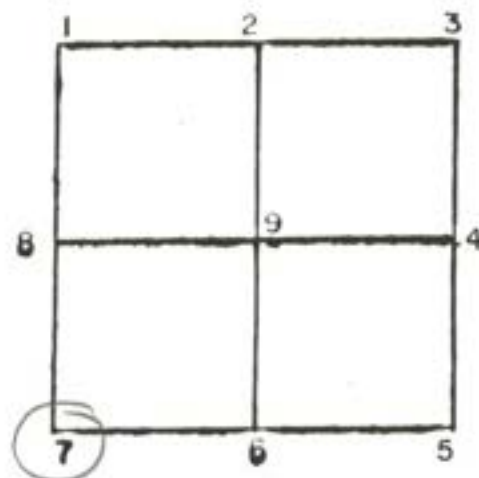

CORNER IDENT. 7


- TIES:
1. 67.00' PWP
 2. 99.87' PWP
 3. 83.34' PK 121 PWP
 4. 103.08' SW CORNER R/41 MARKER
 5. 20.4' TO E OF ST. RD. 19

SEC. 36 TWP. 22 RANGE 4

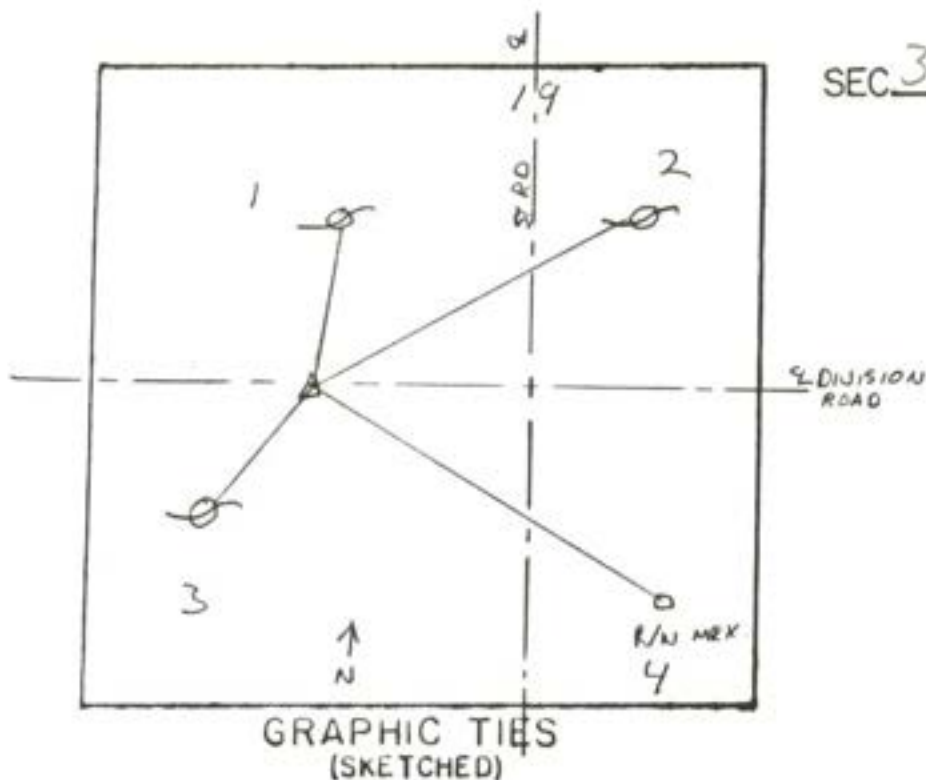

SEC 36 TWP 22 RANGE 4

4-25-80

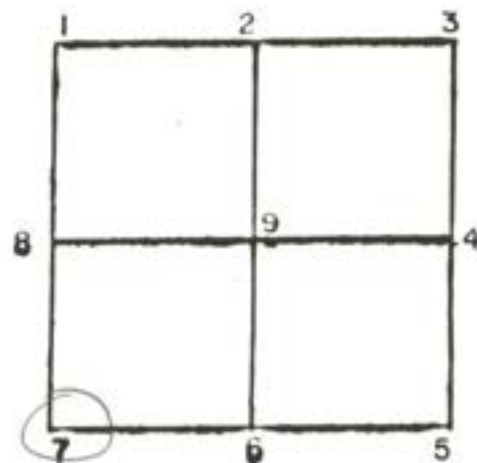

CORNER IDENT. 7 STONE FND 2.3' DEEP ^{MARKED} T 35 CASTING SET 4-25-1990

- TIES:
1. 99.87' PK IN POWER POLE
 2. 83.34' PK IN POWER POLE
 3. 67.00' PK IN POWER POLE
 4. 103.08' SW CORNER OF ST. RD R/W MARKER

SEC 36 TWP 22 RANGE 4